


Camp Blender

<http://cs.oregonstate.edu/~mjb/blender>

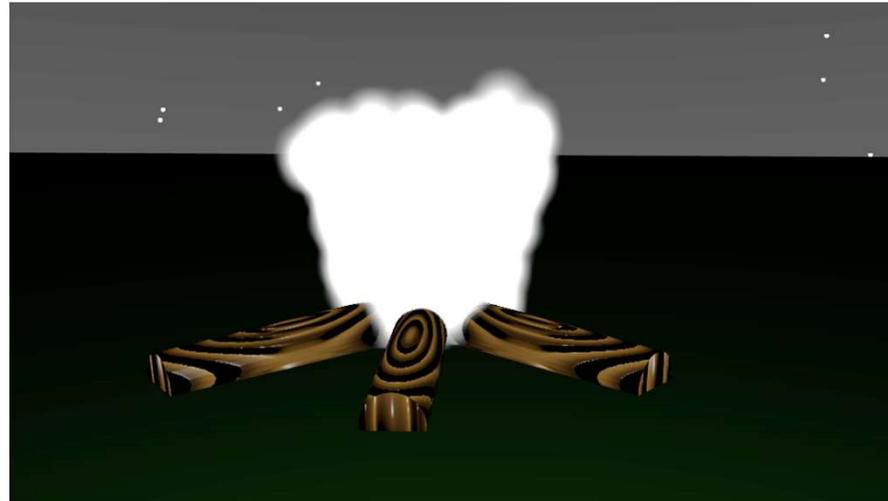

Oregon State
University
Mike Bailey

mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



Oregon State
University
Computer Graphics

For Those of you on Zoom, I Apologize in Advance for the Barking You Might Hear in the Background 😊



They mean well, but delivery vans are just too-tempting a bark-target...

Handy Blender Shortcuts

Shortcut	What it Does
LMB	Select something
Shift-LMB	Add something else to the selection
MMB	Rotate the scene
Shift-MMB	Pan the scene
Shift-spacebar	Bring up the transformation menu
Scroll Wheel	Zoom in and out
Tab	Toggle between Object Mode and Edit Mode
Control-Tab	Bring up Mode pie menu
` (back quote)	Bring up View pie menu
a	Select all
Click in empty space	Unselect all
Alt-a	Unselect all
Shift-a	Bring up the Add menu
Escape	Get you out of almost anything (including stopping a render or an animation)
b, c	Box or circle select
C	Center the scene (good if you are lost in 3D)
Shift-d	Duplicate
e	Extrude (in edit mode)
F3	Search
g	Grab (translate) an object

Handy Blender Shortcuts

Shortcut	What it Does
Shift-g	Group
i	Insert a keyframe
Control-j	Join 2 or more objects
m	Send object to a collection (layer)
n	Toggle the Sidebar menu
Shift-n	Recalculate normals
p	Partition (only in edit mode)
Control-p	Establish a parent-child relationship (last object selected will be the parent)
Alt-p	Destroy a parent-child relationship
Control-Alt-q	Toggle quad viewing
r	Rotate an object
s	Scale an object
Shift-s	Pie menu for using the 3D Cursor
Spacebar	Start / Pause an animation
t	Toggle the Object Tools menu
x	Delete whatever is selected
z	Bring up a display mode pie menu
Control-z	Undo
Alt-z	Toggle x-ray mode
Control-Shift-z	Redo
F12	Render a scene image
F11	Return to the interactive scene



Oregon State
University


Computer Graphics

Not Exactly a Shortcut, but Really, Really Useful

If you would like to be able to rotate the entire scene around a particular object, click on the object and then select:



View → Frame Selected

You can also hit the period (.) on the number pad on the keyboard.

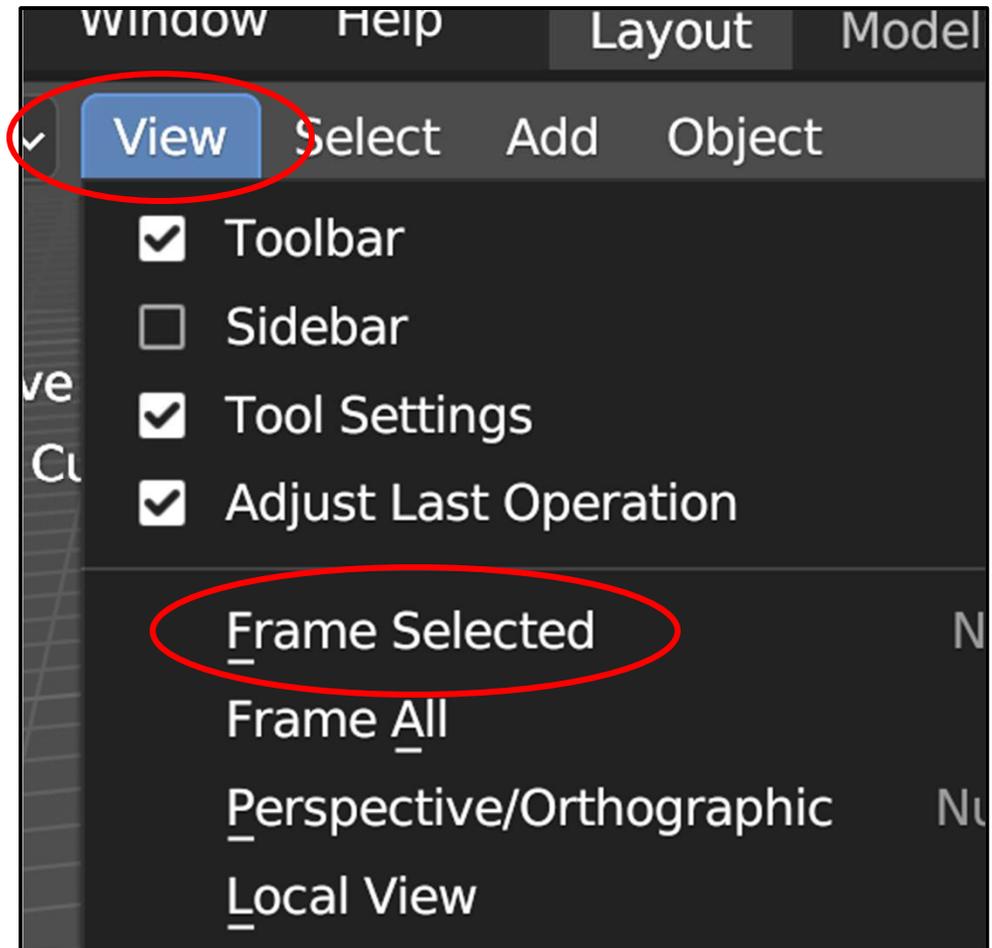

What is Blender?

Blender is a *free* program that lets you do professional-looking 3D modeling, rendering, and animation. This, not this. 😊

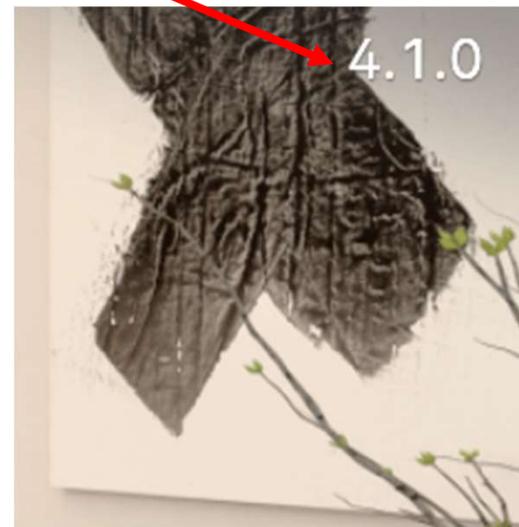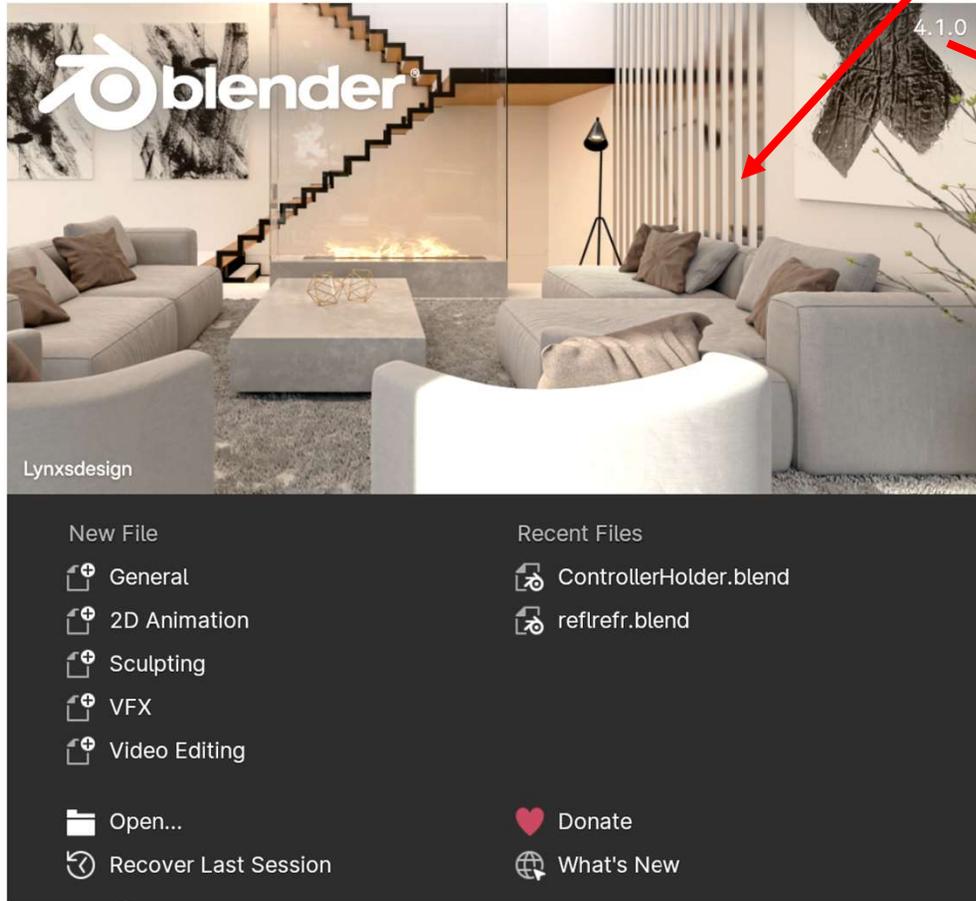


Note: The version number changes often. These notes have been written against Blender version **4.1**



You can get Blender for yourself by going to: <http://www.blender.org>

Next Gen – a Blender-Animated Movie

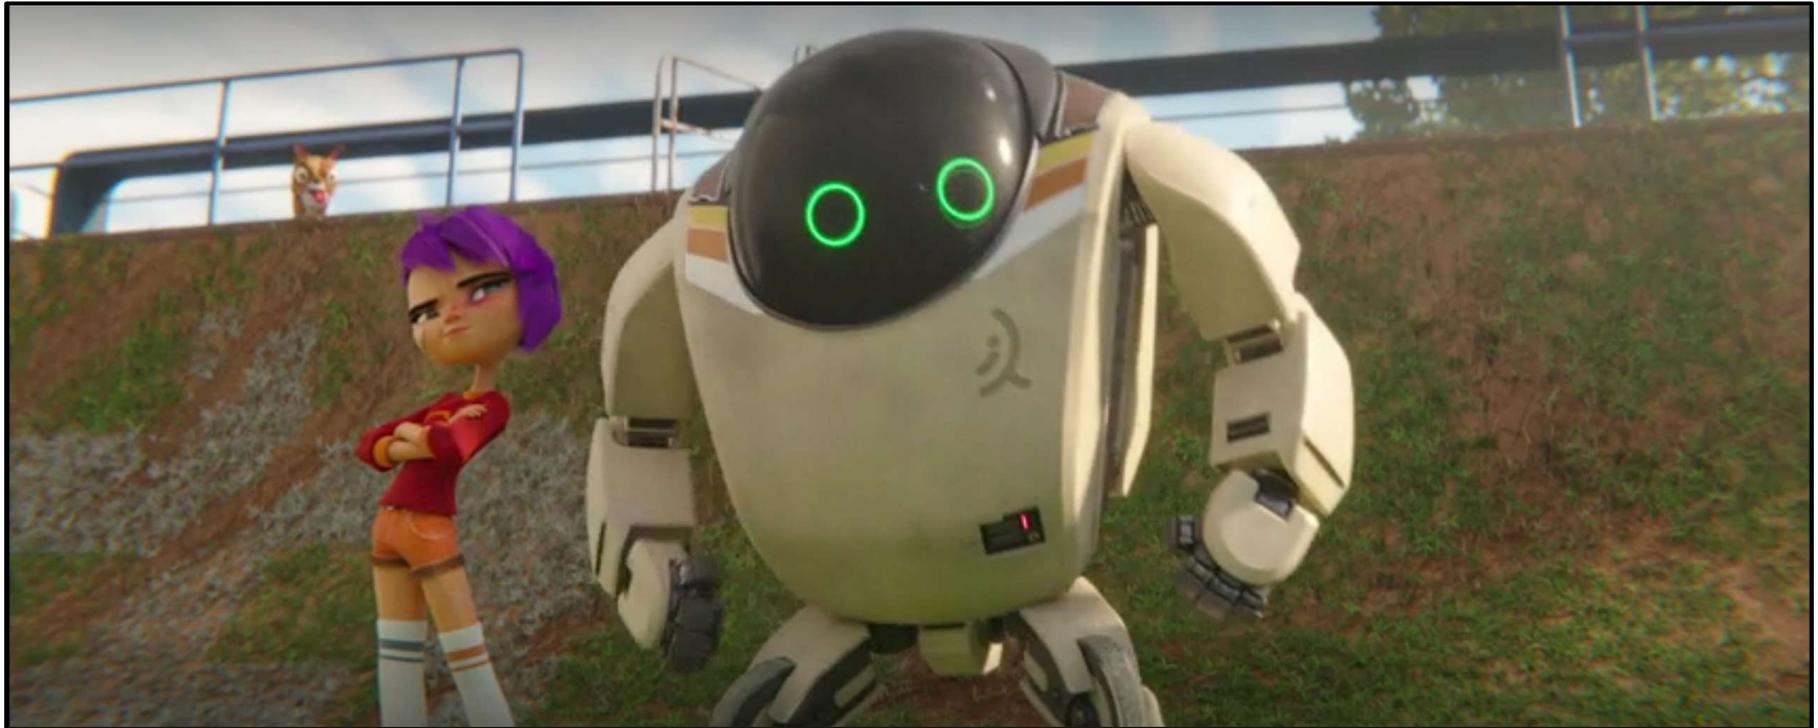


See the trailer at:

<https://www.netflix.com/title/80988892>

(Go to the bottom of the screen to see the trailer and teaser.)



Why Do We Have These Notes?

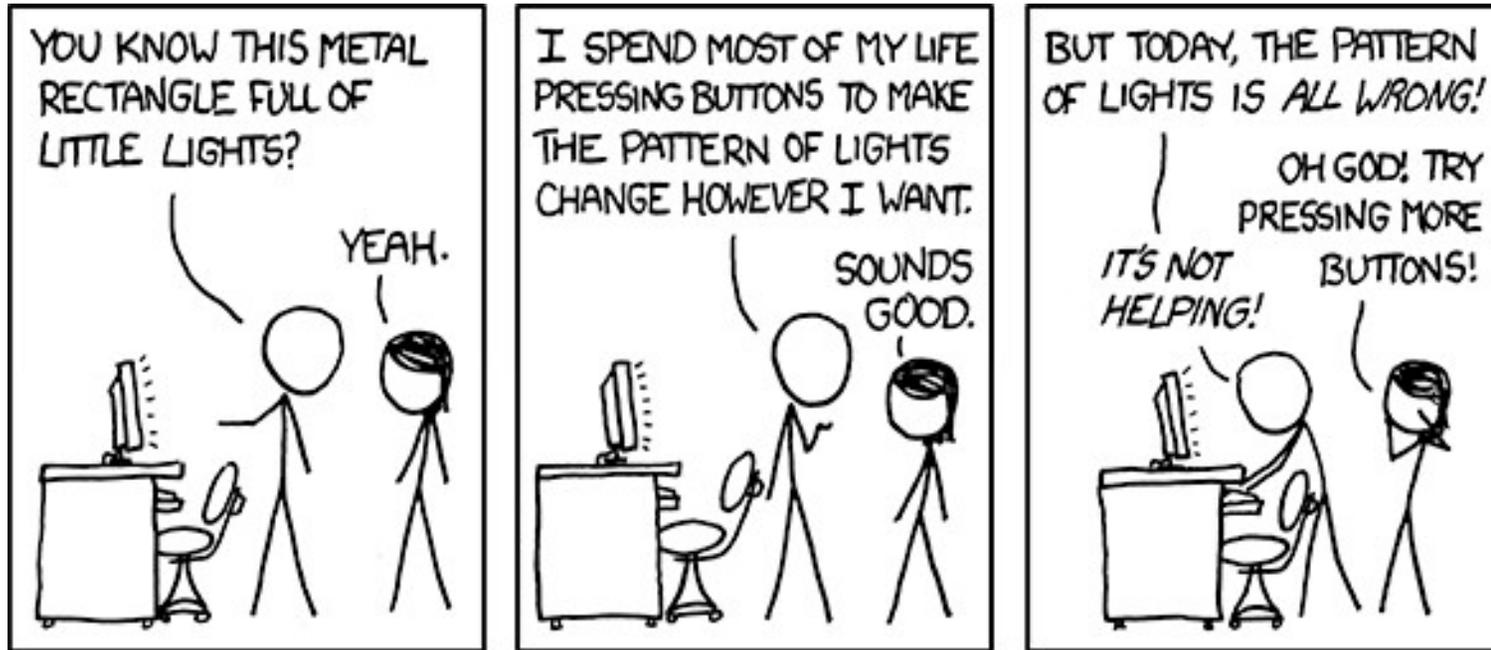

<http://xkcd.com>

Blender has thousands of buttons you can press. It is difficult to understand them all. These notes are here to show you what certain combinations of buttons do in order to learn them, and to remind you later when you've forgotten.




In these notes, what do these icons mean?



cloth.blend



worldtex.bmp



cloth.mp4

They tell you that if you go to our notes web site:

<http://cs.oregonstate.edu/~mjb/blender>


you will find Blender input files (*.blend), texture map files (*.bmp), and animation movie files (*.mp4).

You can read a .blend file right into Blender (File → Open) so that you can experiment with these examples without having to first create them yourself.

You can play an .mp4 movie file right from your browser so that you can see how these examples look without having to run Blender at all.



A warning about me and the Notes

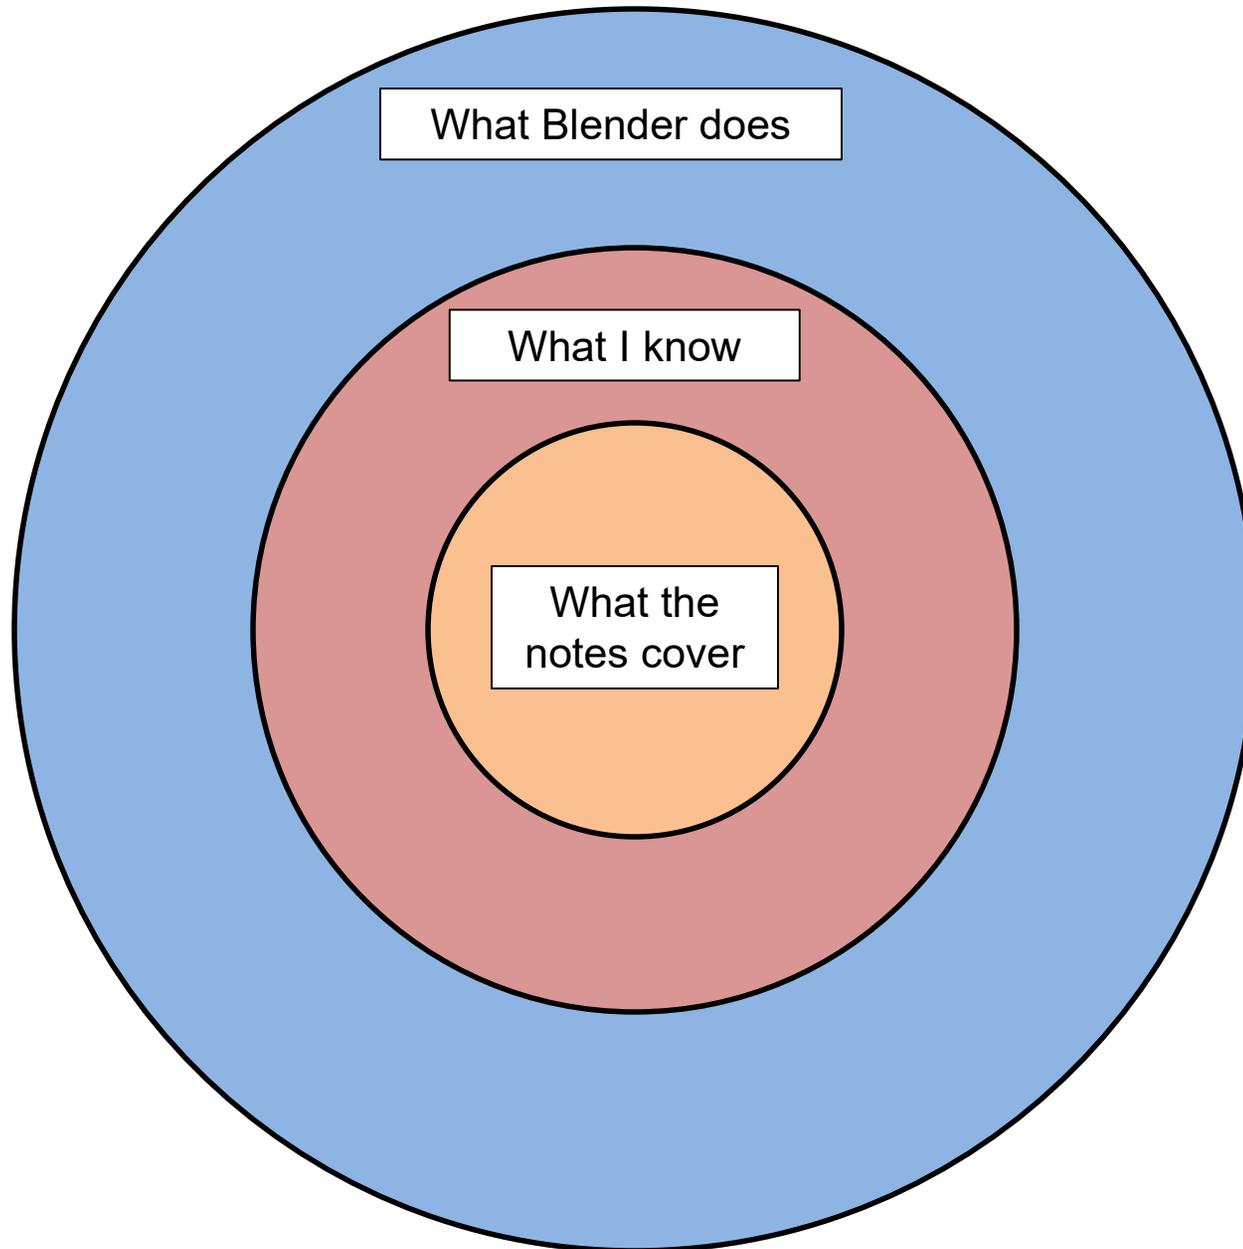


What We Will Cover in these Notes

1. Navigating the screen layout
2. Viewing in 3D
3. Moving things around in 3D
4. Modeling, I
5. Appearance, I
6. Modeling, II
7. Rendering
8. Particle Systems
9. Physics Animation

10. Appearance, II
11. Vertex Sculpting
12. Vertex Painting
13. Keyframe Animation
14. 3D Printing
15. Stereographics
16. References



1. Navigating the Screen Layout

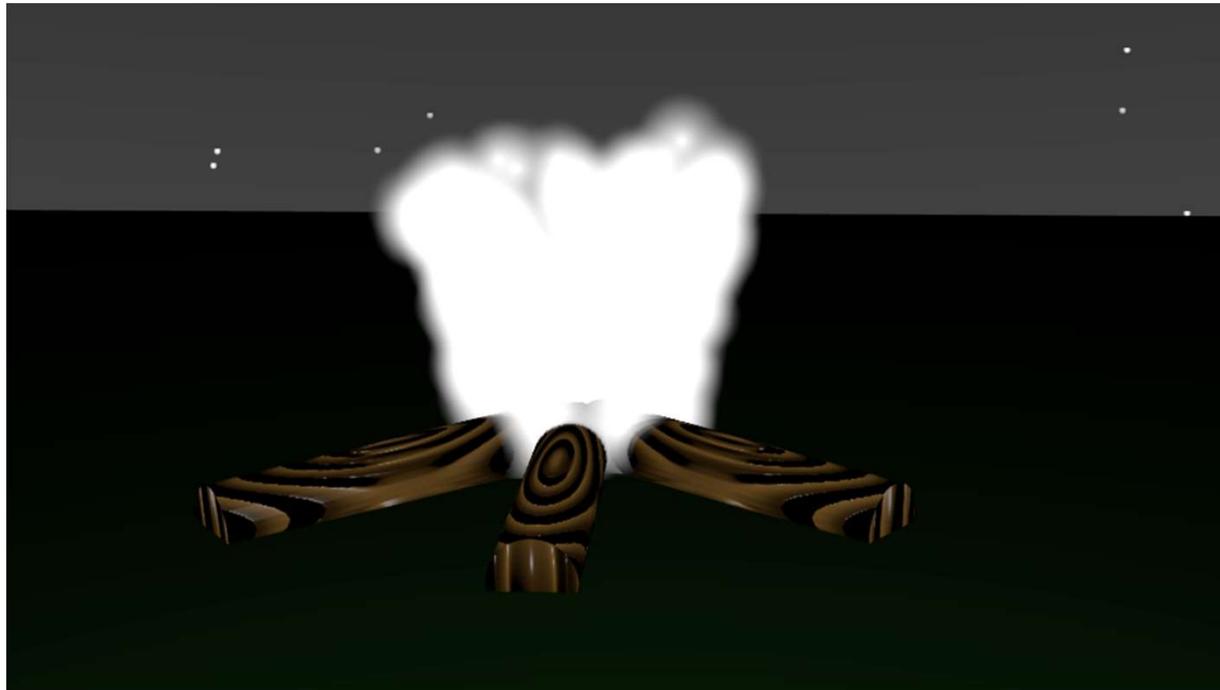


Full Screen Layout

The image shows the Blender 4.1 interface with several components highlighted by red circles and arrows:

- Object Tools ('t')**: A vertical toolbar on the left side of the 3D viewport.
- Main Menu**: The top menu bar containing File, Edit, Render, Window, and Help.
- Property-specific Options**: A toolbar located below the main menu.
- Object Properties ('n')**: A panel on the right side of the interface showing the Transform, Rotation, and Dimensions properties for the selected object.
- View Control**: A set of icons in the top right corner used for navigating the 3D view.
- Outliner**: A panel on the right side showing a hierarchical list of objects in the scene, including the Scene, Collection, Camera, Cube, and Light.
- Animation Controls**: A timeline at the bottom of the interface used for managing animation.

Computer Graphics

The Object Tools Menu

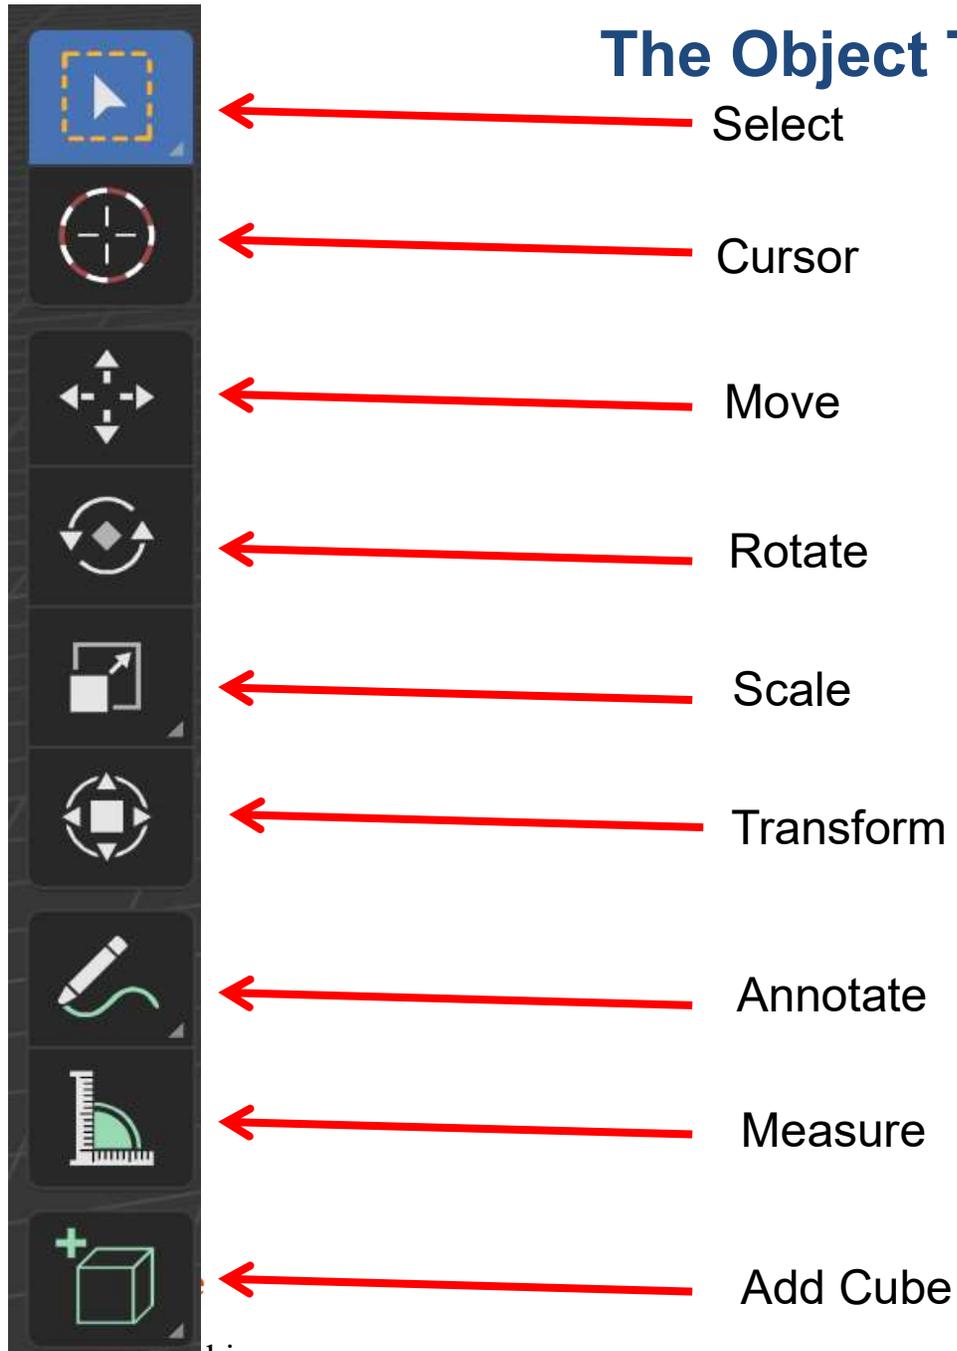


Toggled on and off with the 't' key

The Add Menu



This is the Add tab – you will spend a lot of time here!

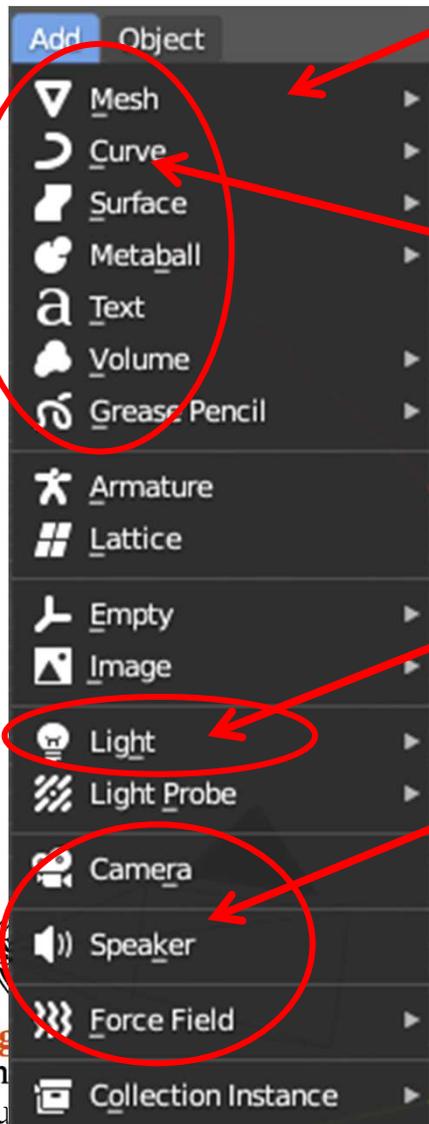


Create geometry

Create lights



Create other cool stuff

The Add→Mesh Menu

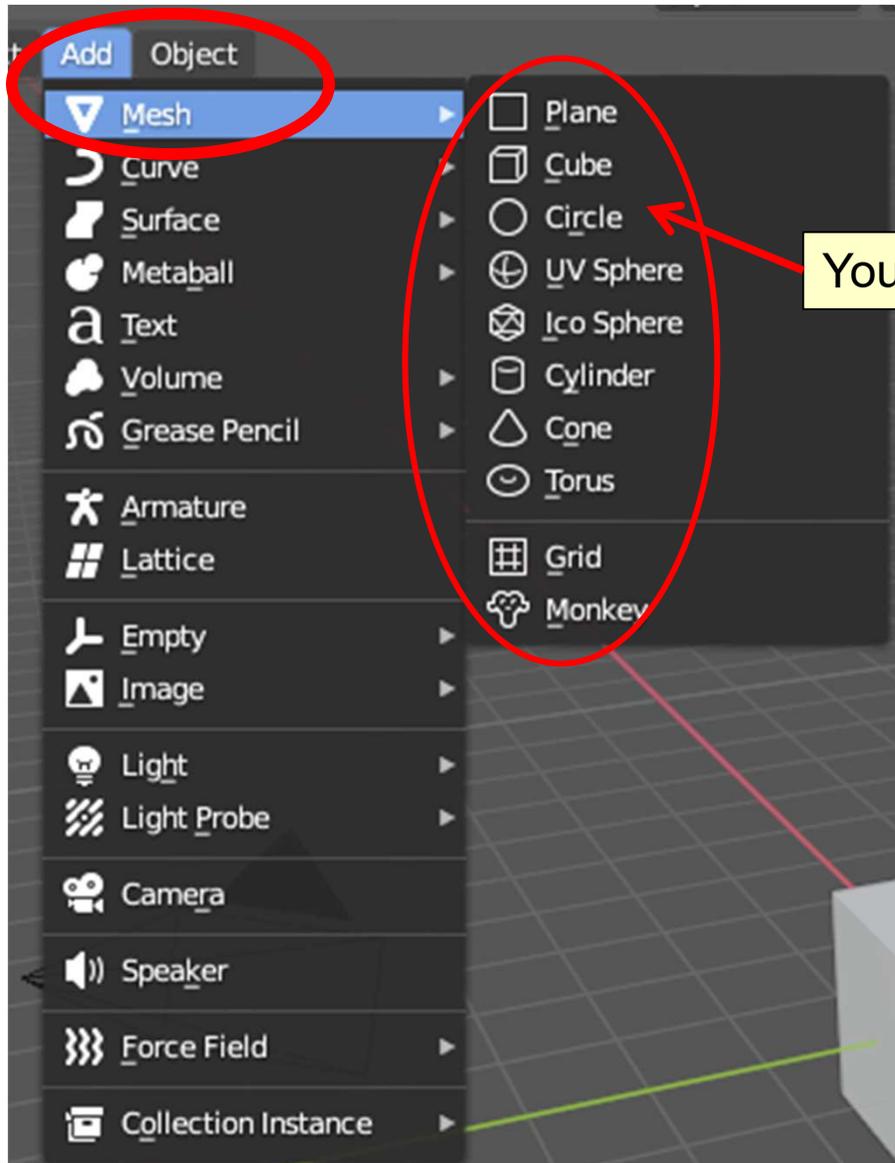

You will *especially* spend a lot of time here!

The Sidebar Panels

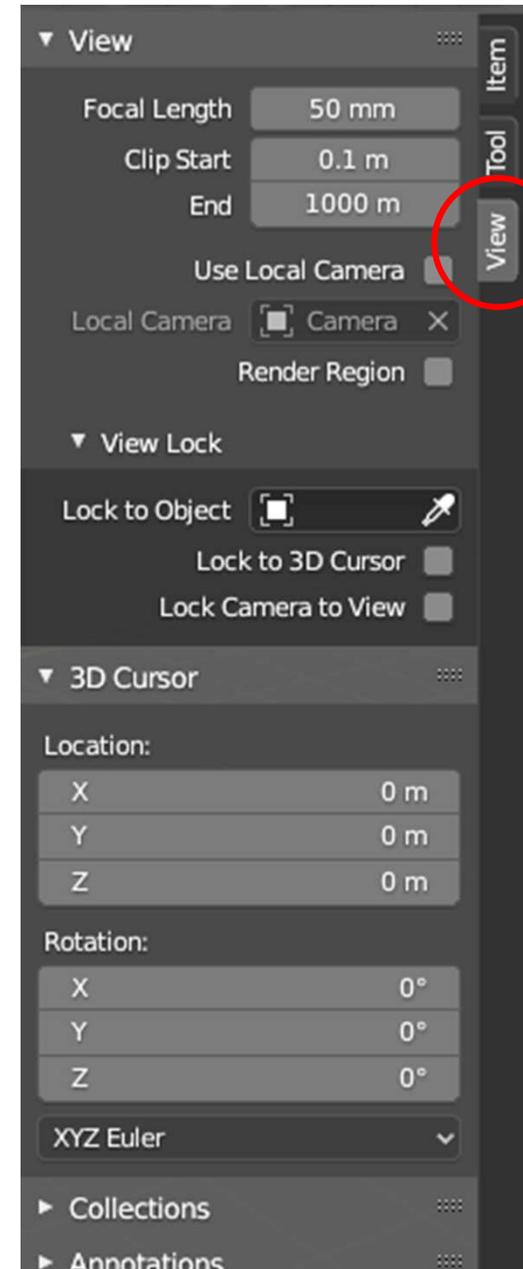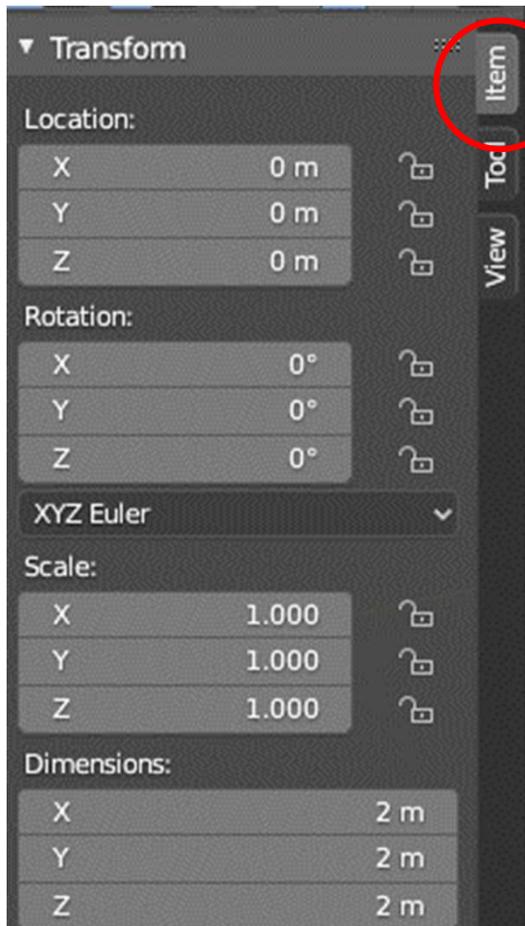

Toggled on and off with the 'n' key

University

Computer Graphics

The Blender Interface Widgets

If Blender shows you something that looks like this ...

... you are expected to click a button to put yourself in a particular mode



The Blender Interface Widgets

If Blender shows you something that looks like this ...




... you are expected to click in the box to bring up something else, like this



The Blender Interface Widgets

If Blender shows you something that looks like this ...

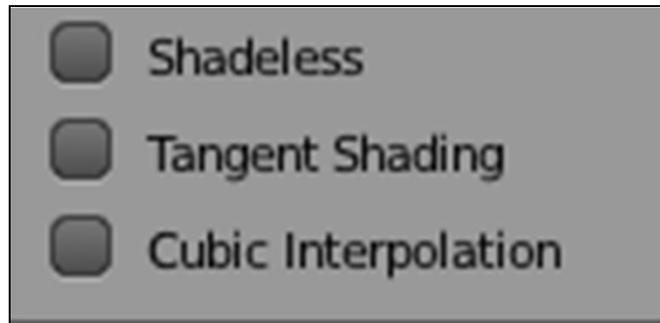

... you are expected to turn features on and off by clicking in **all or none** of the checkboxes

If Blender shows you something that looks like this ...



... you are expected to make a choice of **just one** of these options



The Blender Interface Widgets

If Blender shows you something that looks like this ...




... you are expected to either left-click in the box and (keeping the left button down) drag the mouse left-right like a slider, **or** single-click in the box and type in a new value

If Blender shows you something that looks like this ...




... you are expected to click in the box and then select from the resulting list

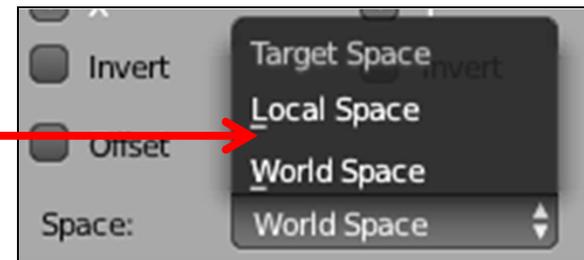


The Blender Interface Widgets

If Blender shows you an “Apply” button ...

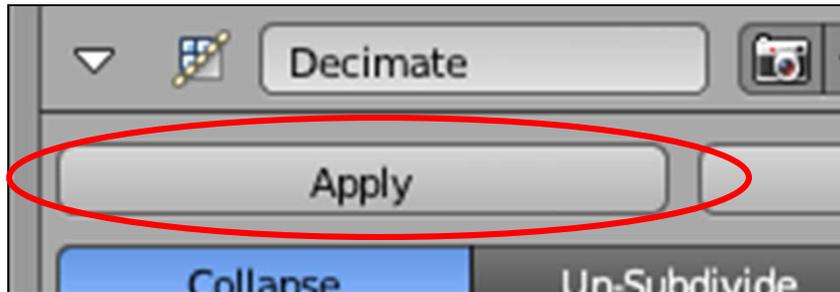

... it means that you can click this button to get rid of your original model and replace it with a model that has the edits you have just made

If Blender shows you this icon (with or without the word “Open” ...

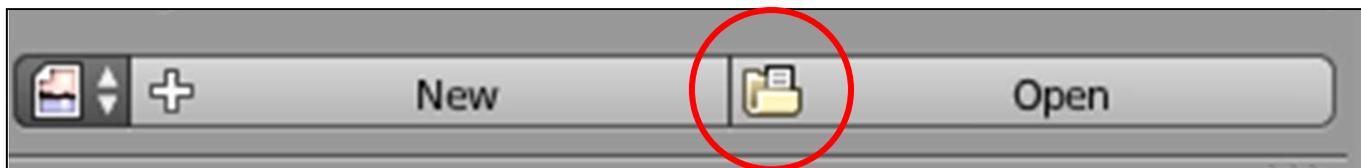

... it means that you can click this button to open a file

The Blender Interface Widgets


If Blender shows you something that looks like this ...



... you are expected to click in the box and select from a list of other **objects** in the scene




If Blender shows you something that looks like this ...

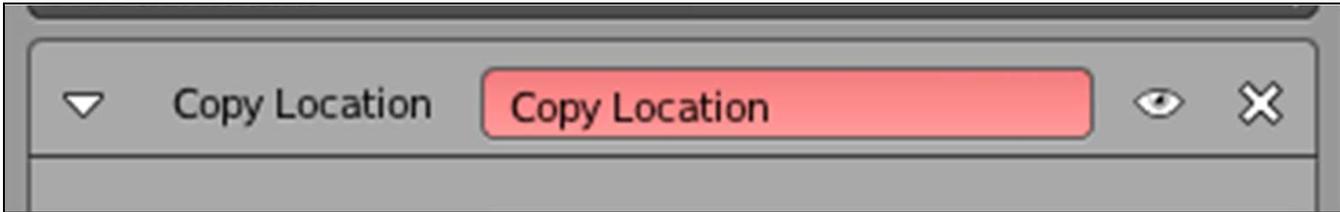

... the red color is telling you that you haven't yet entered enough information in this panel

The Blender Interface Widgets

If Blender shows you something that looks like this ...




... it allows you to hide and unhide something (the Outliner is where you use this most often). Hiding an object is useful for decluttering your scene.

Hint #1: If you no longer want an object in the scene, hiding it for a while before deleting it is usually a good thing. It is surprising how often you need something not long after you deleted it. ☹️

Hint #2: If you hide something, don't forget that you have hidden it. It is pretty freaky to be certain that you once created something, but now you can't find it anywhere in the scene. 😊



The File Menu

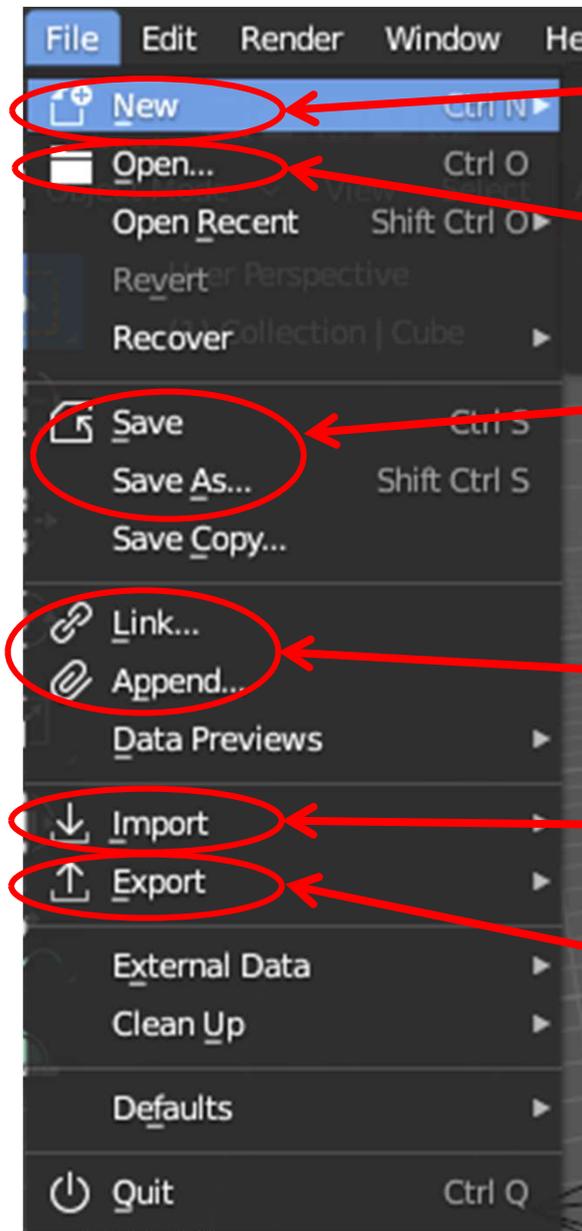

Start a new Blender scene (thus closing the scene you currently have open)

Open a previously-created Blender scene (thus closing the scene you currently have open)


Save the current scene in a file

Bring elements from another Blender file into this scene

Bring an image or object in from somewhere else

Send an image or object to somewhere else

The Difference Between New, Open, Link, and Append

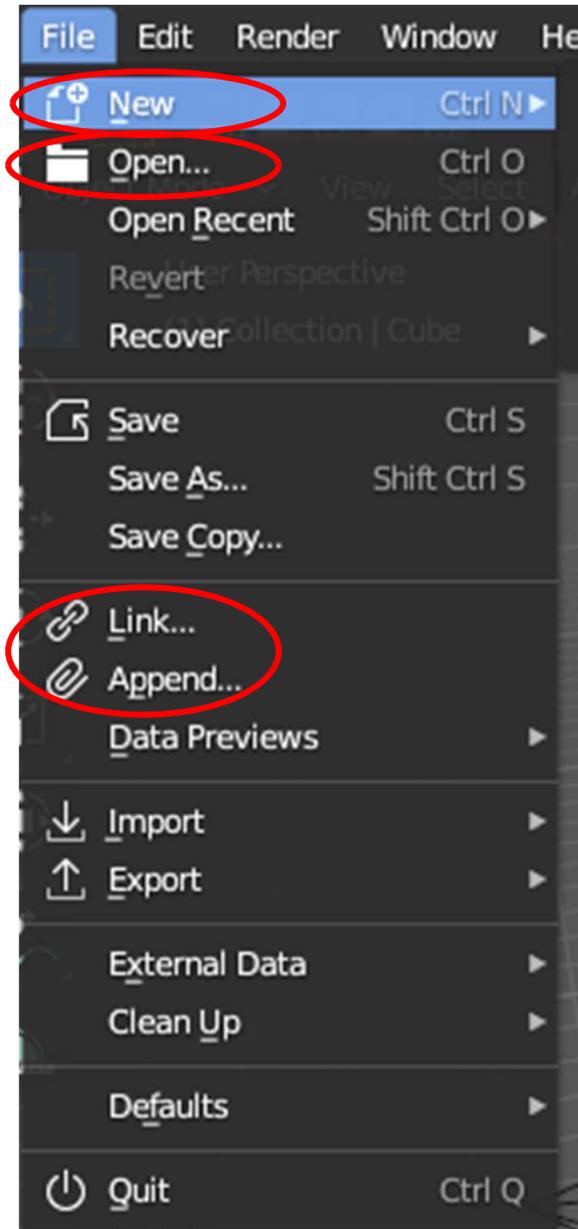

New closes the scene you currently have, then initiates a new Blender scene.


Open closes the scene you currently have, then reads in a previously-stored Blender scene.

Append leaves the scene you currently have open, and adds elements of a previously-created scene into it.


Link is like Append, but every time you open the scene again, it will look at the file you are Linking from to see if changes have been made, and if so, will bring those into the scene instead of the first ones.

The Edit Menu


Control-Z or **Edit**→**Undo** are two of your best friends!

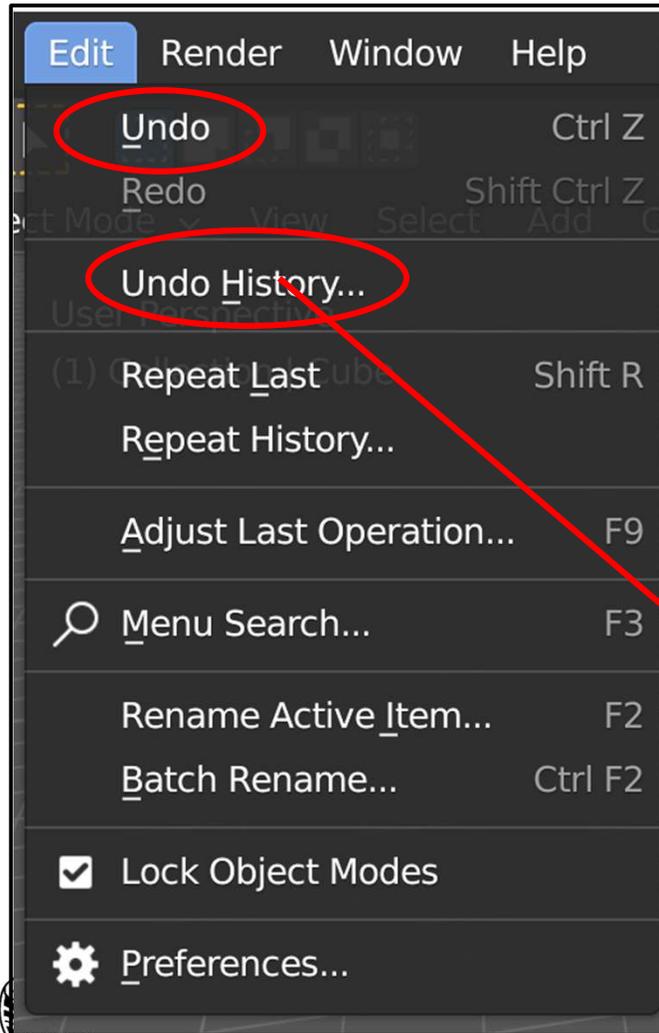


You can also select **Undo History** and go back in time to several commands ago

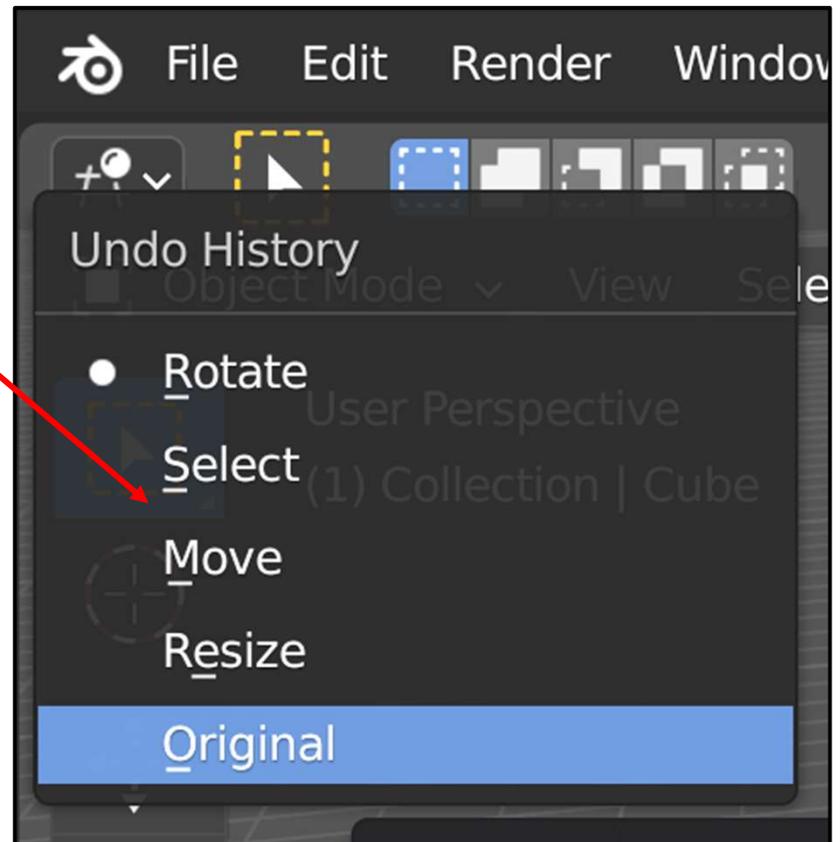


The Render Menu

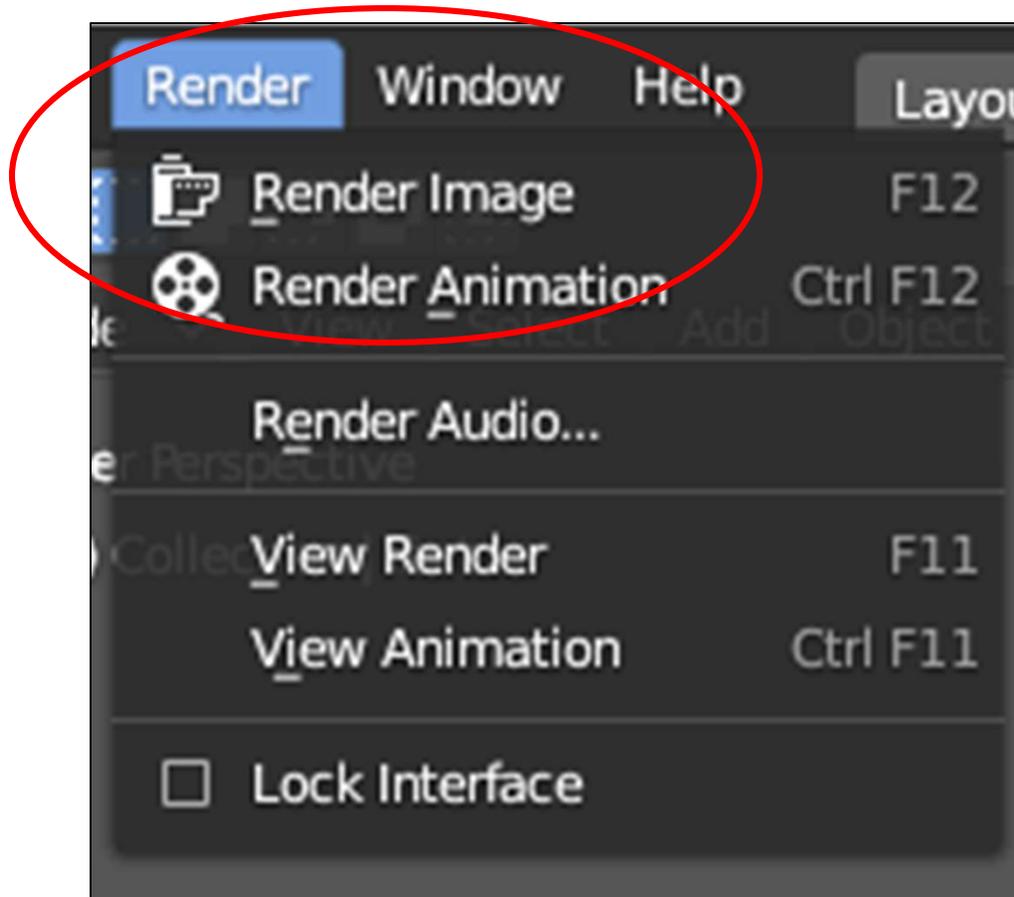

The Help Menu

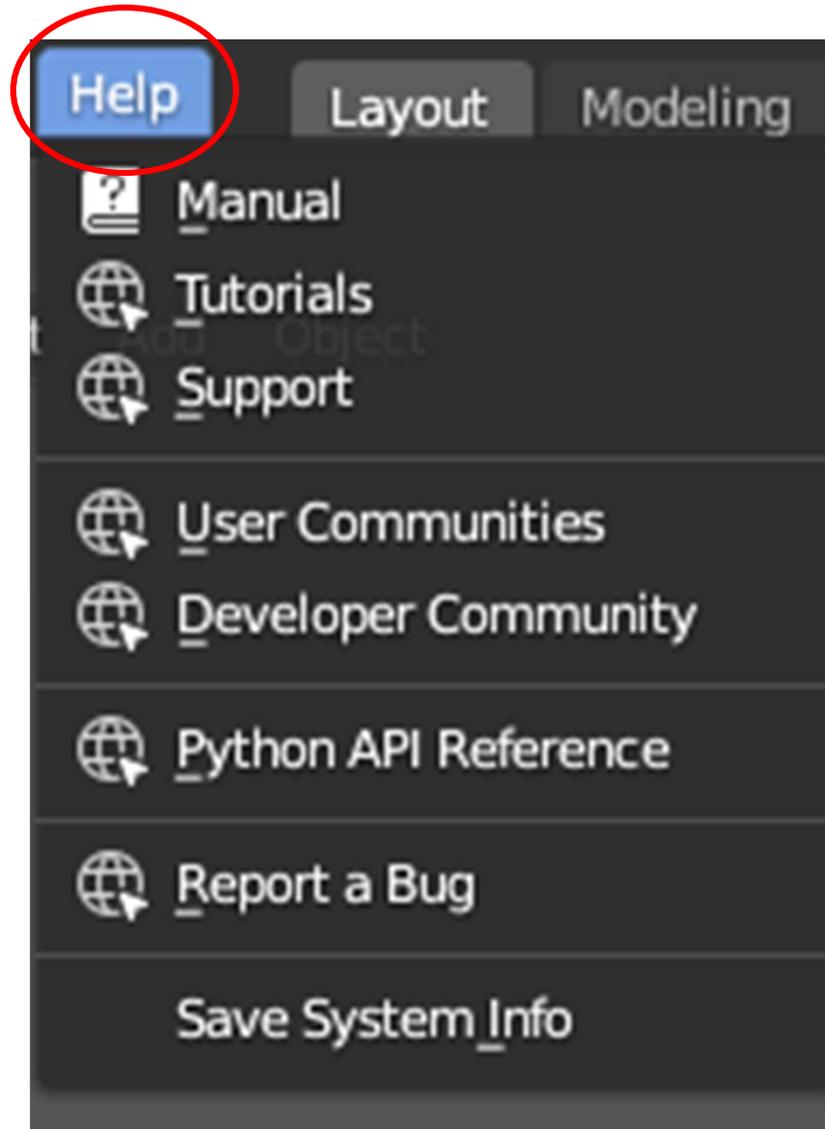


Blender Windows

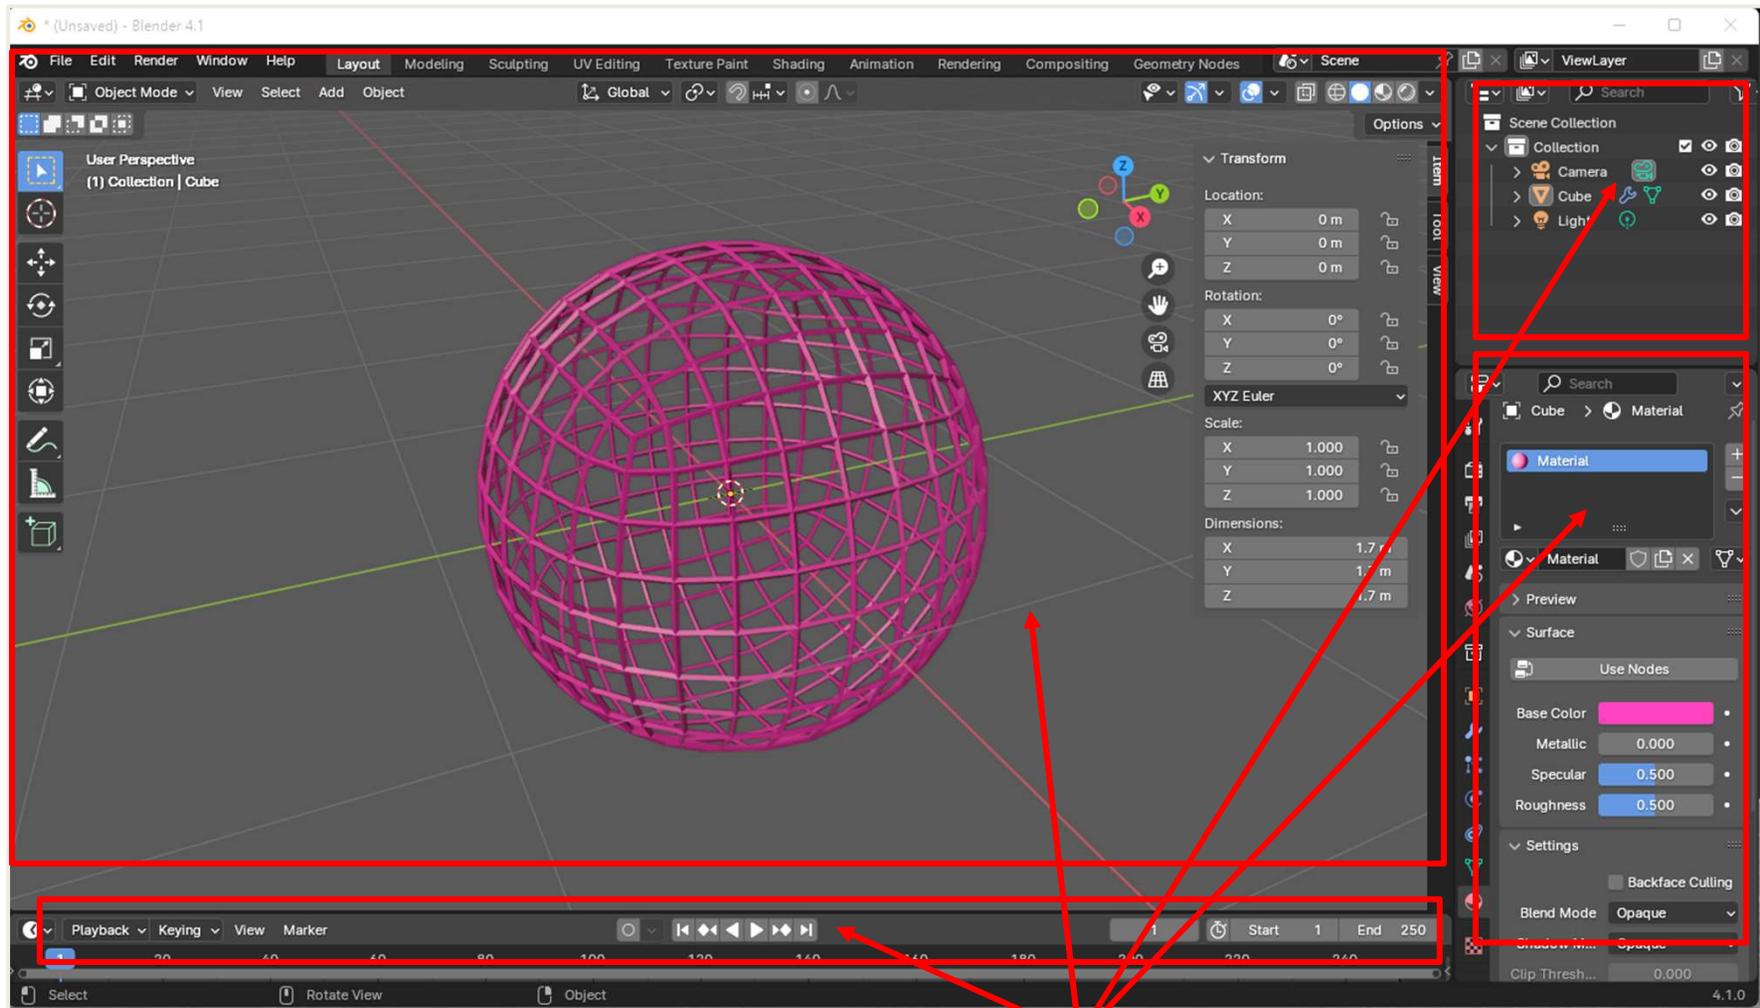

When Blender launches, there are four sub-windows visible. But Blender has 23 Possible sub-window types that you can bring up and change the size of.


Changing the Border Line on Blender Windows

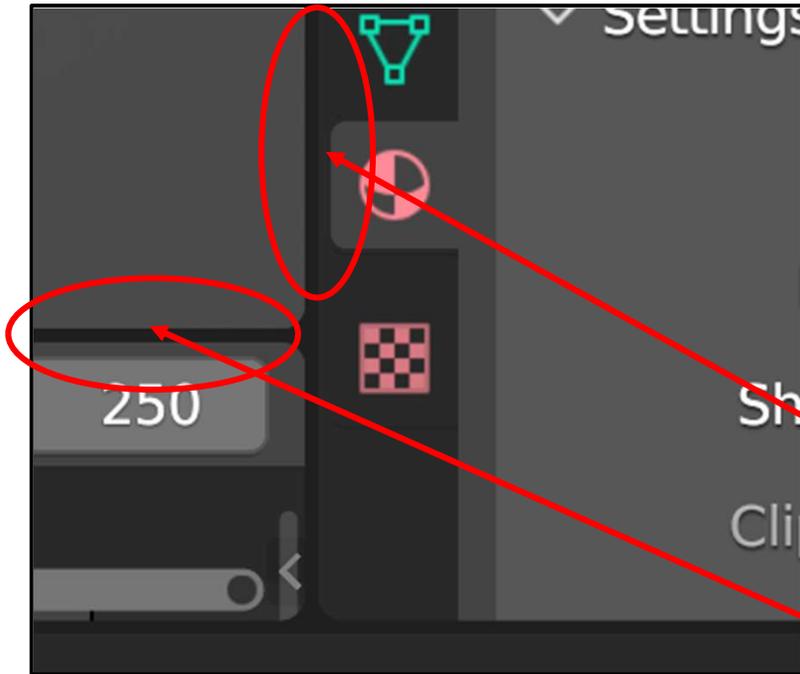

To change a sub-window boundary, **left-click** on the horizontal or vertical border line, wait for the cursor to change to a double-arrow, then move the mouse up/down or left/right.



Adding a New Blender Window

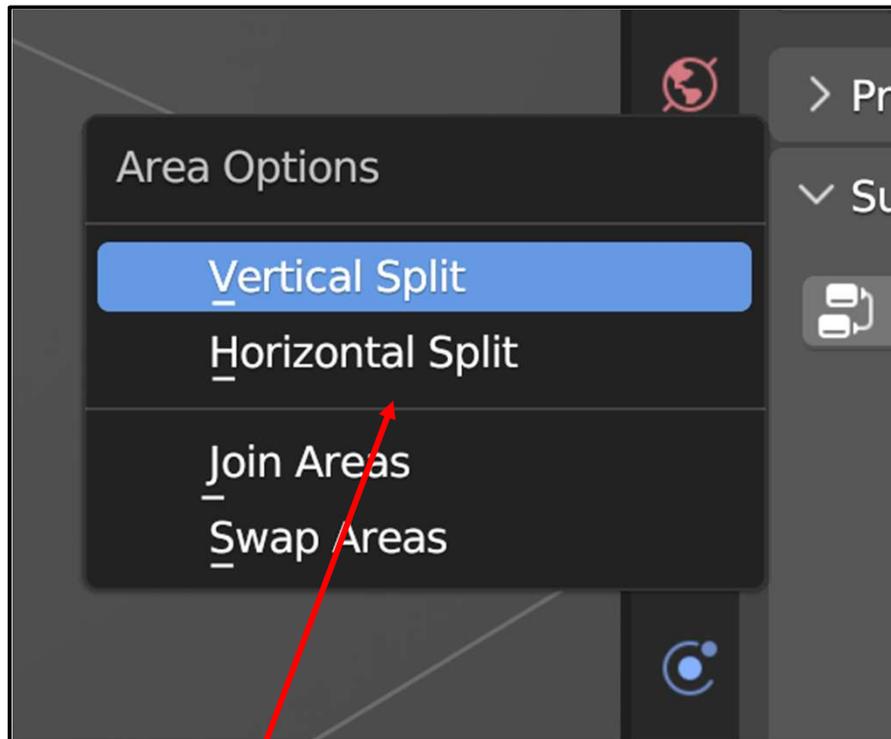


To change a sub-window boundary to create a new window, hover over the boundary, wait for the cursor to change to a double-arrow, then **right-click**. This menu will pop up. Select **Vertical Split** or **Horizontal Split** and move the mouse up/down or left/right. This will create a copy of a Blender sub-window that you already have.



Changing the Type of a Blender Window

“This will create a copy of a Blender sub-window you already have.”
Well, what good is that?

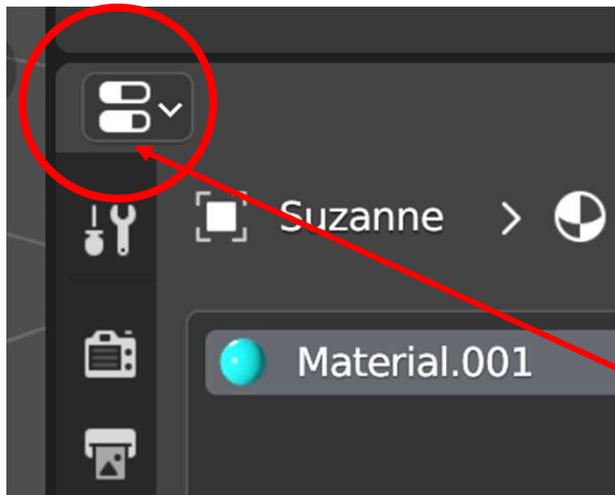

Blender sub-windows have a type, designated by the icon in the upper-left corner.

Changing the Type of a Blender Window





Clicking the down arrow, will bring up the list of the 23 types you can change that sub-window into:

General		Animation		Scripting		Data	
3D Viewport	Shift F5	Dope Sheet	Shift F12	Text Editor	Shift F11	Outliner	Shift F9
Image Editor	Shift F10	Timeline	Shift F12	Python Console	Shift F4	Properties	Shift F7
UV Editor	Shift F10	Graph Editor	Shift F6	Info		File Browser	Shift F1
Compositor	Shift F3	Drivers	Shift F6			Asset Browser	Shift F1
Texture Node Editor	Shift F3	Nonlinear Animation				Spreadsheet	
Geometry Node Editor	Shift F3					Preferences	
Shader Editor	Shift F3						
Video Sequencer	Shift F8						
Movie Clip Editor	Shift F2						

Congratulations! You have now added a new Blender sub-window to your display.

Deleting a Blender Window

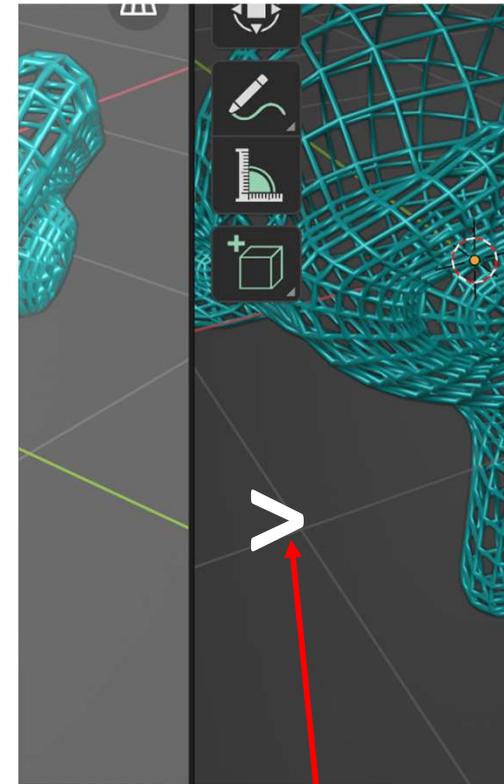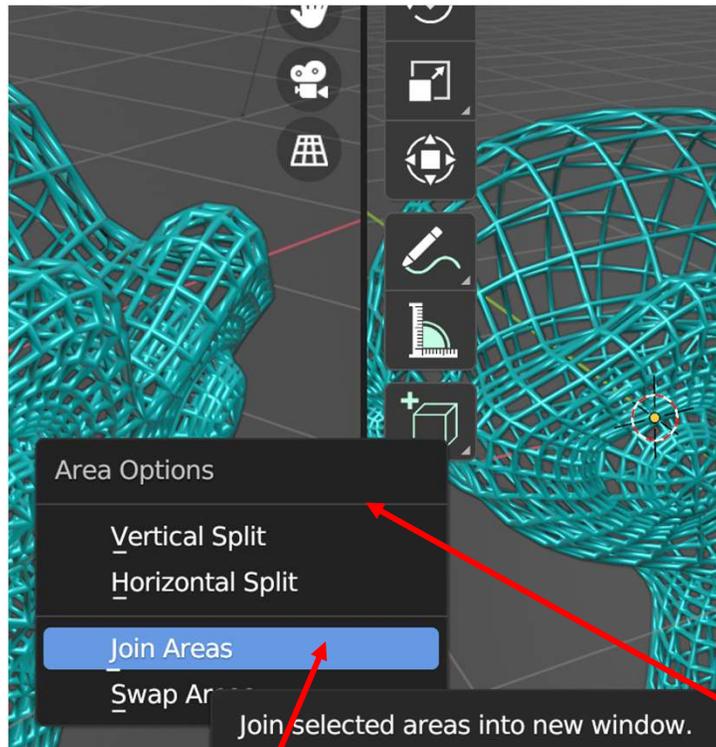


To delete a window, hover over the boundary, wait for the cursor to change to a double-arrow, then **right-click**. This menu will pop up. Select **Join Areas** and move the mouse up/down or left/right. This symbol shows you which window will be eliminated when you click the mouse button.


2. Viewing in 3D



3D Coordinate Systems

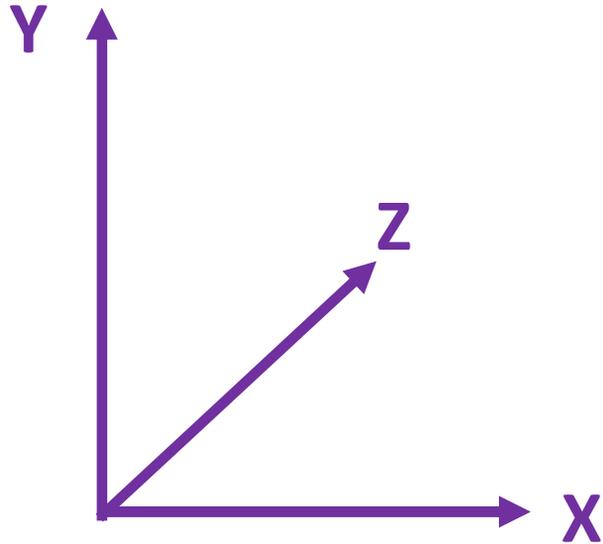

Left-handed

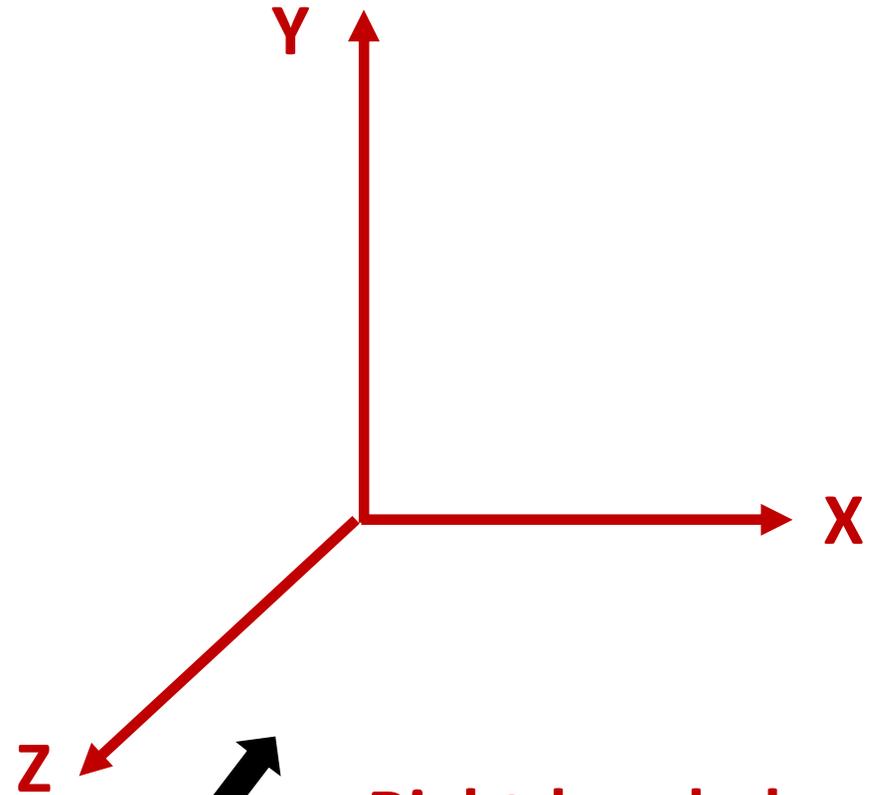


Right-handed

Blender uses this convention


The Coordinate and Viewing System

38

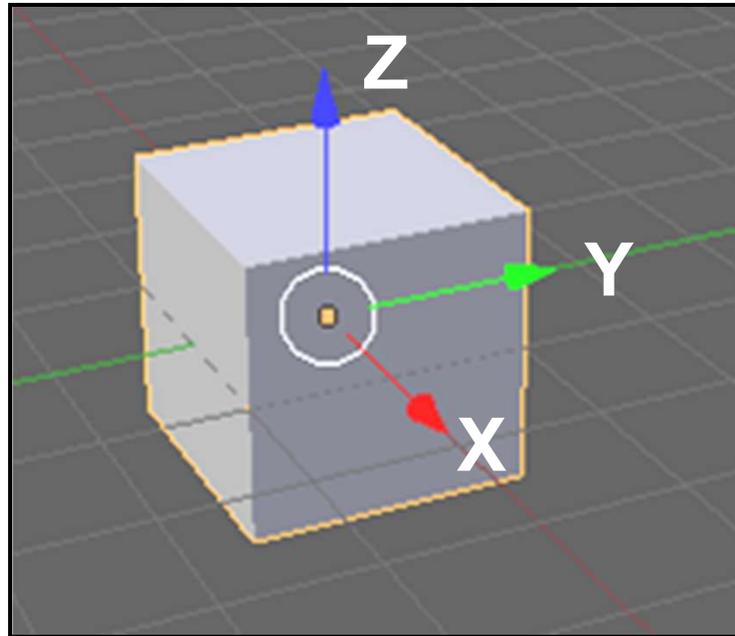

- Right-handed coordinate system
- **X = Red**
- **Y = Green**
- **Z = Blue**
- Middle mouse button (MMB) – orbit (rotate)
- Shift MMB – pan
- Scroll wheel – zoom
- View → Viewpoint → Left, Right, ...
- View → Area → Toggle Quad View
- View → View Perspective/Orthographic

The View Menu

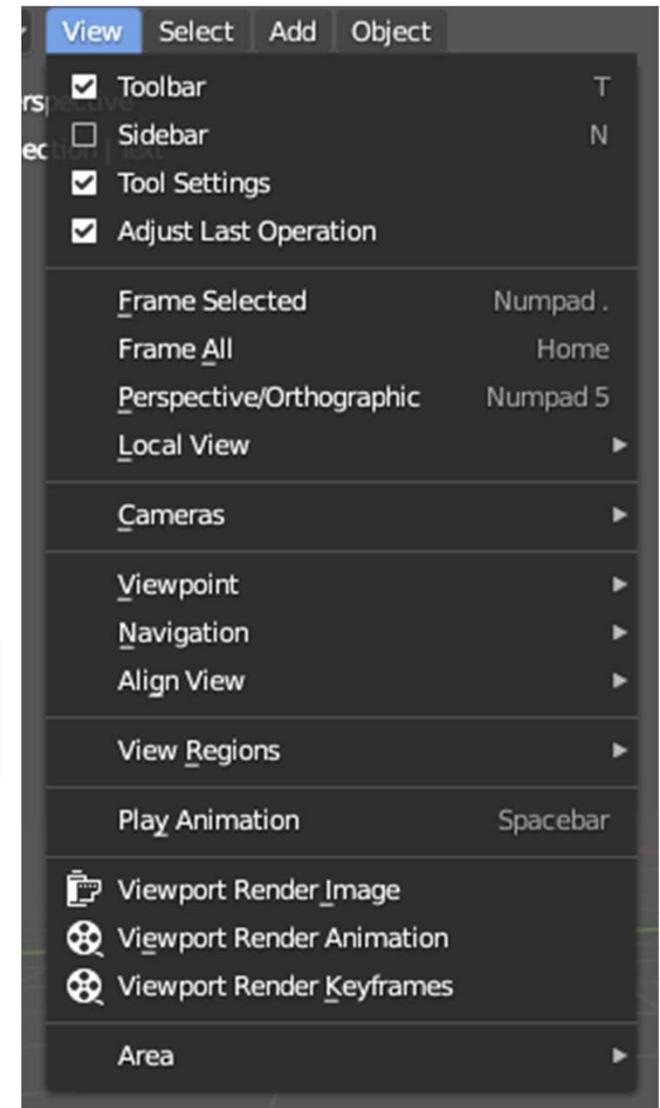


The View Menu gives you access to lots of ways to change how you are viewing the scene

Rotating About a Particular Object



If you would like to be able to rotate the entire scene around a particular object, click on the object and then select:

View → Frame Selected


You can also hit the period (.) on the number pad on the keyboard.

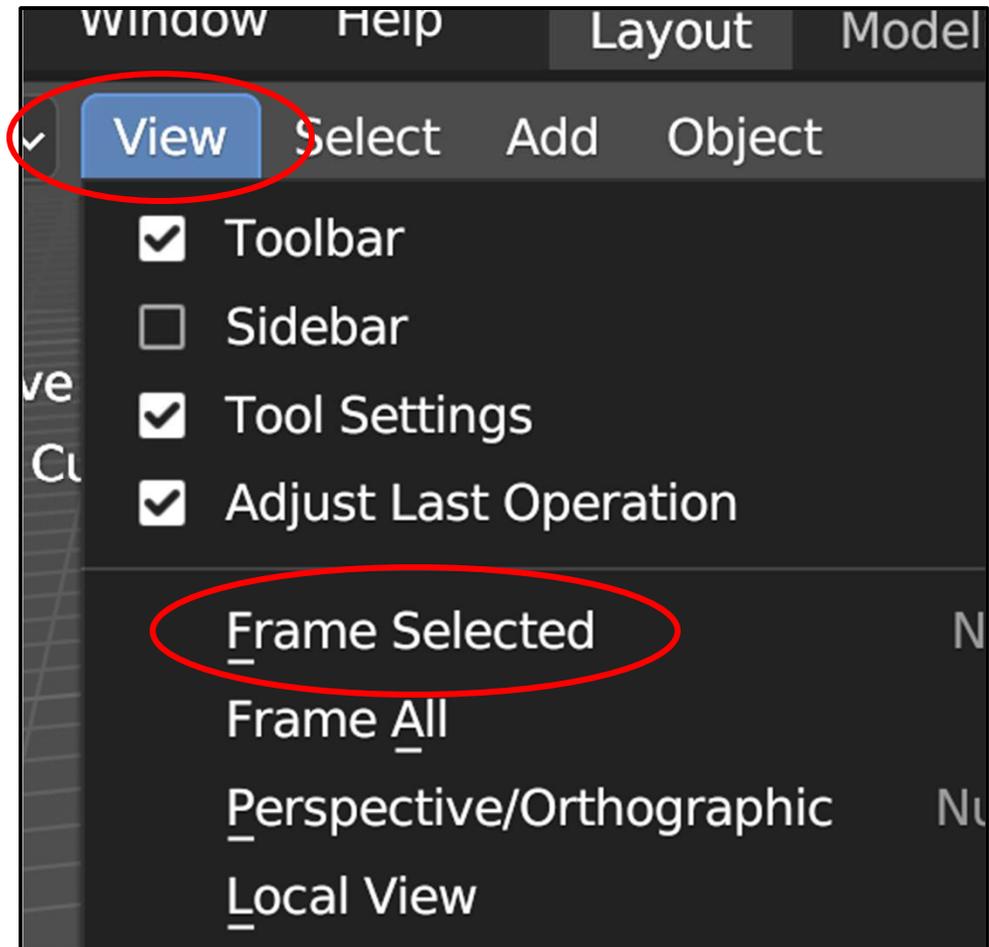

toggling Between Perspective and Orthographic Views

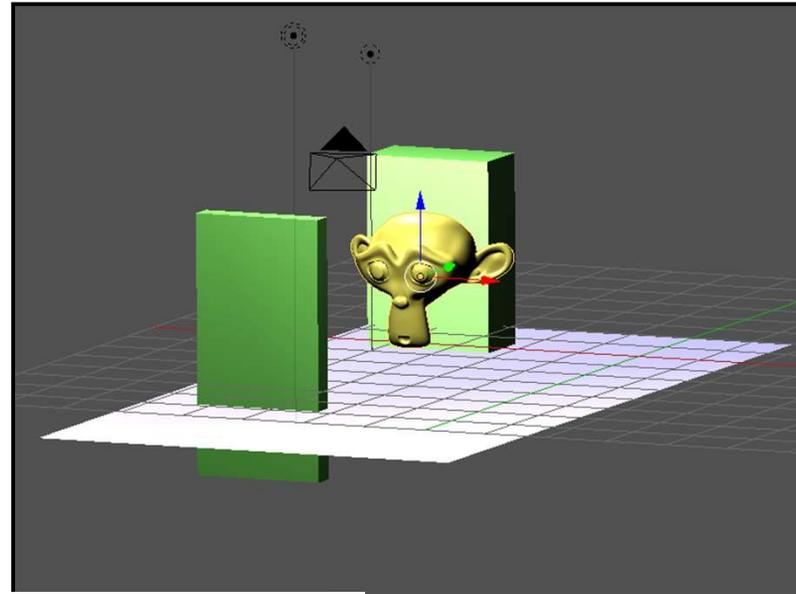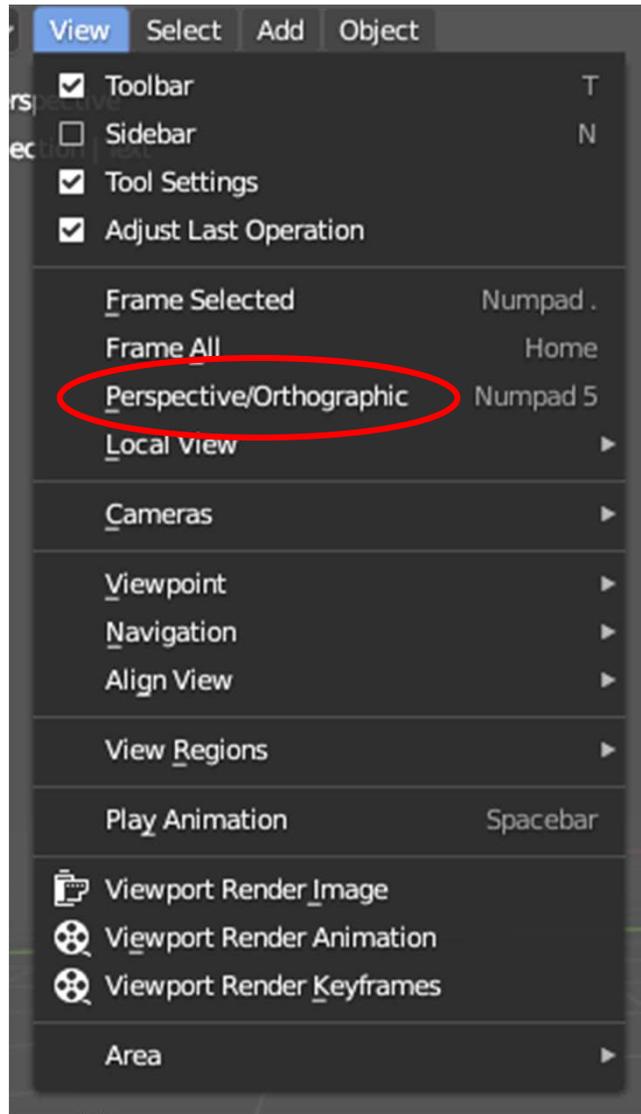


Orthographic

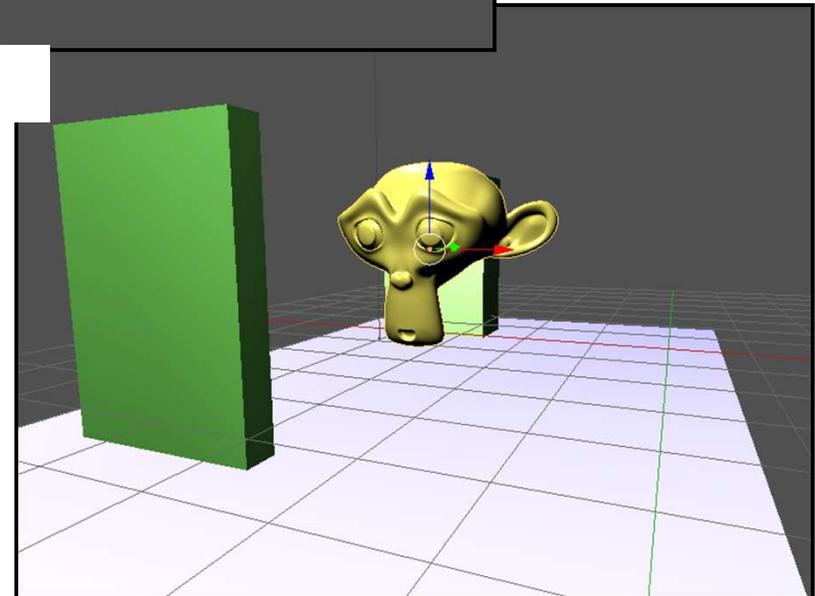


Perspective

toggling Between Perspective and Orthographic Views

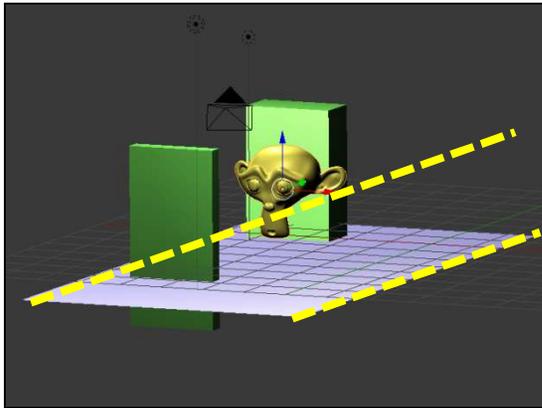

In orthographic, lines that are parallel in 3D remain parallel on the screen. Objects appear to be the same size as they get farther away.

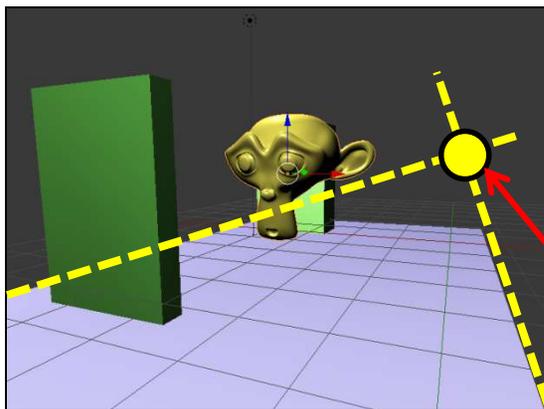


In perspective, lines that are parallel in the 3D depth direction appear to converge on the screen. Objects appear to get smaller as they get farther away.

“Vanishing Point”


Use perspective when you want a more realistic view (which is most of the time).

Use orthographic to see if things separated in depth are the same size.

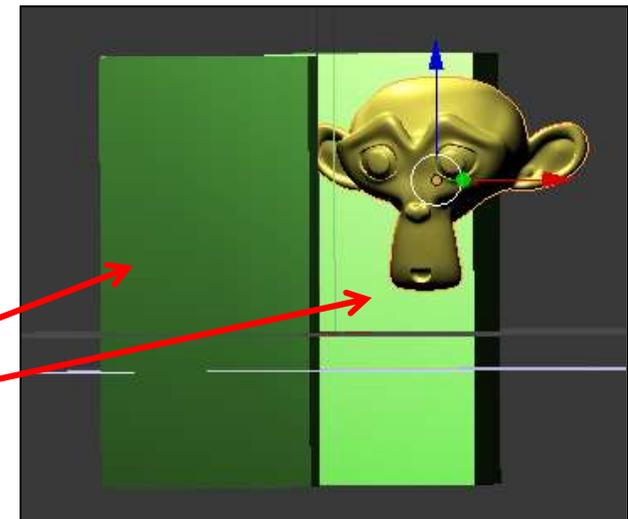



Toggling Between Perspective and Orthographic Views

Use perspective when you want a more realistic view (which is most of the time):



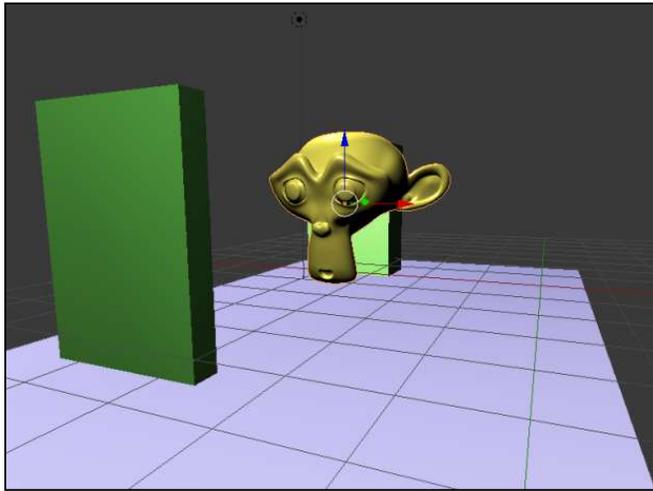


scene.blend

Use orthographic to see if things separated in depth are the same size:

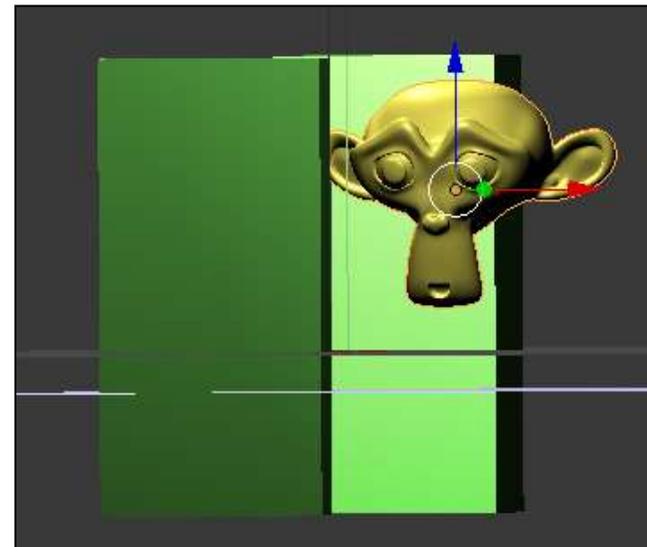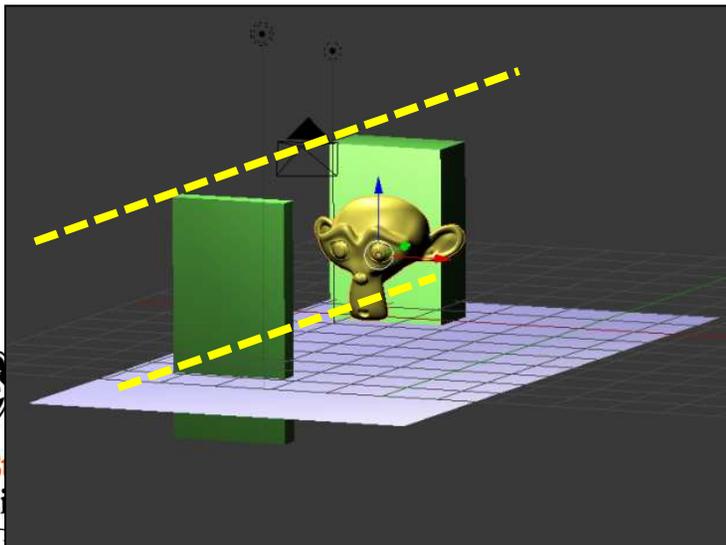


Single View vs. Quad View

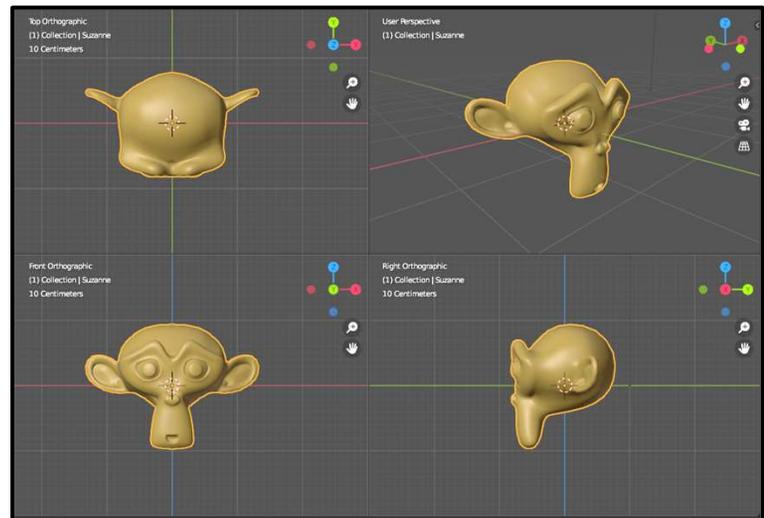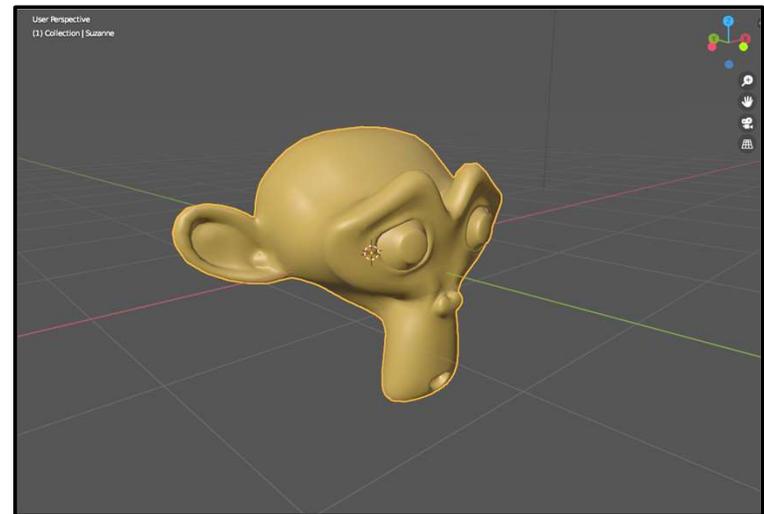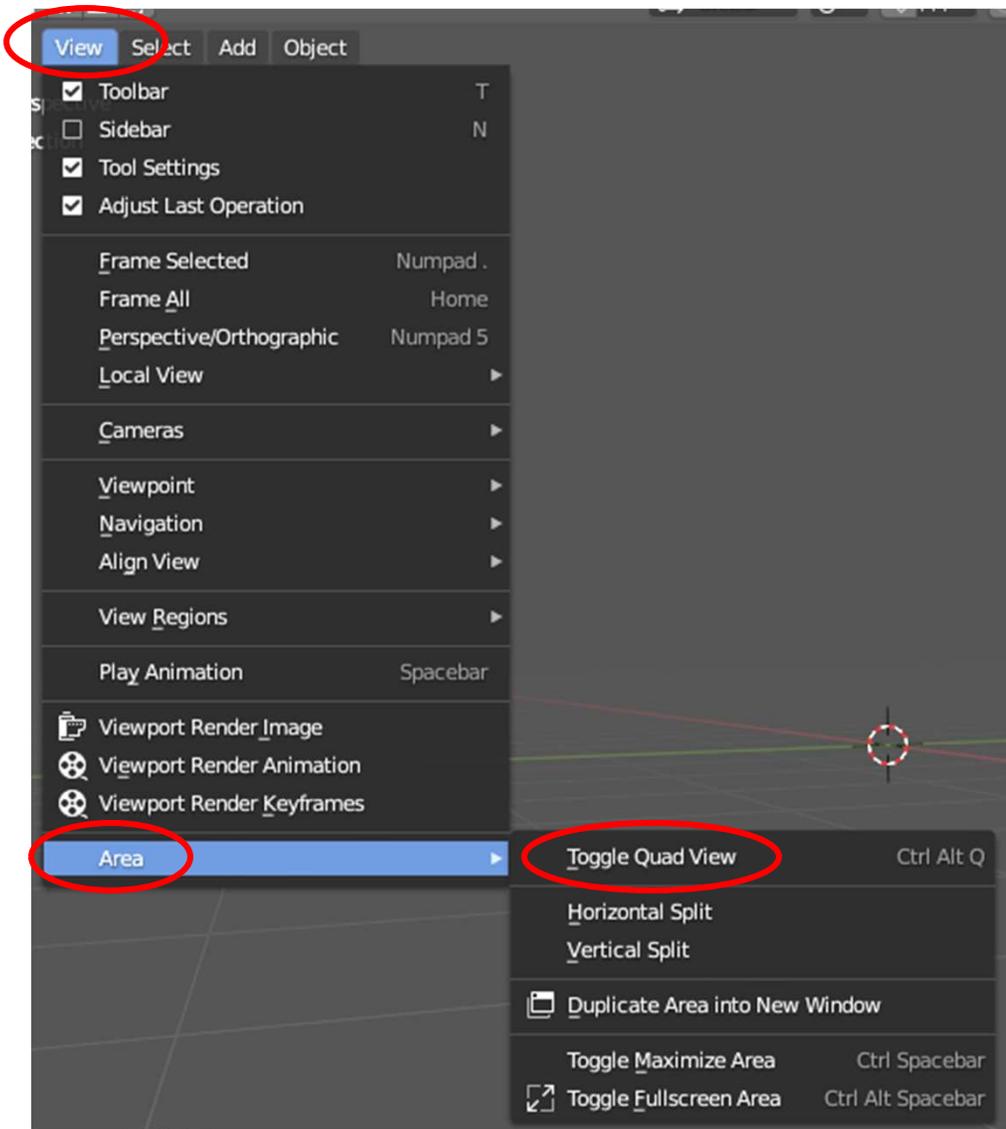

Or hit **Control-Alt-q**






Setting the initial Rendering Mode

On the vertical strip of icons on the right, click this one:

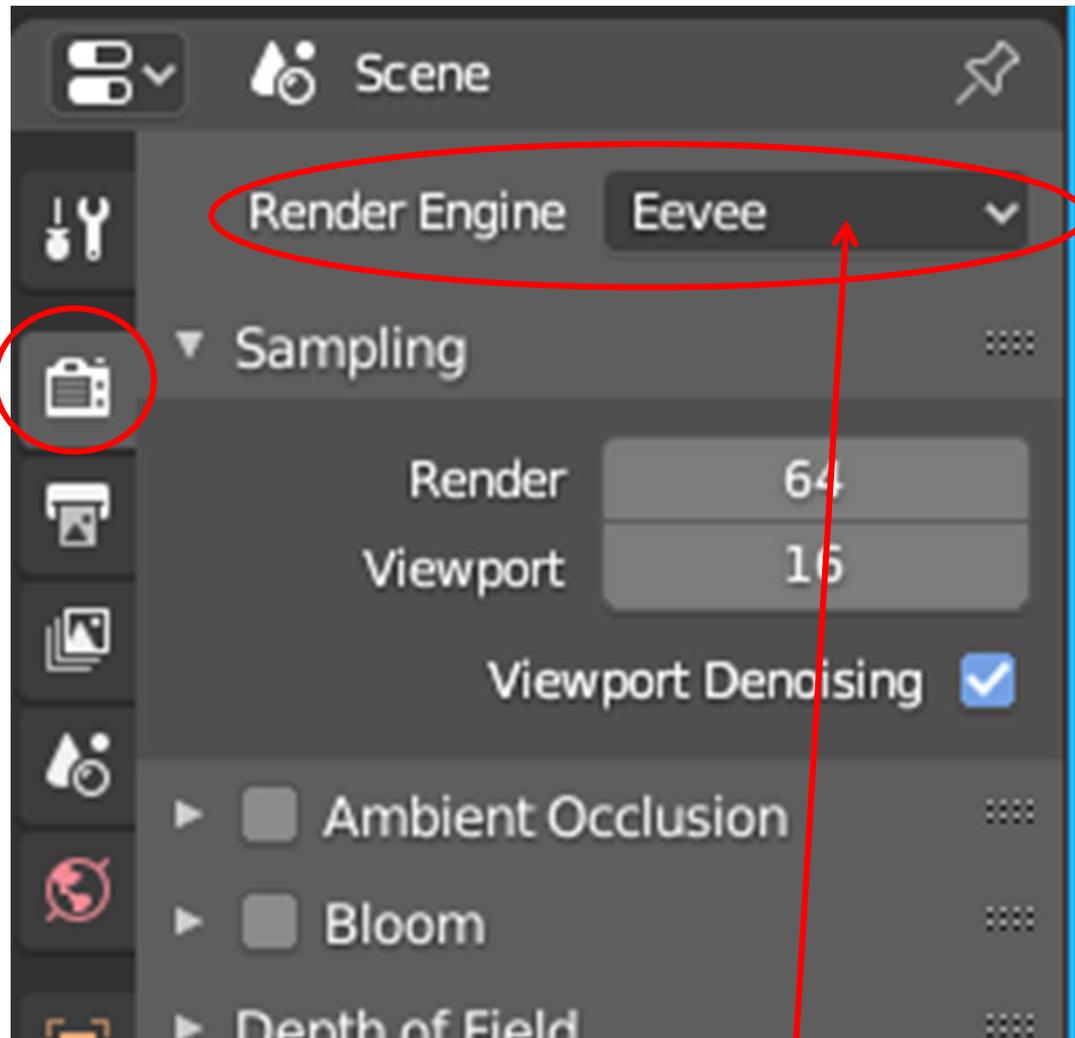

And then be sure the Render Engine is set to **Eevee** for now.


Setting the initial Display Mode

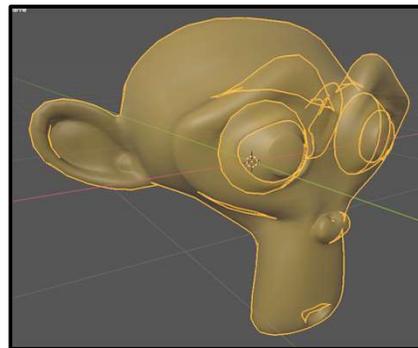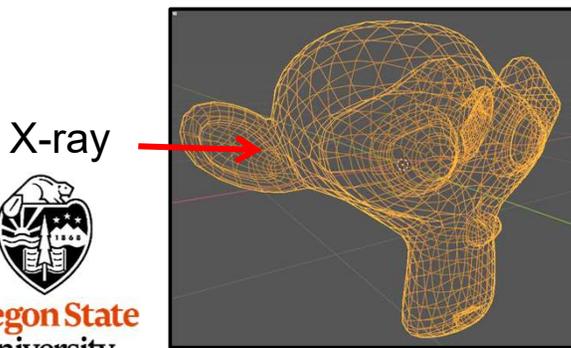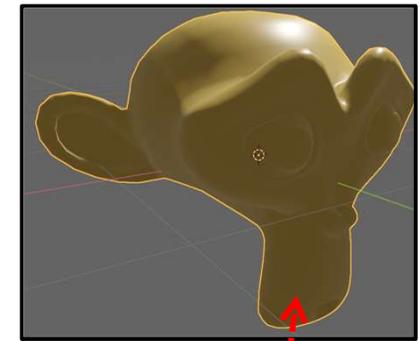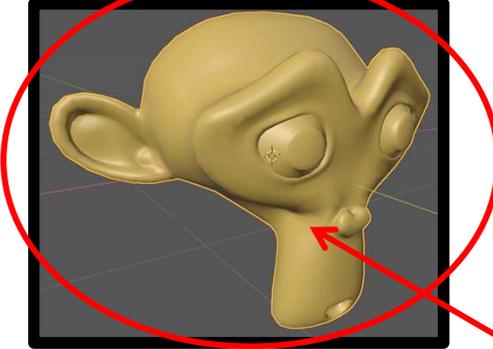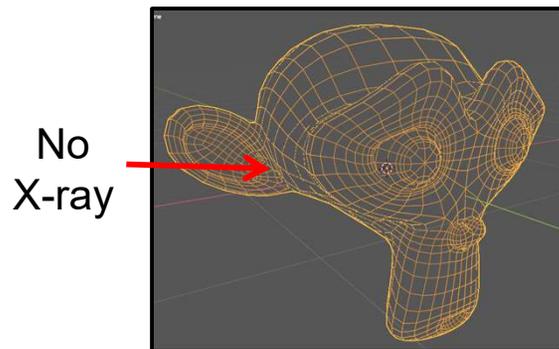



Use **Viewport Shading** to start. It gives good generic lighting.

Later, when we cover Rendering, we will use Rendered lighting, but not now.

3. Moving Things Around in 3D

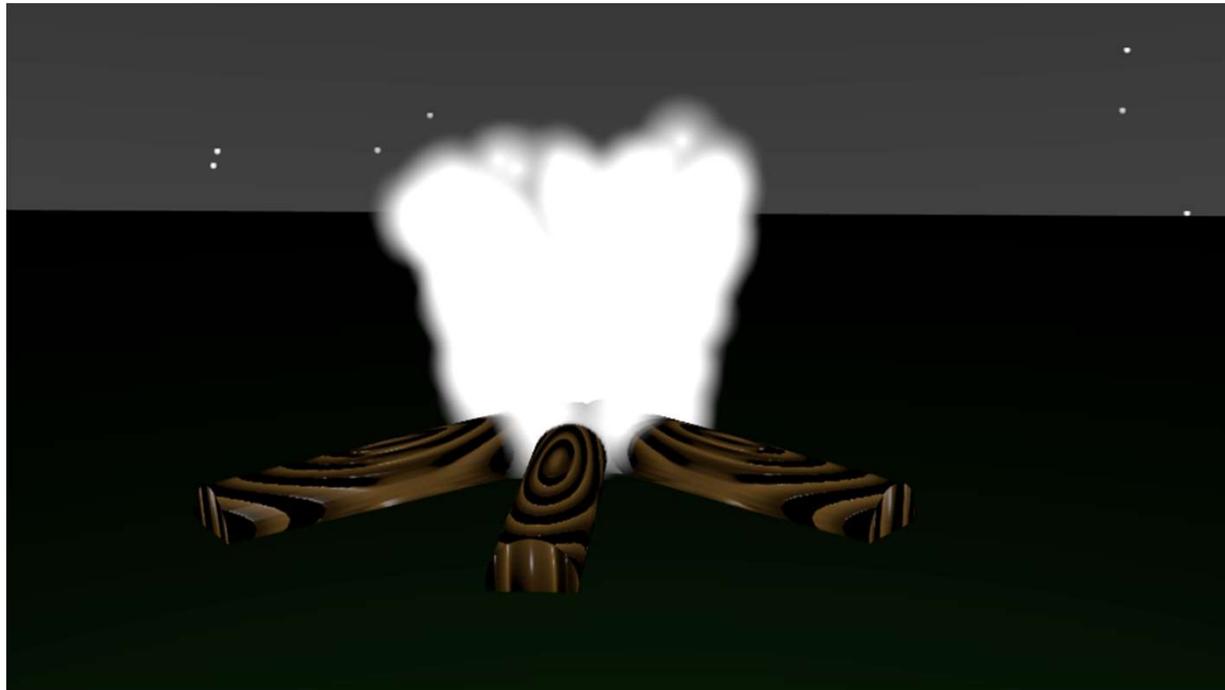

We will get into this in more detail later, but just so that you⁴⁸ have something on the screen, here is the Add Menu

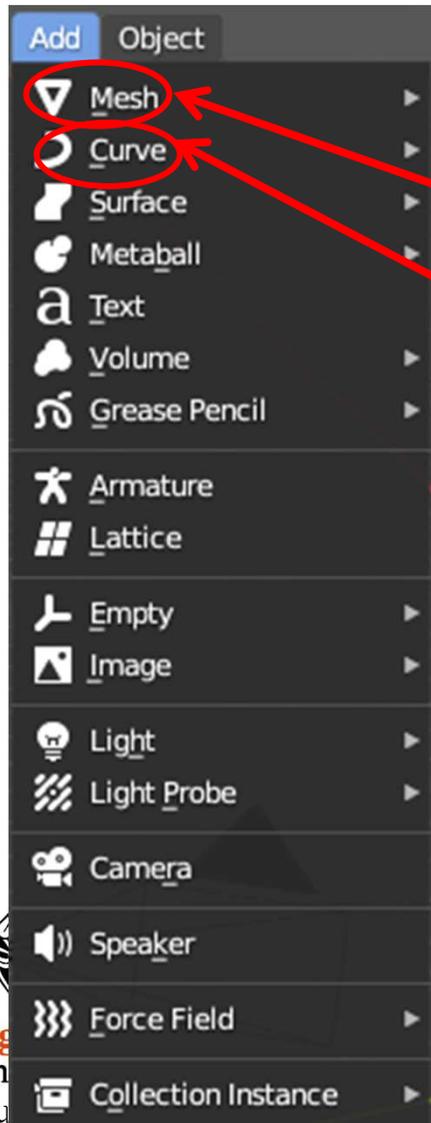


These are all the different geometry things you can add into the scene. We will cover many of them, but not all.

This group is the **meshes**.



This group is the **curves**.

The Add→Mesh Menu

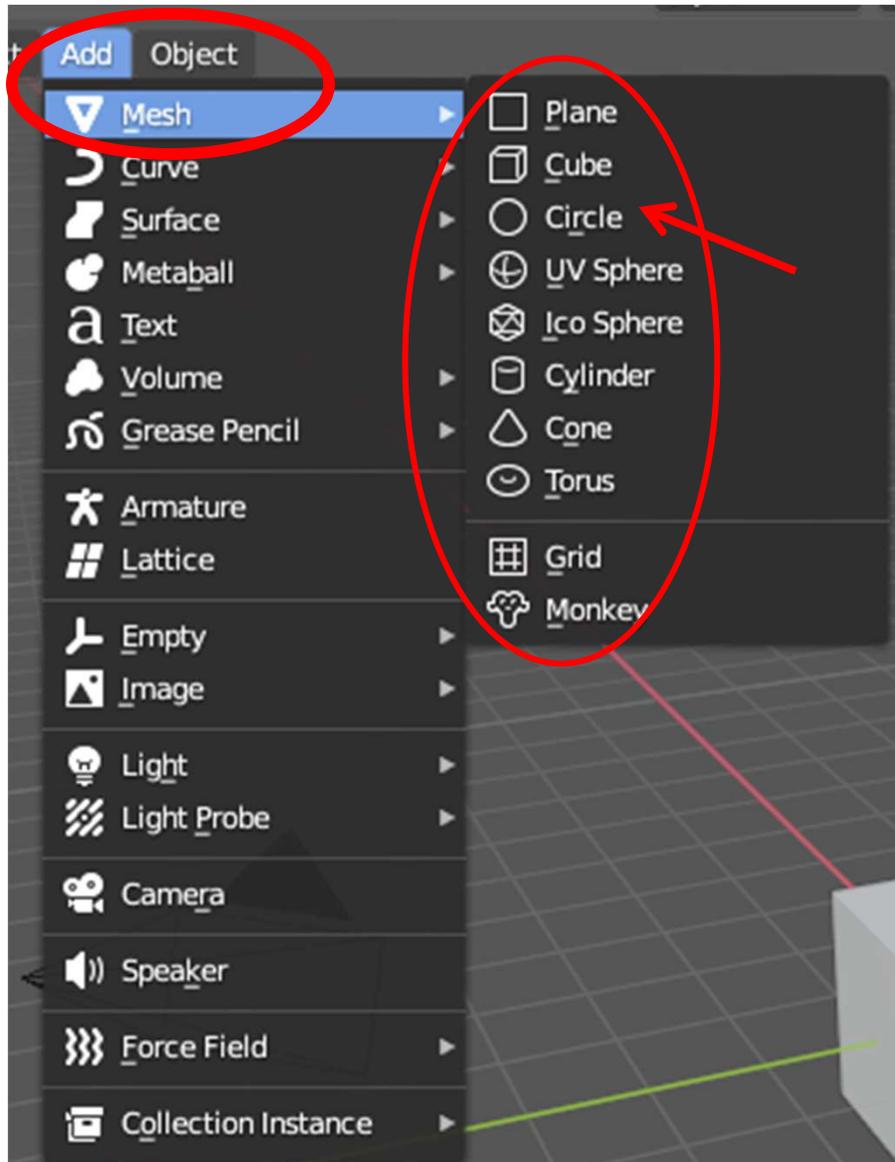


The UV Sphere, Torus, and Monkey are my favorites

Summary of the Mesh Objects

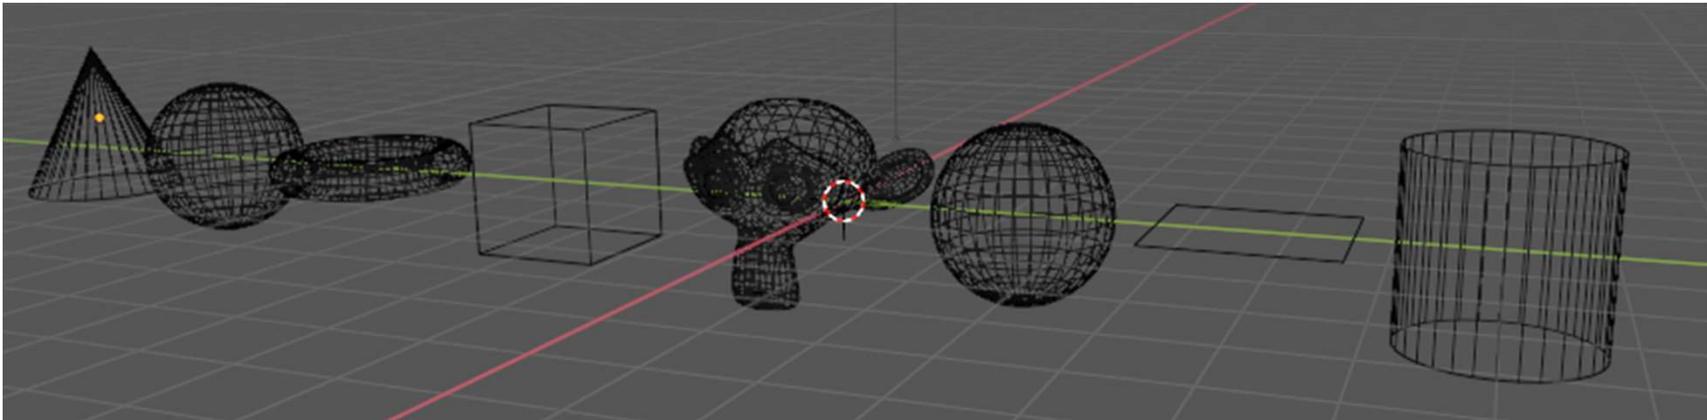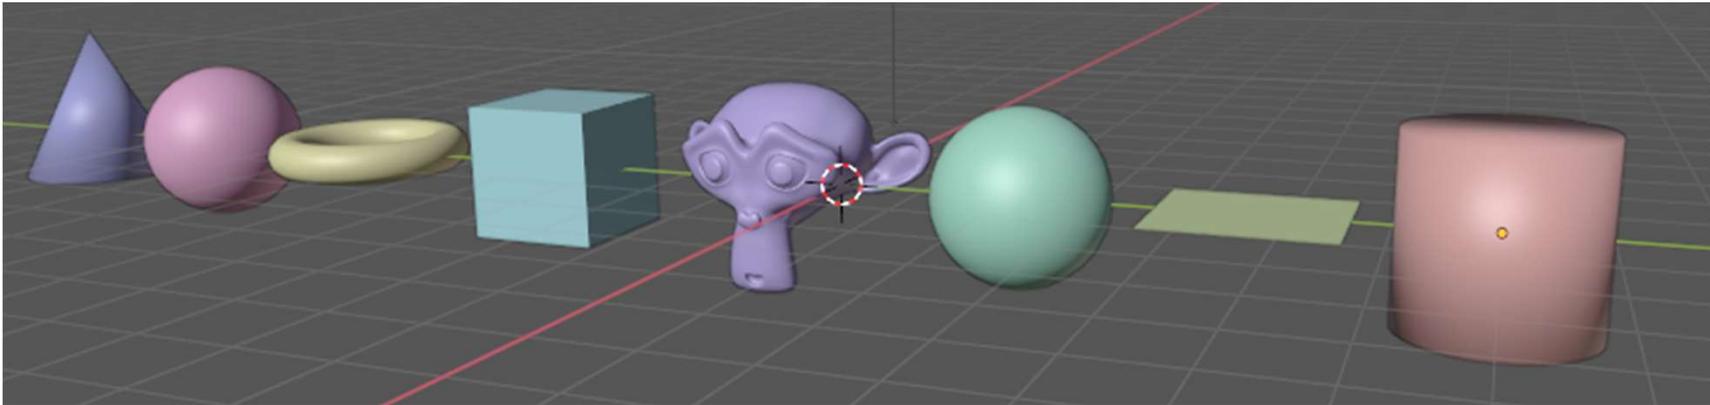


Coordinate System Conventions


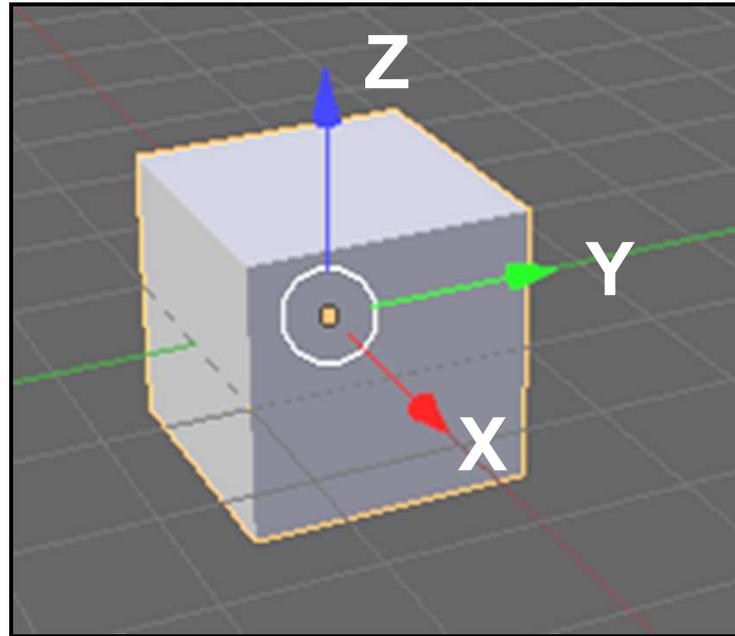


- Right-handed coordinates
- Right-handed rotation rule
- Angles are in degrees

Right-handed Rotation Rule

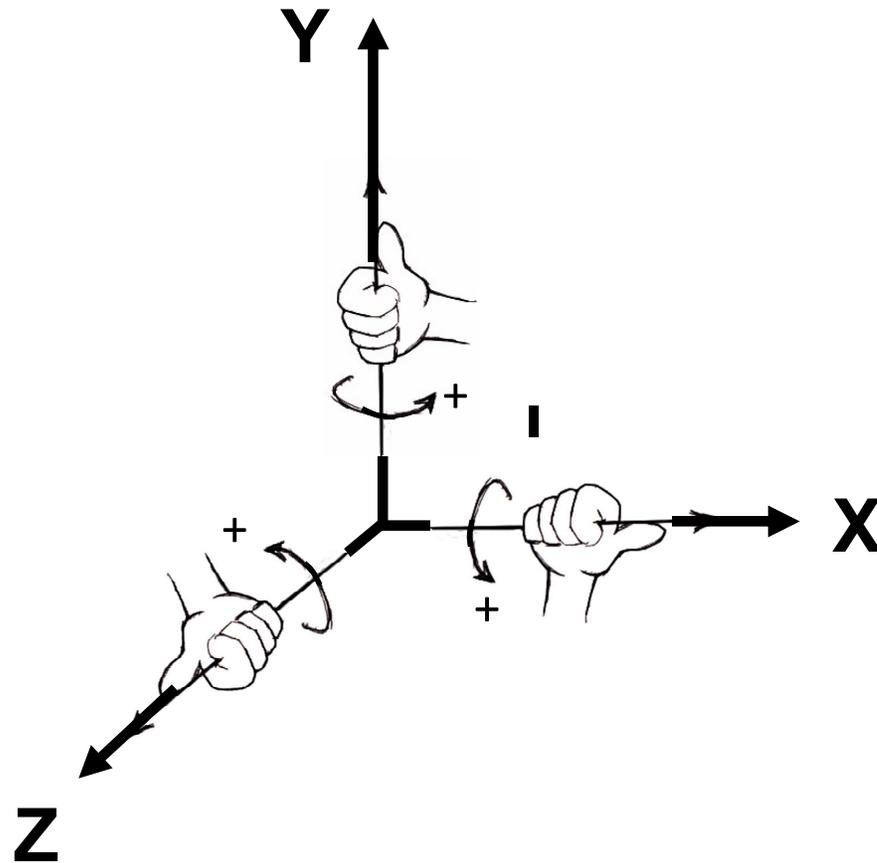

Selecting an Object to Work On

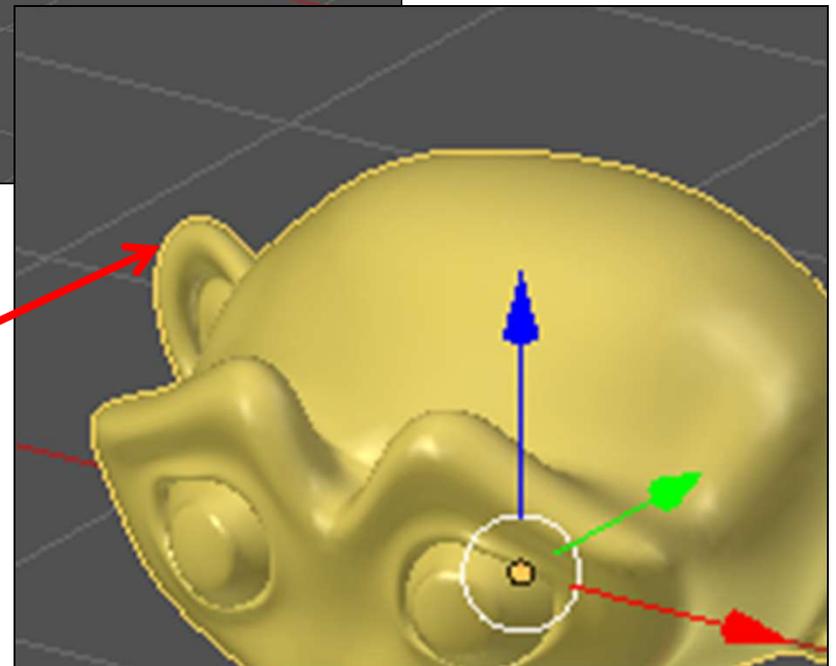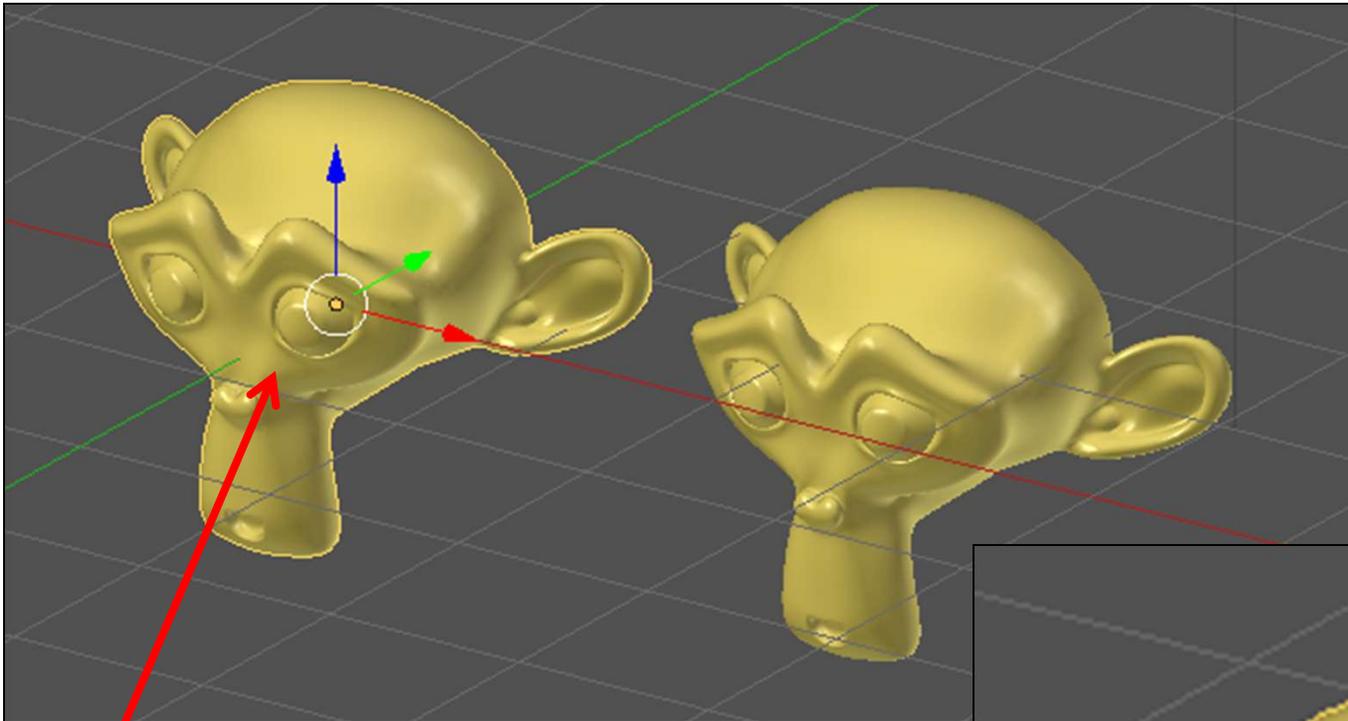


LMB-click on the object you want to select. It will then be highlighted with an orange outline.


Selecting *Multiple* Objects to Work On: Two Ways to Do This

1. Hold down the Shift key while RMB-clicking

2. LMB a rectangular region around objects

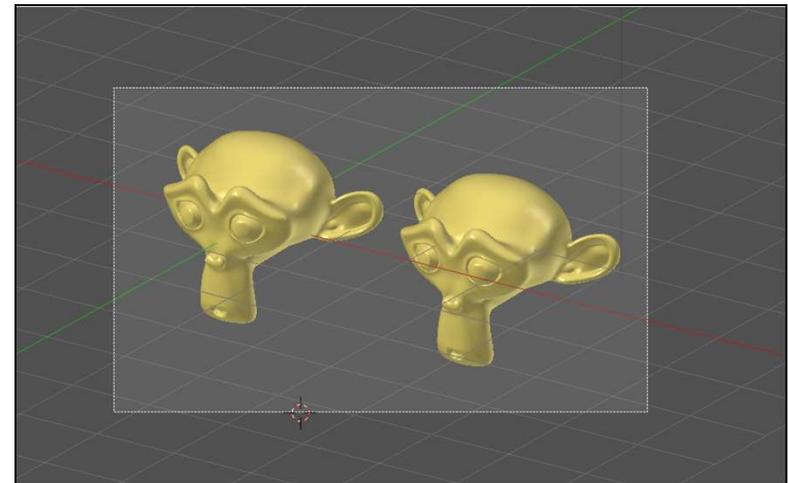





Moving Things By Clicking and Dragging

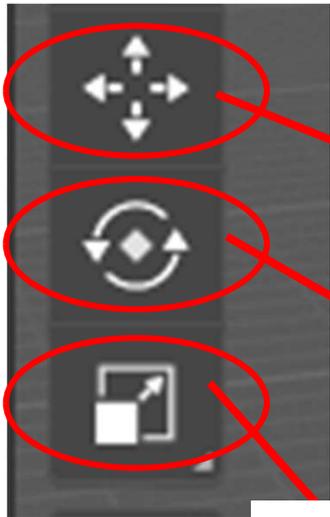

Translate ("grab")

Rotate


Scale

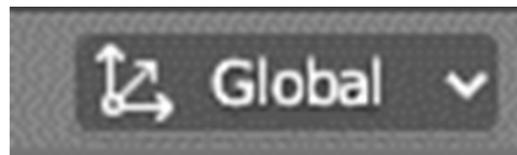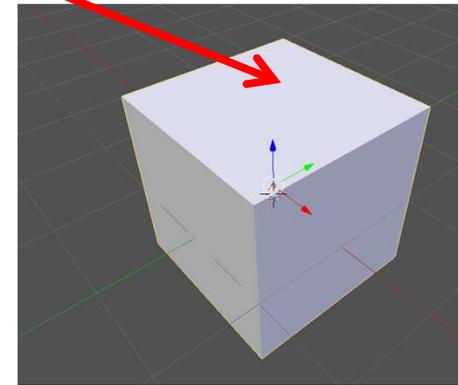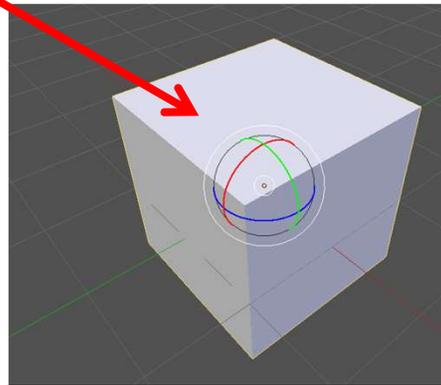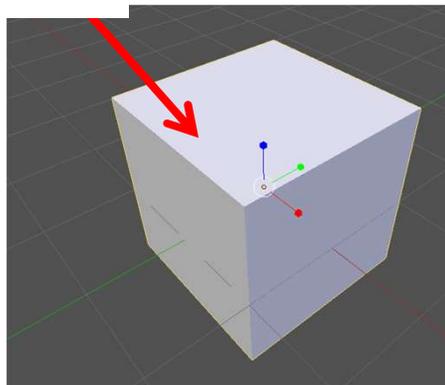

Use Global or Local
Coordinate System


Global and Local Coordinates

Global

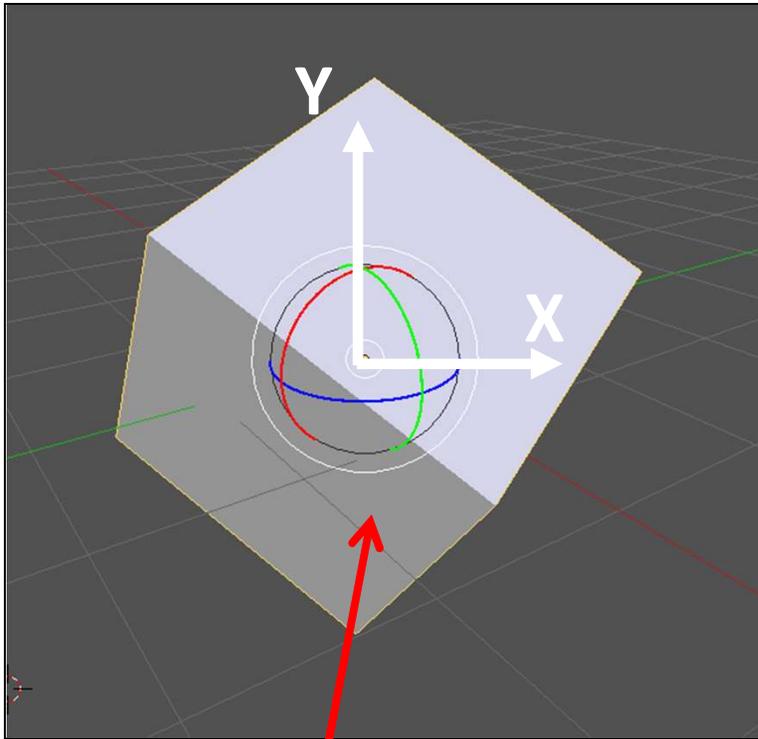


**Global Coordinates
align with the *screen***

Local

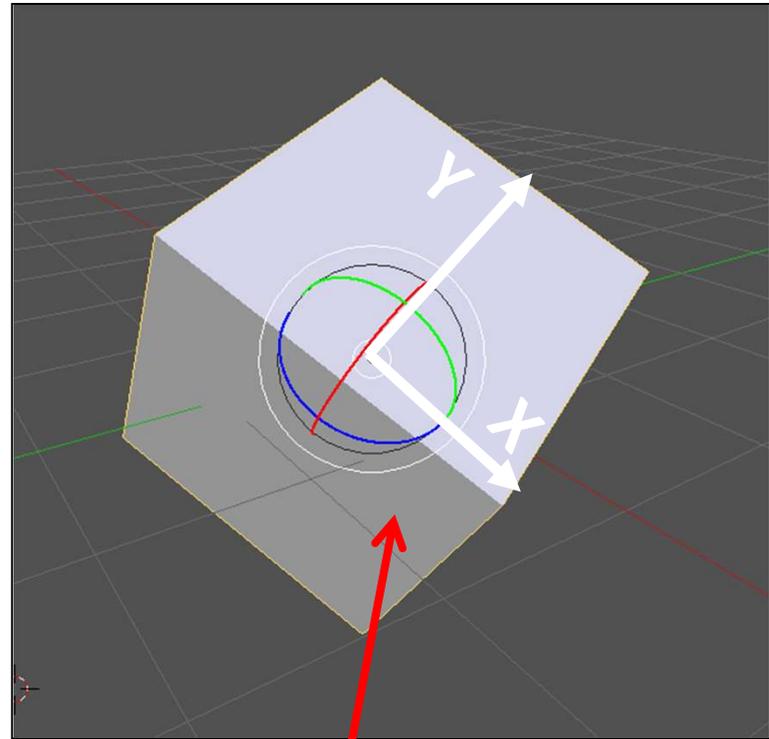

**Local Coordinates
align with the *object***

Saying How to Move Things by Using the Keyboard

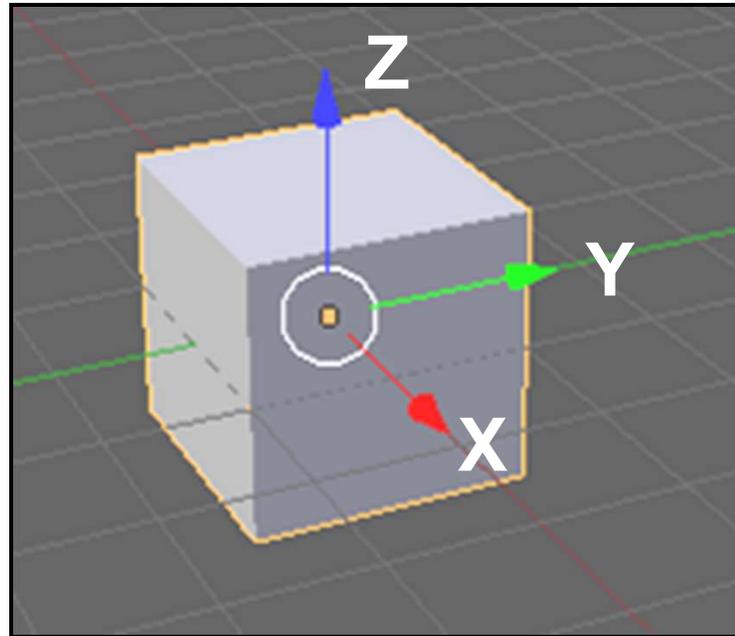


- LMB click to select an object
- Grab: g
- Rotate: r
- Scale: s
- Grab using global axis: g → x, etc.
- Grab using local axis: g → x → x
- Pick all *but* a particular axis: g → X, g → X → X, etc.
- Grab a specific distance: g → x → 12.25 <return>
- Rotate a specific angle: r → x → 45 <return>
- Scale a specific factor: s → 2.0 <return>
- Scale a specific factor: s → x → 2.0 <return>

This is *important* – you will use this a lot!

The arrows (→) mean “and then hit”


You Can Also Use the Sidebar Panel

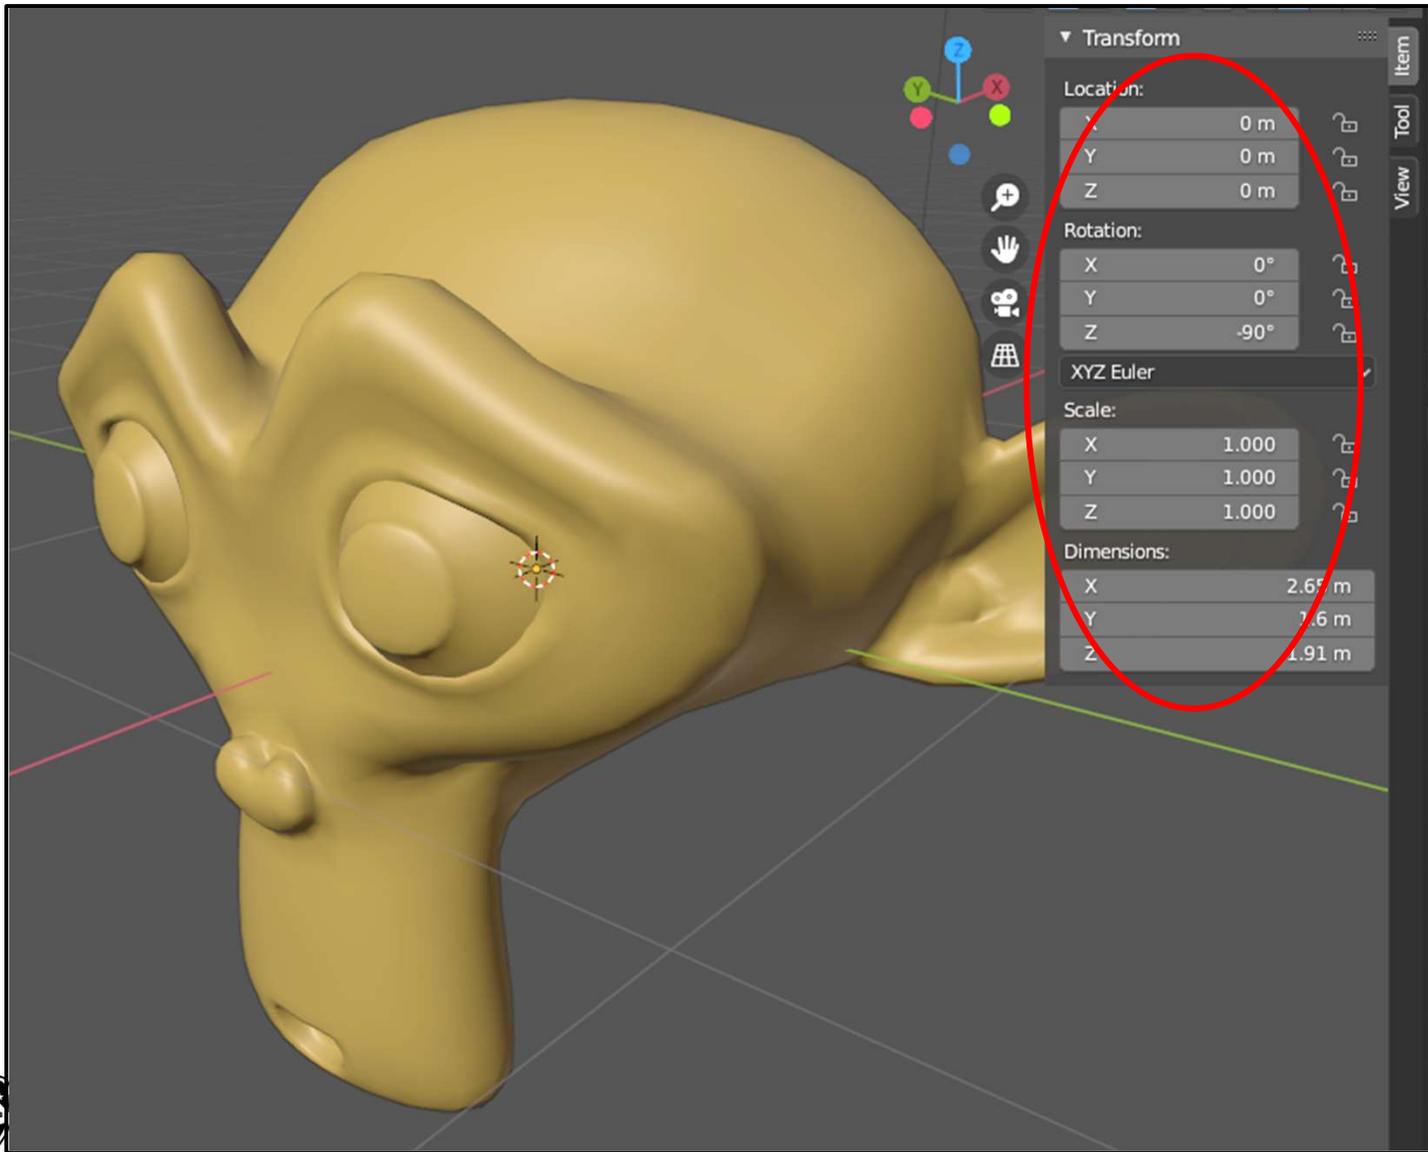

Hit the 'n' key to toggle this panel on and off


Applying the Transformation

When you transform an object, Blender *doesn't change the object's coordinates*. It keeps the object's original coordinates plus a record of the transformation. So, for example, if you scale an object by 2.0, Blender remembers it like this:

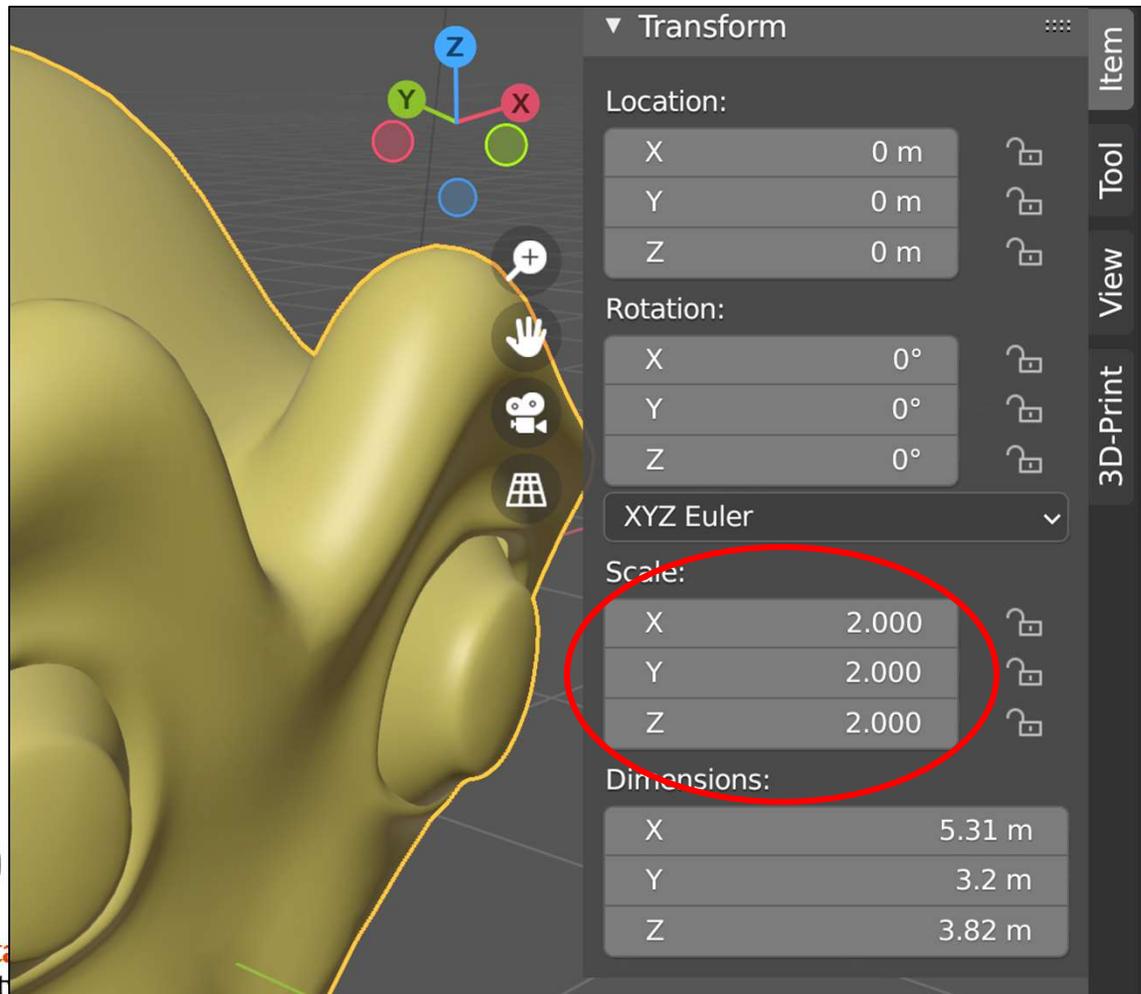

Applying the Transformation


If you want to actually *alter* the object's coordinates, choose **Object** → **Apply**

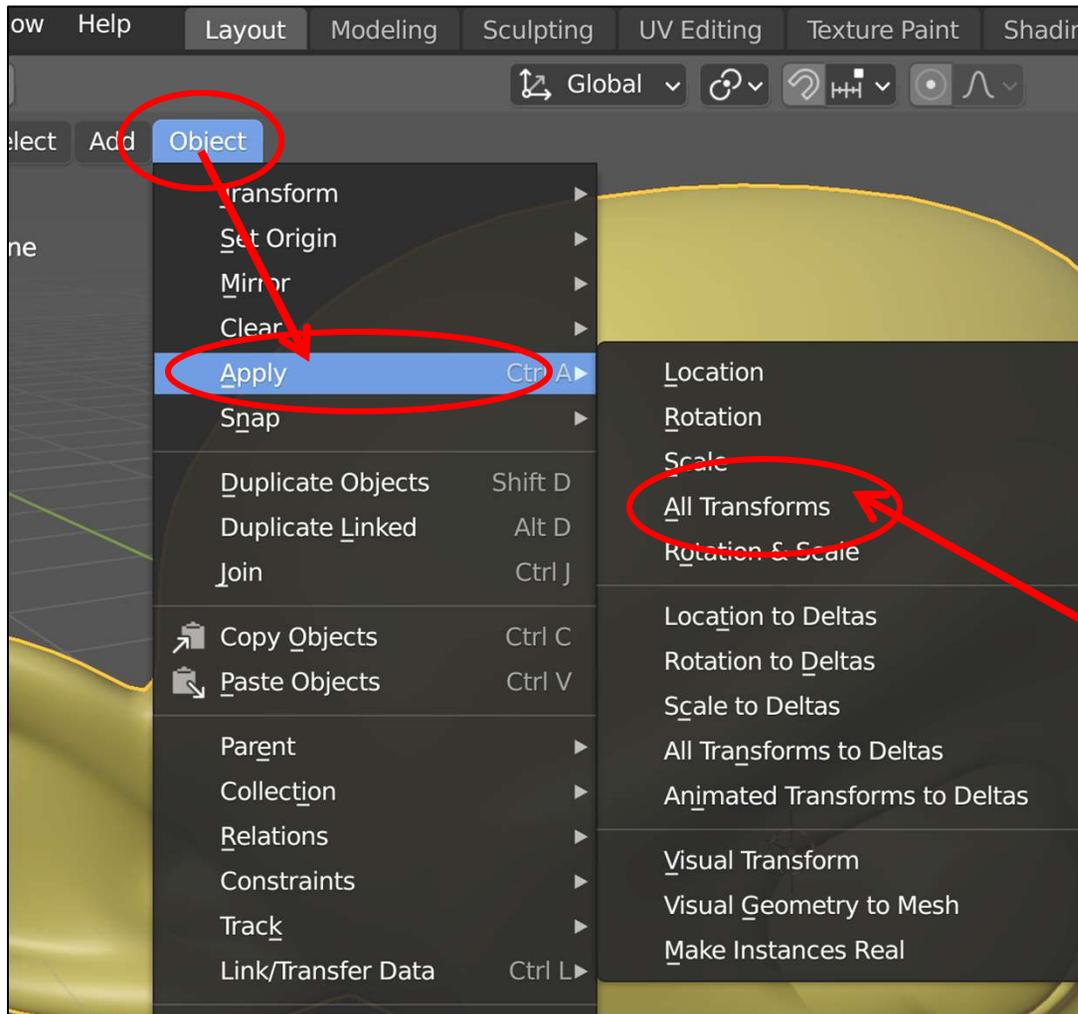


You can pick a specific transformation to apply, but most of the time it is easiest to select **All Transforms**

Applying the Transformation

Once you apply the transformation, the Object Properties Box looks like this:


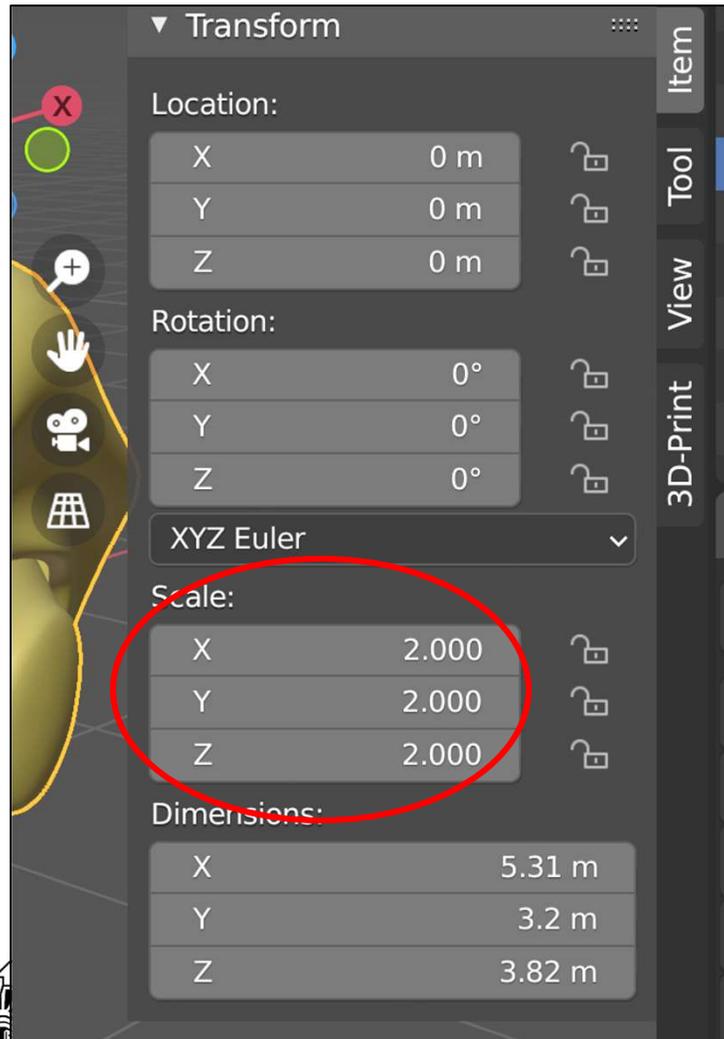


Before

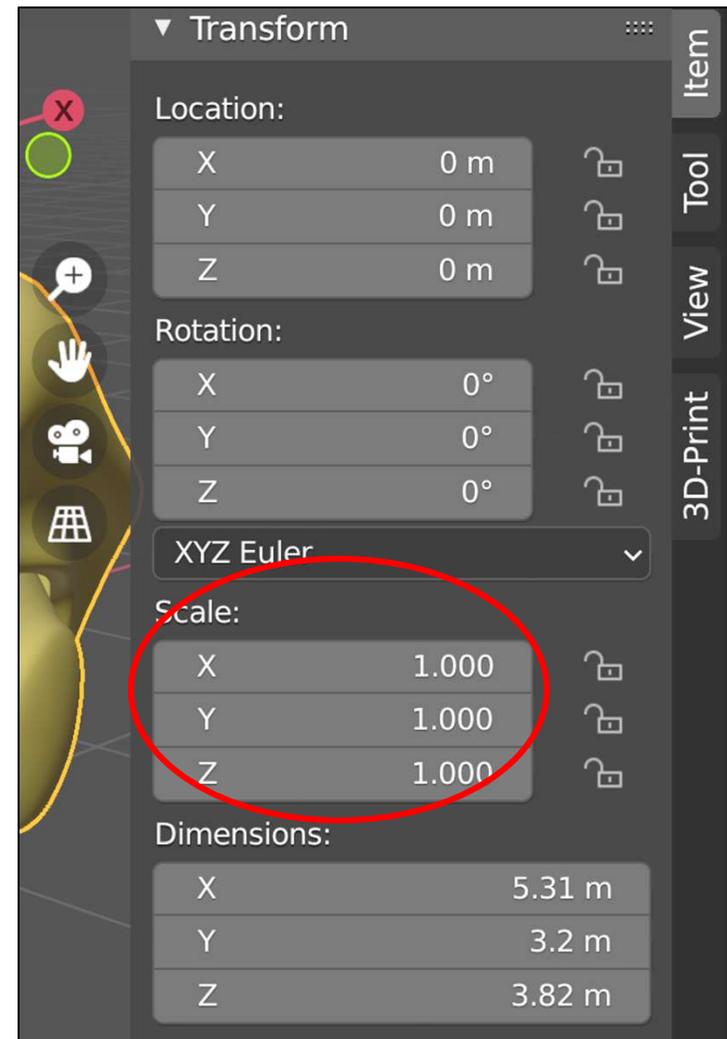

After

The Outliner

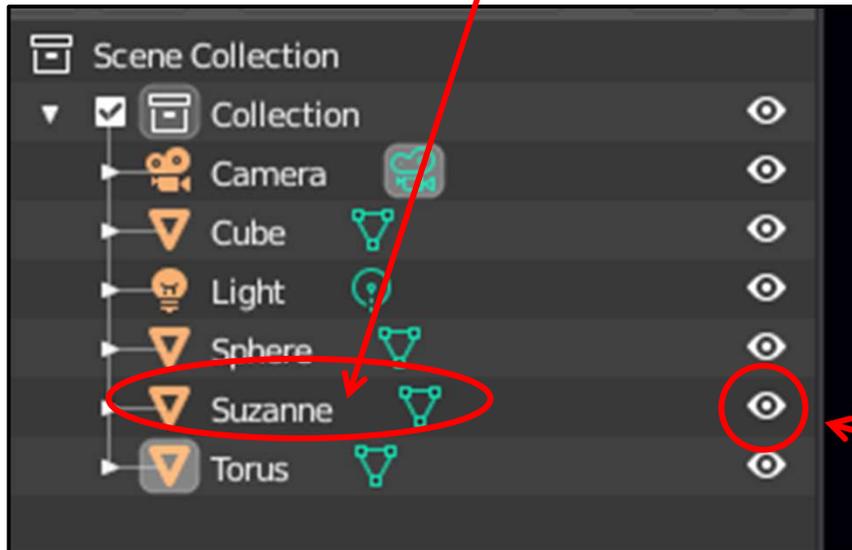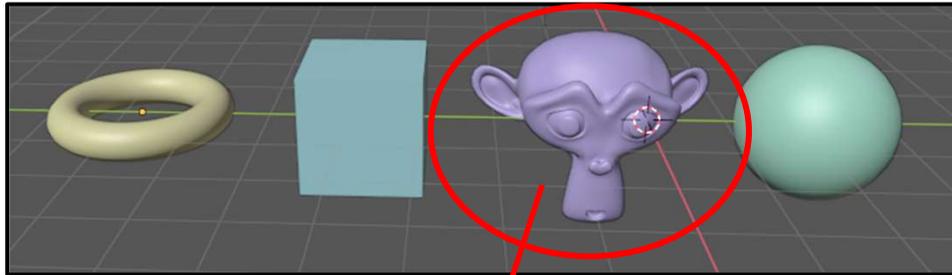

In the upper-right portion of the screen is the Outliner. Like the name implies, it shows an outline of your scene.

It is sometimes nice to have a summary of the scene so you can remind yourself of what all is in it.


Also, if your scene is cluttered, you can select on object by **left-clicking on its name** in the outliner as opposed to selecting it in the scene.

Double-clicking on a name will allow you to rename that object to something more sensible than, say, “sphere”

Also, you can use the outliner to hide certain objects. Just click on the eye icon to hide/unhide.

Hint: If you hide something, don't forget that you have hidden it. It is pretty freaky to be certain that you once created something, but now can't find it anywhere in the scene. 😊

The 3D Cursor


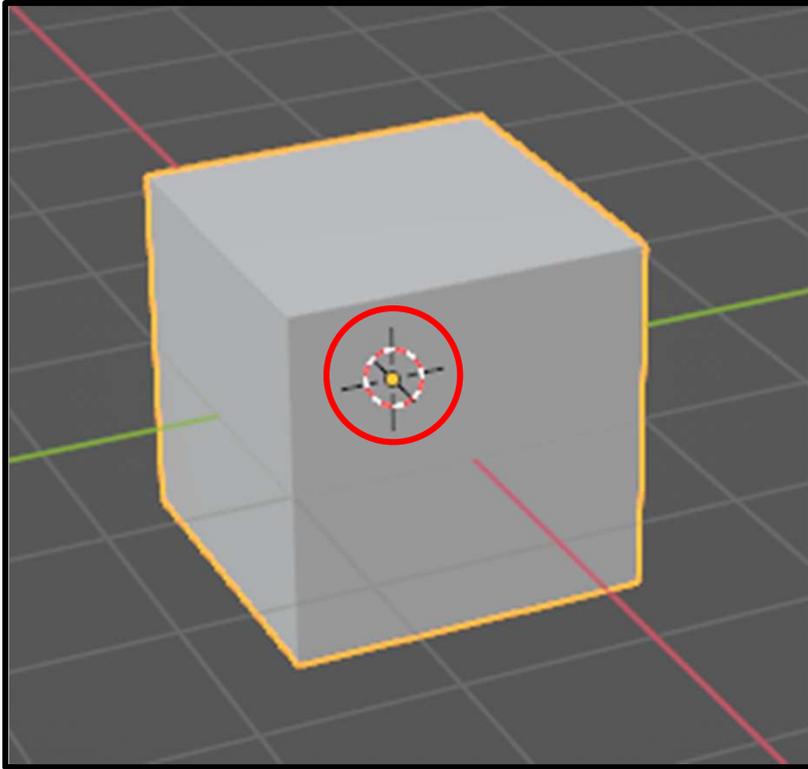


You have probably noticed that when you start up Blender, there is a mysterious cursor positioned at the origin.

This is Blender's **3D View Editor Cursor**.


- o With this, you can point *anywhere* in space.

Positioning the 3D Cursor

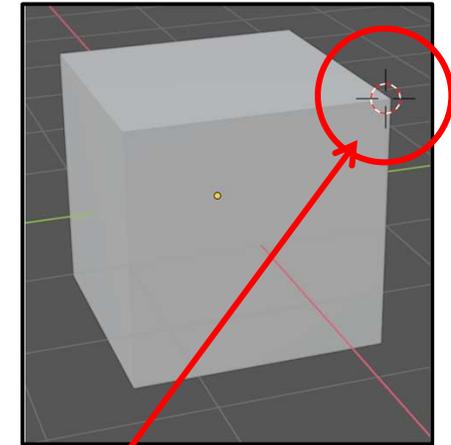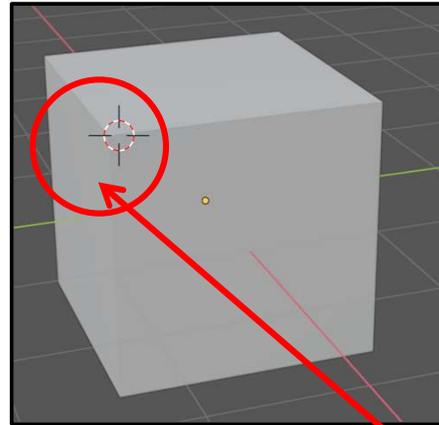


One way to position the 3D View Editor Cursor is to click on the **Cursor icon** and start left-clicking around the scene.

When you are done, be sure to let go of the 3D Cursor by clicking here

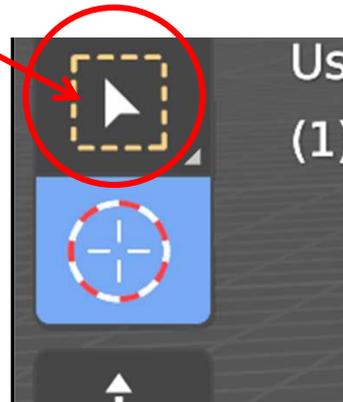


Positioning the 3D Cursor

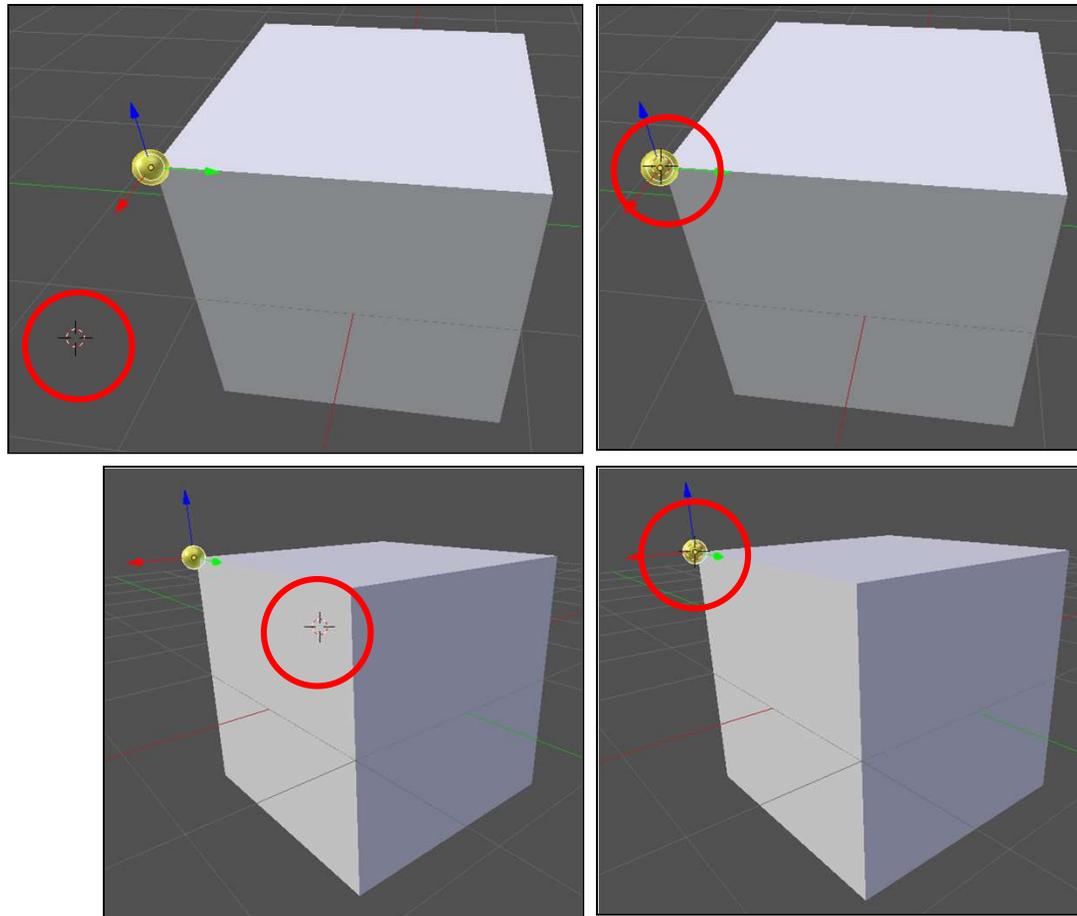

But, it is hard to get the 3D Cursor exactly where you want it to be. For example, if you want to position the 3D Cursor at the corner of the cube indicated by the yellow dot, LMB click on it. But, upon rotating, you realize that it is at the wrong depth. So, get a view roughly 90° from the last view, and click again. You might have to do this a couple more times.


The 3D Cursor

You can also automatically position the 3D Cursor using the **Object** → **Snap** menu

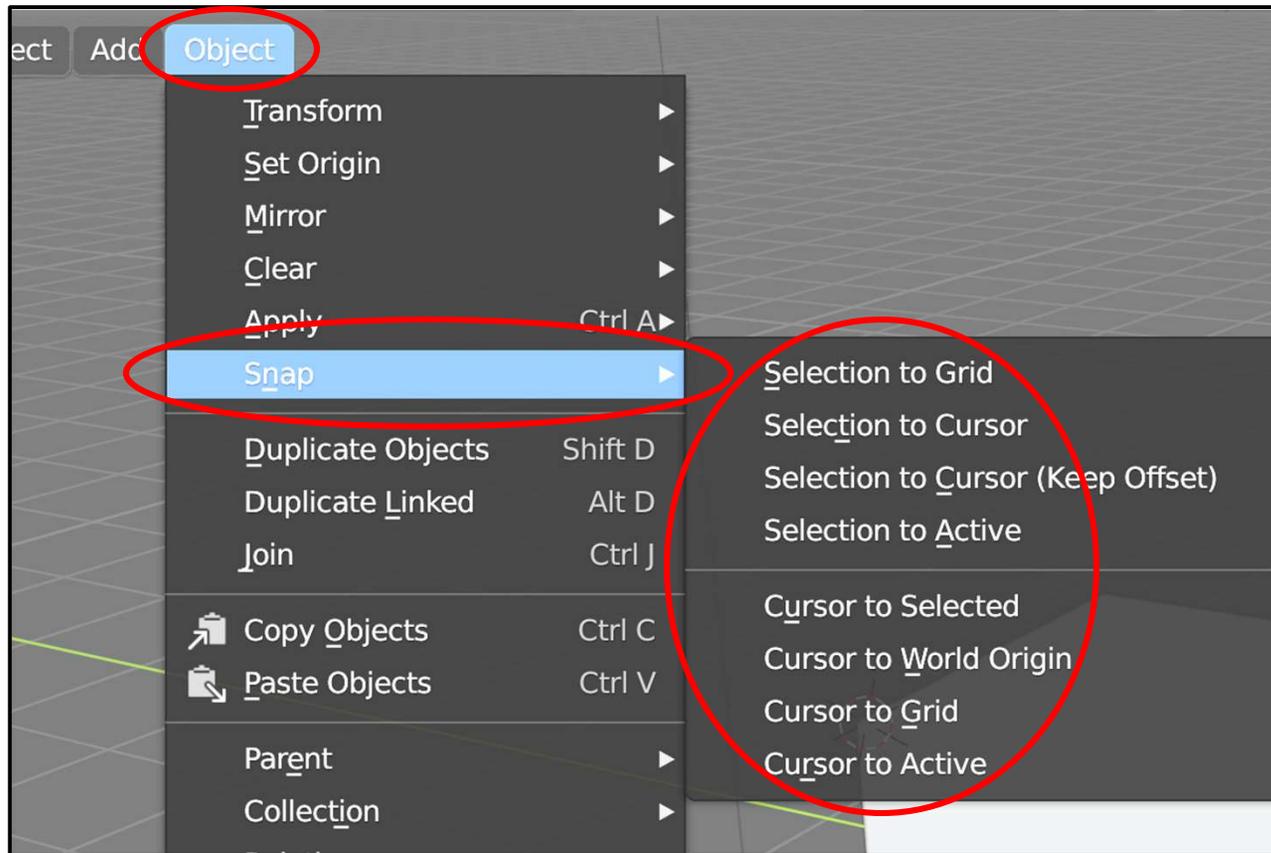


For example, choosing **Cursor to Selected** will move the 3D Cursor to the median point of the object you have most recently selected. Choosing **Selected to Cursor** will move the selected object's median point to where the 3D Cursor is.


A Use for the 3D Cursor – Arbitrary Pivot Point

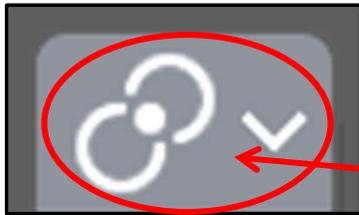

Suppose you then wanted to rotate the cube about the yellow corner point. After positioning the 3D Cursor there, you would then go to the **Pivot Center menu** and select **3D Cursor**. Rotations and Scaling will now take place around the yellow corner

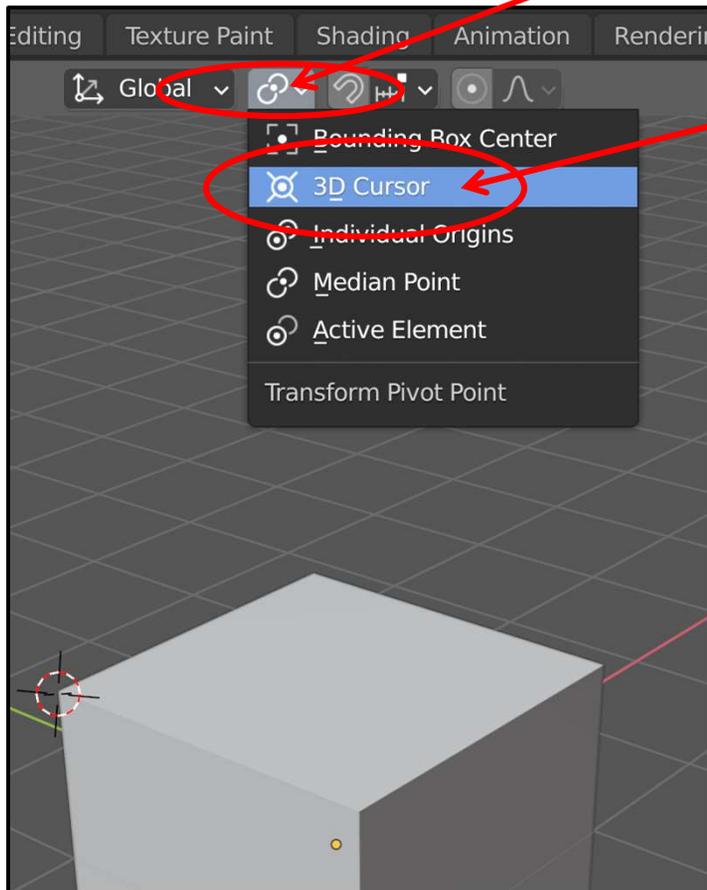

Later, you probably want to change the pivot point back to **Median Point**.

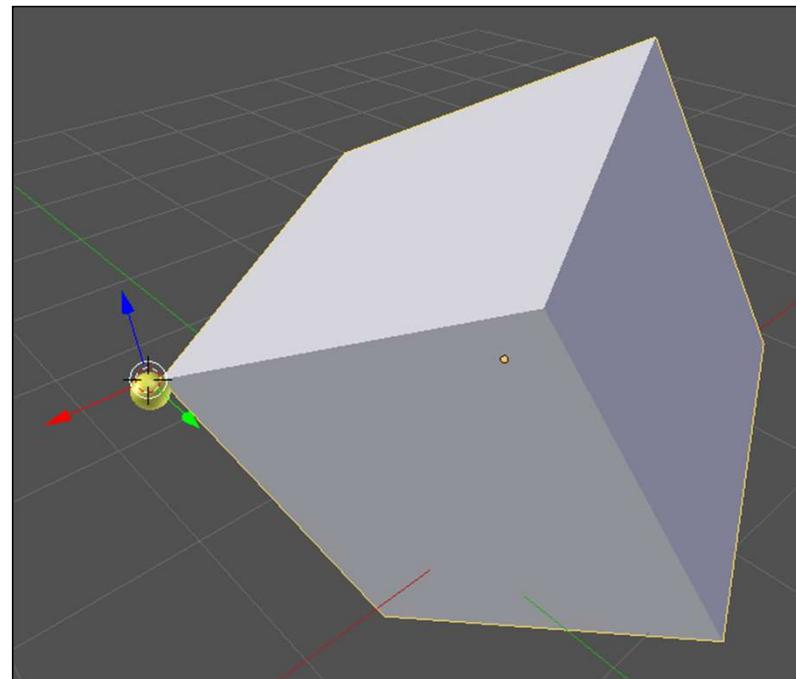

Another Way to Set the Arbitrary Pivot Point


Select the object, tab to **Edit Mode**, select all vertices ('a') and translate them ('g').

In Edit mode, the pivot point stays put while the vertices move.


Tab back to Object mode, and rotate the object to confirm that the pivot point has changed.

In contrast, in Object Mode, the pivot point moves with the vertices.



The little orange dot is the pivot point.

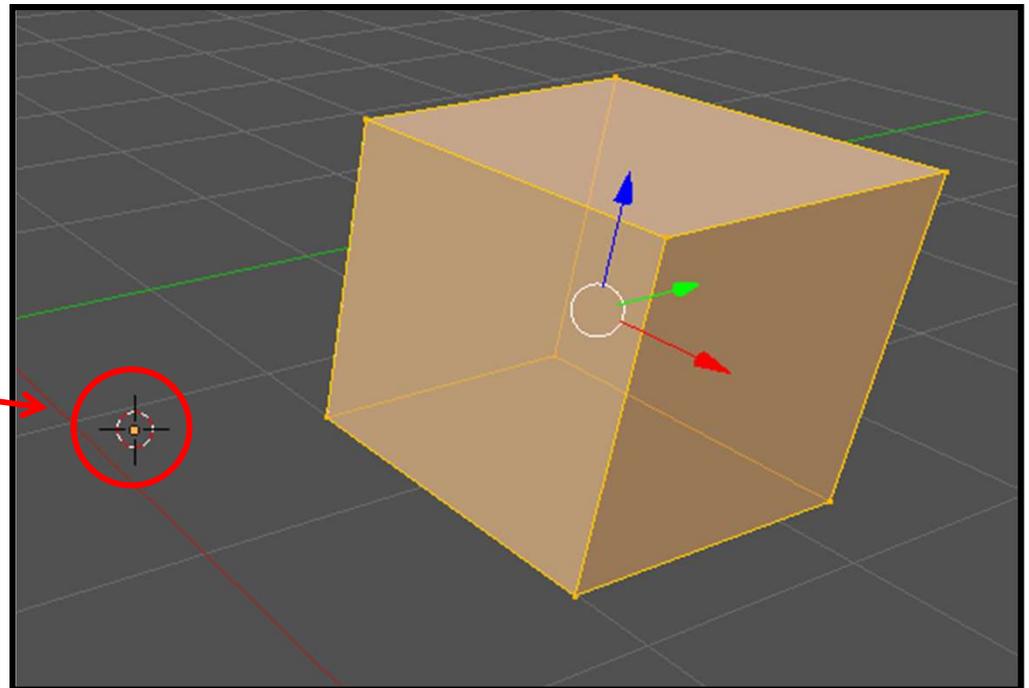

4. Modeling, I

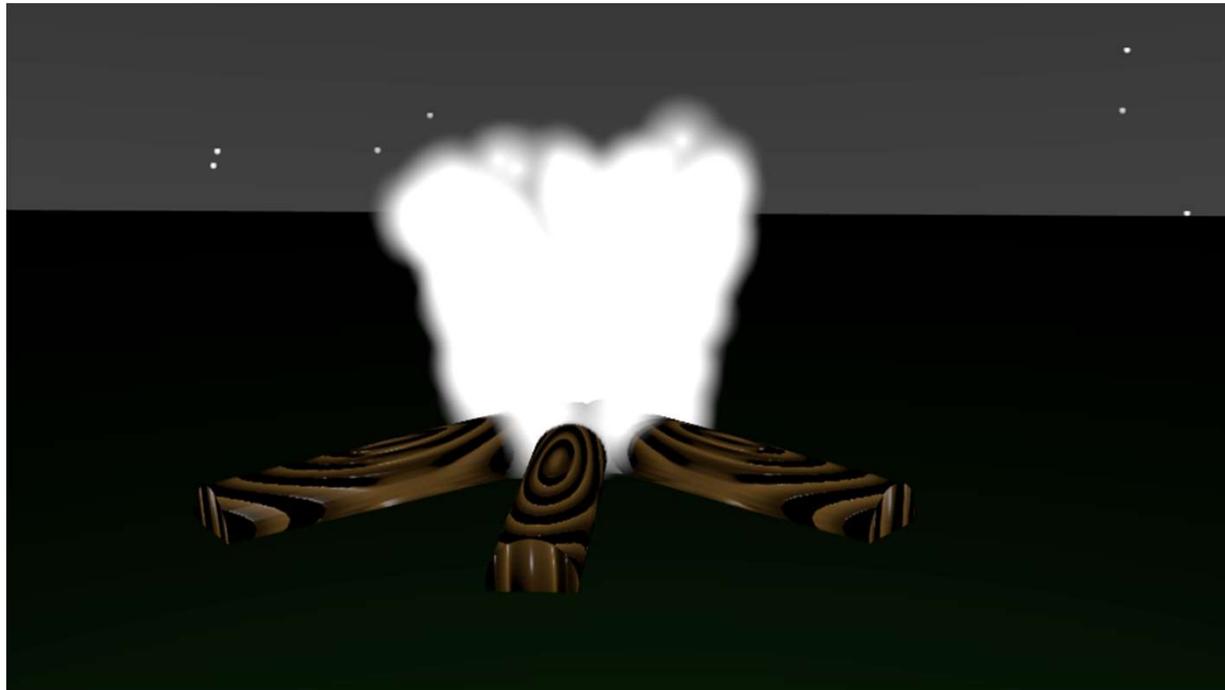

The Add Menu

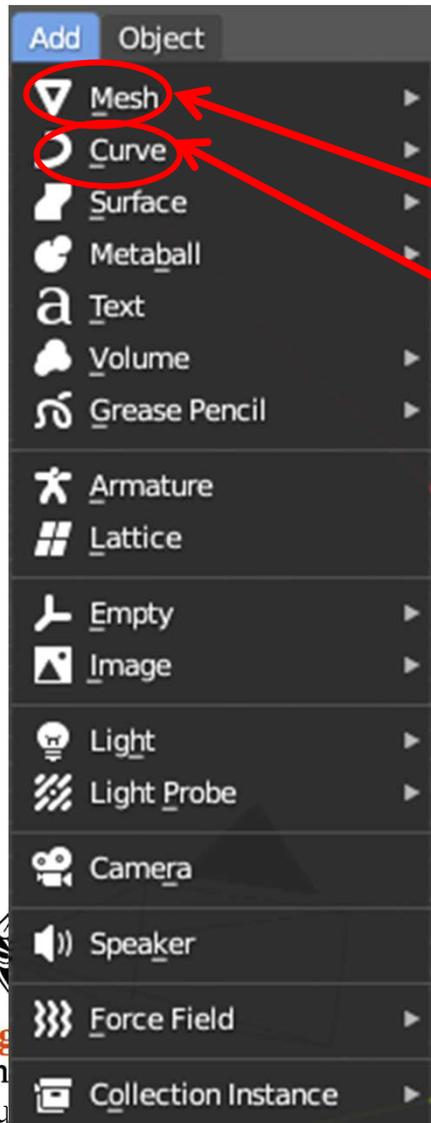


These are all the different geometry things you can add into the scene. We will cover many of them, but not all.

This group is the **meshes**.


This group is the **curves**.

The Add→Mesh Menu

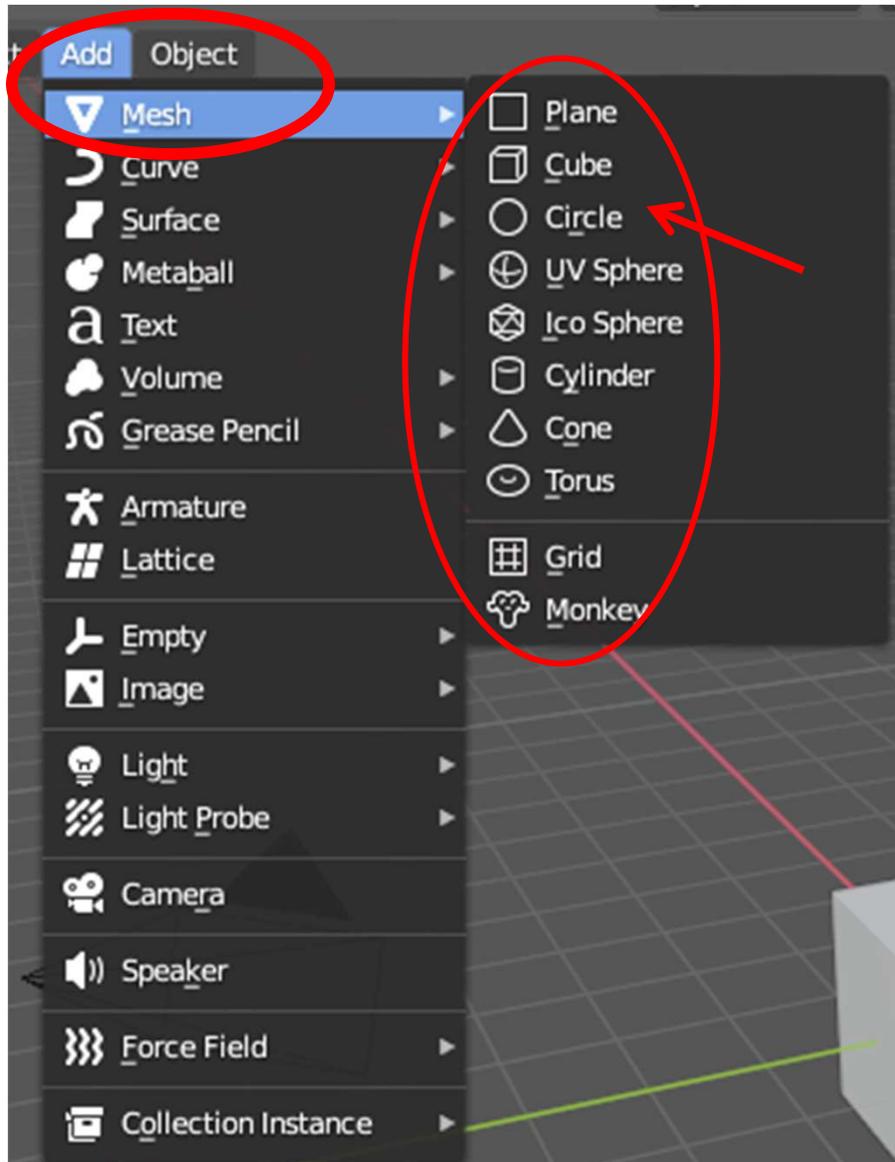

The UV Sphere, Torus, and Monkey are my favorites


When you Add a Mesh, a Small Menu Appears in the LL Corner

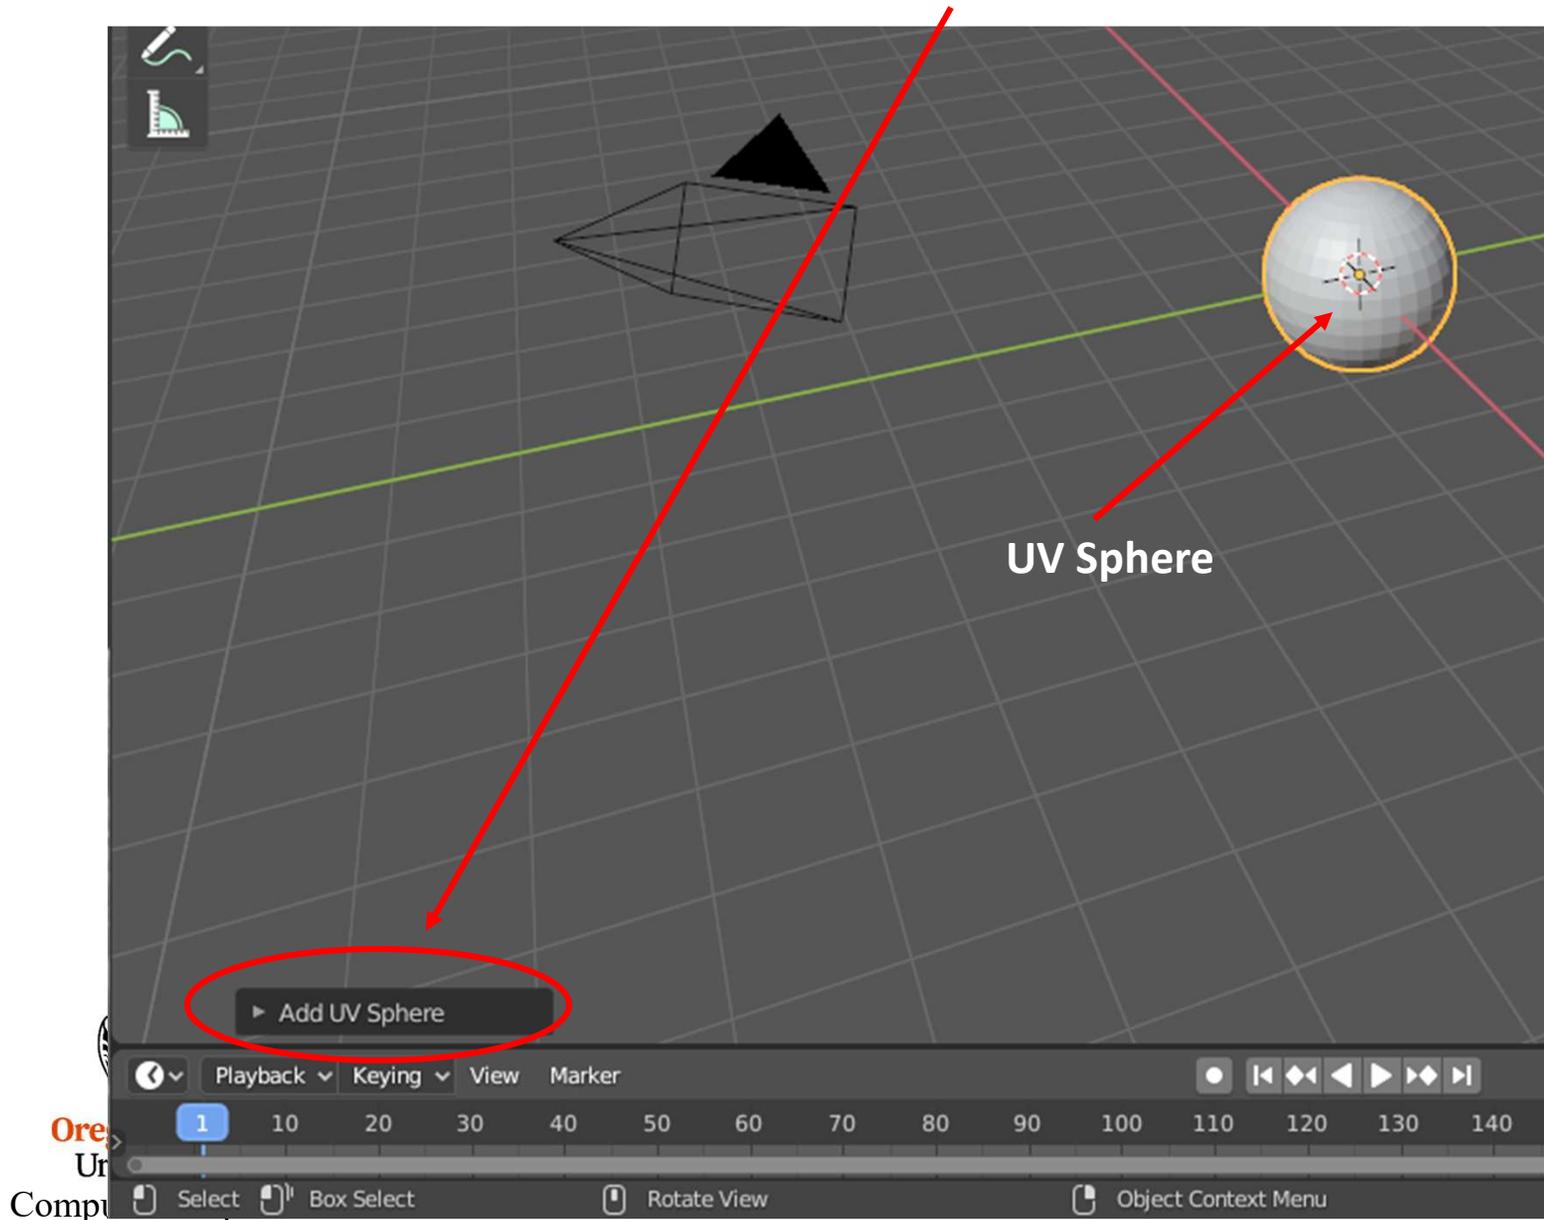

When you Add a Mesh, a Small Menu Appears in the LL Corner



Try clicking on it.

The small menu lets you modify how the last thing you did works. In this case, the most important thing it is doing is letting you change the polygon resolution of the sphere. ***But, this menu only exists until you do something else. After that, the ability to change these values is gone.***

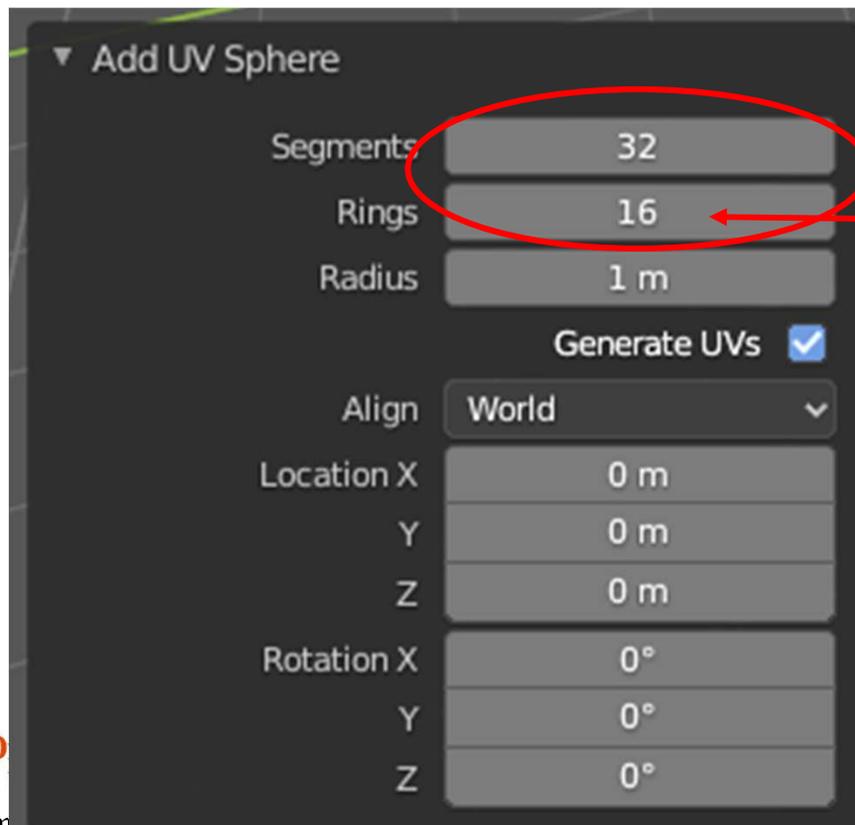




Personally, I like changing these two values to **64** and **32**, respectively.

Summary of the Mesh Objects

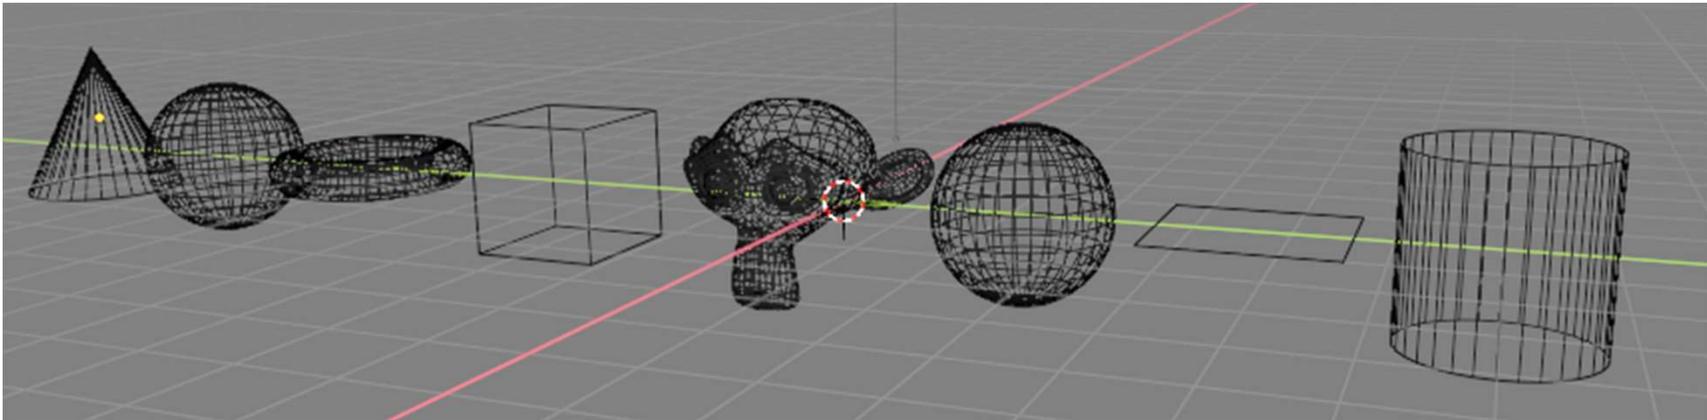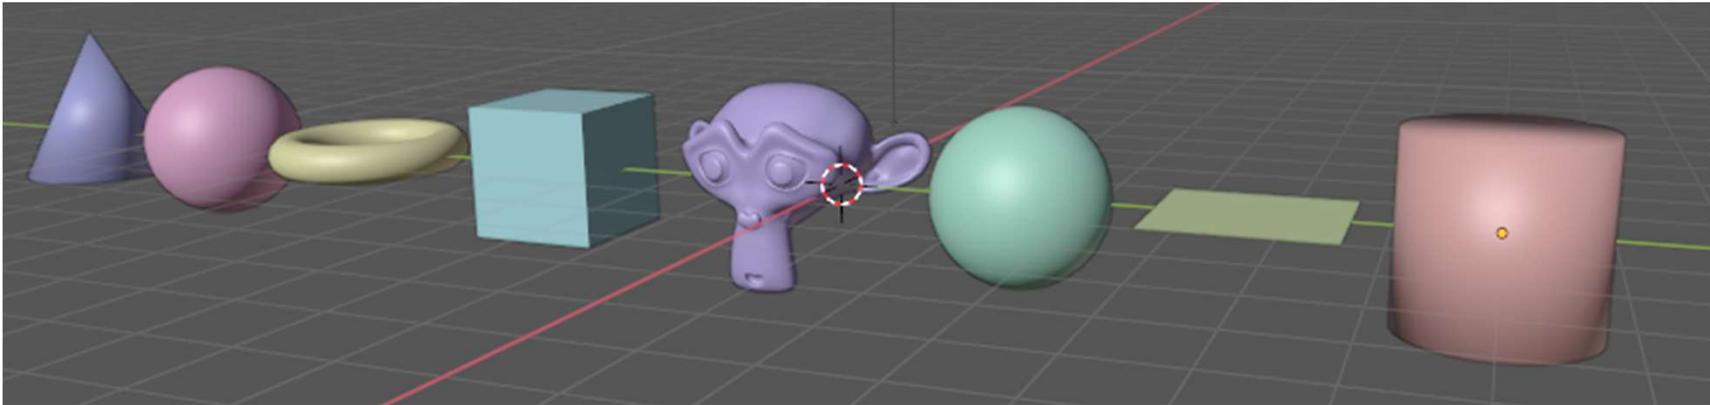

Making the Mesh Objects Look Nicer


Blender is able to play a graphics trick to make your curved geometry look better. Select the object (LMB) then click the RMB and select **Shade Smooth**. To go back, select **Shade Flat**.

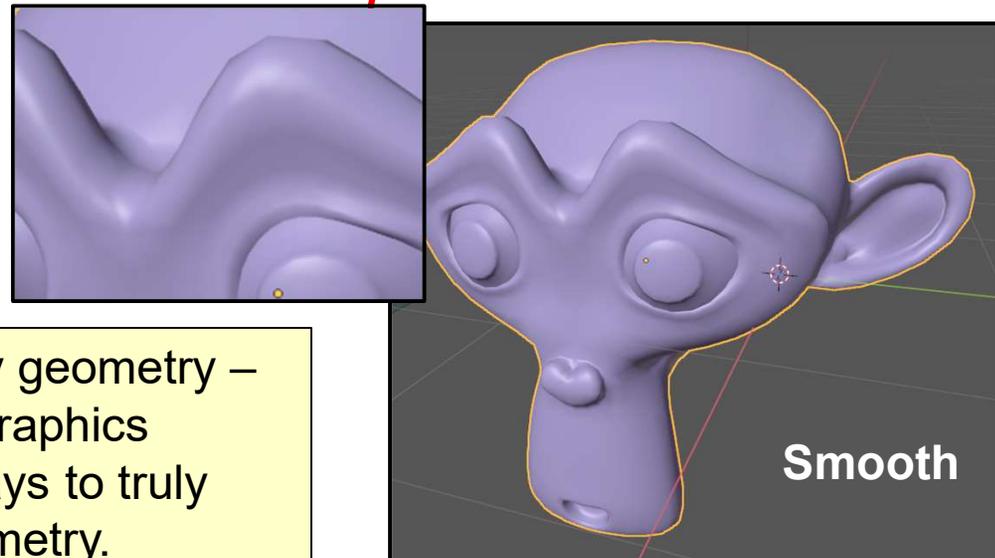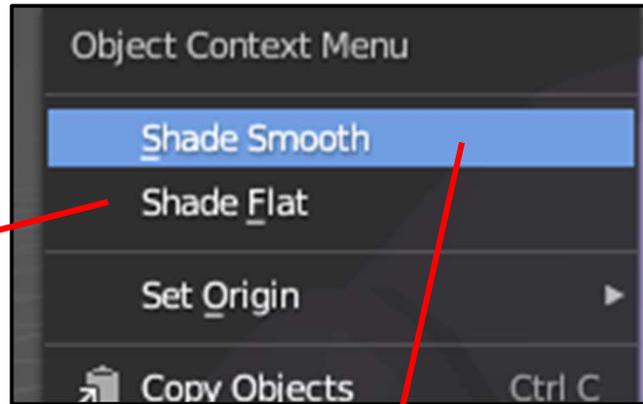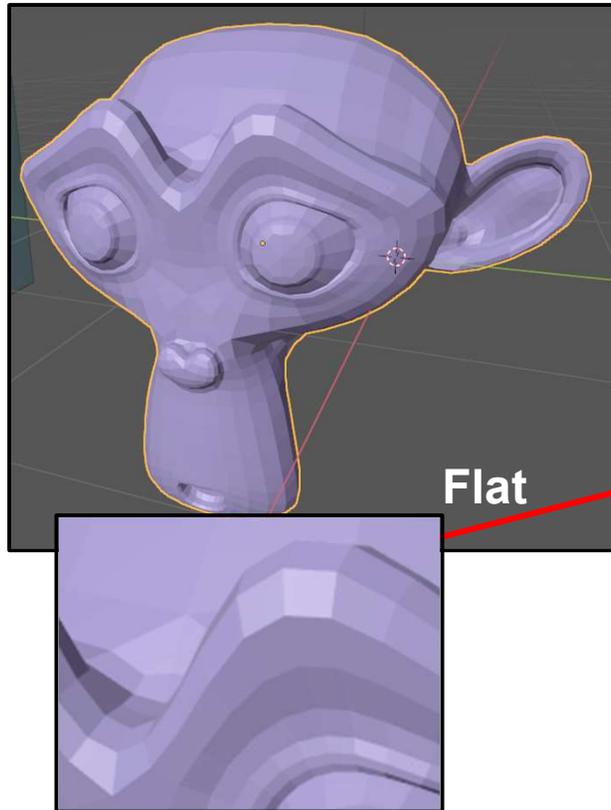


This doesn't actually change any geometry – it's just a really good computer graphics display trick. There are other ways to truly create smoother underlying geometry.

How to Find Out How Detailed a Mesh Object Is


In the overlay menu, turn on **Statistics**

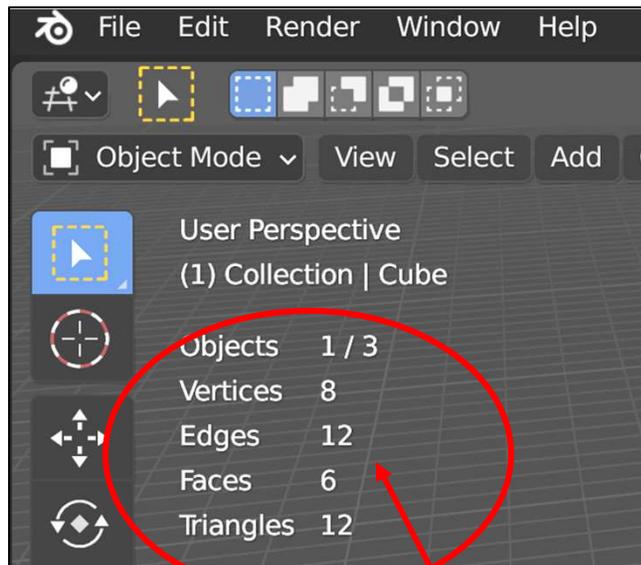



The number of Vertices, Edges, Faces, and Triangles show on the left side of the screen

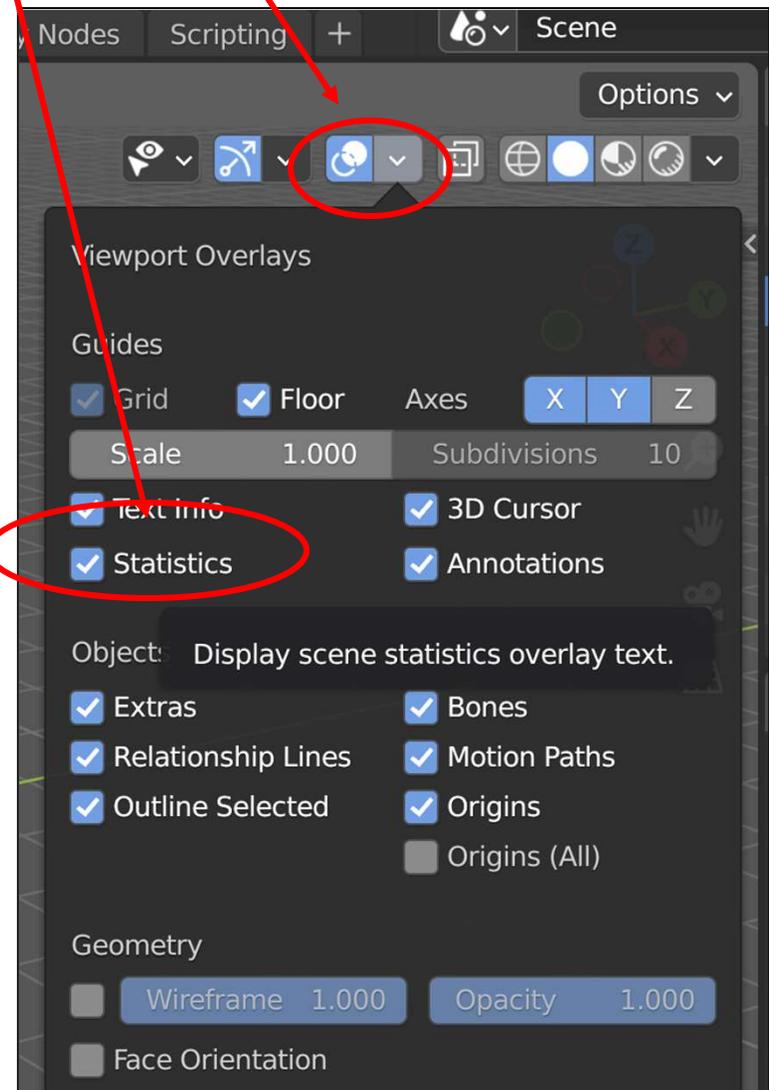

Duplicating an Object from the RMB Menu

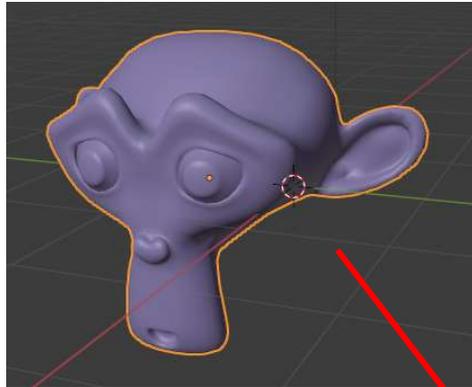

Select the object (LMB) then click the RMB and select **Duplicate Objects**. This leaves the new object right on top of the old object and leaves you in **Grab mode**. Just move the mouse to separate the two objects.

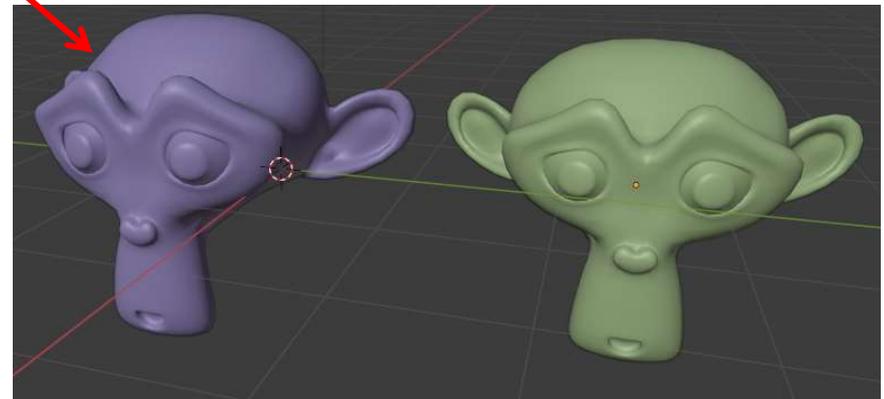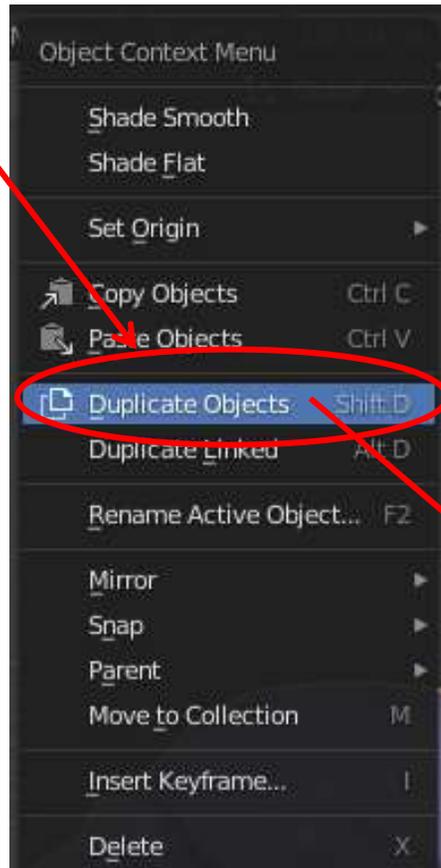


Mirroring an Object


Oftentimes you want to create an object that is identical to itself but is symmetric about an axis. This type of operation is called **mirroring**.

Create an object, in this case, Suzanne the Monkey.


Let's say that we want to mirror this object left-right (y). Select the monkey, right click, then select **Mirror**, and then select **Y Global**.

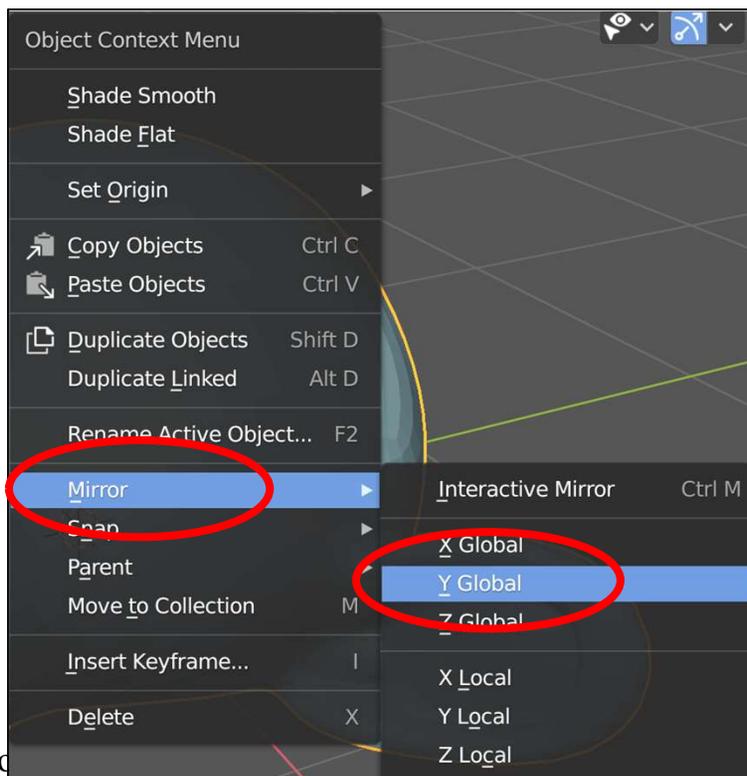

Before

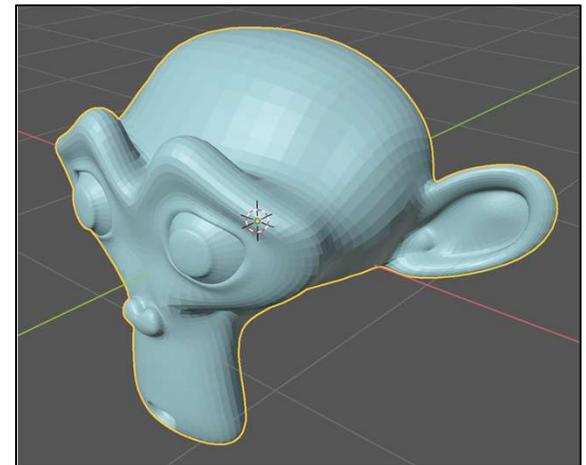

After

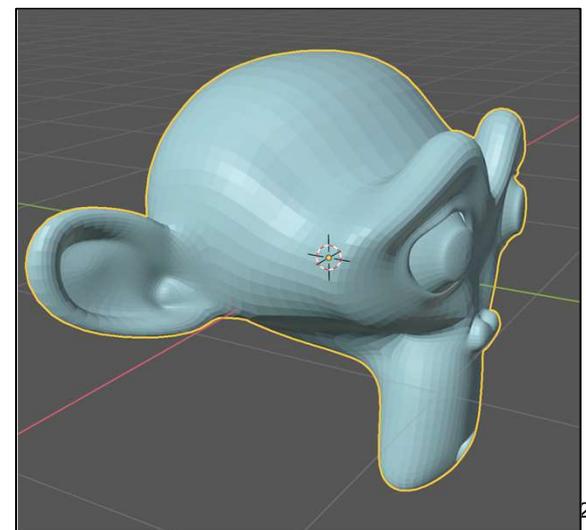

Editing a Vertex, Edge, or Face on a Mesh

Click here, or hit the **Tab** key, to get into Edit Mode

Select and edit:

A vertex


An edge

A face



Using the **Tab key** is so common, that “tab” has become a *verb* in the Blender community. As we like to say, “Just tab over into edit mode.”

Editing a Vertex

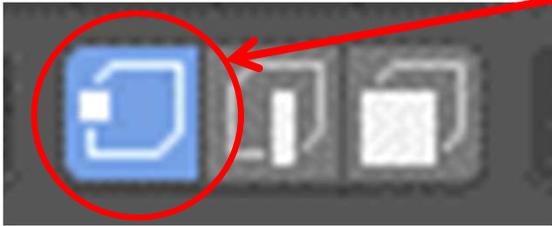


Be sure you are in vertex-editing mode

Left click on a vertex


Hit 'g' (grab) and move the mouse

You can also hit 'x', 'y', or 'z' to restrict motion

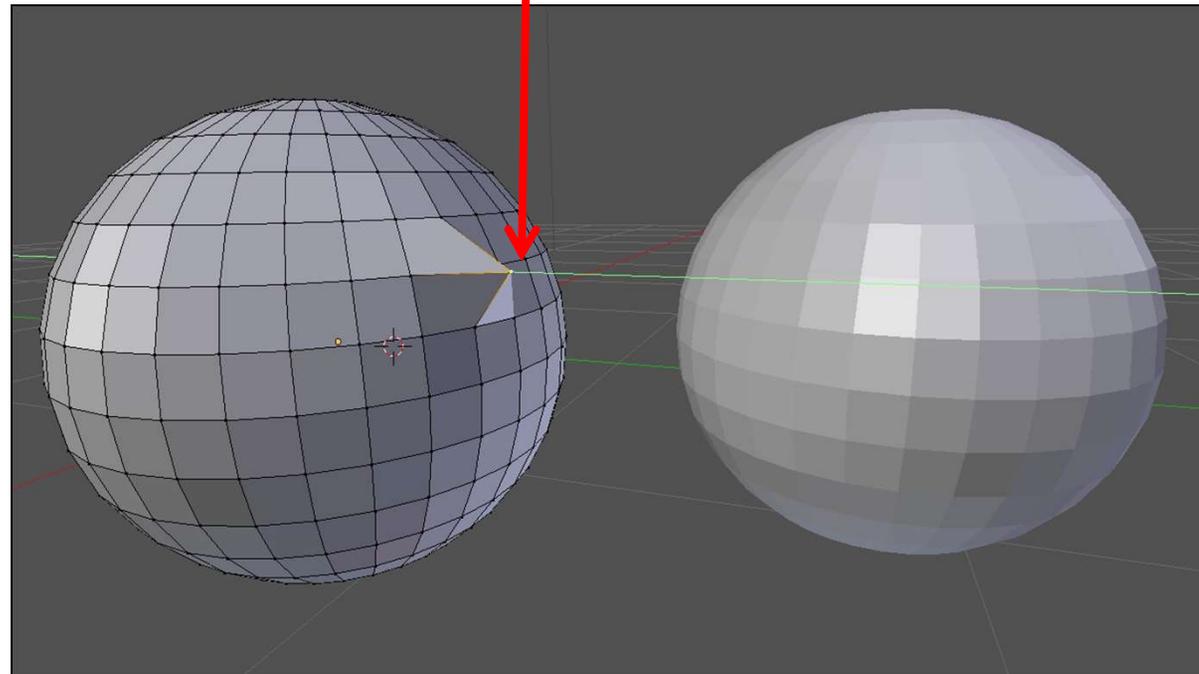

Editing a Vertex with Proportional Editing

Be sure you have Proportional Editing enabled

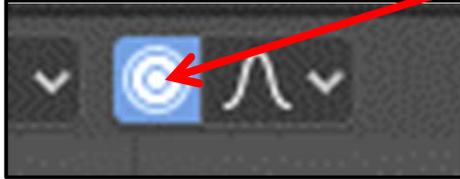


LMB click on a vertex

Hit 'g' (grab) and move the mouse


You can also hit 'x', 'y', or 'z' to restrict motion

The mouse Scroll Wheel changes the size of the Circle of Influence

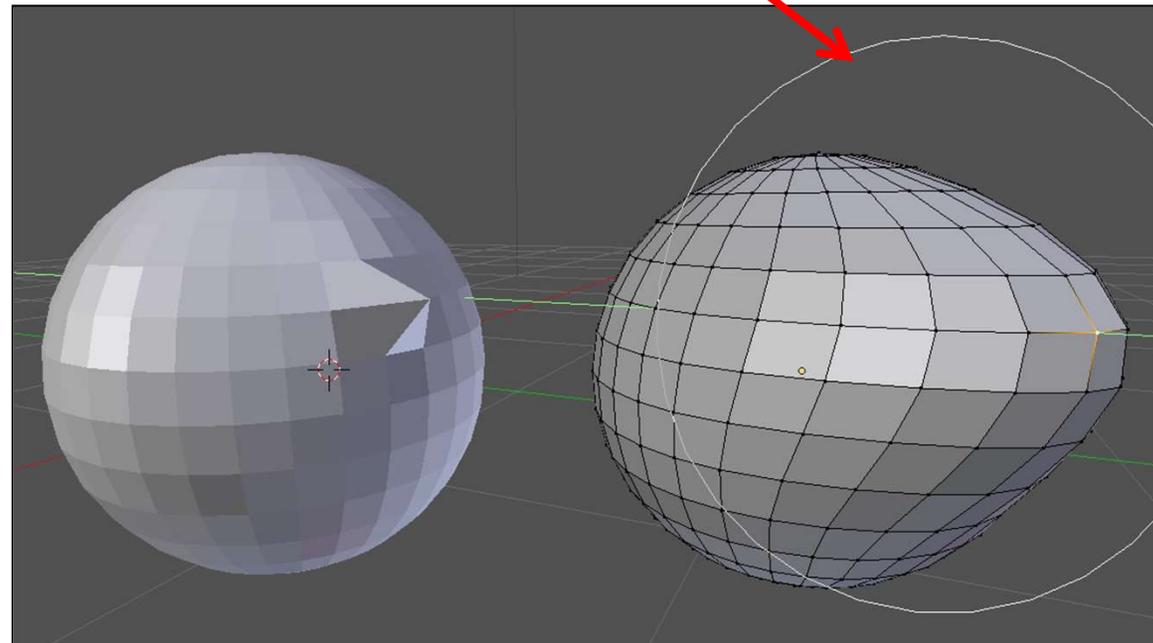



You can also LMB select an edge or a face for editing or proportional editing.

Subdividing and Smoothing Really Show the Difference Between Localized and Proportional Editing

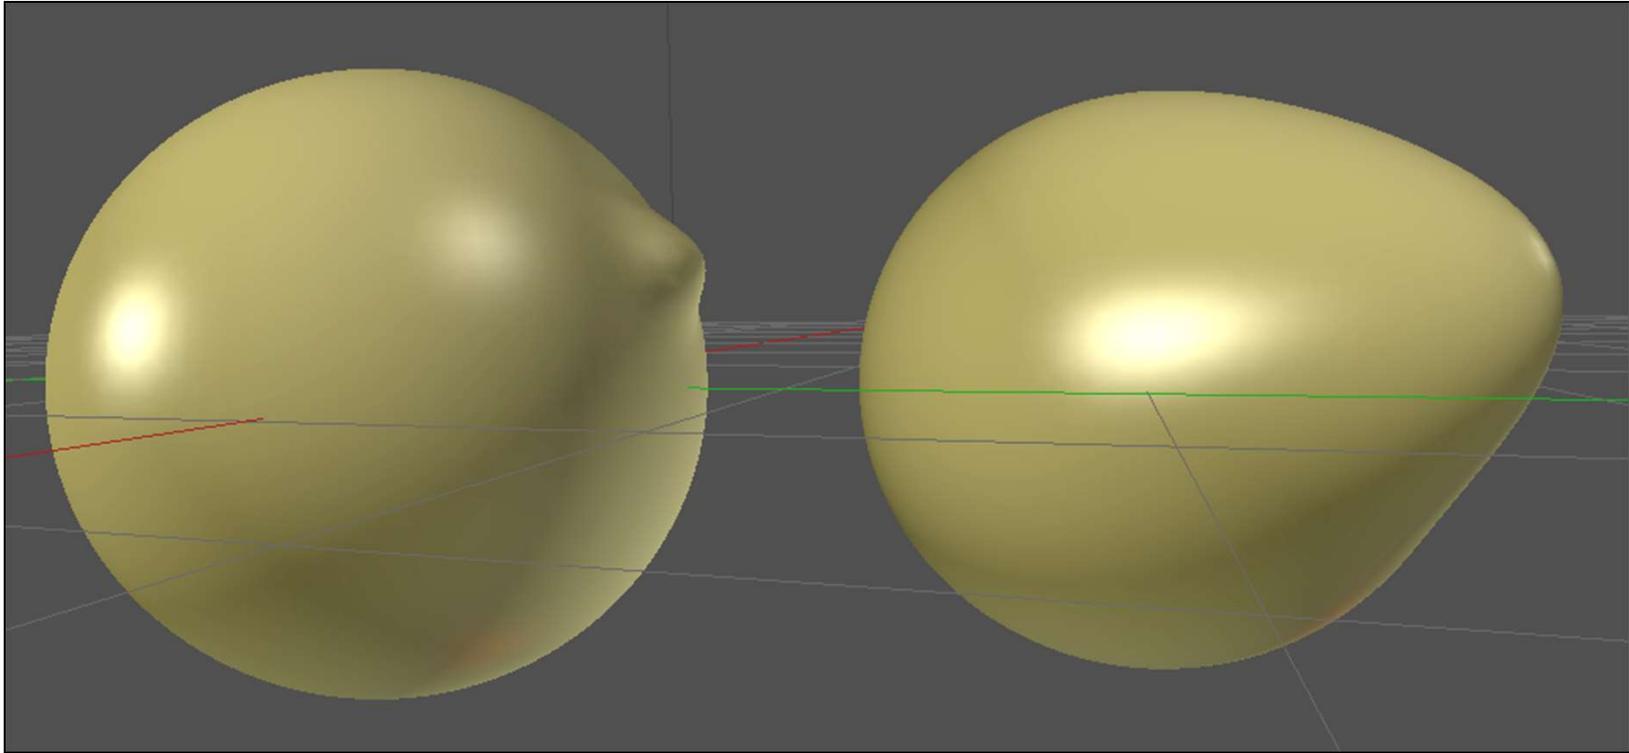


An Unexpected Use for Proportional Editing

Create a **Plane**, then go to **Edit Mode**, then box select all the edges, then click on **Edge** → **Subdivide** and subdivide it several times

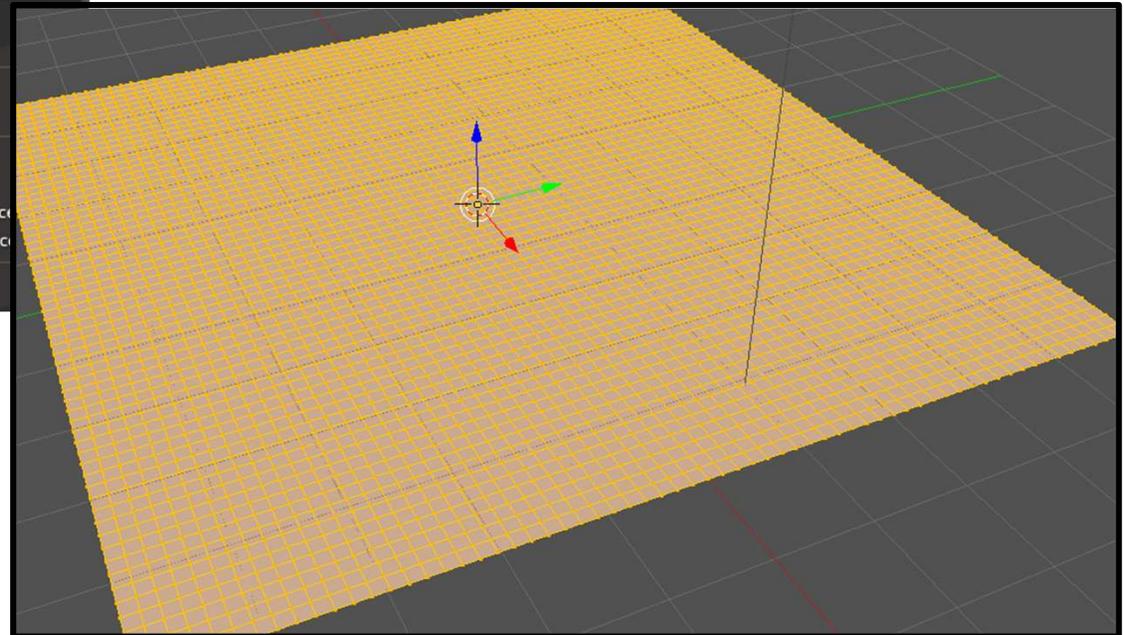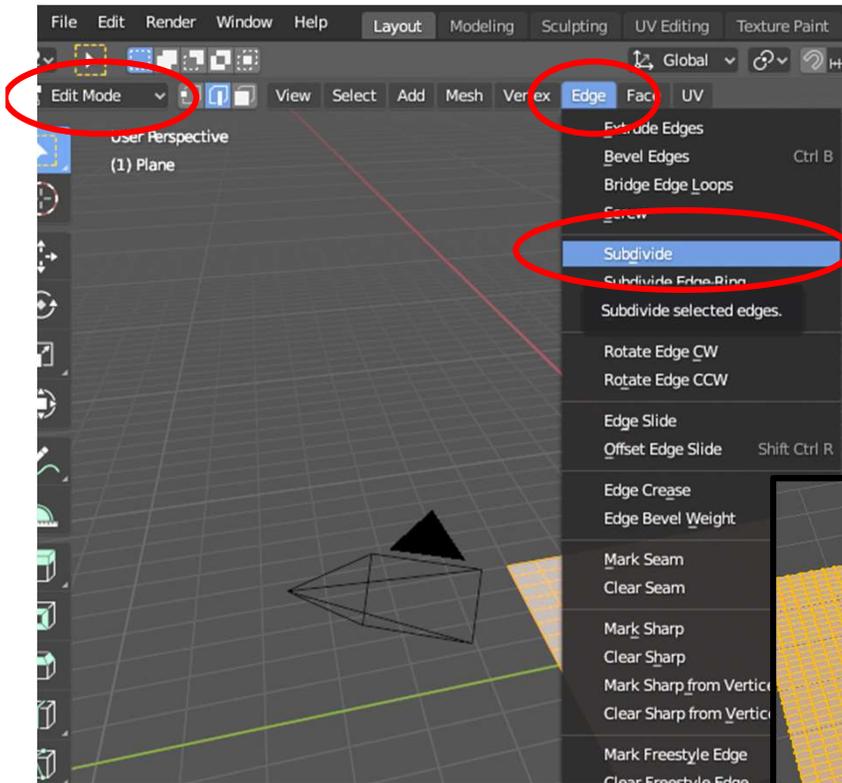


An Unexpected Use for Proportional Editing

Enable **Proportional Editing**, then go one widget to the right and change the kind of Proportional Editing from **Smooth** to **Random**

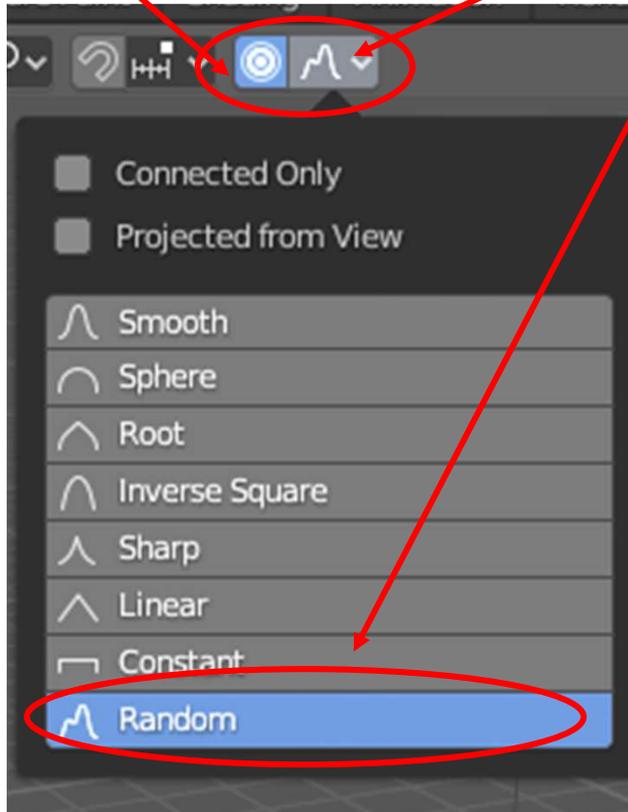


An Unexpected Use for Proportional Editing

Go to **Edit Mode**, select a vertex, and lift it along with those around it

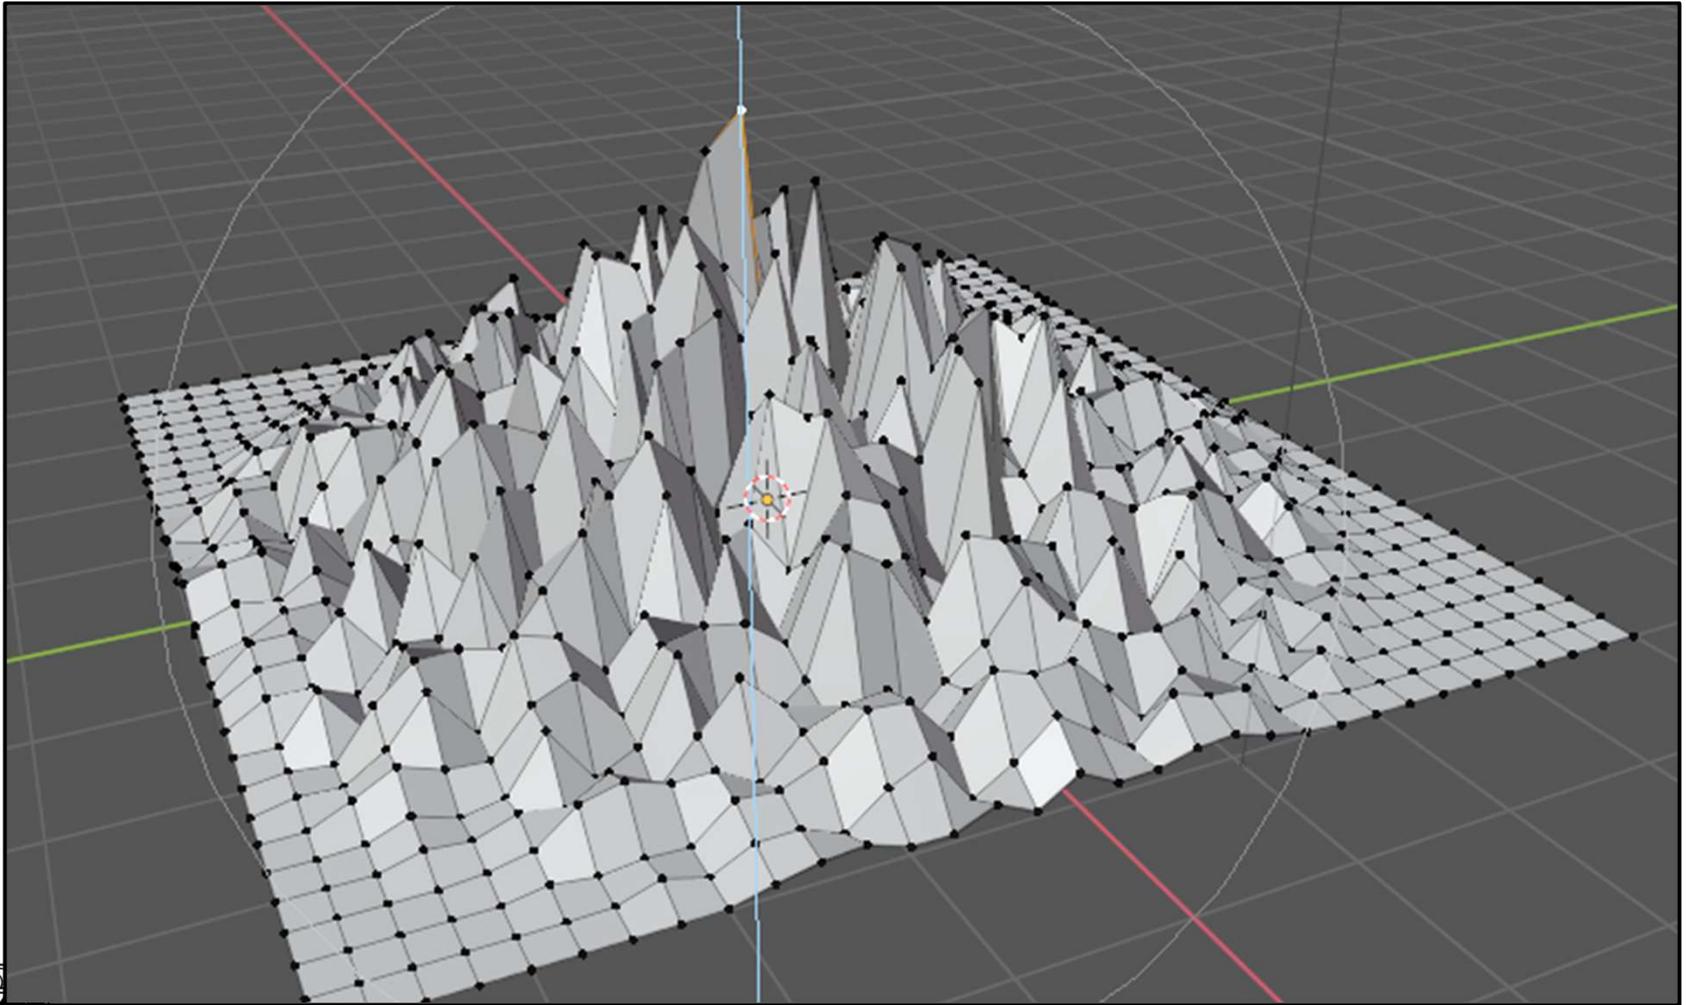


Deleting

In **Edit Mode**, you can delete things. For example, here four faces have been selected. **Right-click** and select **Delete Faces** from the pop-up menu

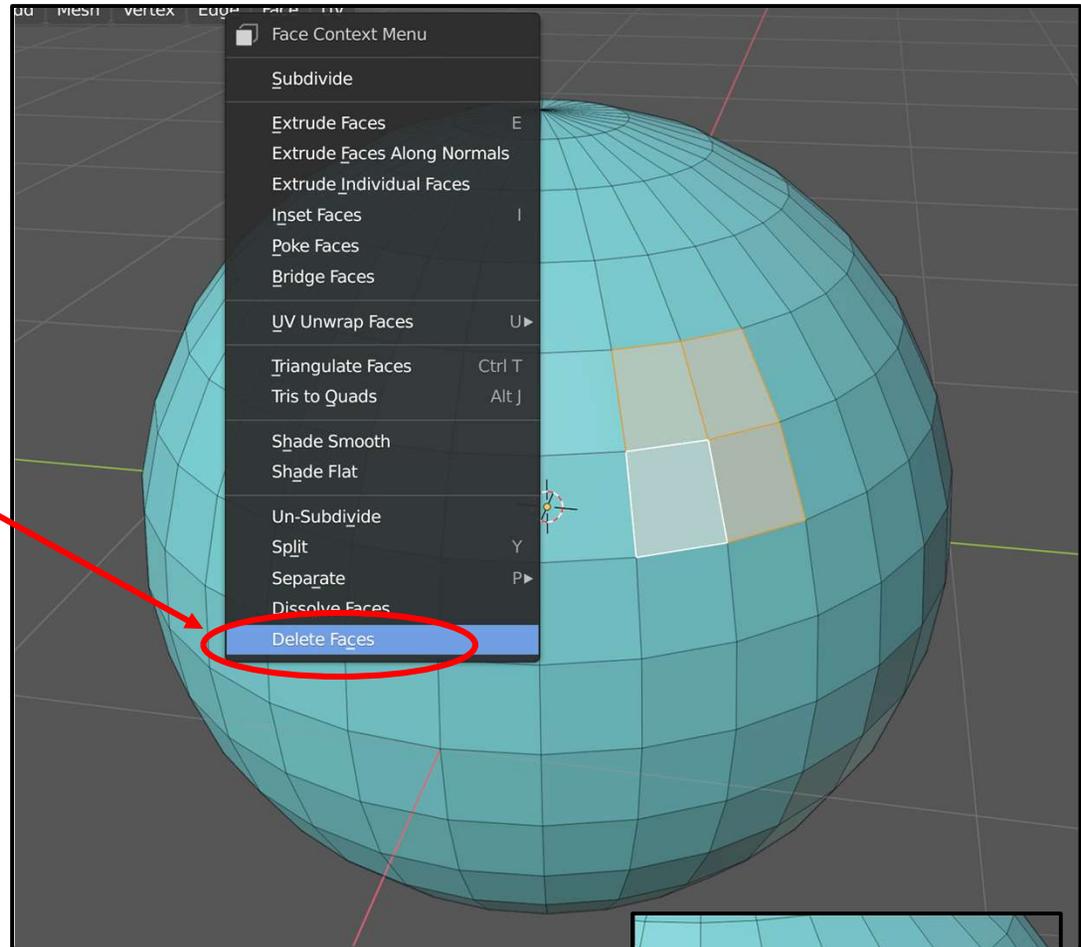


Here's what you get:

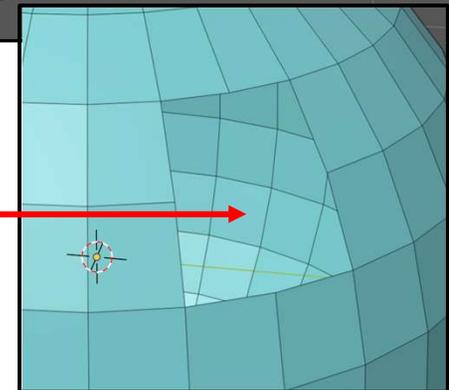


Dissolving


You can also **right-click** and select **Dissolve Faces** from the pop-up menu

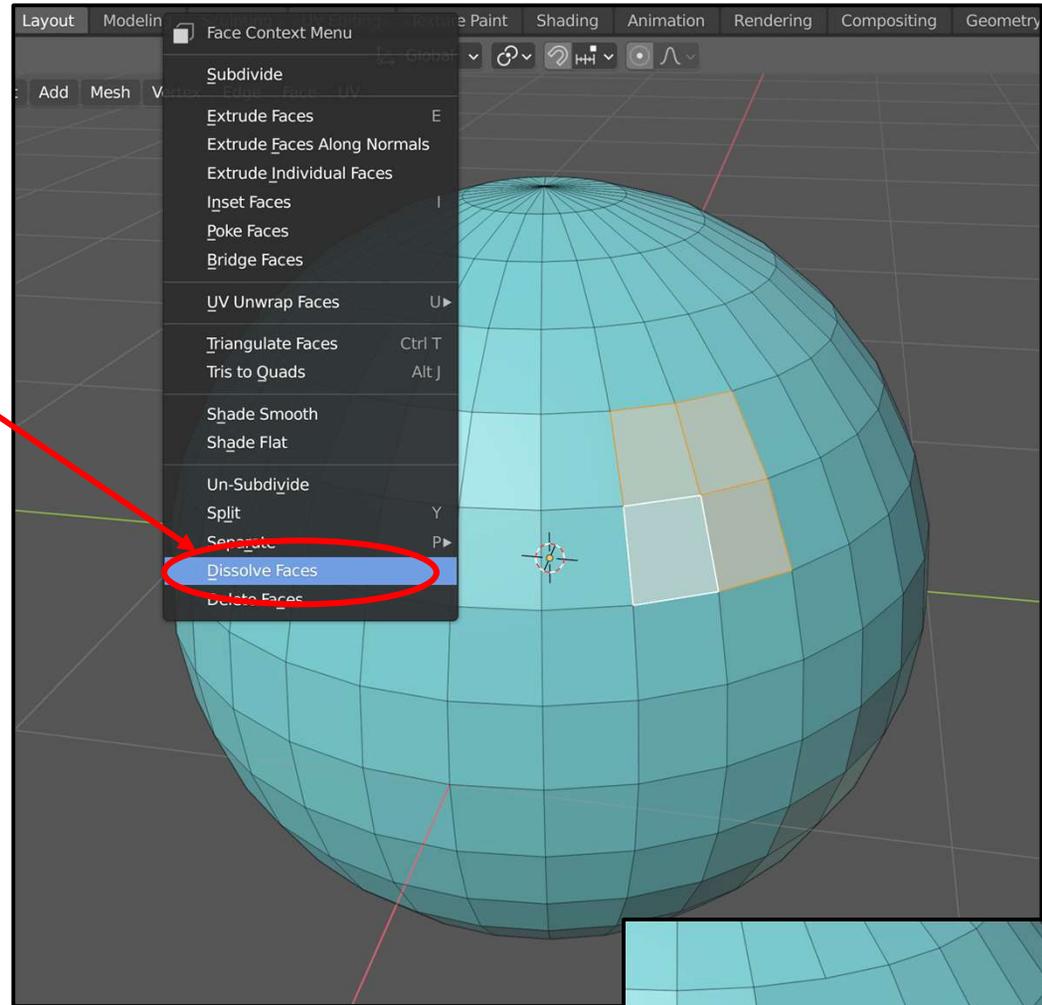

In which case, you get this:

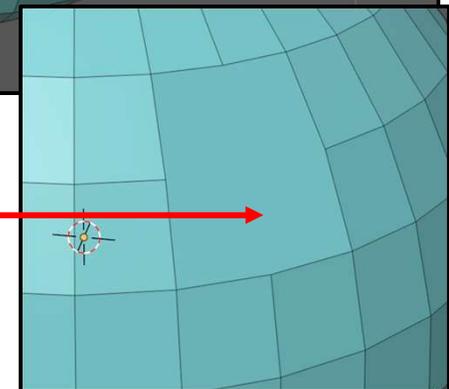

5. Appearance, I

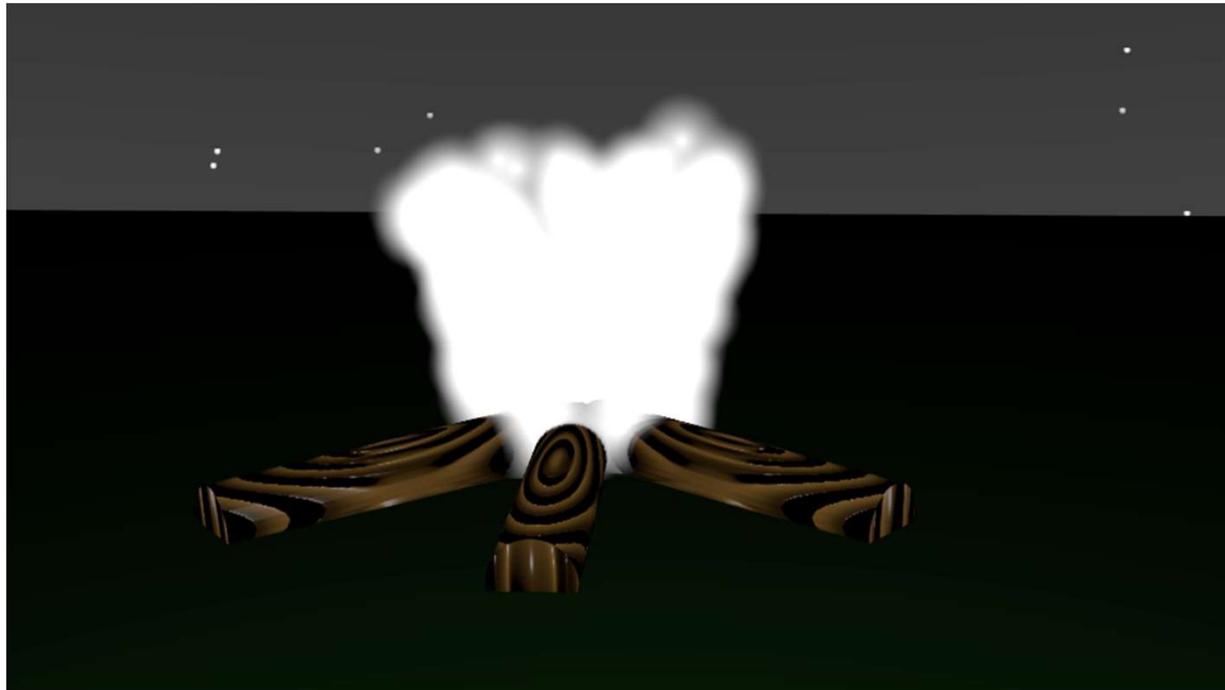

The Button Properties Menu

Tells you that we are in the Button Properties Menu


- Render Properties
- Output Properties
- View Layer Properties
- Scene Properties
- World Properties
- Collection Properties
- Object Properties
- Modifier Properties
- Particle Properties
- Physics Properties
- Object Constraint Properties
- Object Data Properties
- Material Properties (colors)**
- Texture Properties

Clicking one of these brings up a much more detailed menu of options

Using the Material Properties Menu




Click on this ... to get this

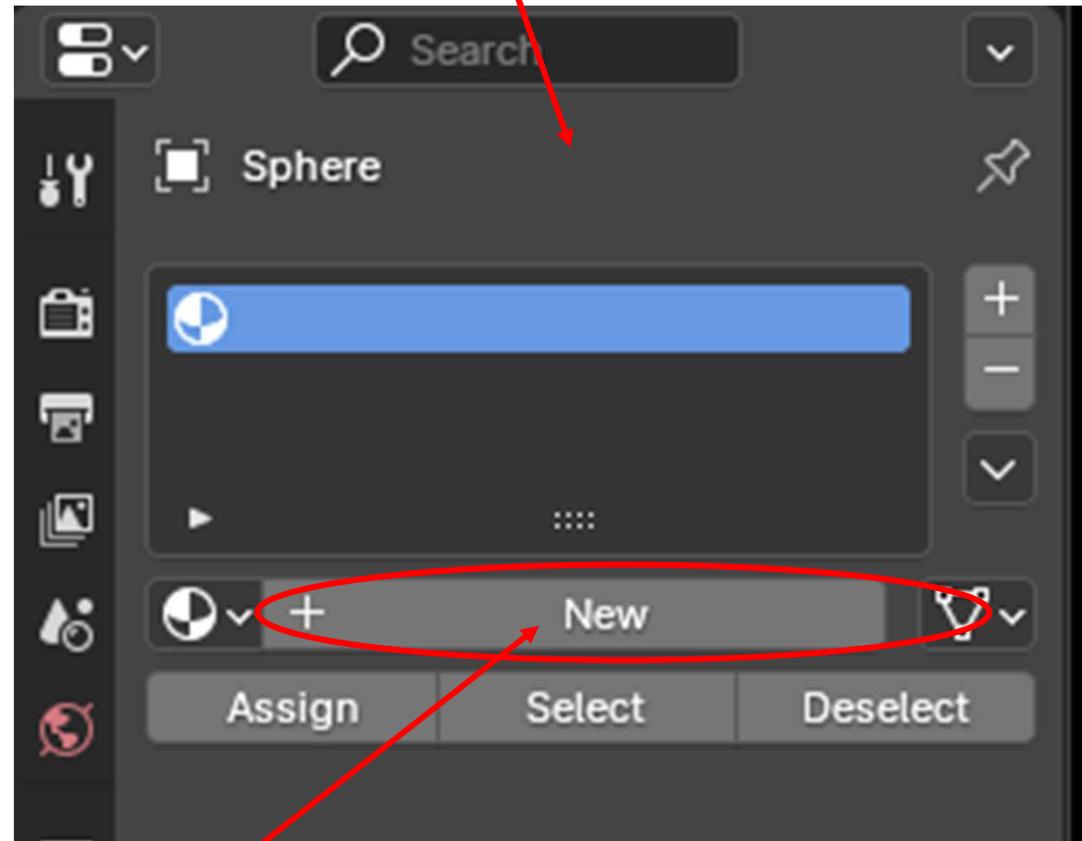


Then, click on **New**

Using the Material Properties Menu

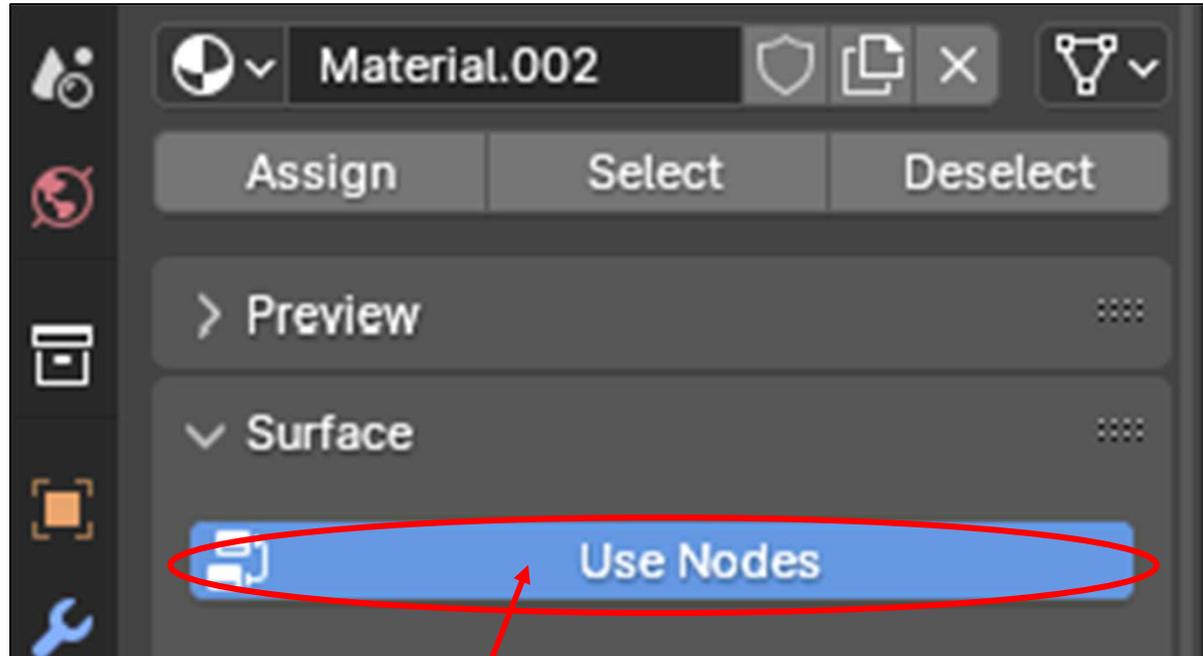


To make our lives simpler for now, click here to **turn off *Use Nodes* mode**

Using the Material Properties Menu

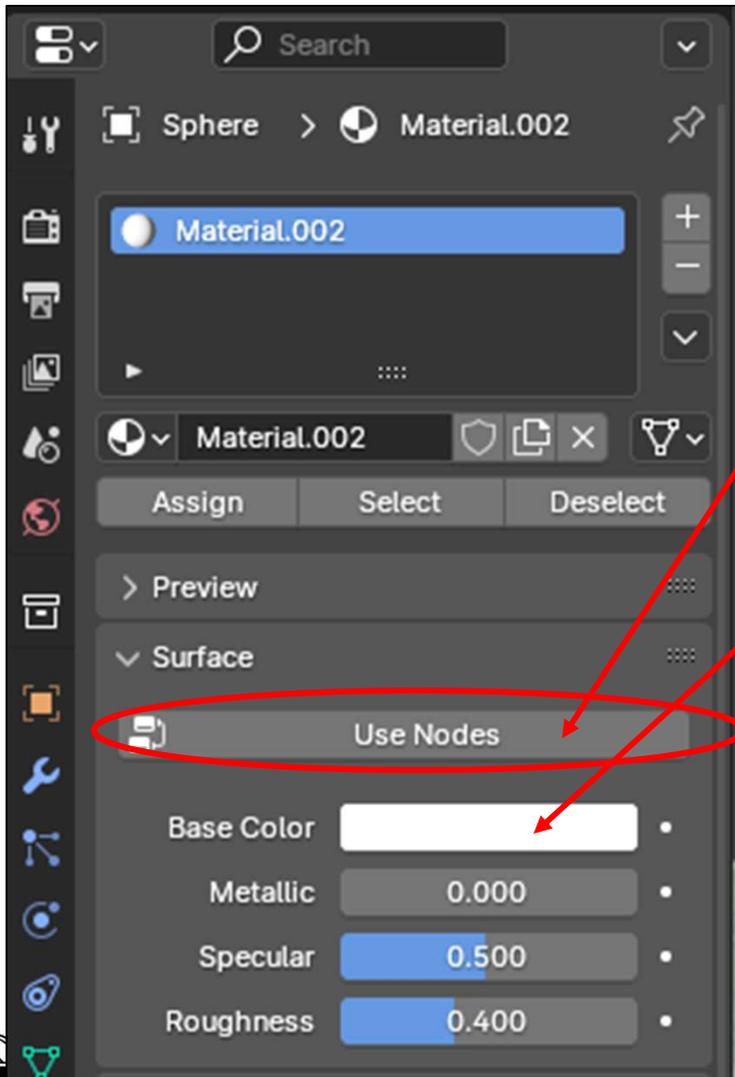


Use Nodes mode has been turned off

Clicking in here brings up a color wheel


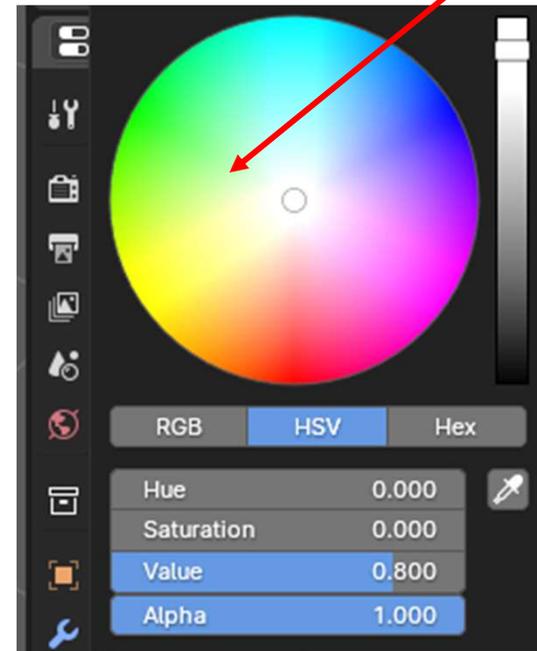


Controlling Shininess

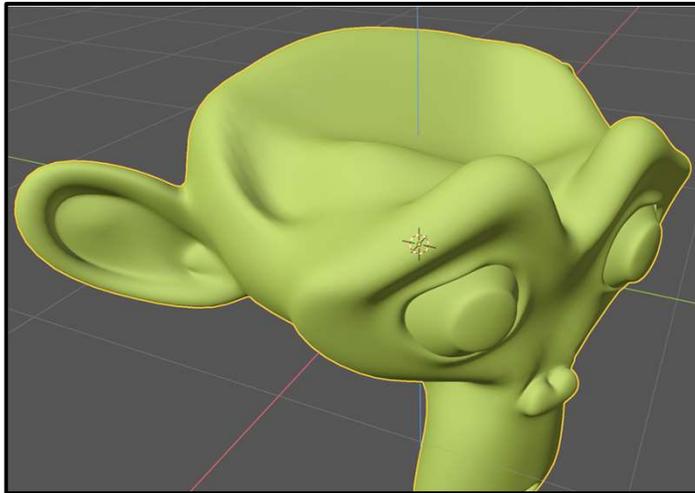

Most matte

Turn Use Nodes off

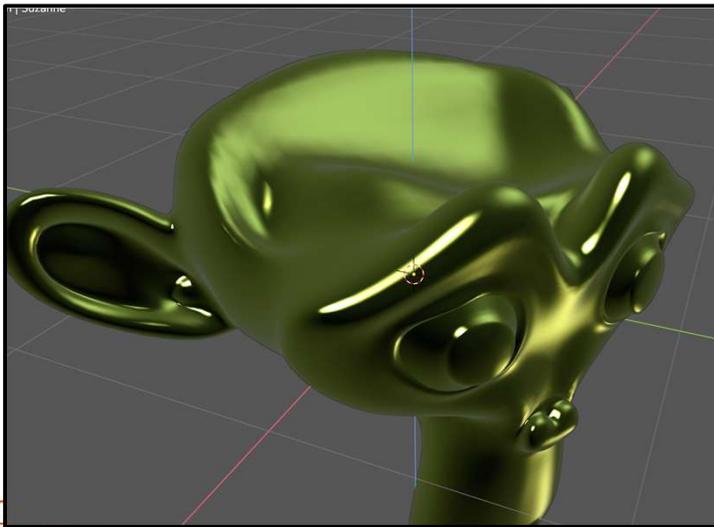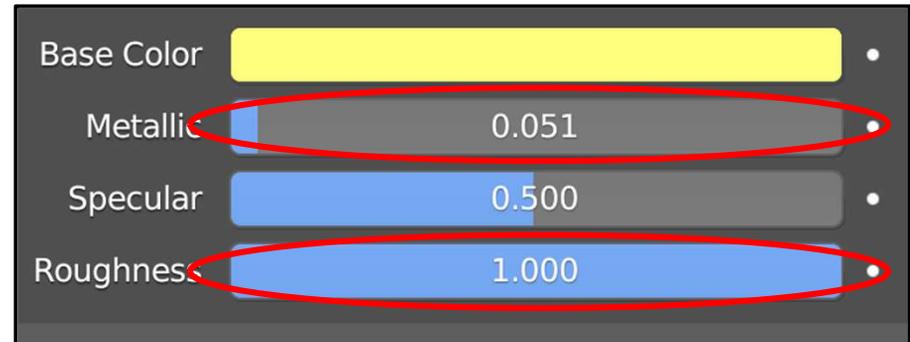

Most glossy



The Color Wheel


Click in here to change the **Hue** and **Saturation**

Click in here to change the **Value** (brightness)

Hue is angle around the wheel
Saturation is the radius

These are the possible ways the color will be defined

If you know the color definition numbers you want, you can type or slider them here

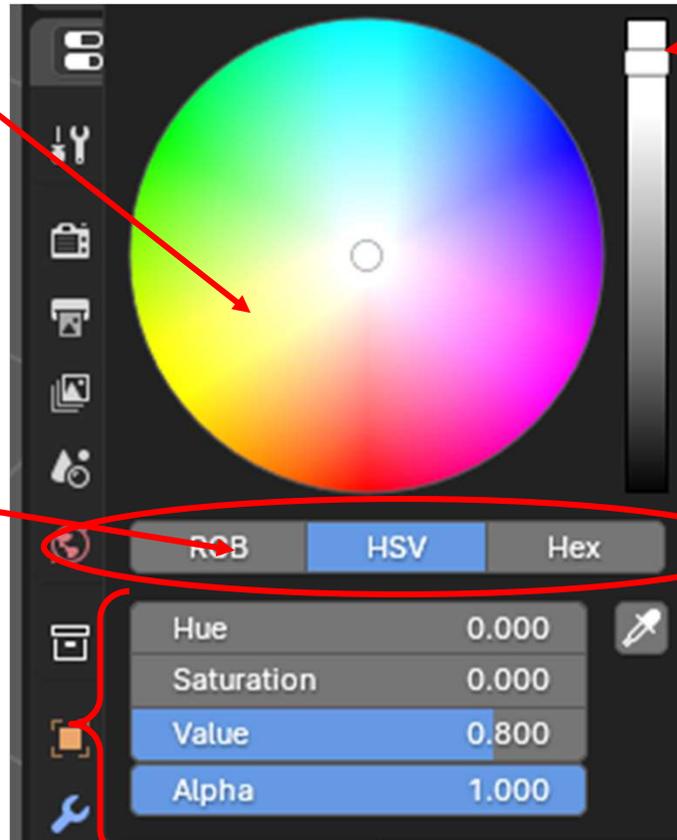

Color Scales



Red-Green-Blue



Hue-Saturation-Value




Hexadecimal



Eyedropper

(lets you select a color you see somewhere else on the screen)

RGB Additive Color Scale

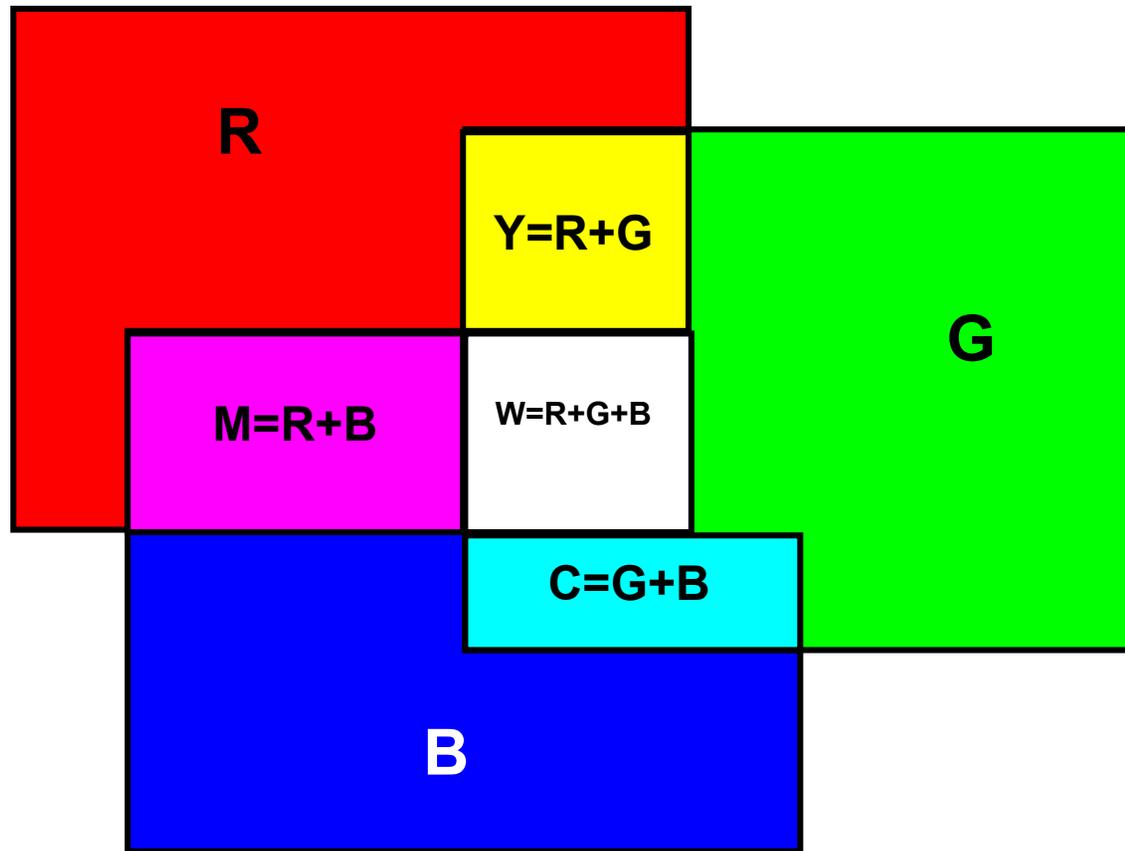



R = Red
G = Green
B = Blue
W = White

C = Cyan
M = Magenta
Y = Yellow
K = Black

Blender's RGB scale lets you give the red, green, and blue components in the range 0. – 1.


Blender's hexadecimal scale lets you give the red, green, and blue components in the range 00 00 00 – FF FF FF

Hue-Saturation-Value (HSV) Color Scale

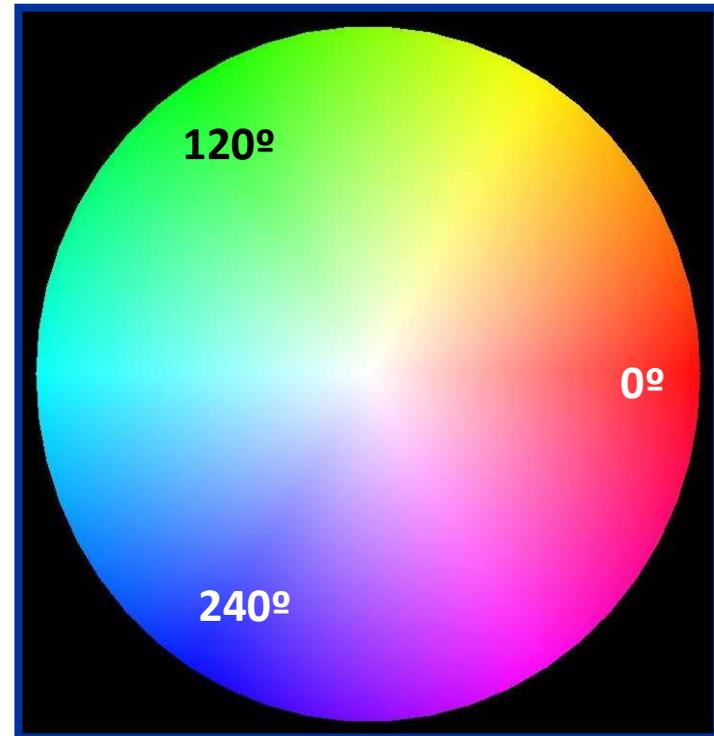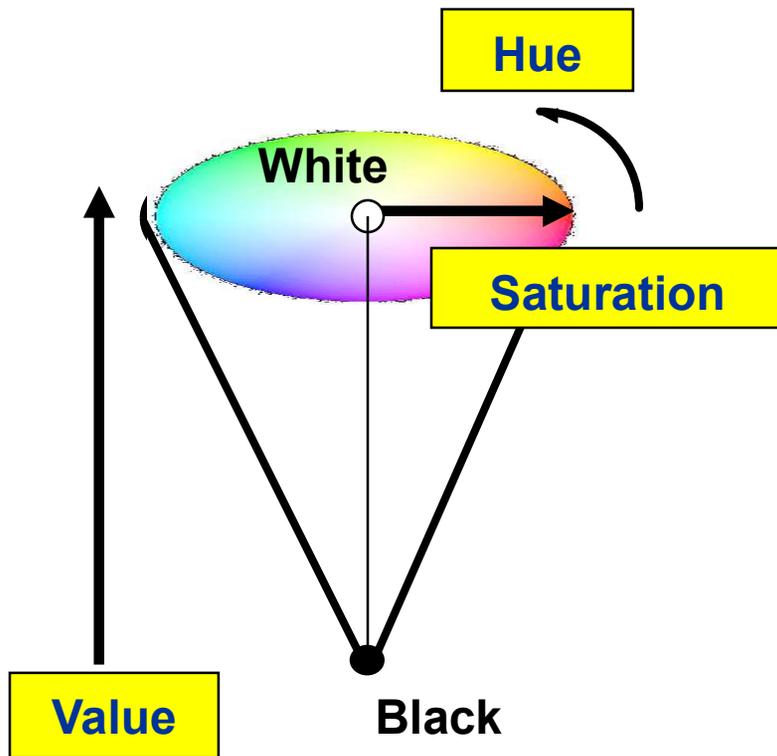

Blender's HSV scale lets you give the hue, saturation, and value components in the range 0. – 1.

Subtractive Colors (CMYK)

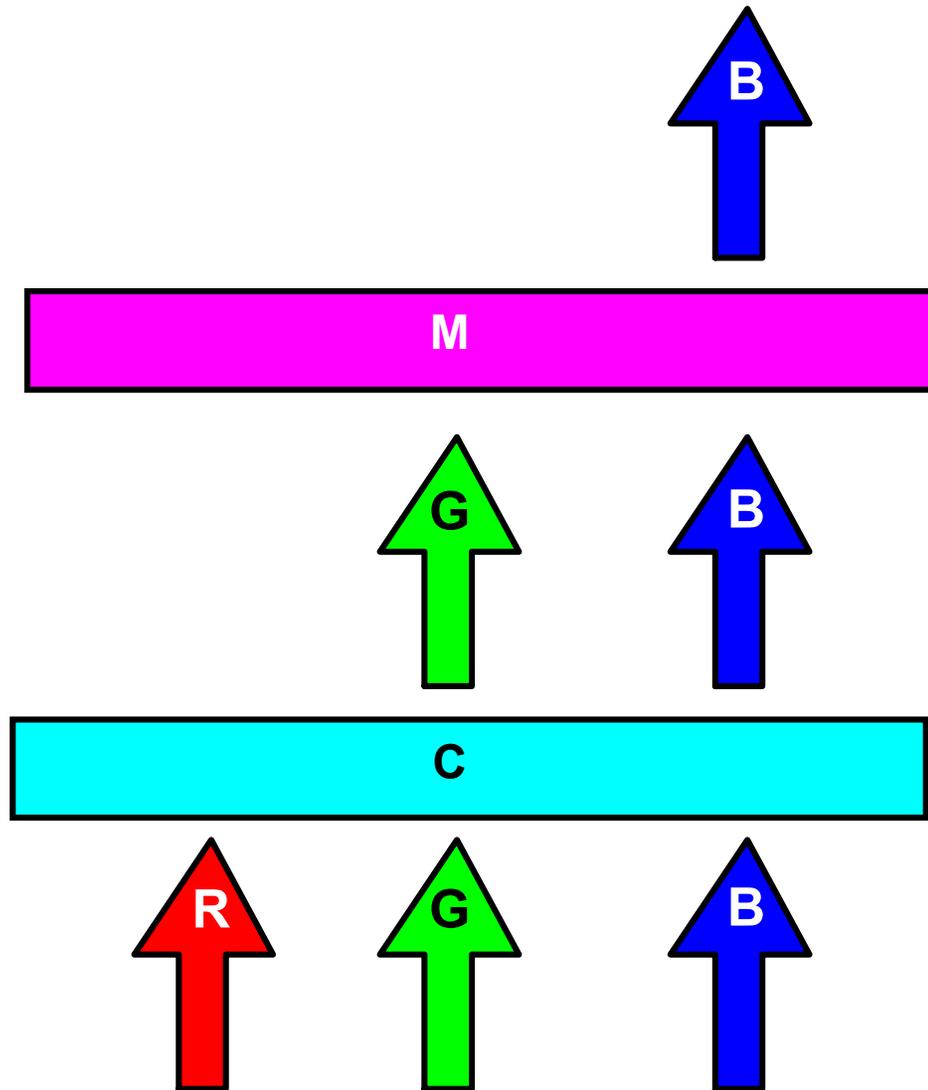


R = Red
G = Green
B = Blue
W = White

C = Cyan
M = Magenta
Y = Yellow
K = Black




Subtractive Color (CMYK)

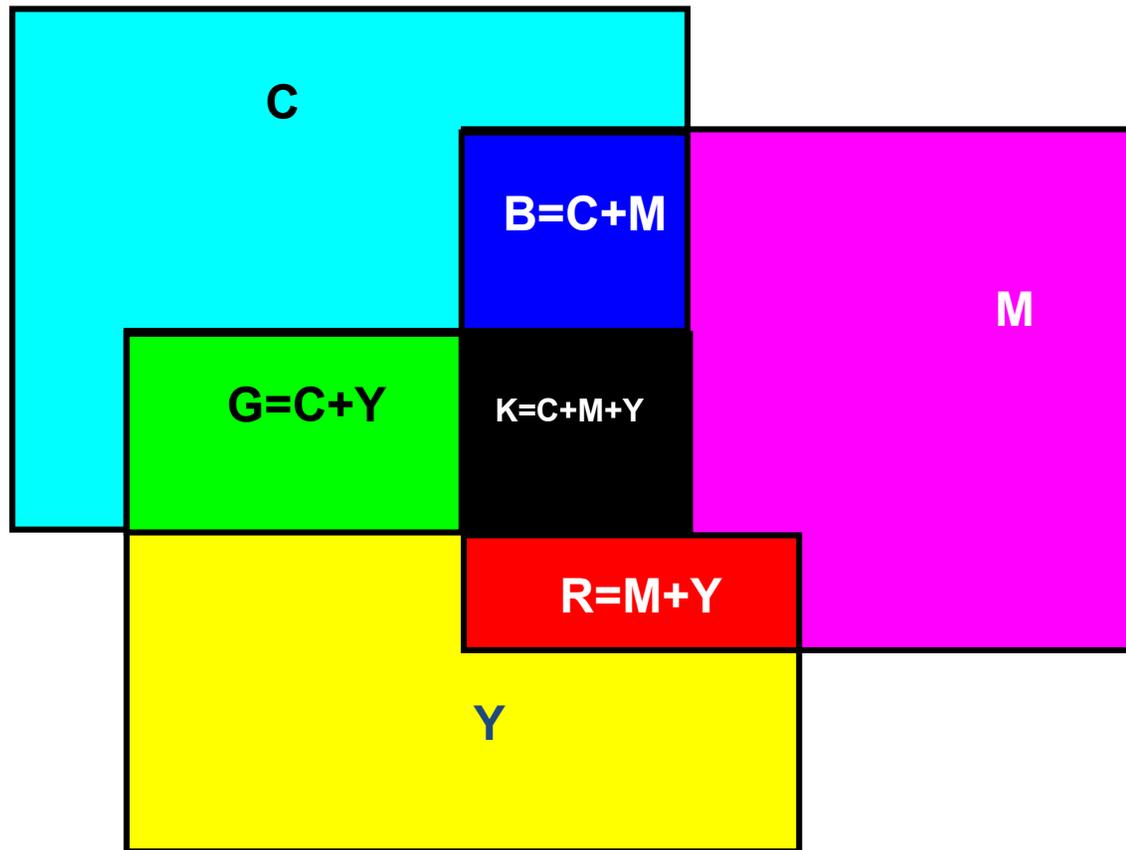


R = Red
 G = Green
 B = Blue
 W = White

C = Cyan
 M = Magenta
 Y = Yellow
 K = Black

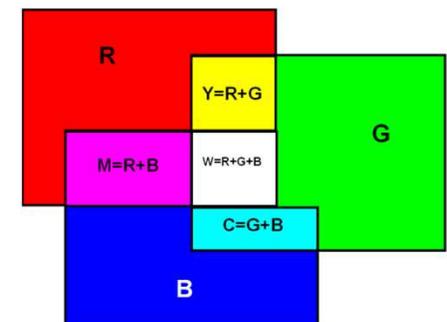

Color Printing

- Uses subtractive colors
- Uses 3 (CMY) or 4 (CMYK) passes
- CMYK printers have a better-looking black

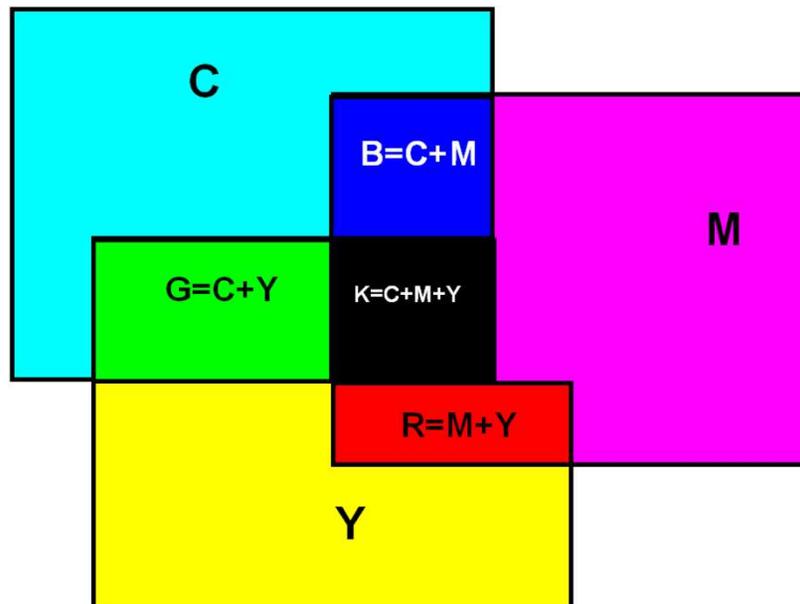


R = Red
G = Green
B = Blue
W = White


C = Cyan
M = Magenta
Y = Yellow
K = Black

Changing the Color of Individual Faces

Let's say that we have created and colored this yellow cube and you want to color the front face red instead.

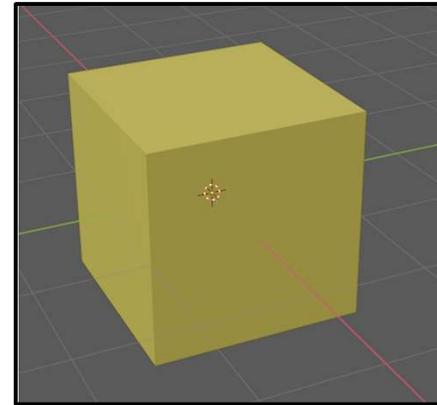


With the yellow cube selected, add another color.

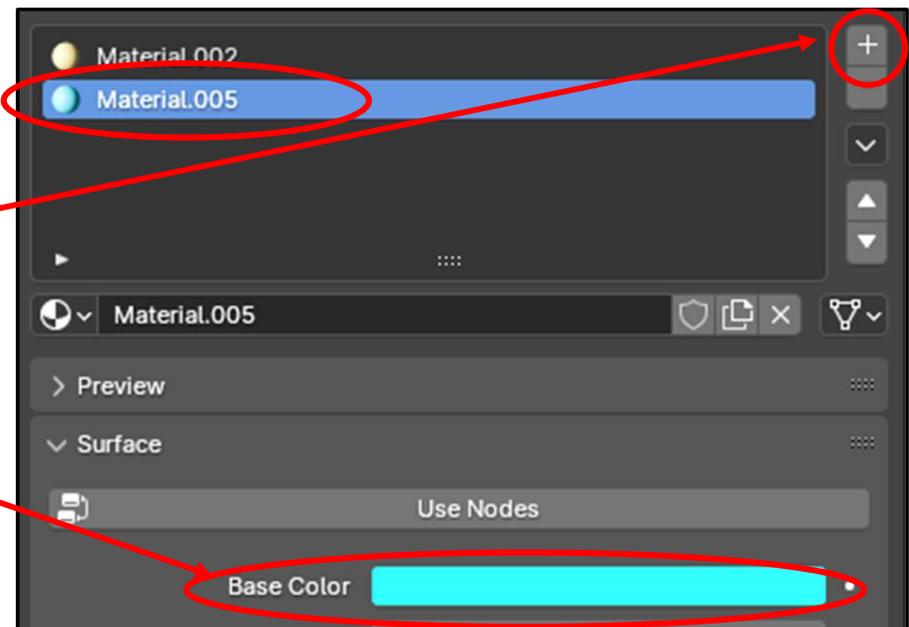


Changing the Color of Individual Faces

Now select the yellow cube and Tab into **Edit Mode**. Tell Blender that we will be selecting faces.

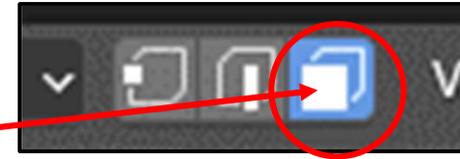


Let go of all faces by clicking in an empty area and then click on the front face.



Click on the **Material Properties** menu icon


From this list, select the new color you want this face to be.

Click **Assign**

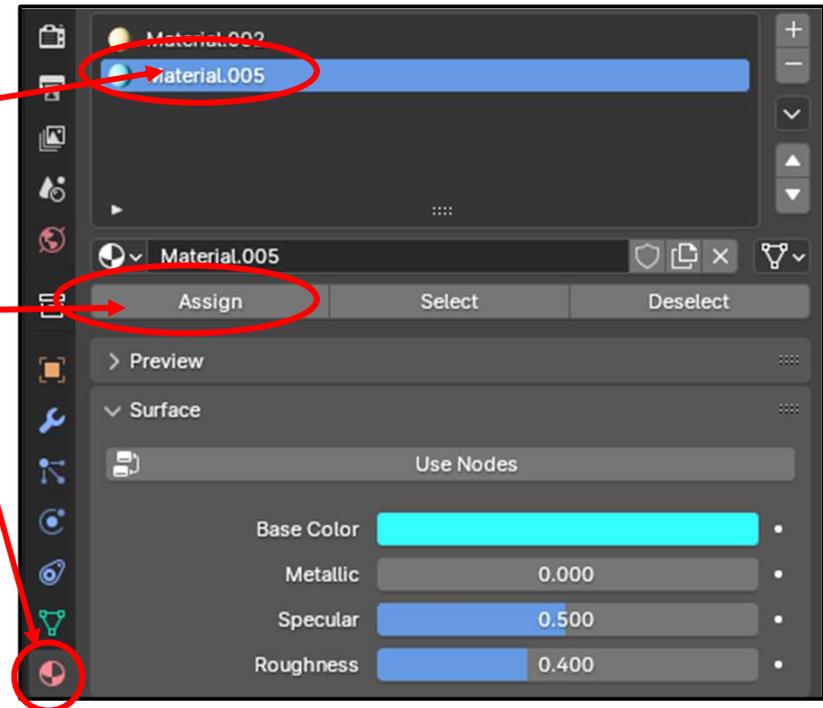


Changing the Color of Individual Faces



You have now changed the color of an individual face.

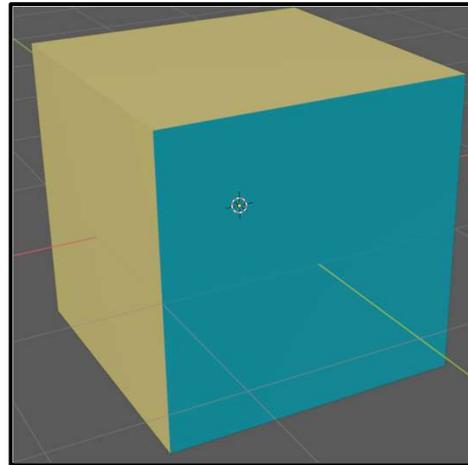

I especially like this for highlighting the results of Boolean operations:

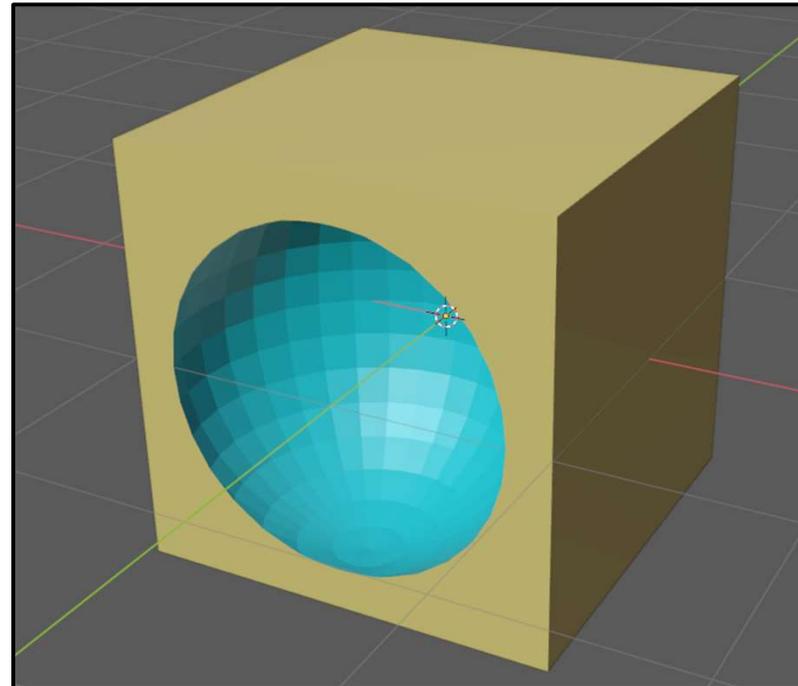


So Far We Have Been Using Viewport Shading

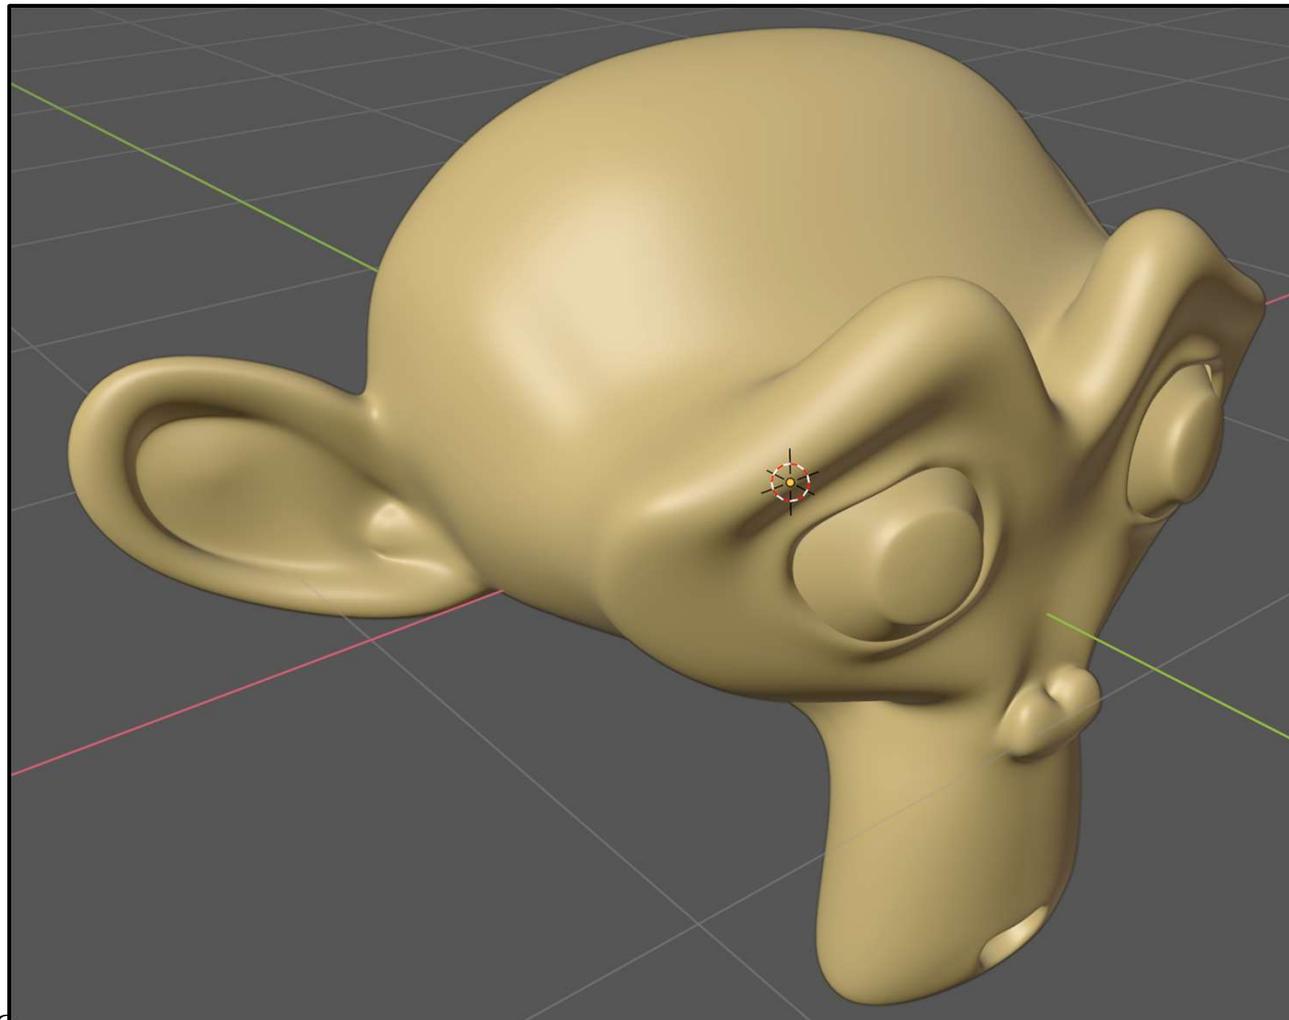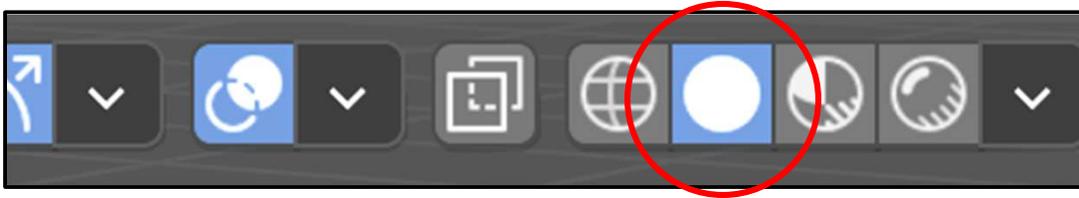

We have gotten pretty good views of our objects without having to position light sources, cameras, etc.

We Could Switch to Rendered Shading

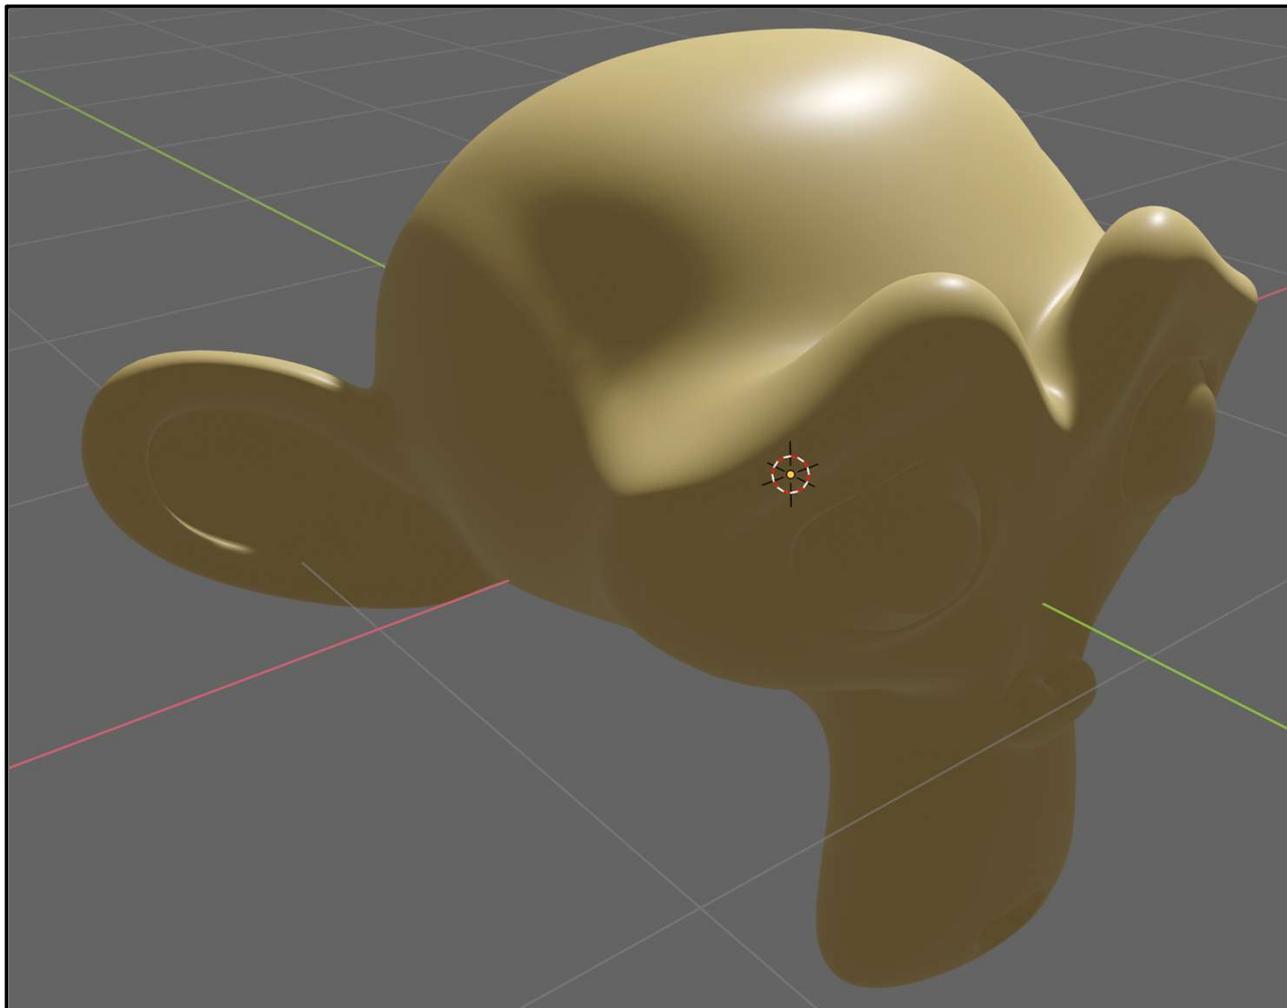


But, that *would* require us to position light sources, cameras, etc. We're not ready for that yet.

But, here comes *MatCap*, a More Creative Use of Viewport Shading ¹⁰⁶



Click on Viewport Shading and then click on the down-facing arrow

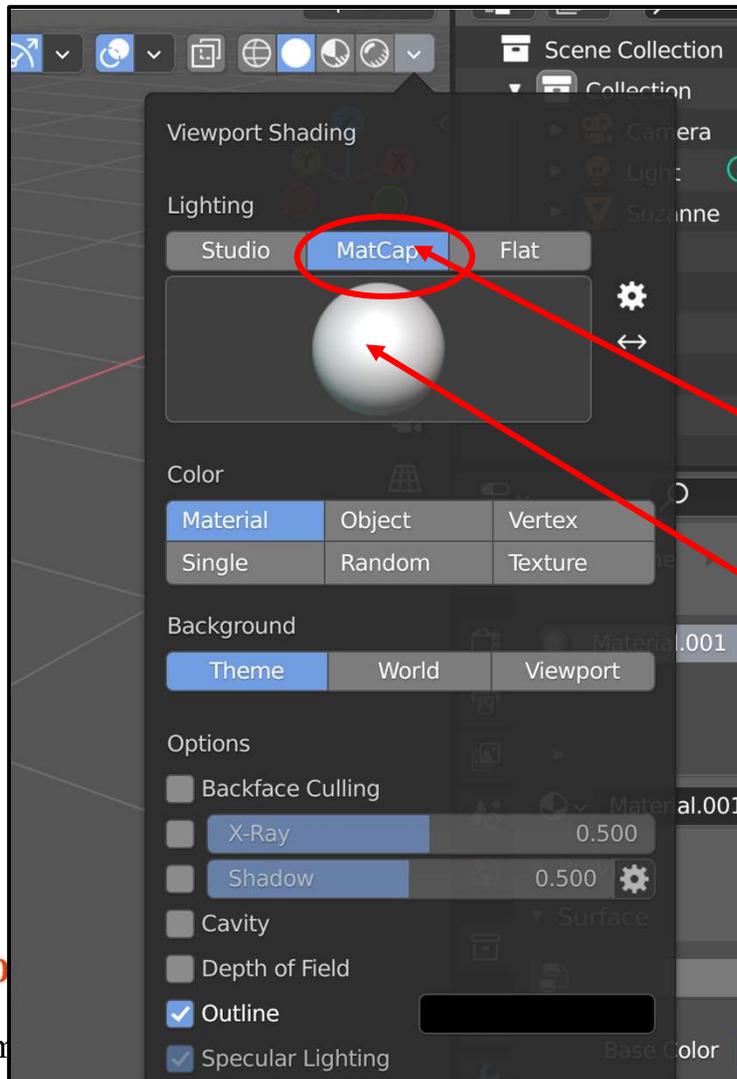


Studio Lighting is what you have been using. Instead, select **MatCap**, which stands for "Material Capture".



Then, click on the sphere.

Com


Up Pops a Lot of Material Options!

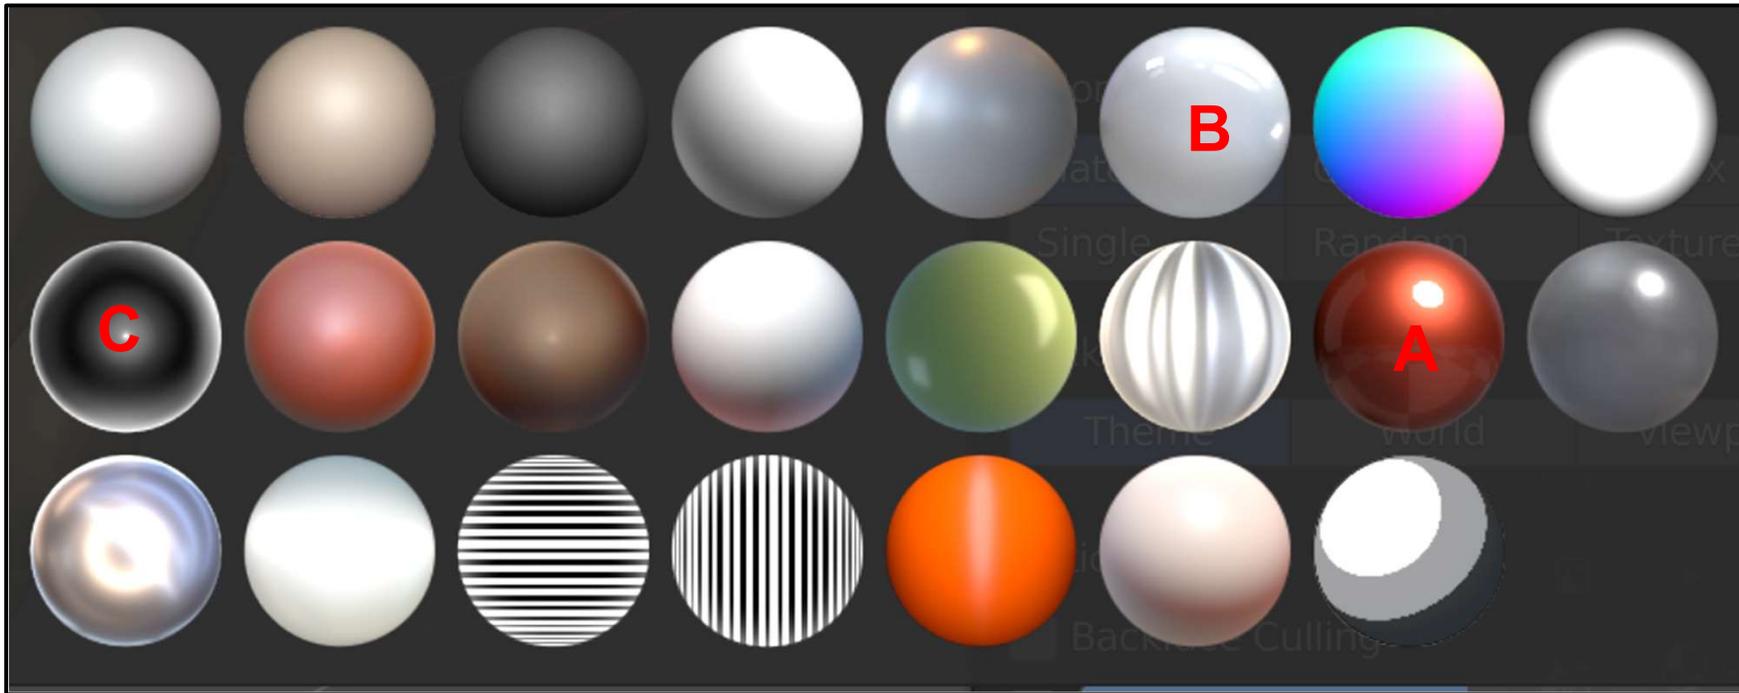


Try them, especially the shiny ones!

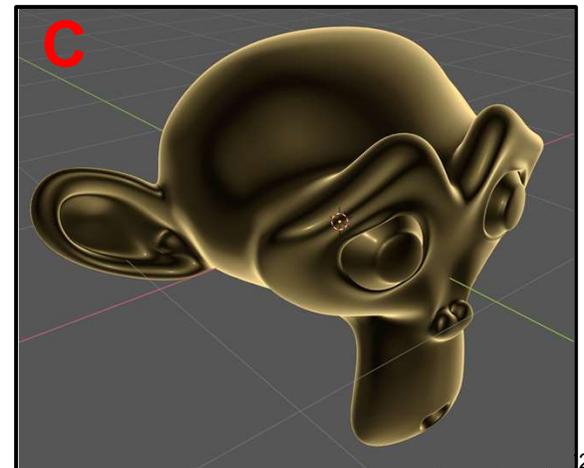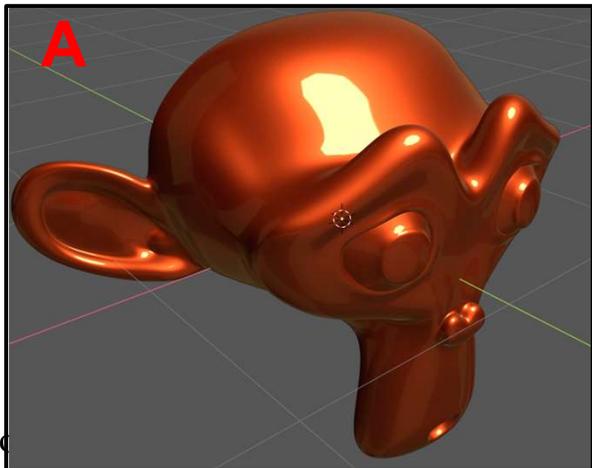


6. Modeling, II

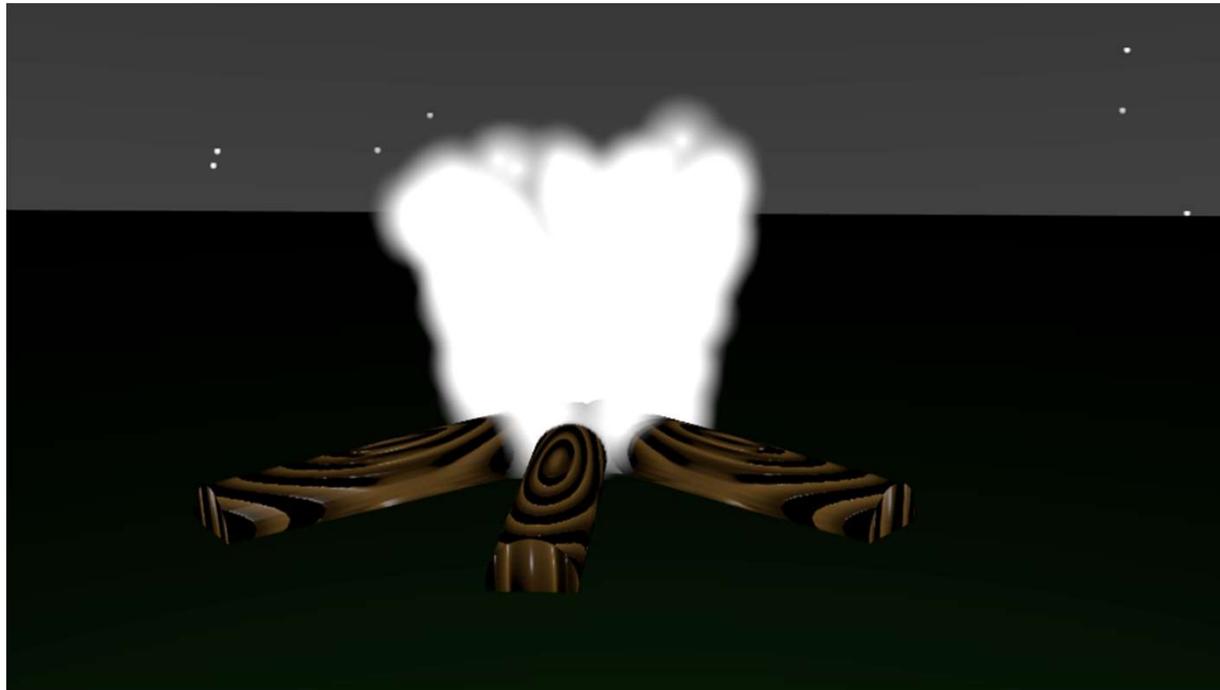

Adding 3D Text

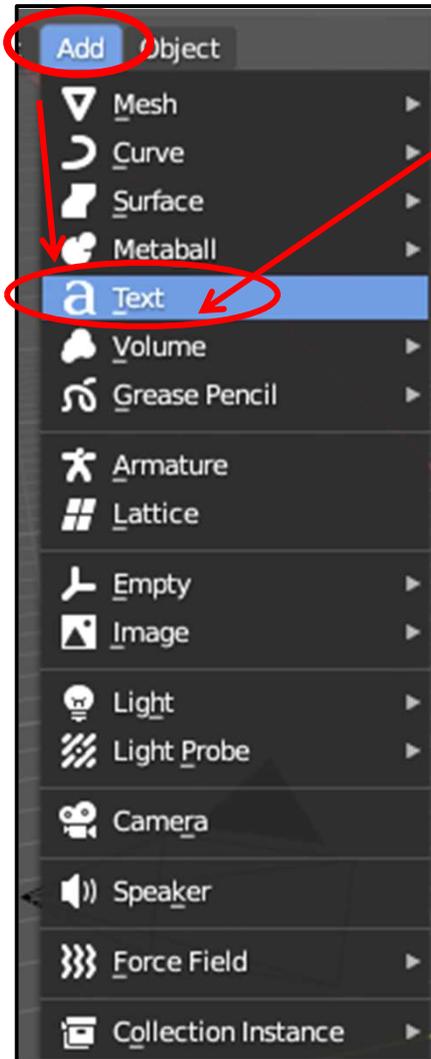


Select **Add** → **Text**

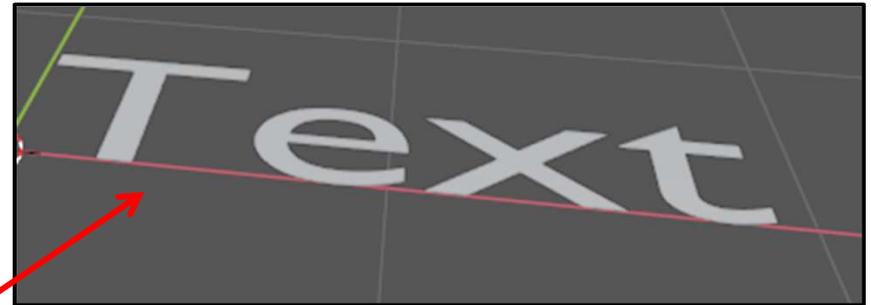

It ends up giving you the fairly-useless line “Text”

To change the text string, tab into **Edit mode**. The white rectangle acts as a text cursor. Backspace over “Text” and type your new text. The return key will let you enter multiple lines.

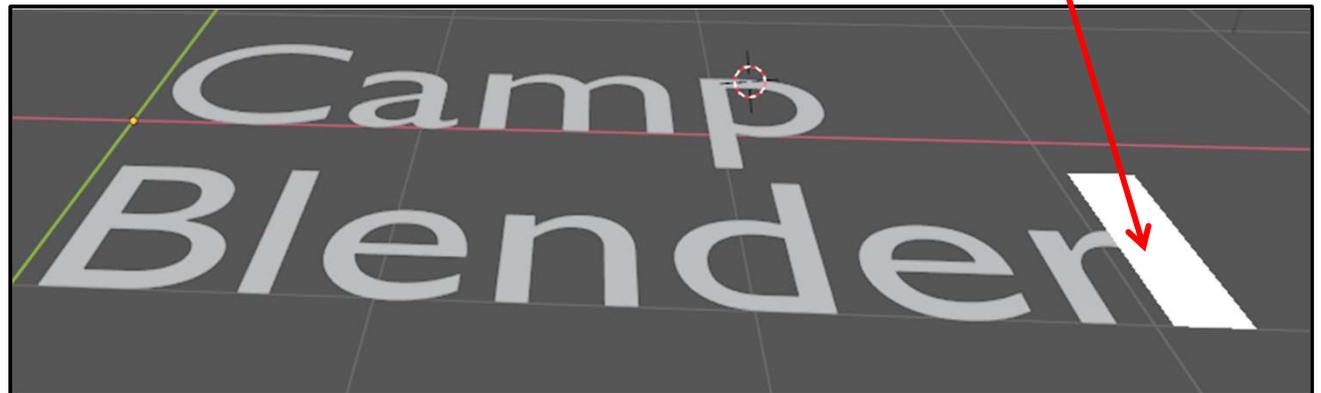


Changing the Style of 3D Text

So far, not very 3D, huh?
Tab back to **Object Mode**, click on your text,
then click on this **Font** button

Go to the **Geometry**
sub-menu


Extrude: give the letters height
Depth: bevel the top and bottom
Resolution: round the bevel

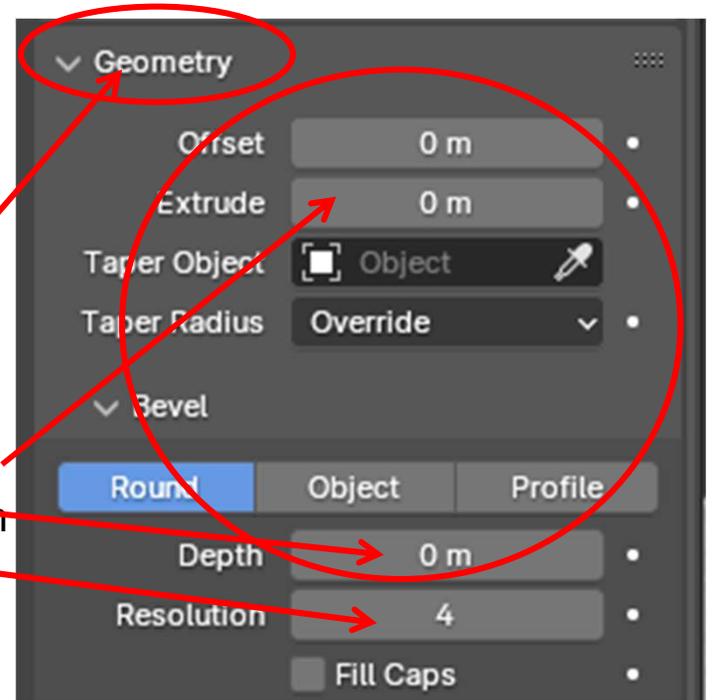


Edit Mode Subdivision

The Edit Mode subdivision feature adds more vertices, but doesn't do any sort of smoothing (like the Subdivision Surface Modifier does). So, when you are done, you will have more vertices to sculpt with, but, in Object Mode, your object will look exactly the same as it did before.

1. Object Mode

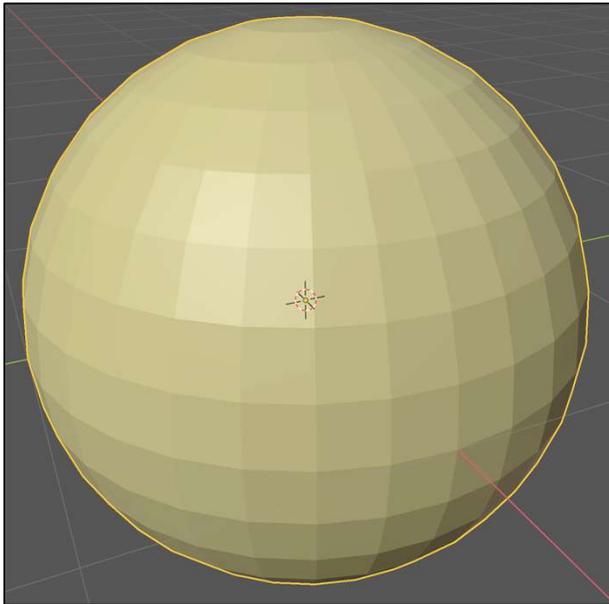

2. Tab into Edit Mode

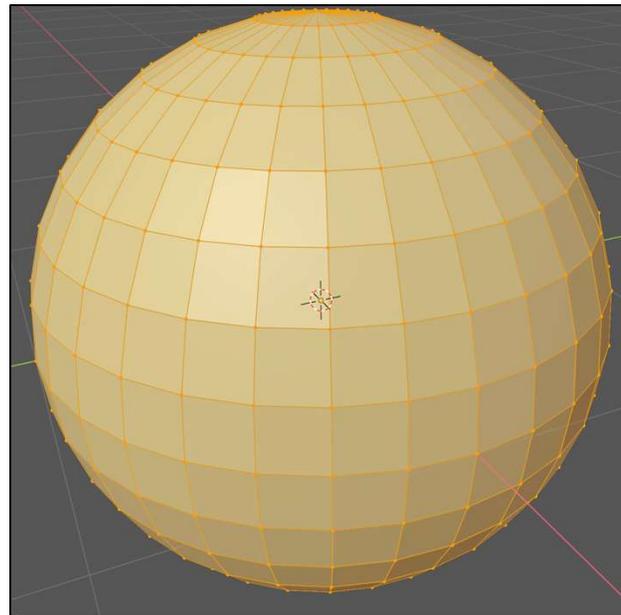


3. Get Ready to Edit Faces




Edit Mode Subdivision


4. Right-click Subdivide

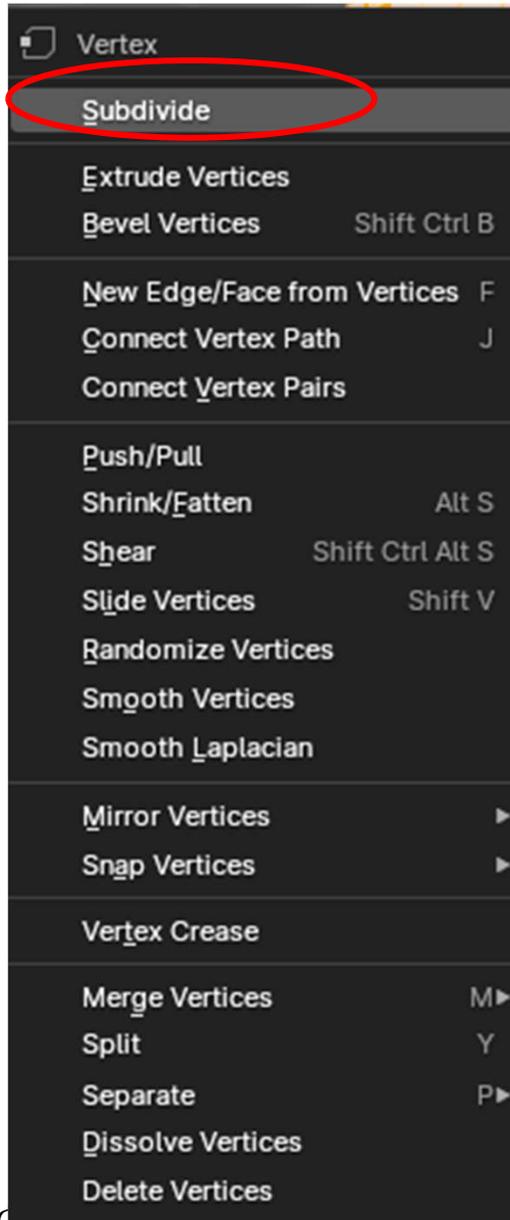

5. You now have more vertices

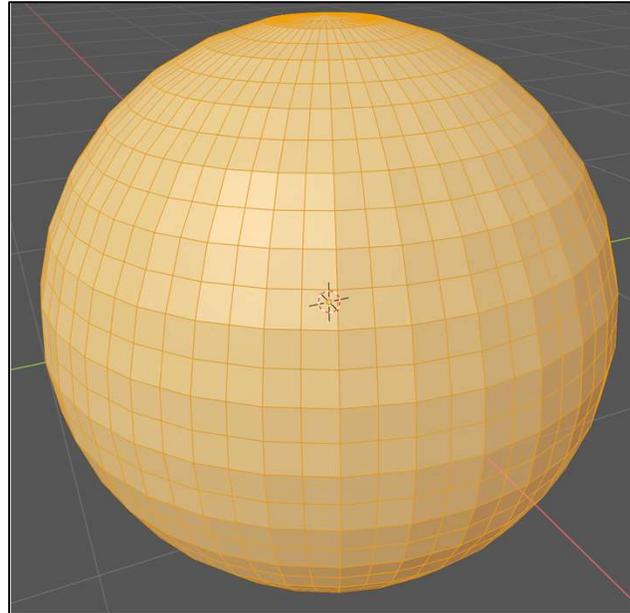

6. Tab back into Object Mode

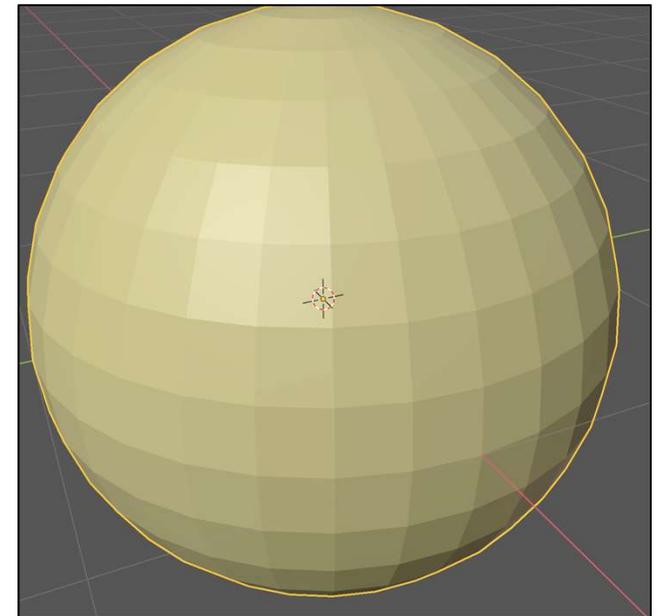


A Multi-Vertex Picking Hint

First, make this model:

1. **Object Mode** → **Add** → **Mesh** → **Cylinder**
2. Tab to **Edit Mode** → **RMB** → **Subdivide**

Edit a vertex


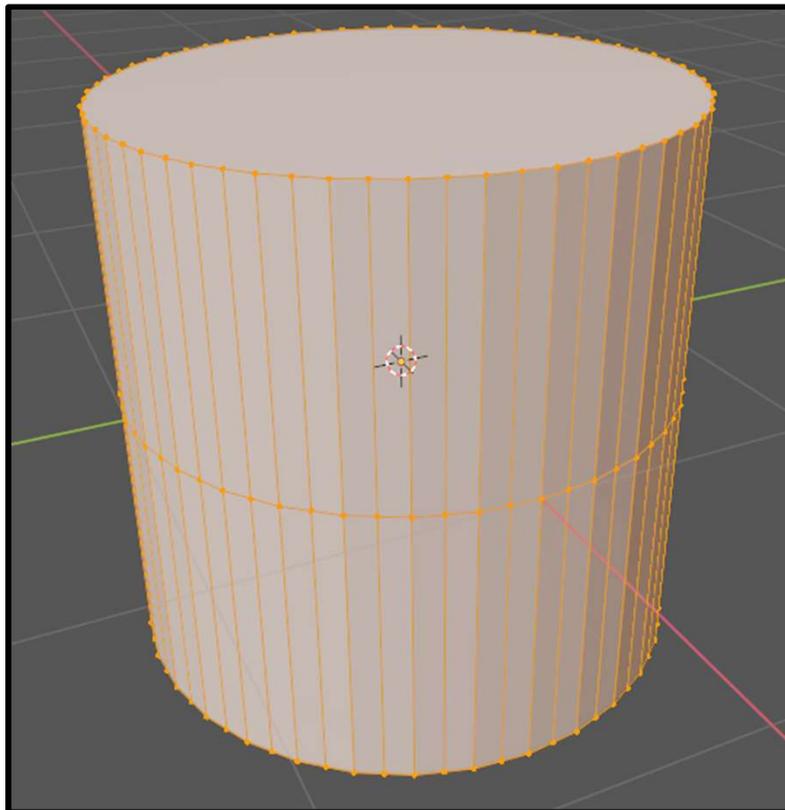


A Multi-Vertex Picking Hint


Now, **LMB-sweep** over these vertices. (I call them the “equator” or the “belt”.)

But, if you do that, you will only end up selecting the front vertices, that is, *the ones you can see*.

The trick is to go into **X-ray Mode**, by clicking here.

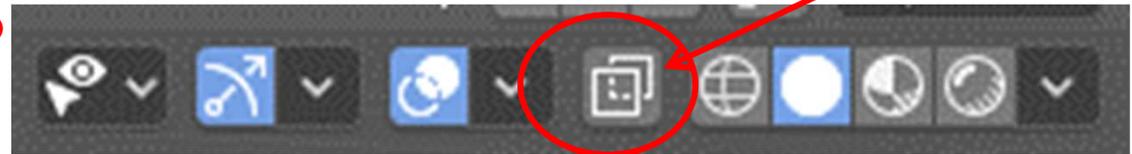
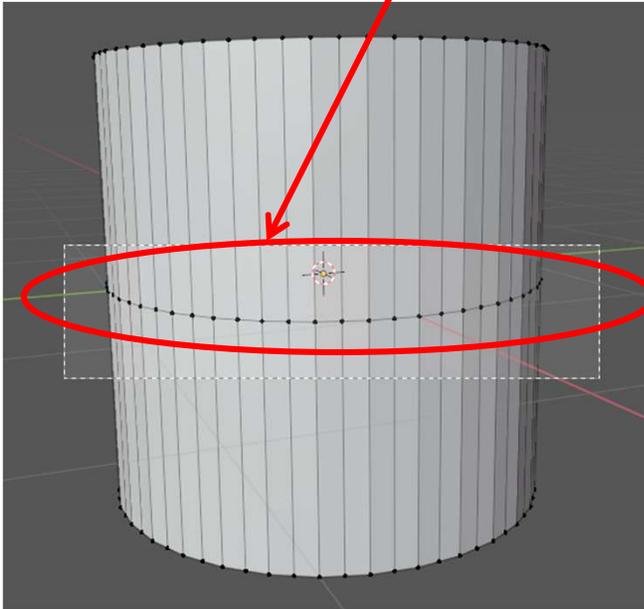


This will now let you select *all* the points in the belt.

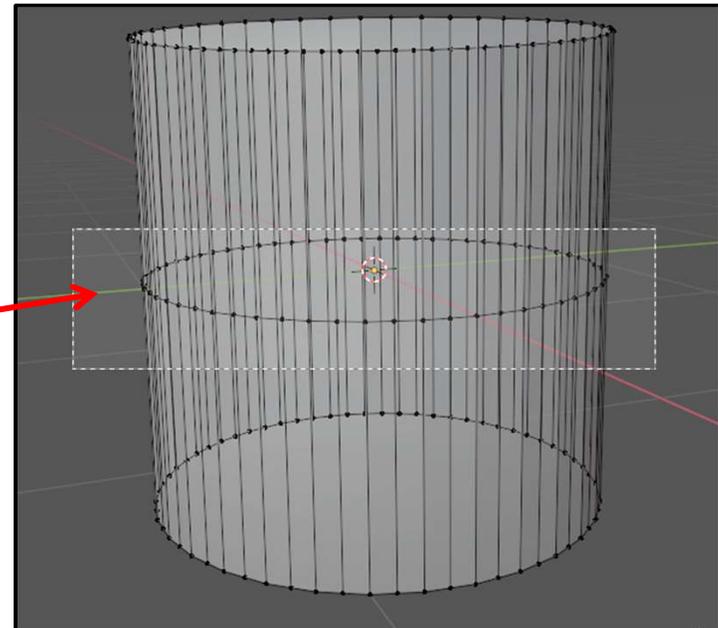


A Multi-Vertex Picking Hint


Why do that? Well, if you have those vertices selected and you hit the **s** key (for **s**cale) and move the mouse, then you can get this:

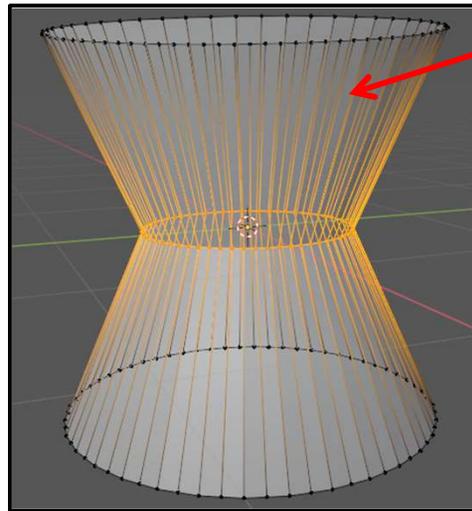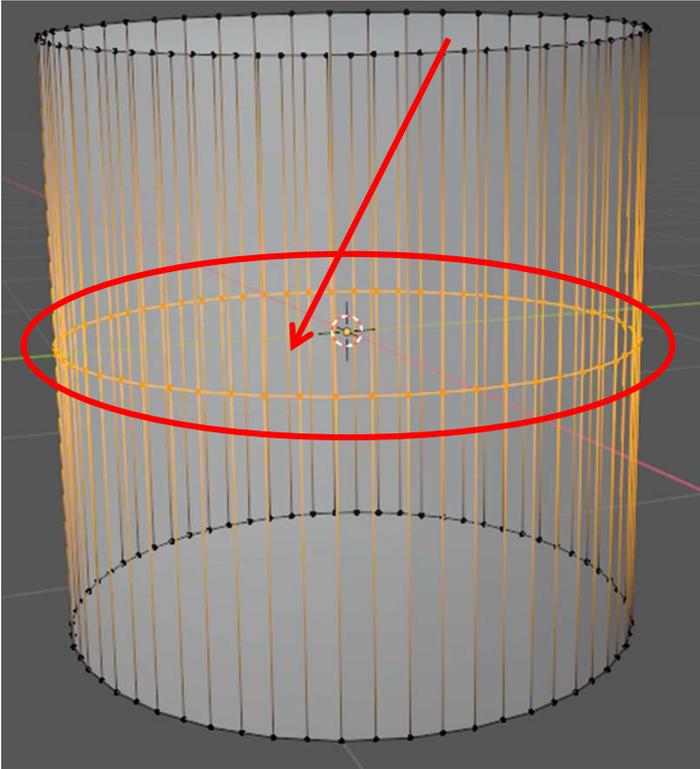

Or, this:

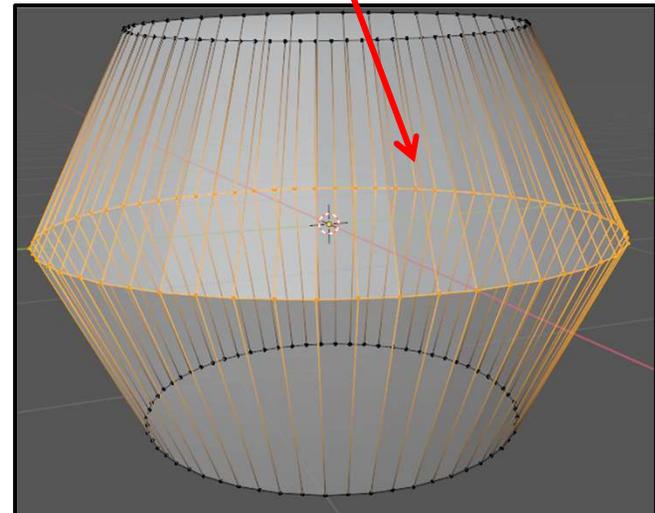


A Multi-Face Picking Hint

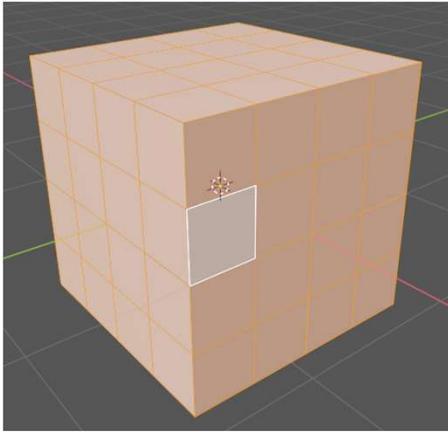


To create this model:

1. **Add** → **Cube**
2. Tab to **Edit Mode** → **RMB** → **Subdivide** → **Subdivide**

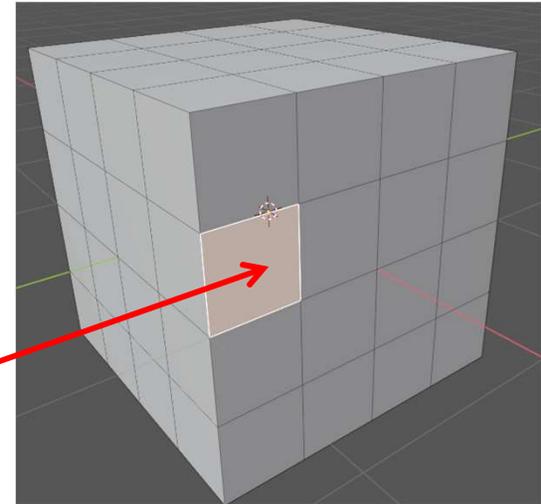


Suppose you want to select an entire row of faces in order to “fatten the belt”. You could select all the faces individually (**LMB** → **Shift-LMB**). But, here’s a better trick

1. Click on one face in the row
2. **Alt-LMB** on another face down the row

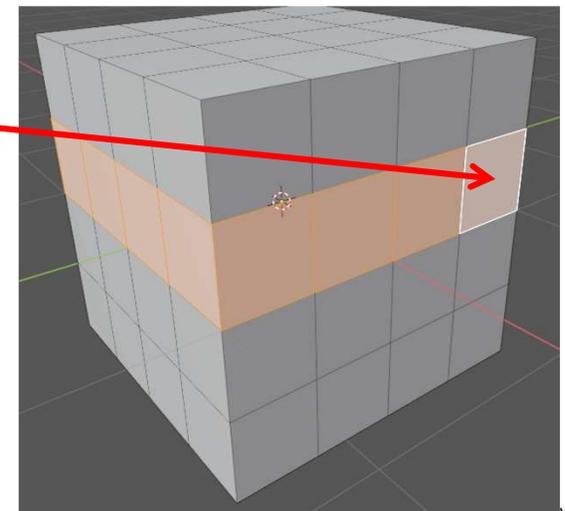

Face Select Mode

A Multi-Face Picking Hint

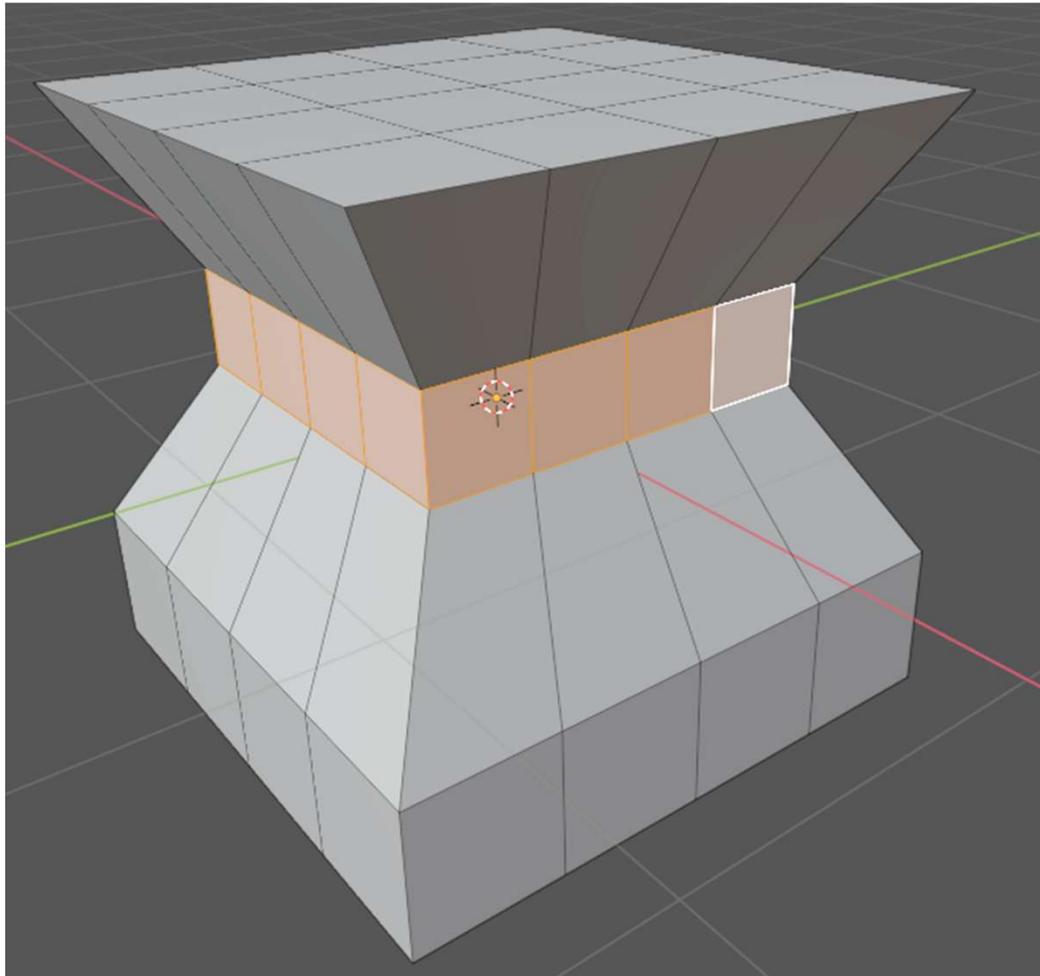


Scaling ('s')

A Face Picking Hint


Similarly, if you put yourself into face-picking mode:



And click on the top face of the cylinder (don't need the belt and don't need to be in X-ray Mode for this):


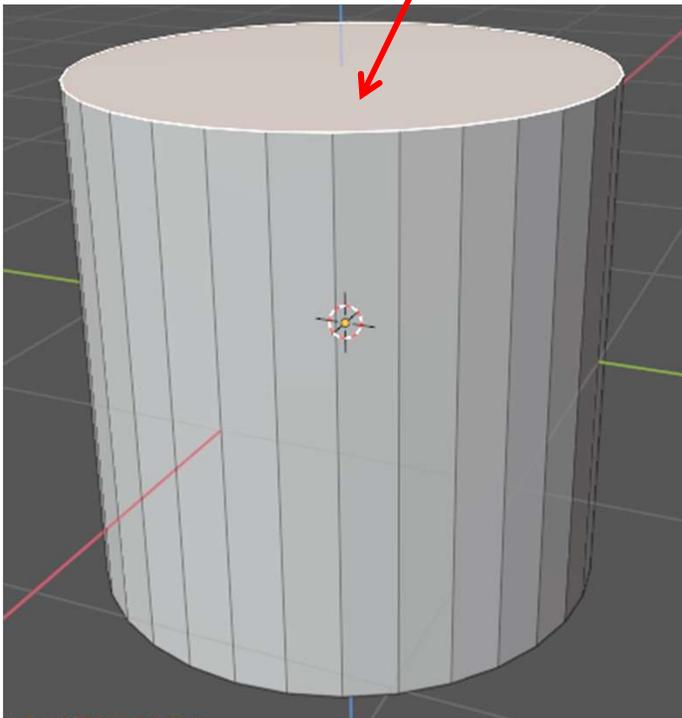


And hit the **r** and **z** keys (for rotate about the **z** axis) and move the mouse, then you get this:

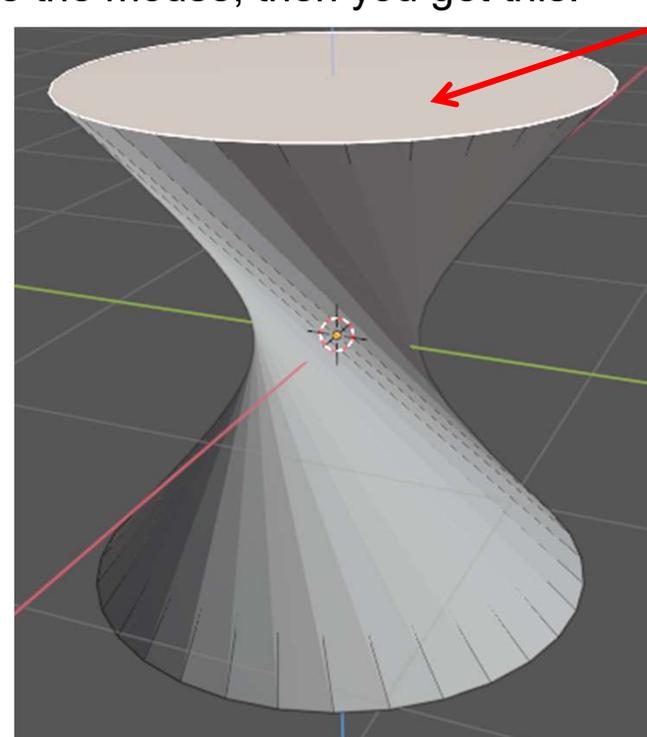





Intentionally Joining Two Objects

Let's say that you have two objects and want to join them together so that you can act on them as one object.

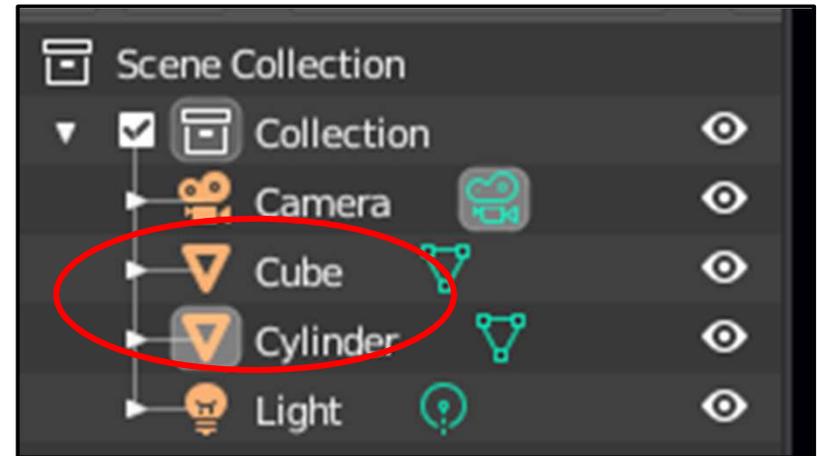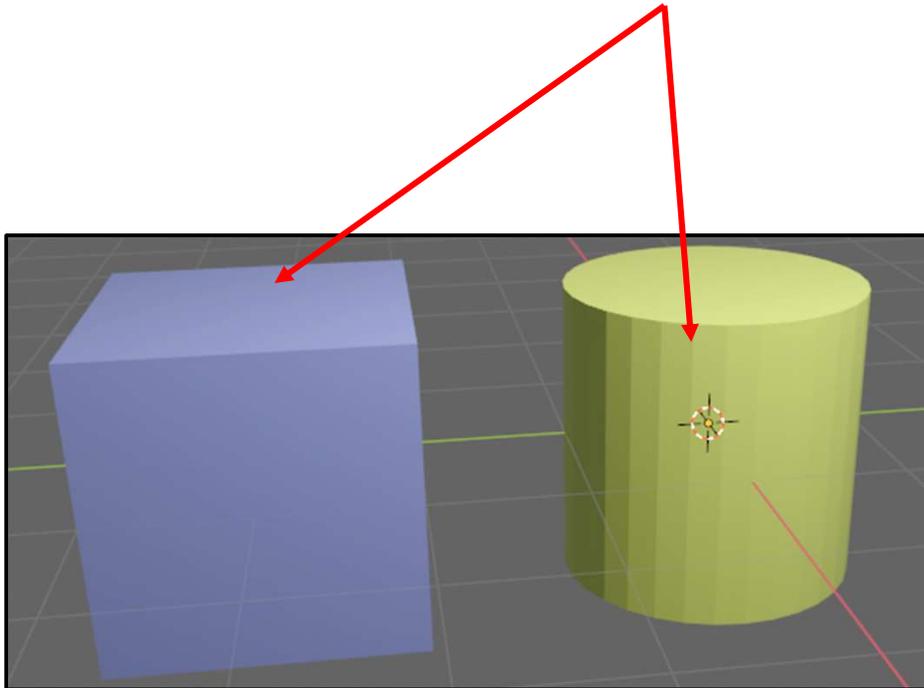



Intentionally Joining Two Objects

Easy! **LMB** on one, then **Shift-LMB** on the other, then hit **RMB** → **Join** (or **Control-'j'** on the keyboard). The orange “selection outline” now goes around both objects and the outliner shows just one object.

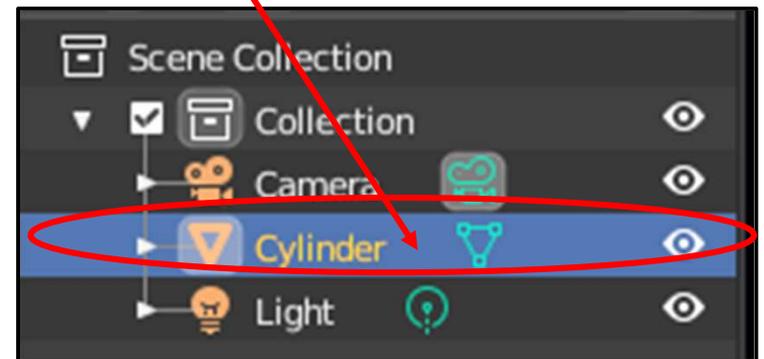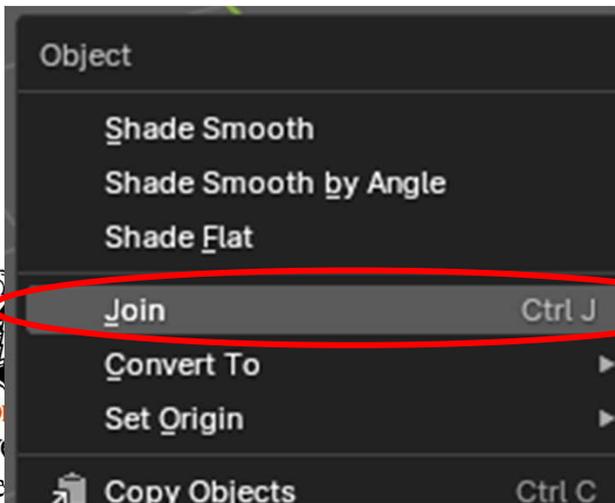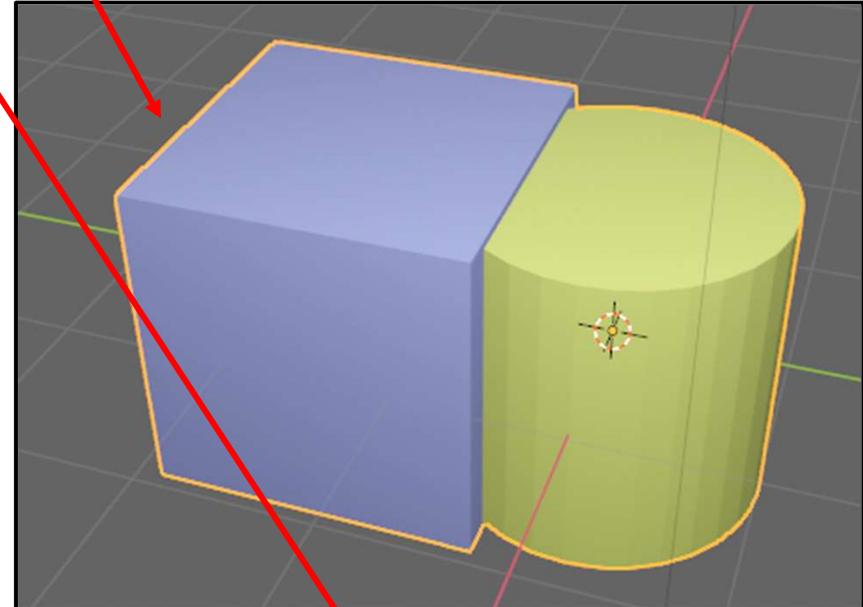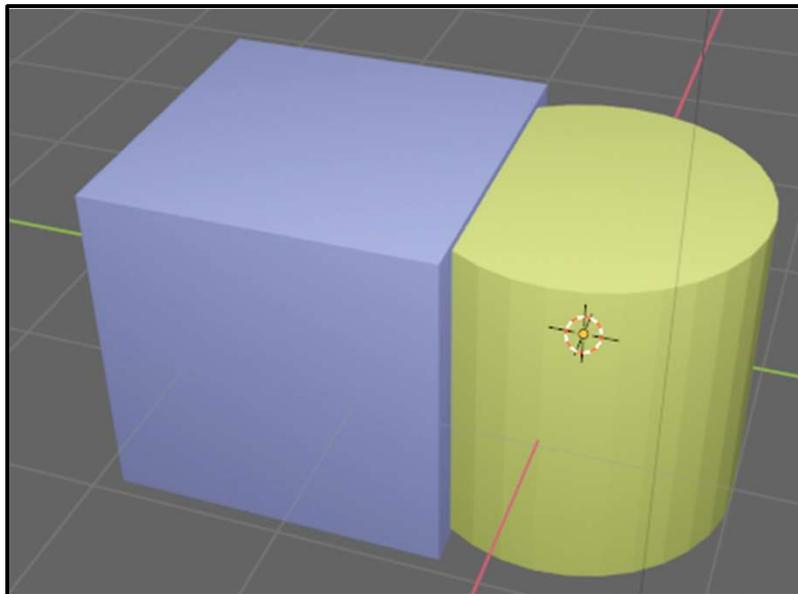



Separating Objects By Loose Parts

Select the Joined object. Tab over to **Edit Mode**. Then hit the ‘p’ key (“Partition”). You will then have three options on how to partition the joined object. If you select **By Loose Parts**, then the Joined object will be partitioned based on the original primitives that made it up.

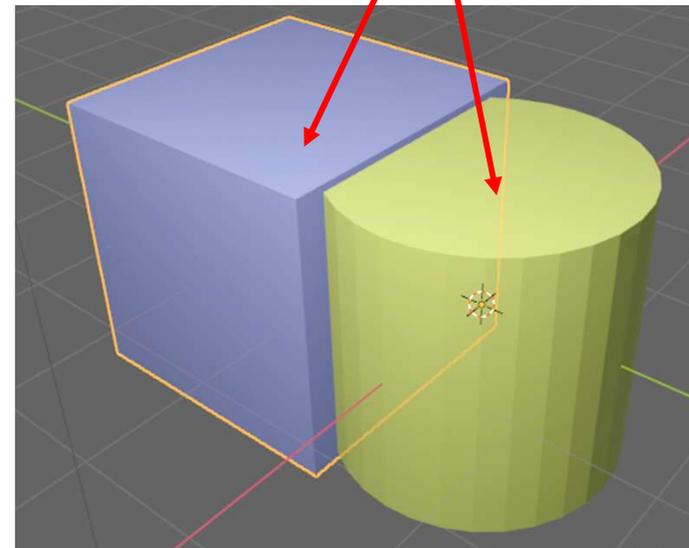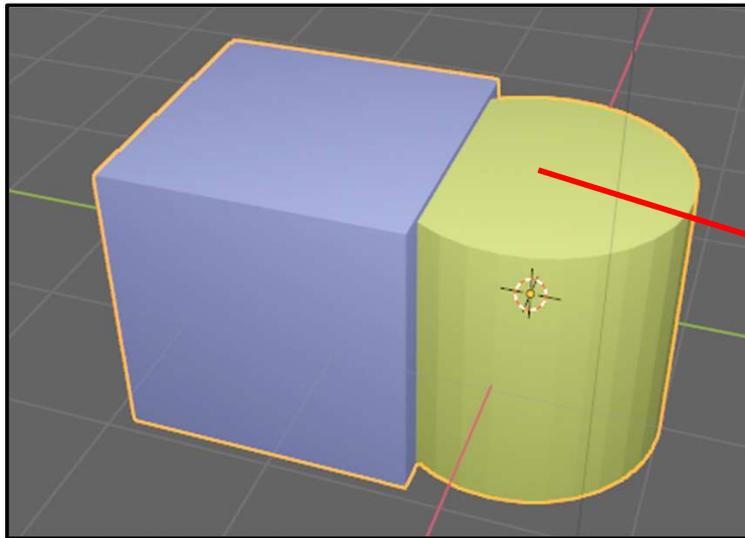


Inset Faces (aka, Offset Curves)

Often you want to create a “face-within-a-face”. In Blender, this is called an **Inset Face**. (CAD systems often call this sort of thing an **Offset Curve**.)

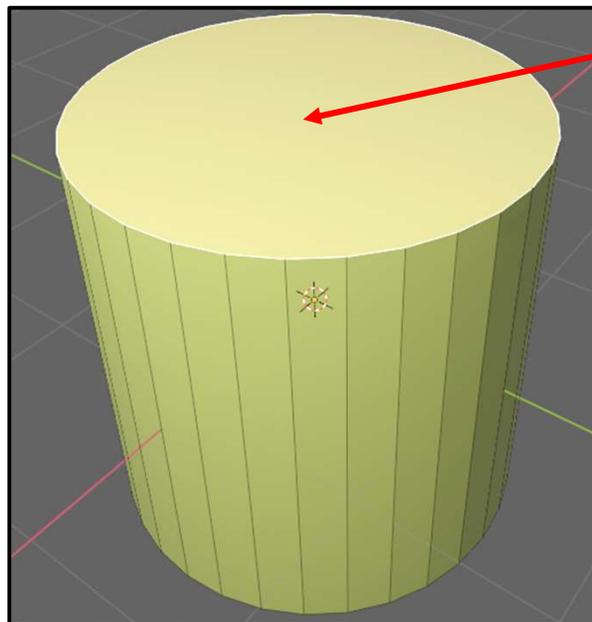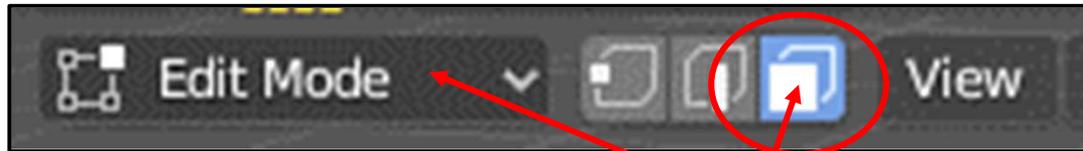


In **Edit Mode**, select the top face.

Then, either **RMB** → **Inset Faces**, or click on this icon on the left side:


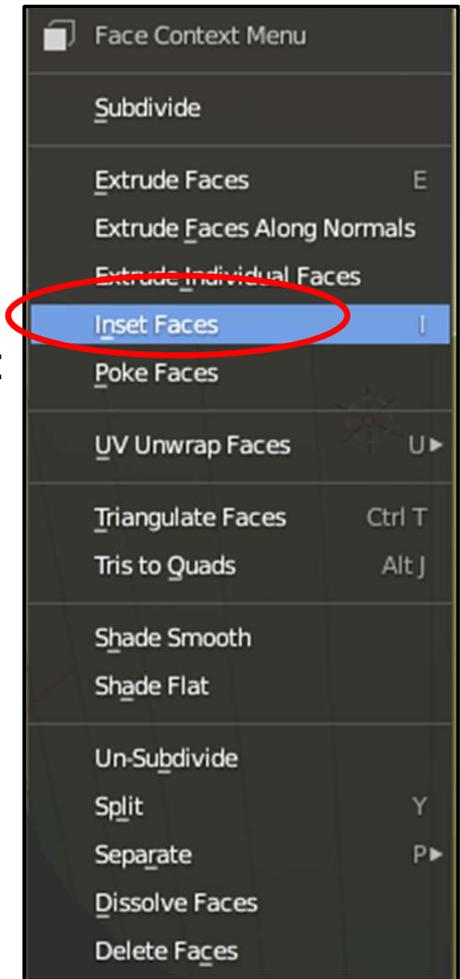


Inset Faces (aka, Offset Curves)

With the LMB, push the little handle down until the Inset Face is the size you want.

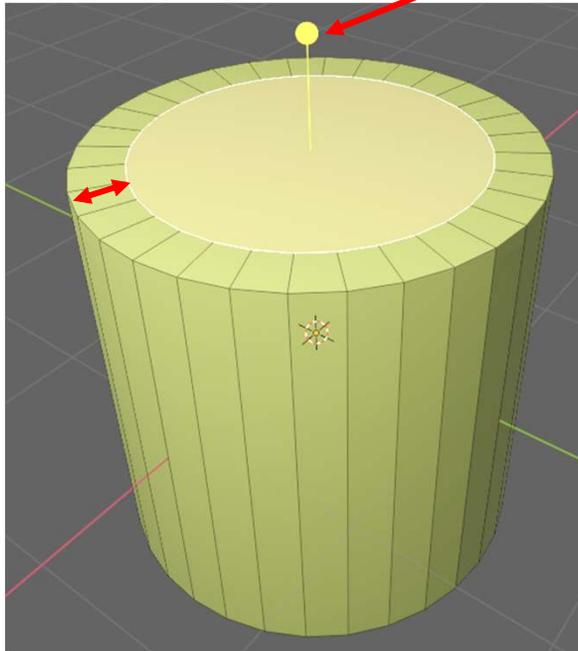

At this point, you can select the inner face and hit **g** and **z** (grab in the **z** direction) to do this, or this.

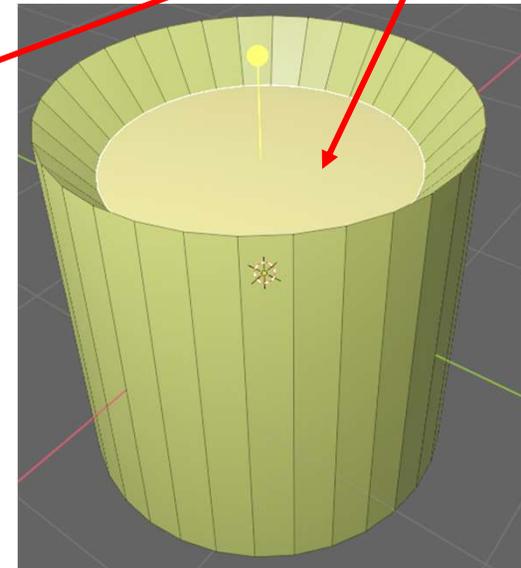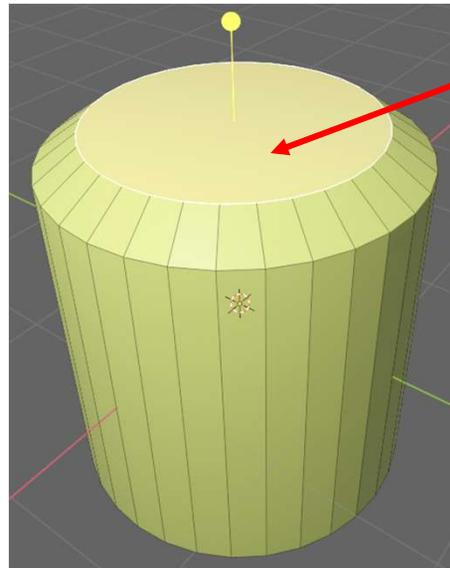


Try rotating or scaling the inner face.


You can also create a new inset face inside the inset face you just created.

Extrude Tool

Start with a cube

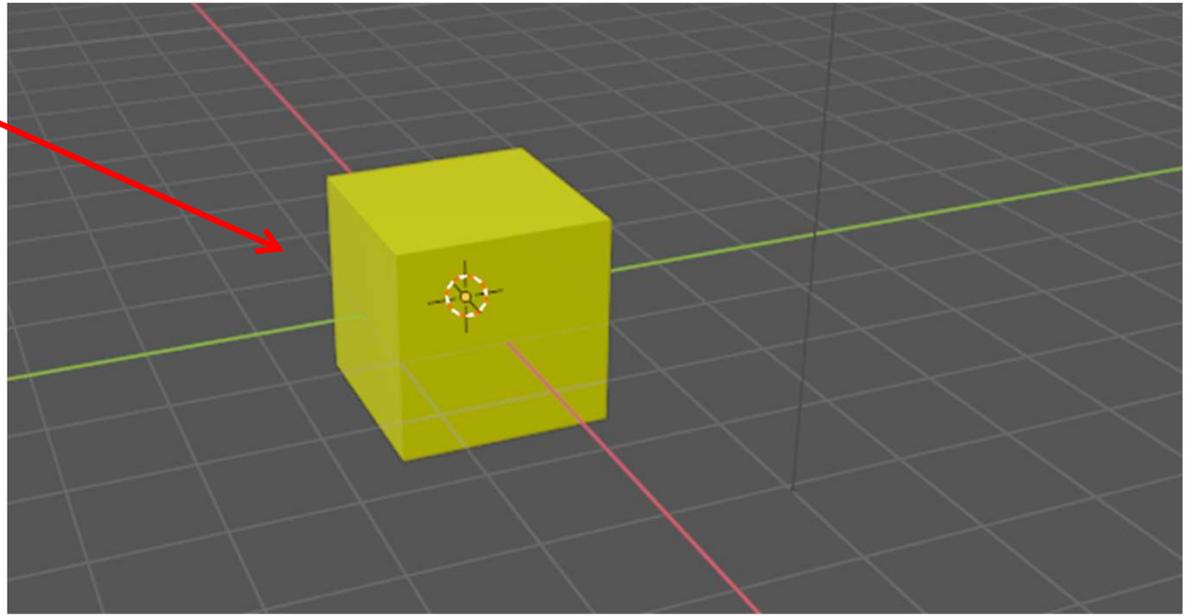

Select **X-ray mode** and select **all vertices**

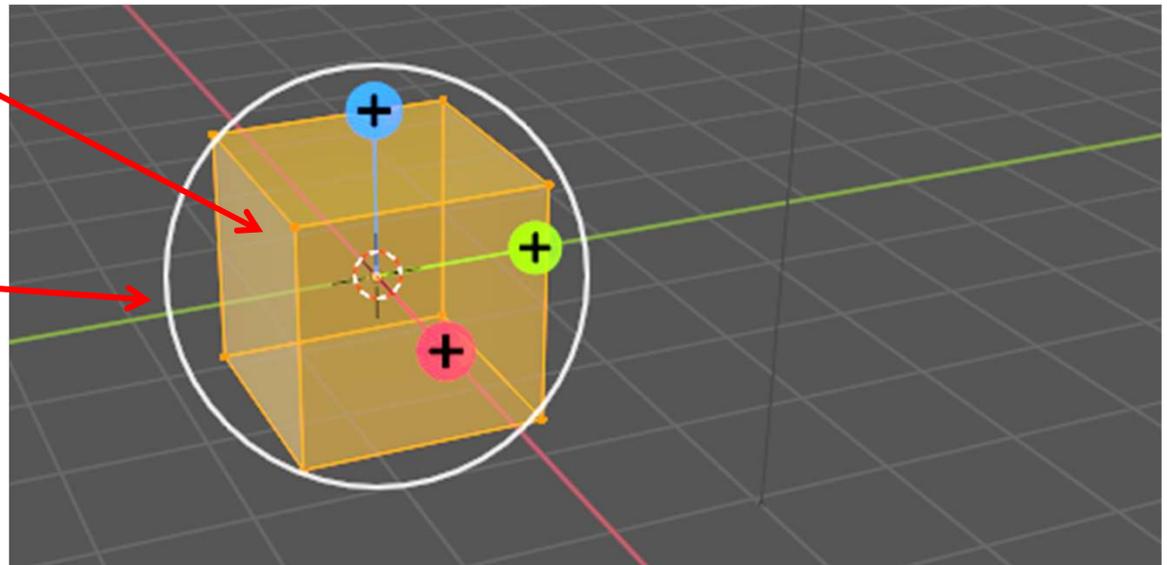


Tab into Edit Mode.
Click on the **Extrude Tool**





Extrude Tool

I like **XYZ mode** so that you can extrude in any direction

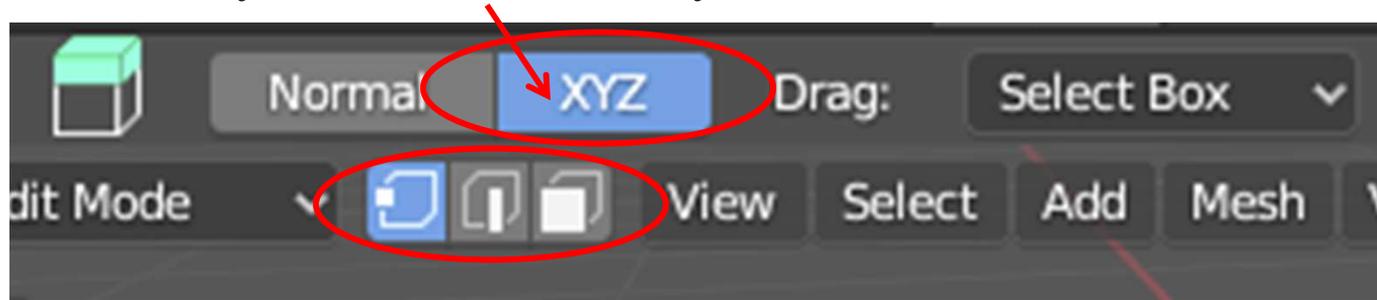

Grab one of the **+**'s and pull

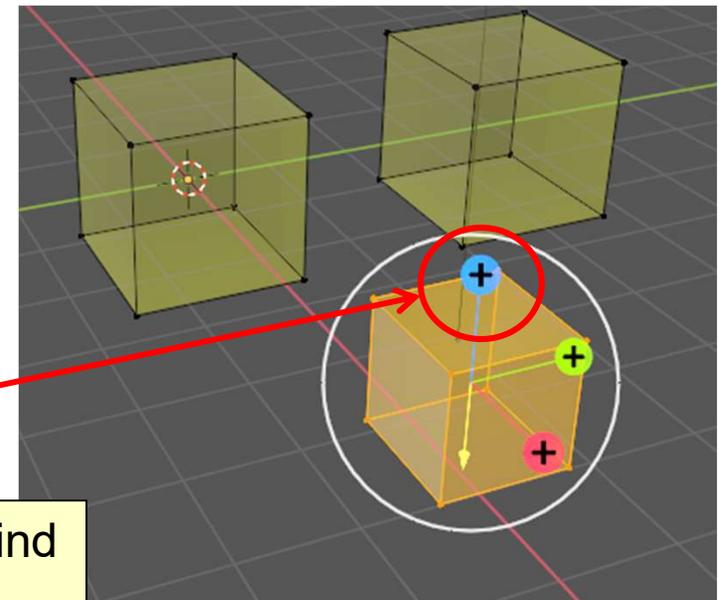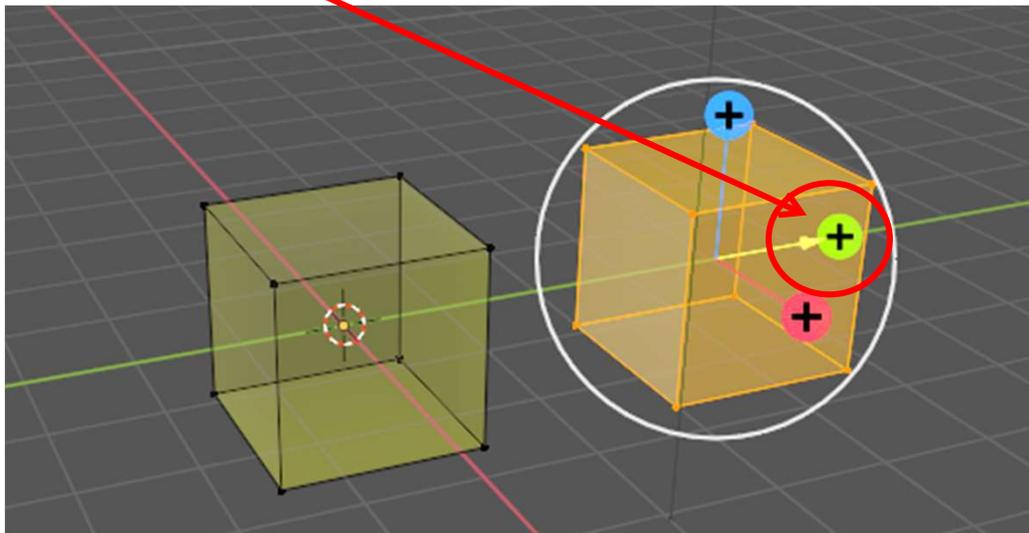


You can even keep doing it



When you get back to Object Mode, you will find that all of these are part of the same object.

Spin Tool

Start with a cube translated along the x axis (gx) →

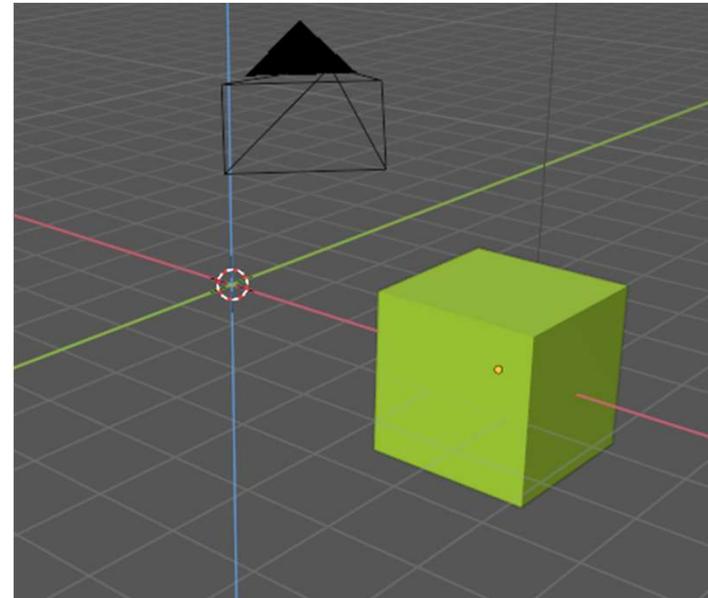

Tab into Edit Mode. →
Click on the **Spin Tool**

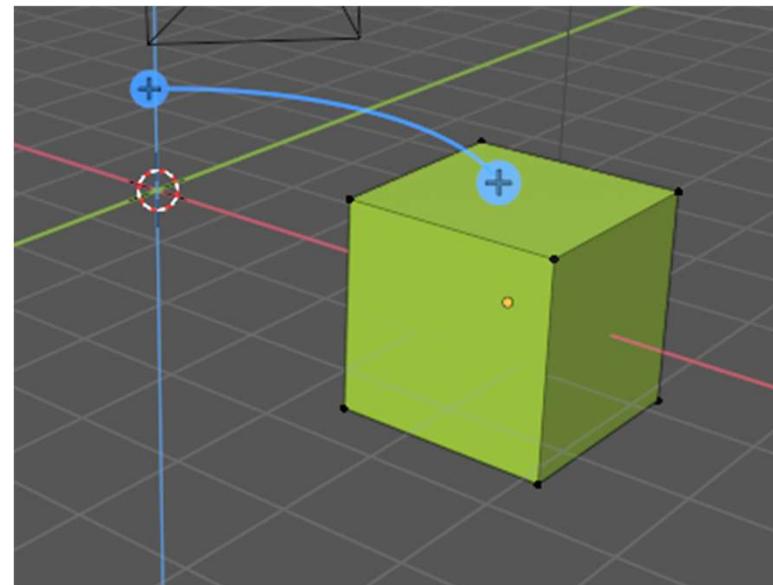

Spin Tool


Pick the number of duplicates to make



Pick the axis/axes about which to spin

Be sure all of the object's vertices are selected.

Grab one of the blue +’s and rotate

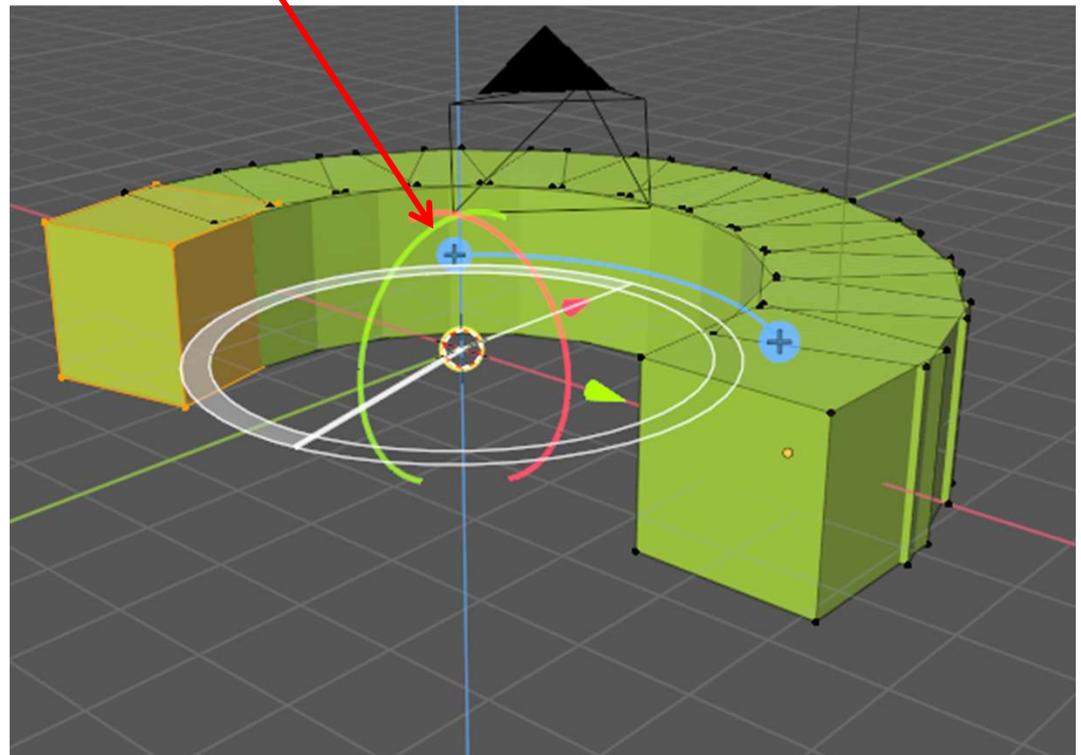


Vertex Groups

Using a group of vertices together is very useful. It is used for editing (like we are doing here), but also to pin certain vertices for cloth animation, to grow hair for hair simulation, and to rig objects for animation.


For that reason, Blender allows you to select the group and give them a name for later. This is called a **Vertex Group**.

3. Click the **+** to add this as a new Vertex Group


1. Select the vertices in Edit Mode (Shift-LMB)

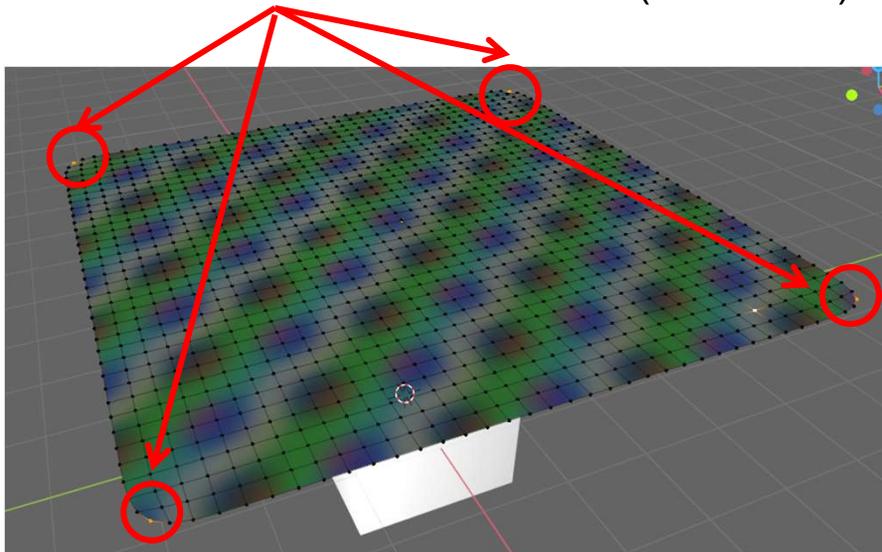

2. Select the **Object Data Properties** button

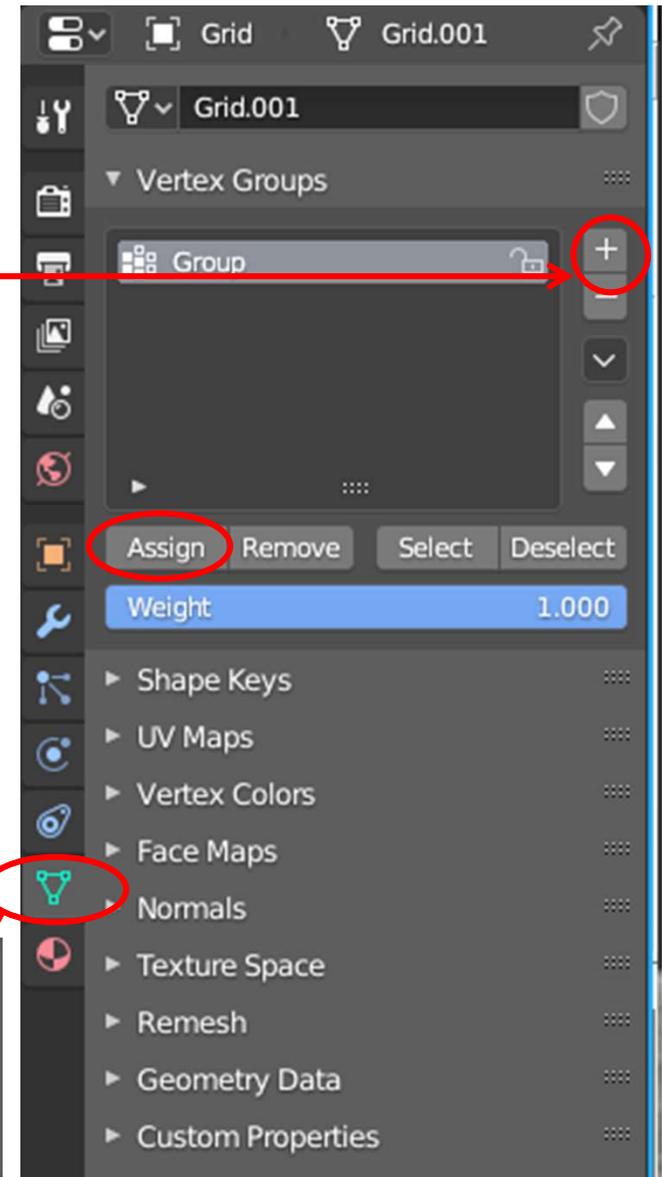

Vertex Groups

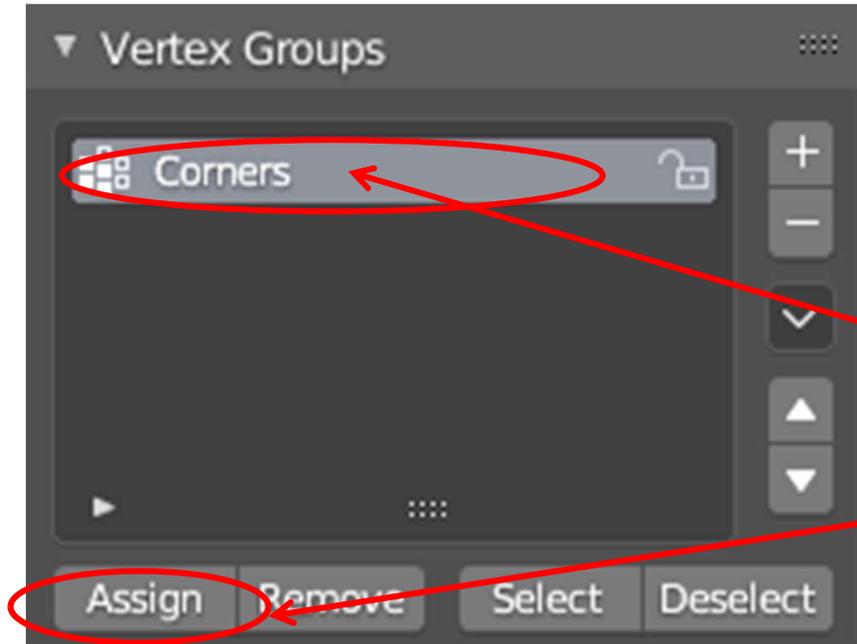

4. Double-click on whatever the default name is (“Group” in this case) and type in a descriptive name for this Vertex Group

5. Click **Assign**



From now on, this group of vertices can be selected just by selecting the name from the list of Vertex Groups and clicking **Select**.

Extruding Faces – three ways


First, tab into **Edit Mode**. Then select one or more faces. Then right-click and select:

Extrude Individual Faces (cracks in between skyscrapers)

Extrude Faces Along Normals (push each face perpendicular to the surface)

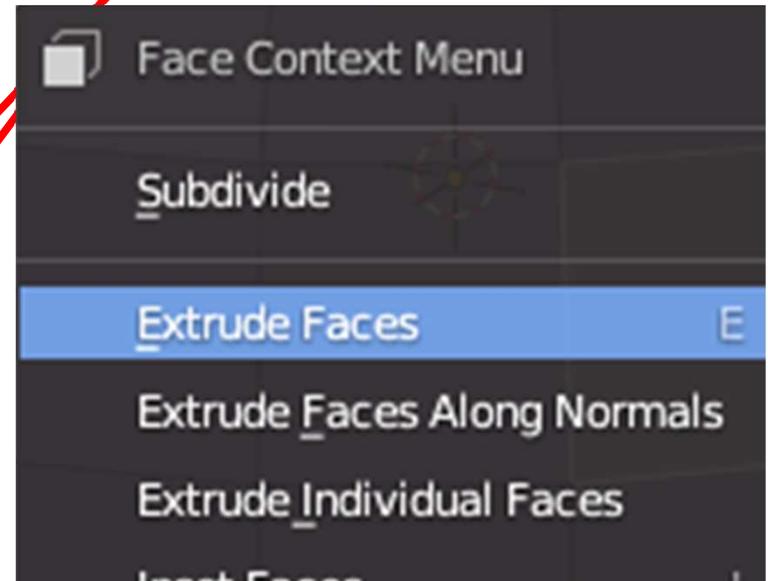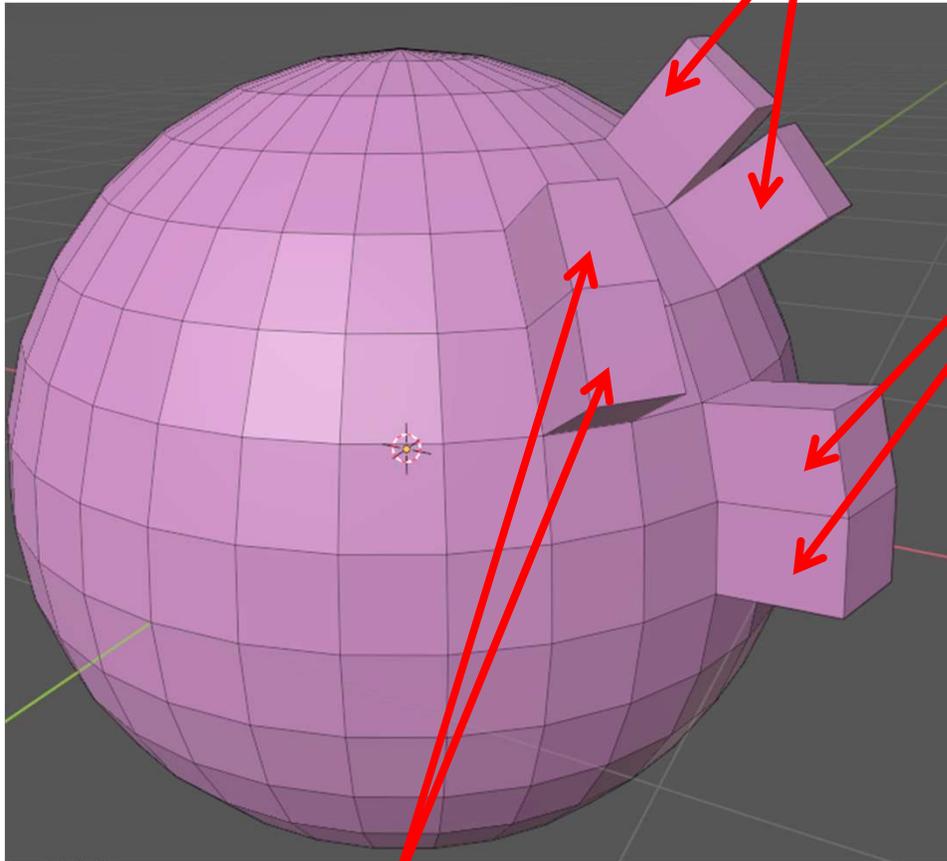


Extrude Faces (push each face along the group average perpendicular to the surface)

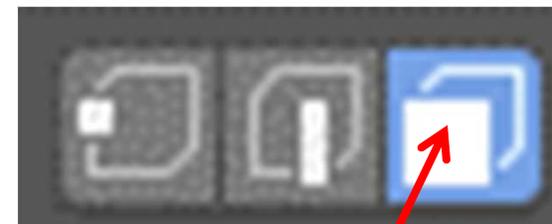

Face Select Mode

Shrink/Fatten and Push/Pull

Find this edit icon in the column on the left side of the screen. Click it with the LMB and leave the button down for a couple of seconds.

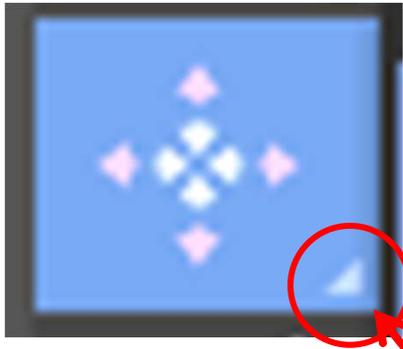

It will then expand into both of these commands, and you can pick the one you want:




Shrink/Fatten and Push/Pull are very much like extruding faces. Here are the differences:

Extruding lifts the selected faces along their normals. It leaves behind a “cliff” that connects them to the surrounding faces.

Shrink/Fatten lifts the selected faces along their normals, but leaves behind a “ramp” connecting those faces to the surrounding ones.







Push/Pull essentially scales the selected faces around their centroid.

For example, suppose we start with this object and these selected faces

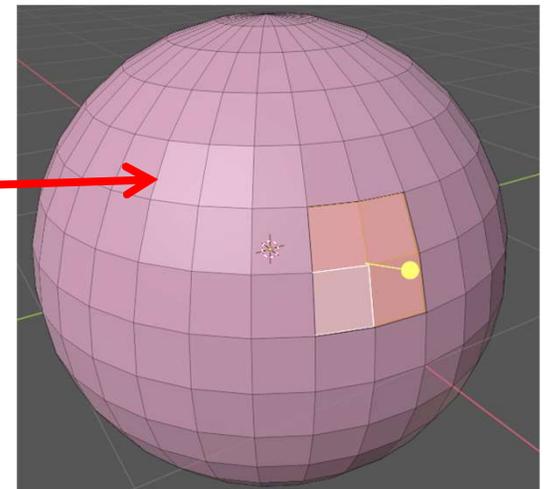

Every one of the edit-icons that has a little arrow in the lower-right corner expands in this same way. Check ‘em out!

Extrude, Shrink/Fatten, and Push/Pull

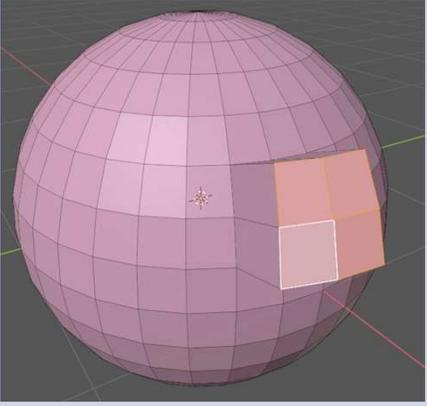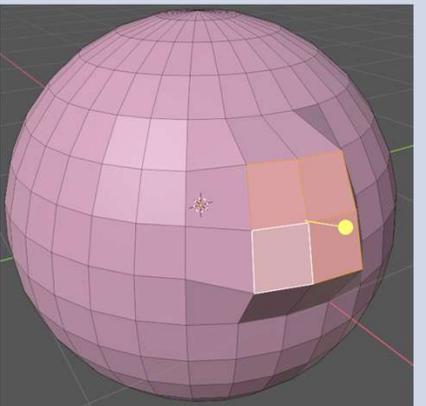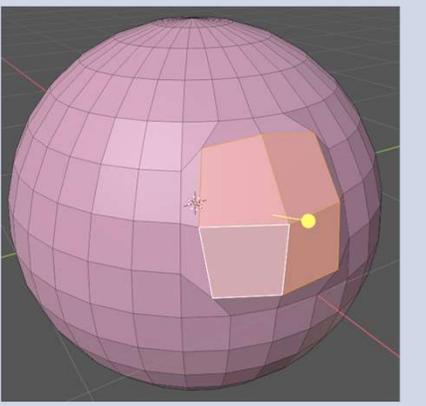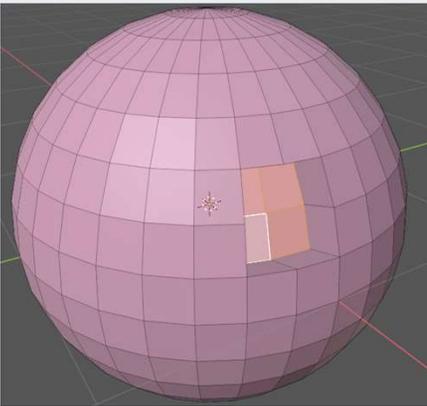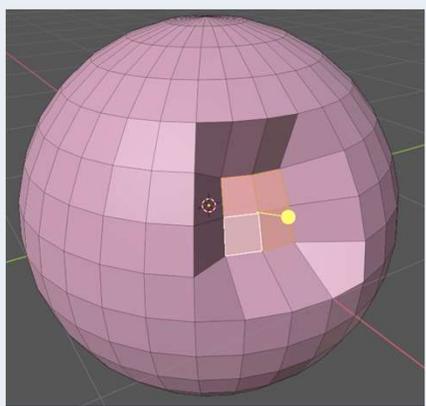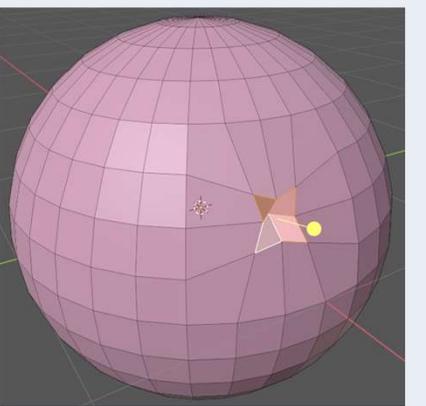	Extrude	Shrink/Fatten	Push/Pull
Out	 A sphere with a square extruded from its surface. The extrusion is a flat, rectangular slab extending outwards from the sphere's surface.	 A sphere with a square fattened from its surface. The square is pushed outwards, creating a concave indentation on the sphere's surface.	 A sphere with a square pushed/pulled from its surface. The square is pushed outwards, creating a concave indentation on the sphere's surface, and the edges of the square are slightly curved.
In	 A sphere with a square extruded from its surface. The extrusion is a flat, rectangular slab extending outwards from the sphere's surface.	 A sphere with a square fattened from its surface. The square is pushed outwards, creating a concave indentation on the sphere's surface.	 A sphere with a square pushed/pulled from its surface. The square is pushed outwards, creating a concave indentation on the sphere's surface, and the edges of the square are slightly curved.

The Button Properties Menu, Again



Tells you that we are in the Button Properties Menu



Render Properties



Output Properties



View Layer Properties



Scene Properties



World Properties



Object Properties



Modifier Properties



Particle Properties



Physics Properties



Object Constraint Properties



Object Data Properties




Material Properties (colors)



Texture Properties



Clicking one of these brings up a much more detailed menu of options




The Modifiers Menu




Modifiers don't actually change an object's *permanent geometry* – just the object's *appearance* on the screen. The geometry only gets permanently changed if you click the **Apply** button

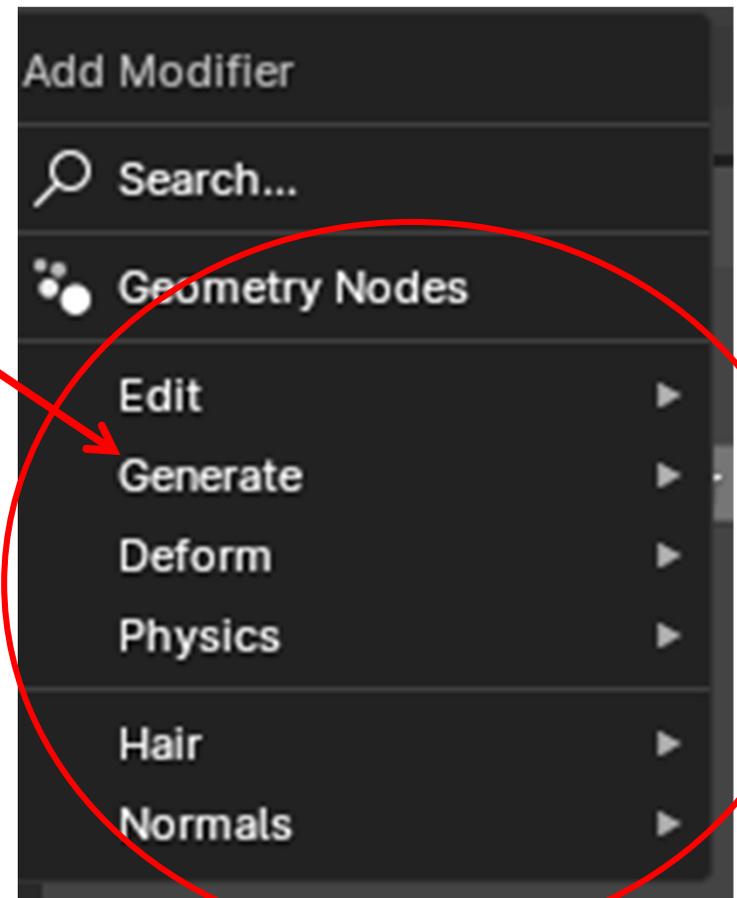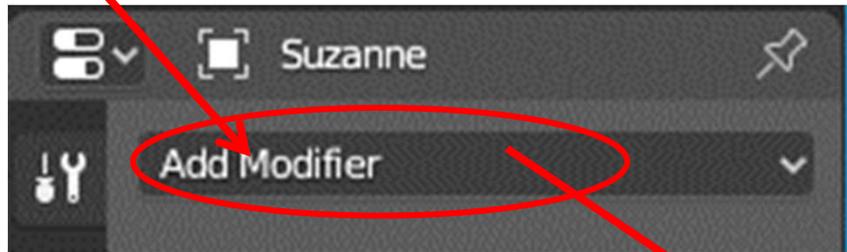


The *Edit* Modifiers

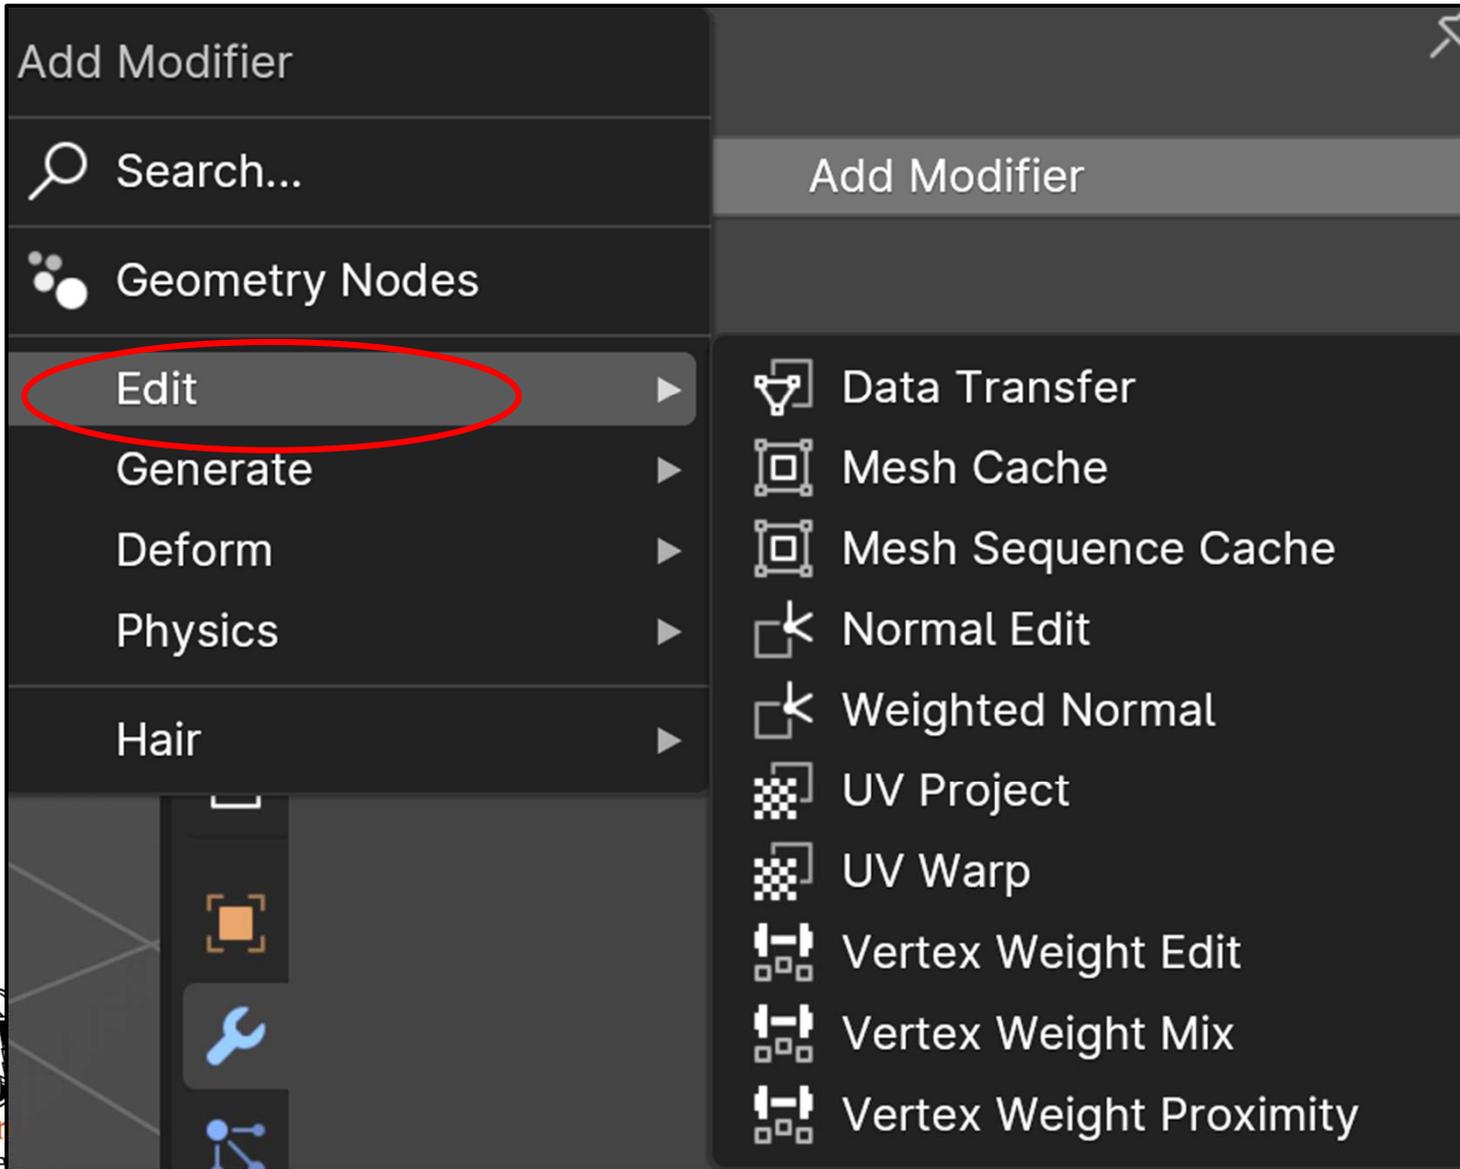


The *Generate* Modifiers

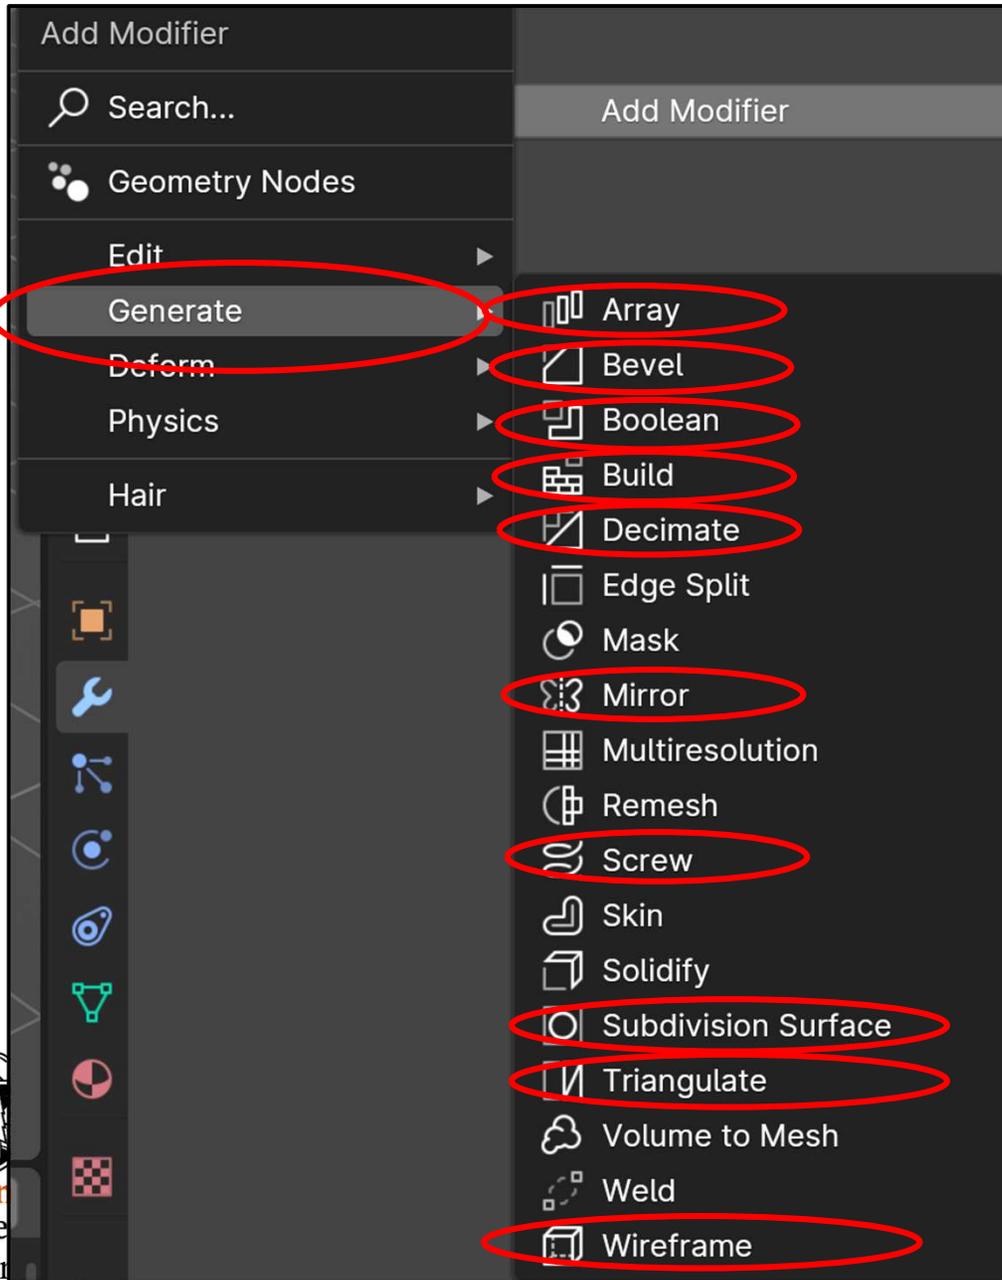


The *Deform* Modifiers



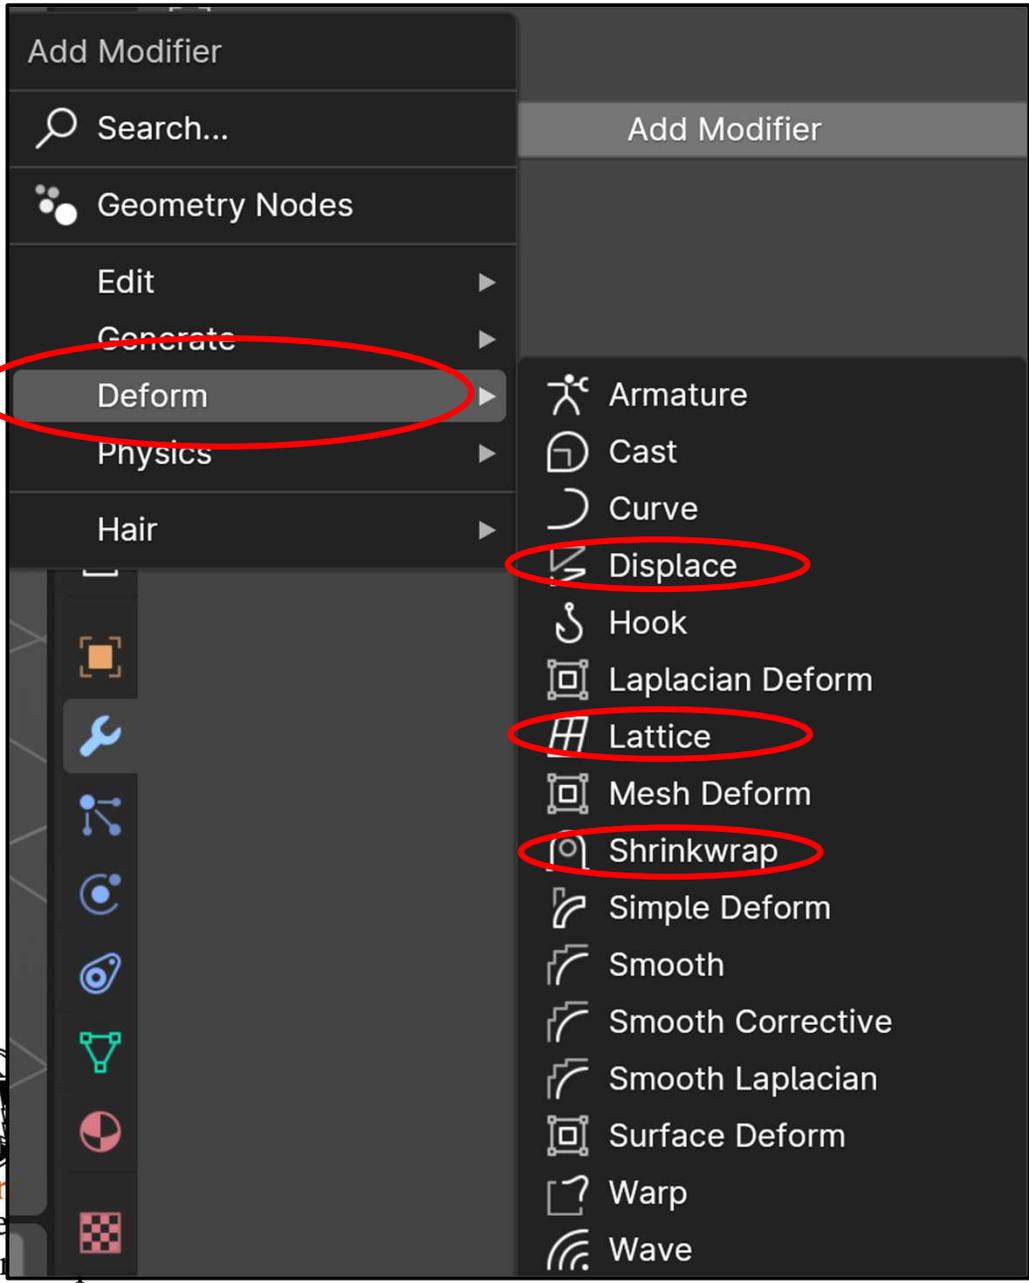


The *Physics* Modifiers

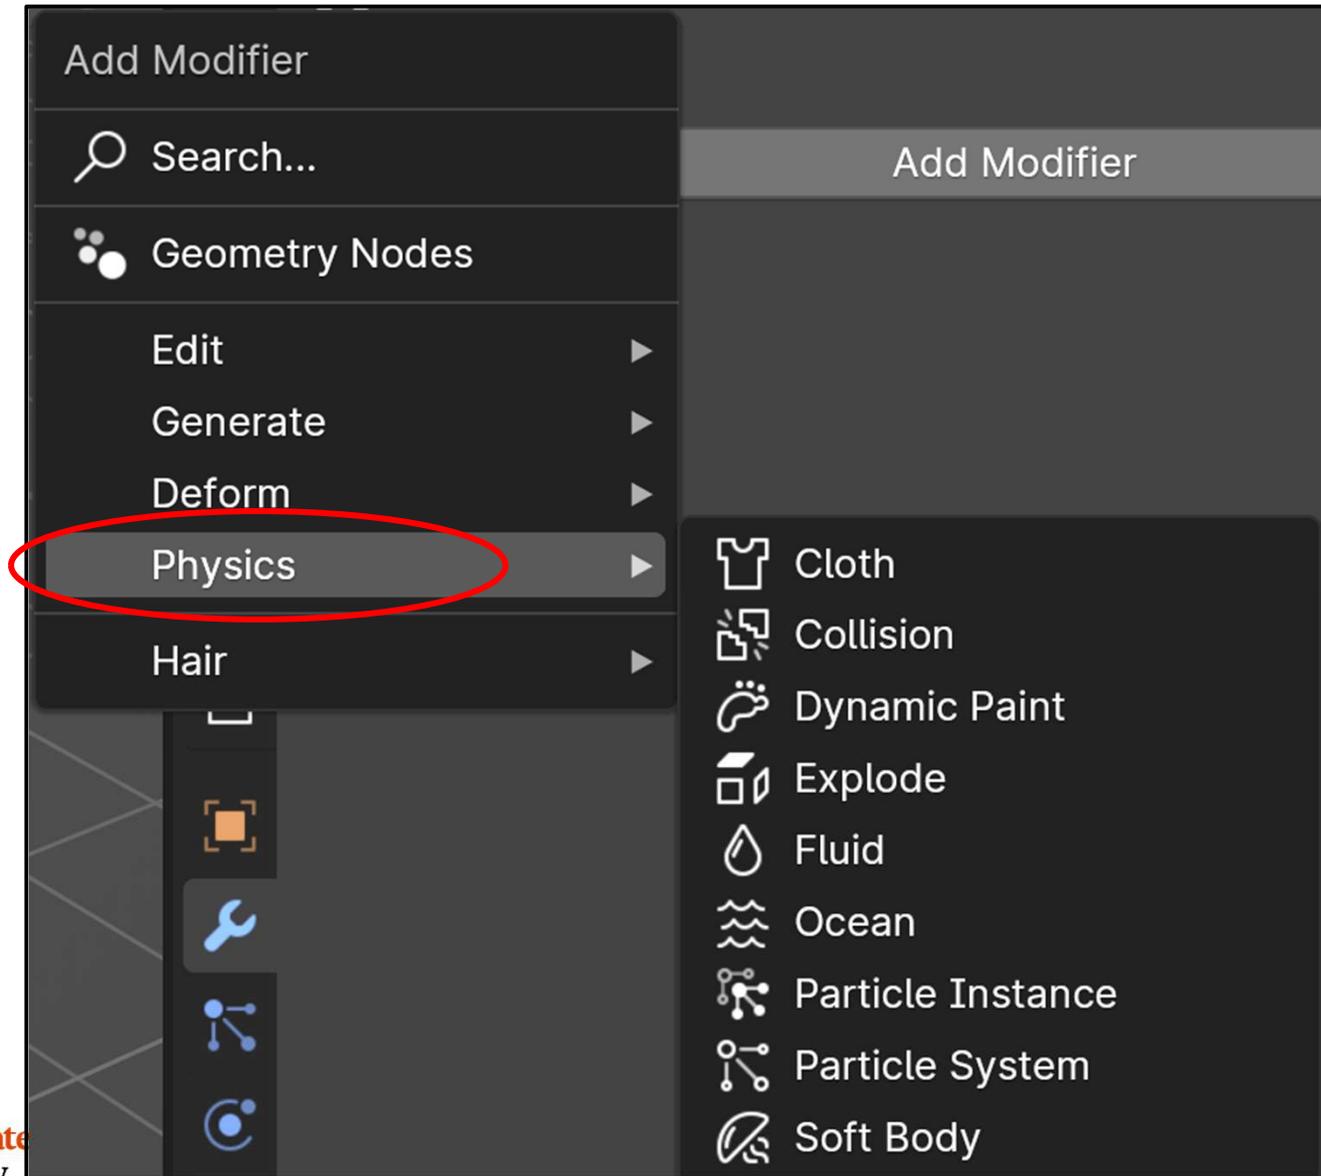

The *Hair* Modifiers

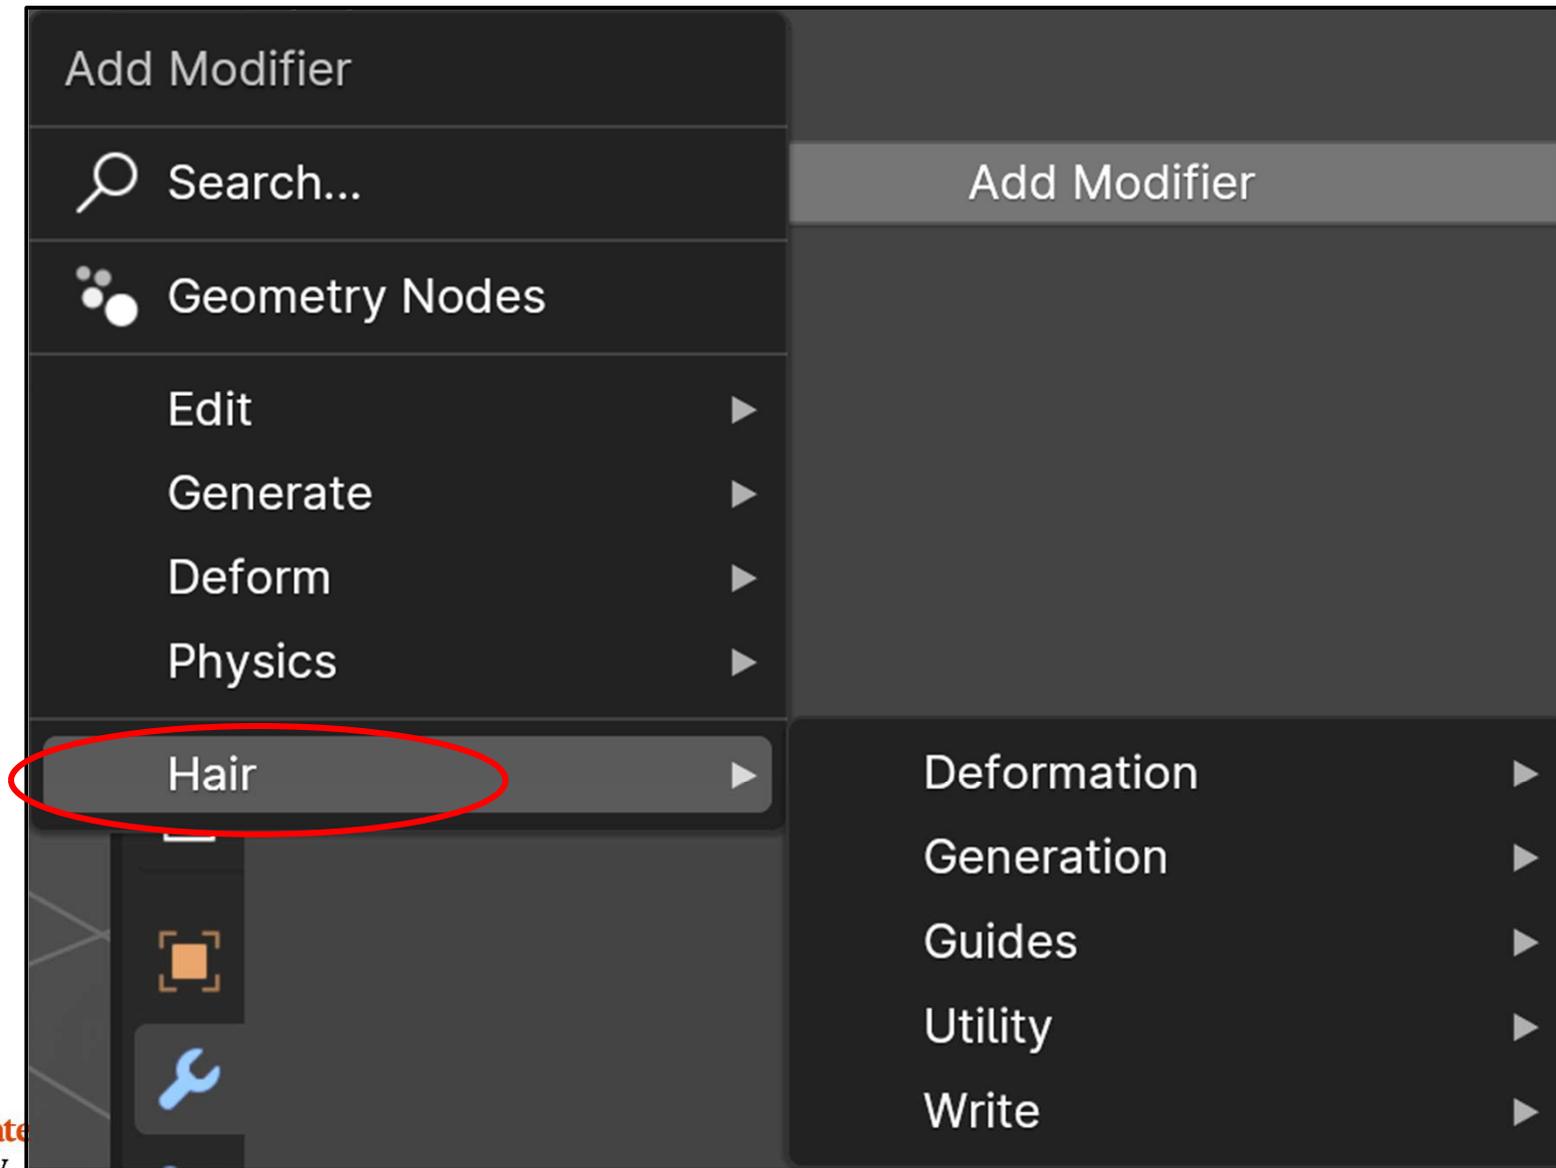

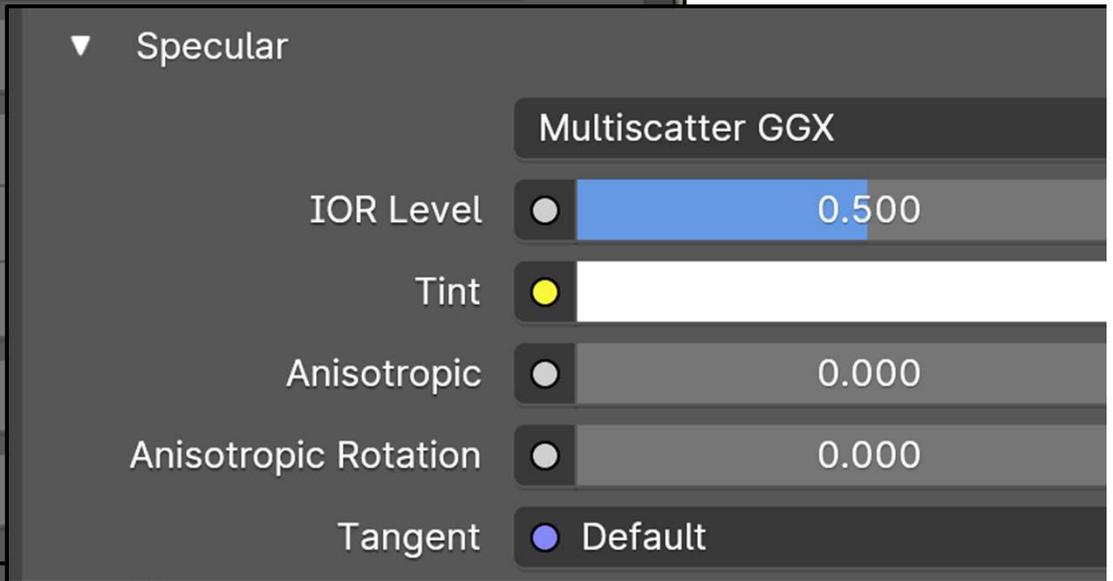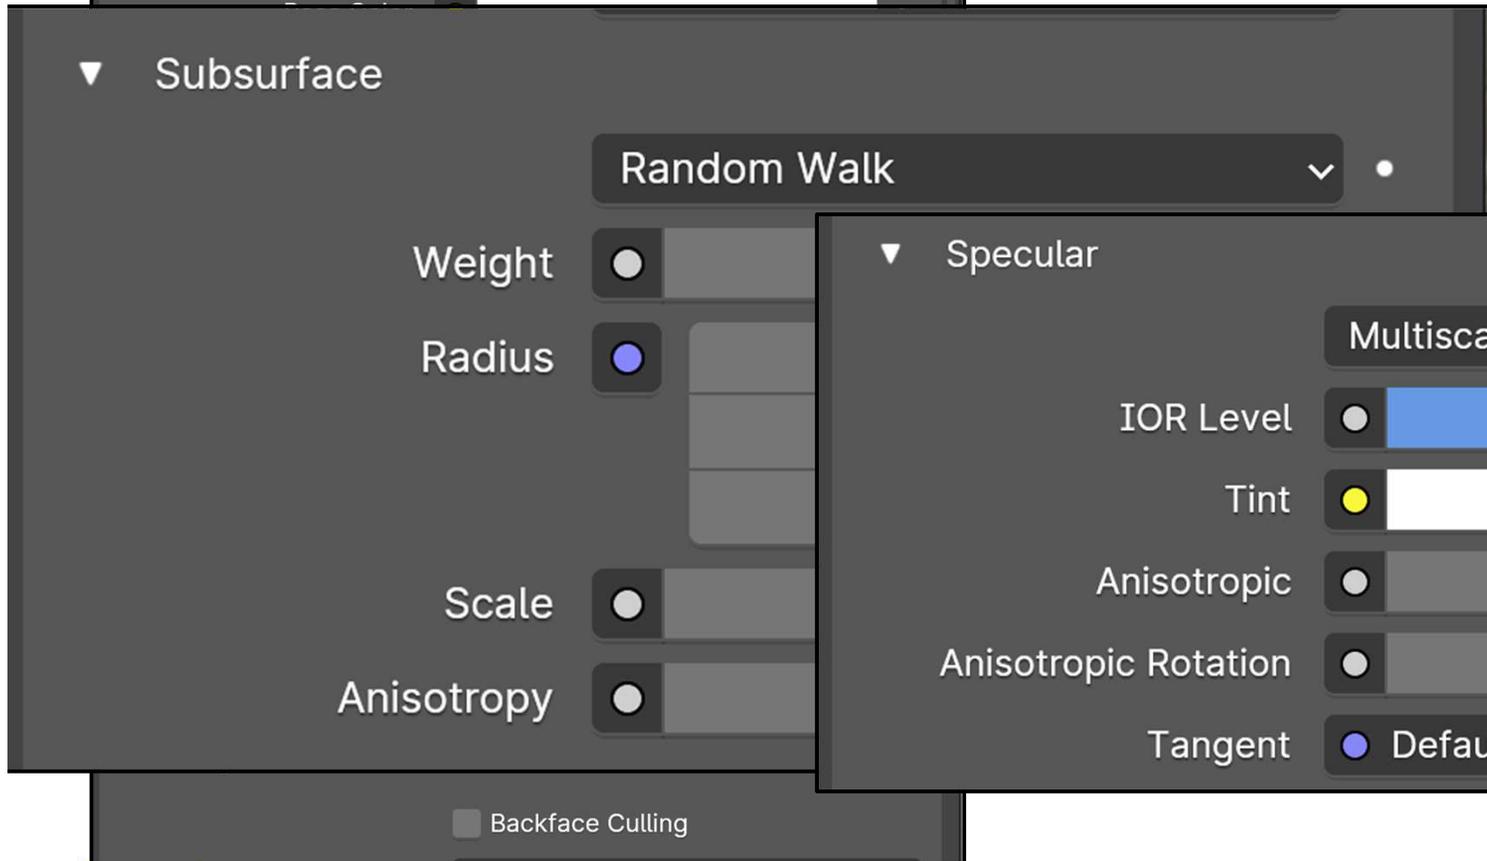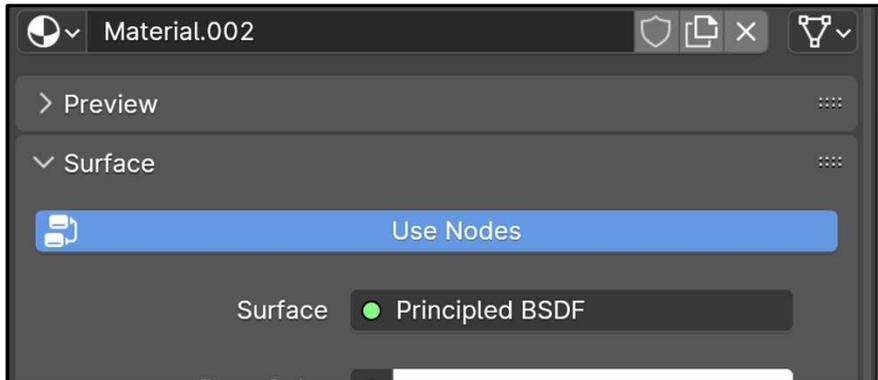

▼ Transmission

Weight

▼ Coat

Weight

Roughness

IOR

Tint

Normal Default

▼ Sheen

Weight

Roughness

Tint

▼ Emission

Color

Strength

Or
U
Comp

Settings

- Backface Culling
- Blend Mode: Opaque
- Shadow Mode: Opaque
- Clip Threshold: 0.500
- Screen Space Refraction
- Refraction Depth: 0 m
- Subsurface Translucency
- Pass Index: 0



Viewport Display

Line Art

- Material Mask
- Masks: [Grid of 8 slots]
- Levels: 1
- Intersection Priority: 0

Blender Modifiers

Modifiers don't actually change the object's *permanent geometry* – just the object's *appearance* on the screen.

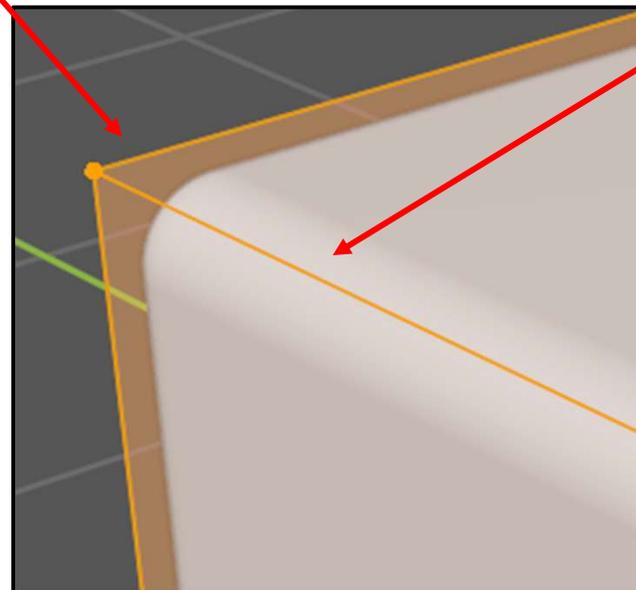
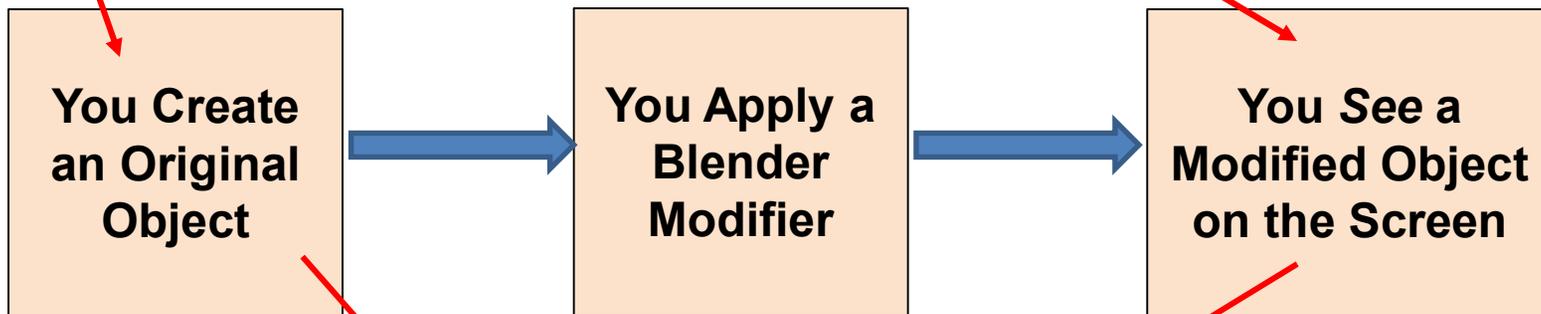


Cube with
Bevel Modifier
in Edit Mode

The Modifiers Menu




Modifiers don't actually change the object's *permanent geometry* – just the object's *appearance* on the screen.

Example: Here a cube has been beveled (one of the Modifiers). In **Edit Mode** you can see both the beveled cube and the original cube. You can edit the vertices and the new shape will get beveled as you edit.

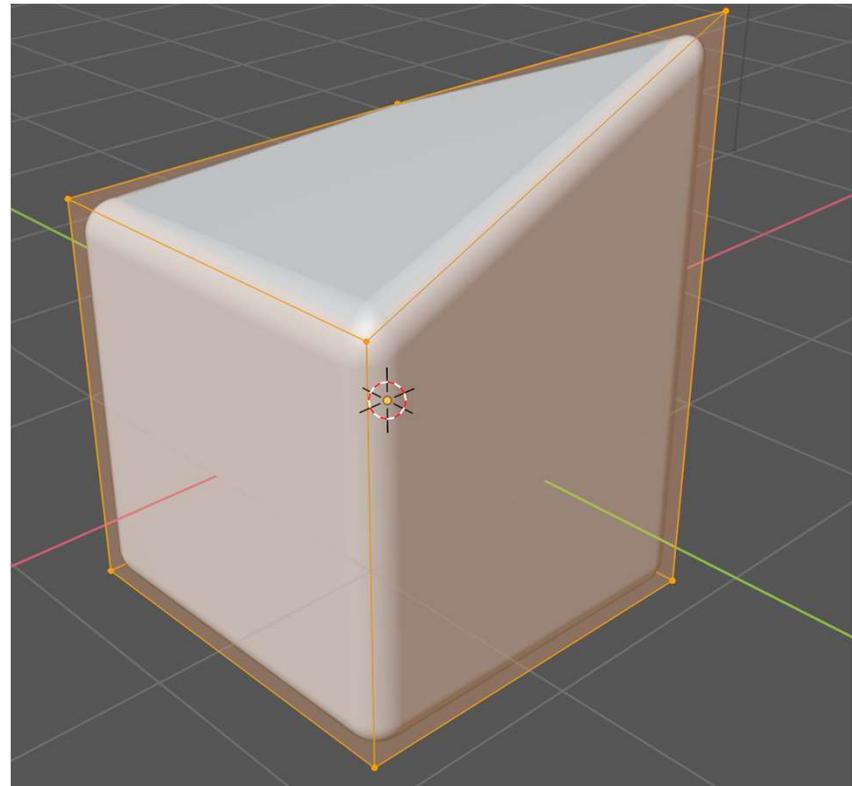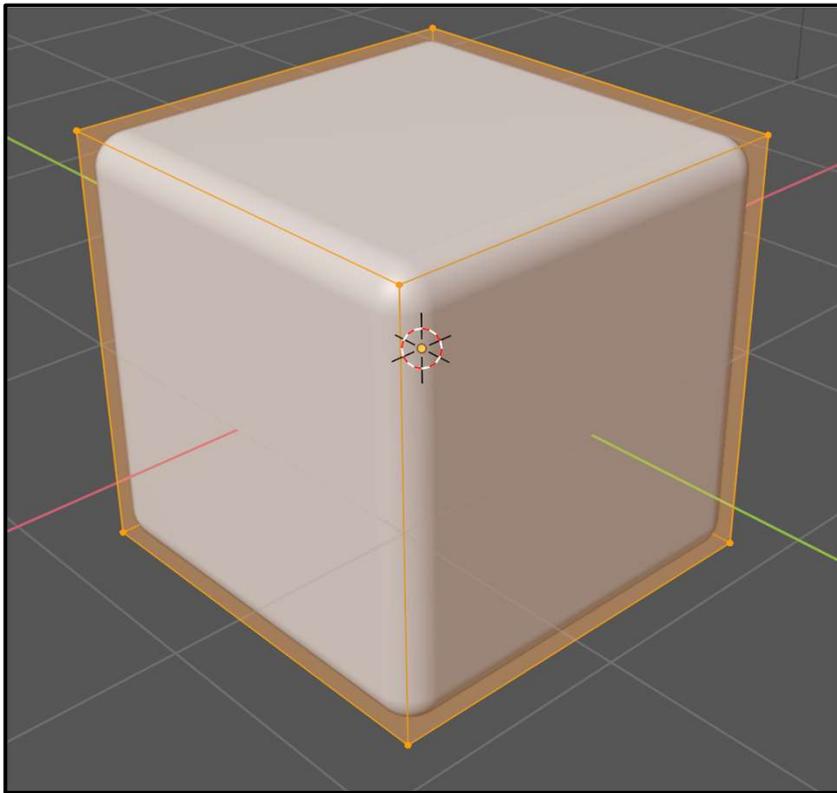

My Favorite Modifier -- Subdivision Surface

This modifier increases the number of polygons in your object. At the same time, it smooths your object out. Be careful! It very quickly increases your polygon count.

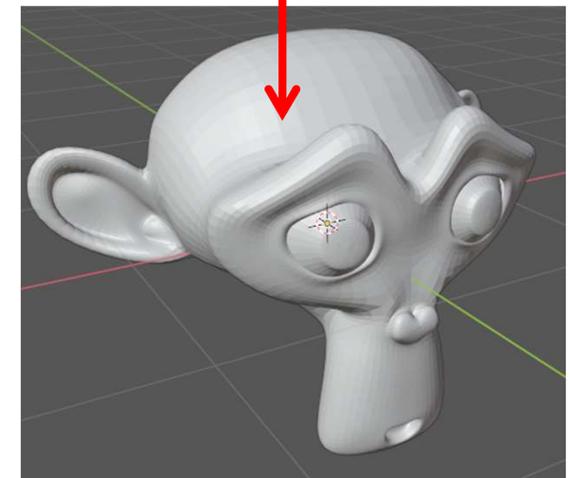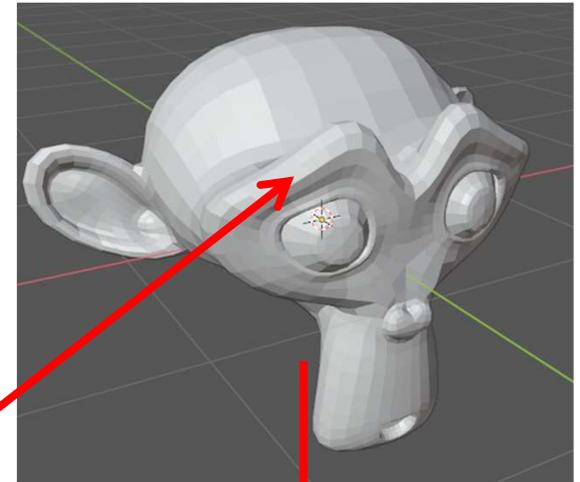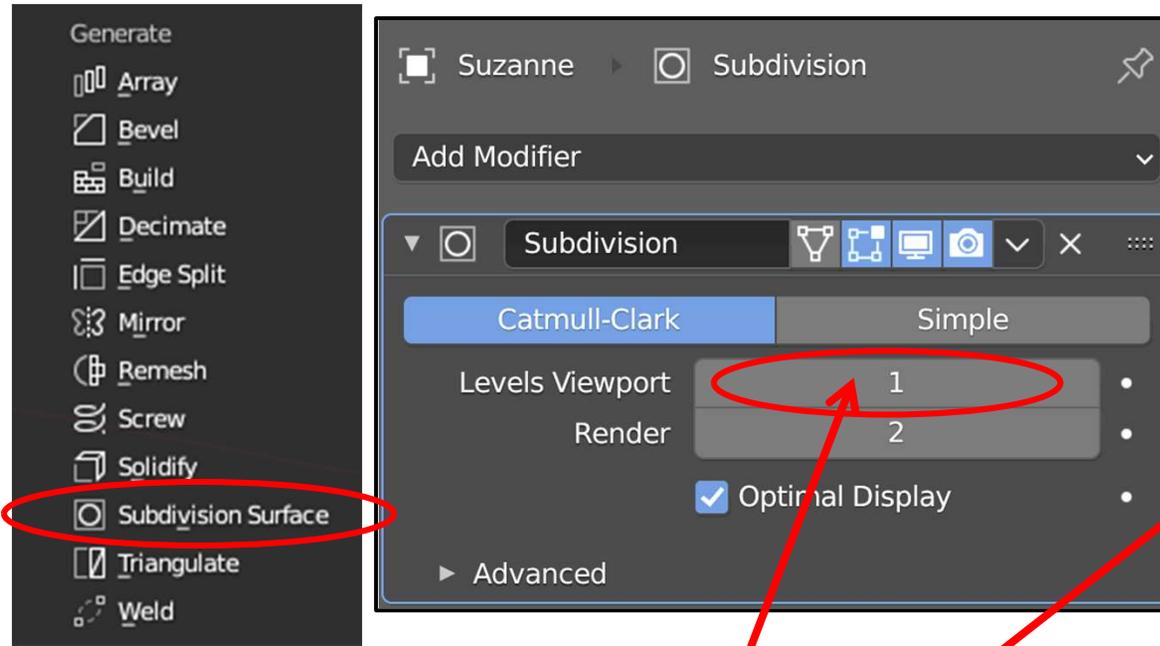


This controls how much to subdivide.
Here we've changed this value from 1 to 2.

Fun: try it on a cube!

Deleting and Moving Modifiers

Oftentimes you have a list of several Modifiers that are used with a single object. The Modifiers take effect in the order that they are in the list. To change this, you can:

- Delete a Modifier
- Move a Modifier elsewhere in the list and thus change how it modifies the object

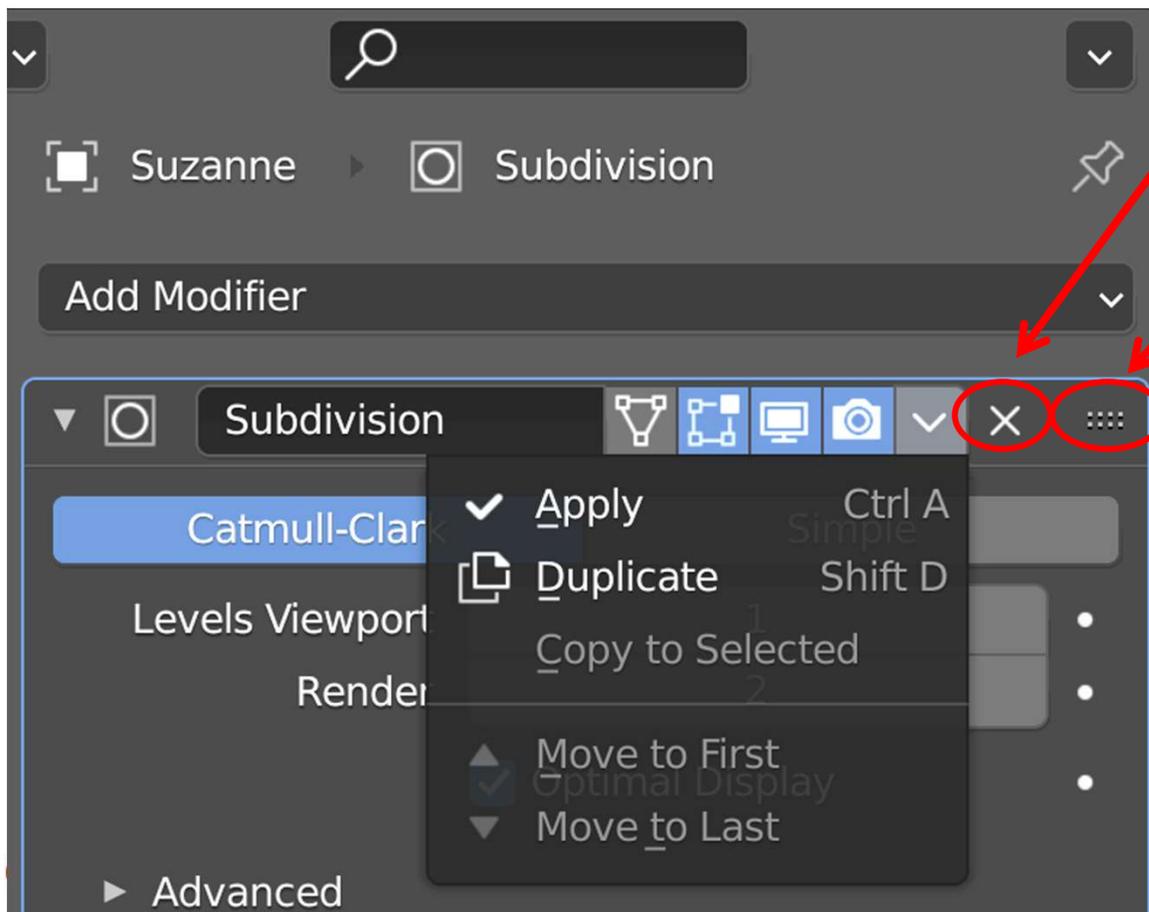


Delete this Modifier

Move this Modifier elsewhere in the list of Modifiers

Making Your Modifier Effect Permanent


Despite the name, Modifiers do not actually modify the object's underlying coordinates. They create an "alternate representation" that you can see. Most of the time, this is good. It lets you edit the underlying coordinates and have the Modifier then use them. If you want the Modifier to change the object's underlying coordinates permanently, bring up this sub-menu and click on **Apply**.

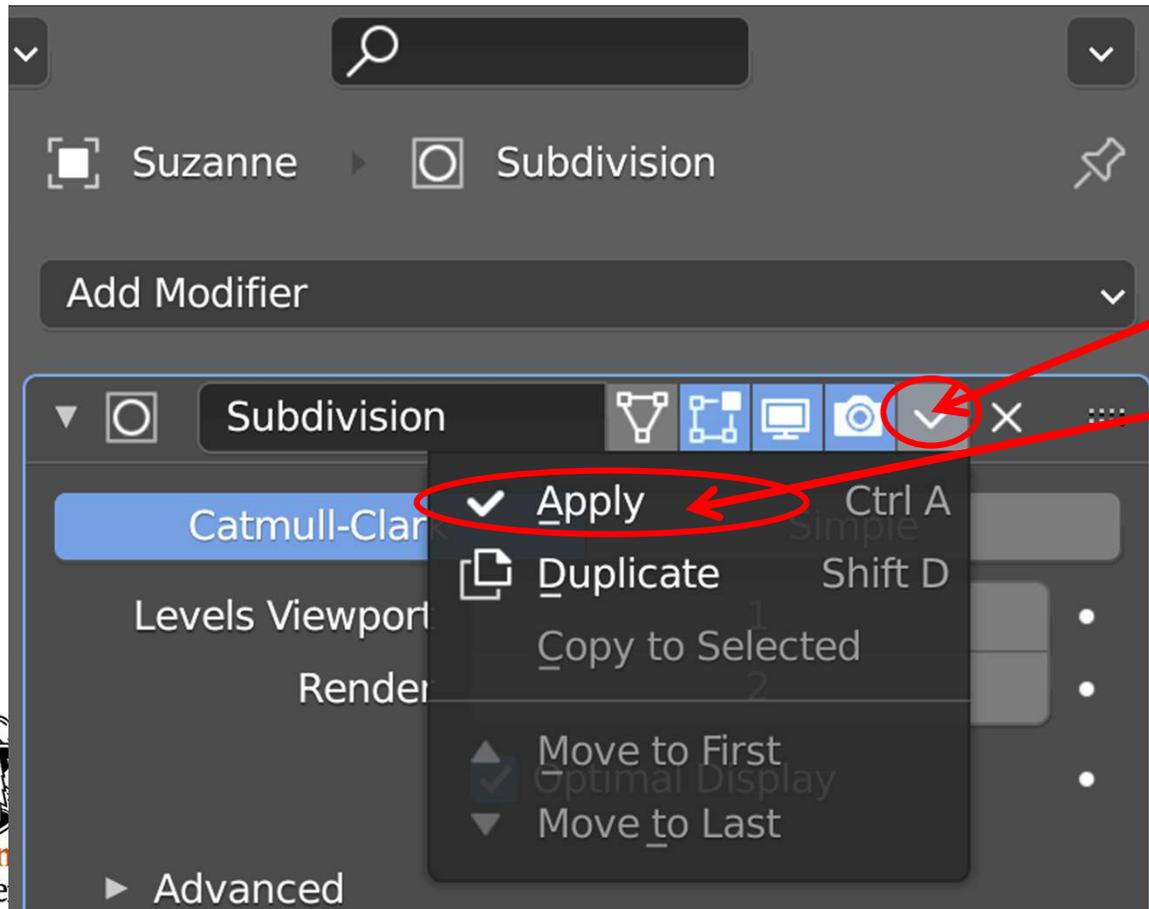

Click here

To bring up this menu.
Then click on **Apply**.





Bevel Modifier

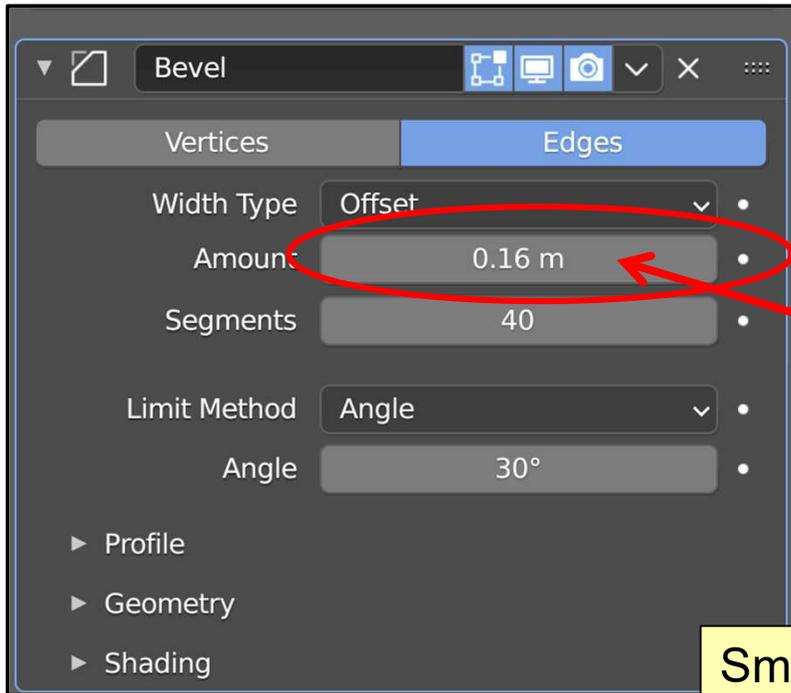


Beveling causes edges to be rounded instead of sharp

How much to bevel


Smooth shading makes bevels look much better!

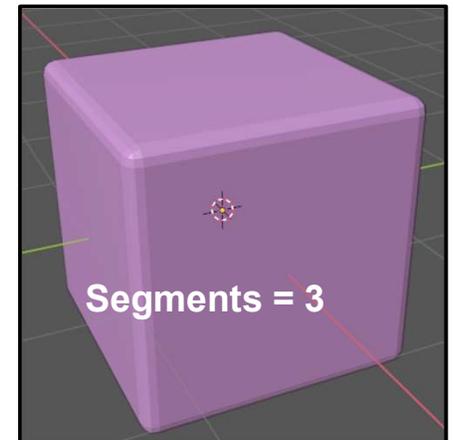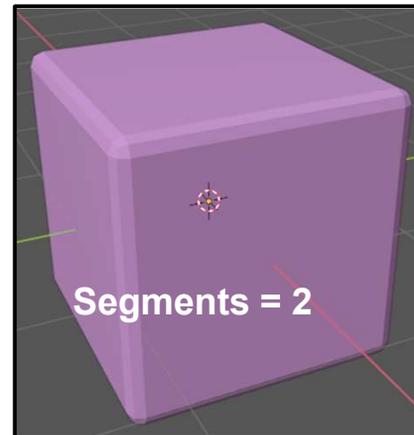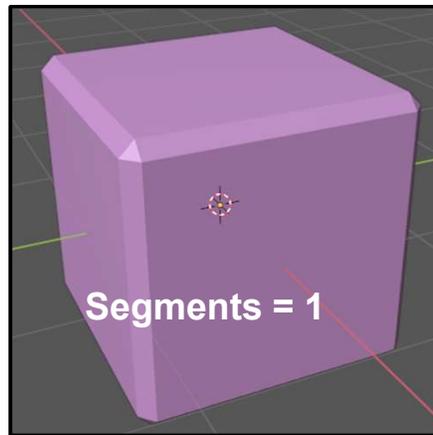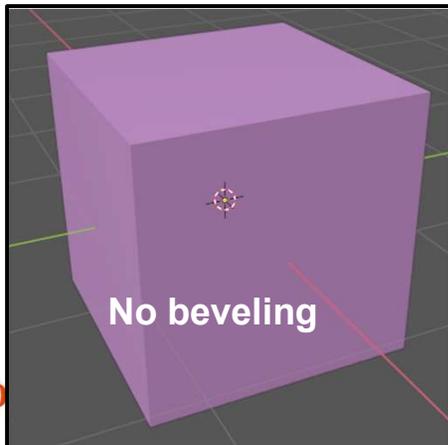


Remember Venn Diagrams (Boolean Operators)?

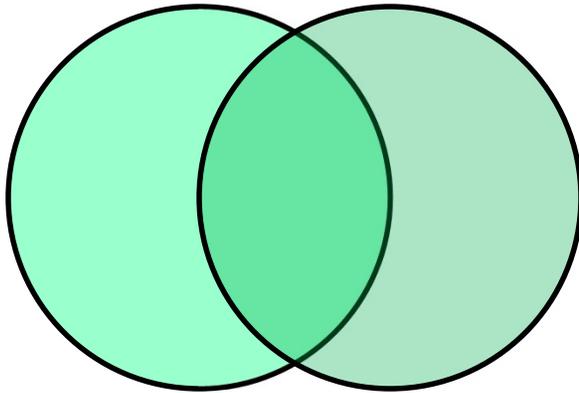


Two Overlapping Shapes

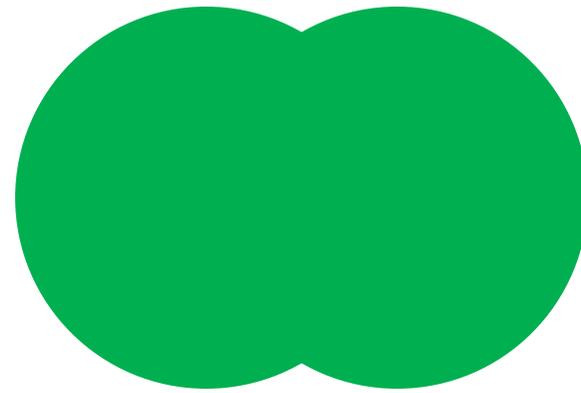

Union



Intersection

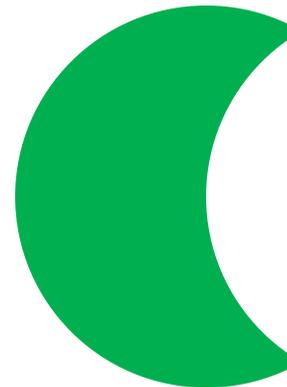


Difference




Booleans (also known as Constructive Solid Geometry) ¹⁵¹


Think of them as Venn diagrams in 3D!

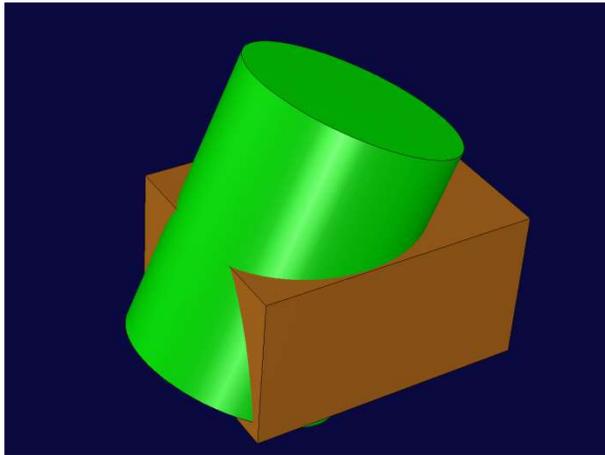


Two Overlapping Solids

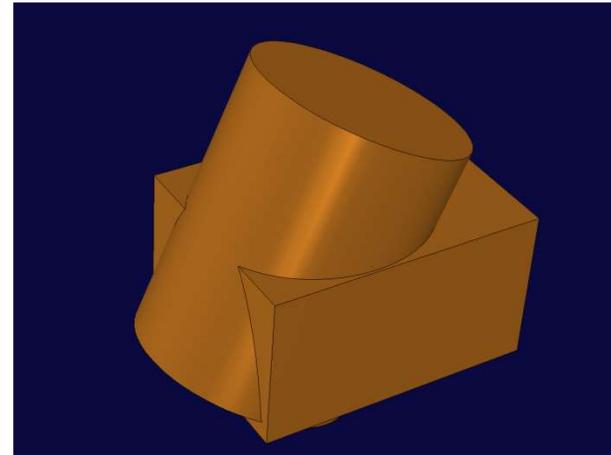

Union

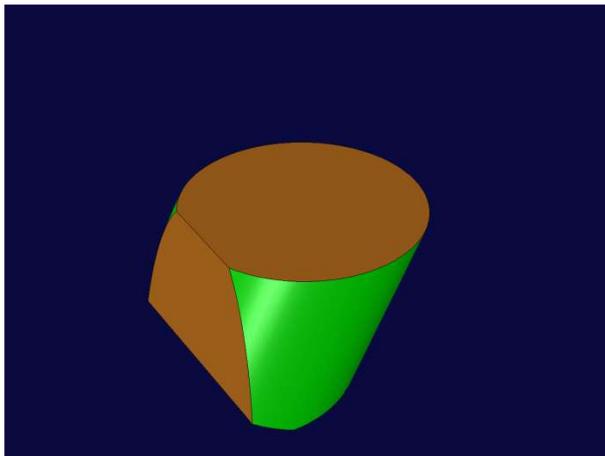

Intersection


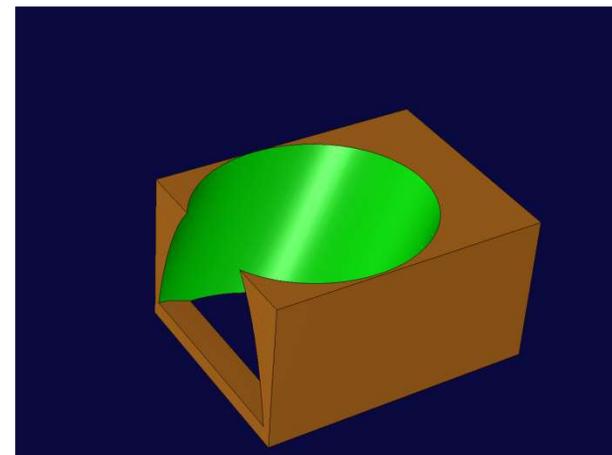


Difference



Boolean Modifier

“Block minus Cylinder”

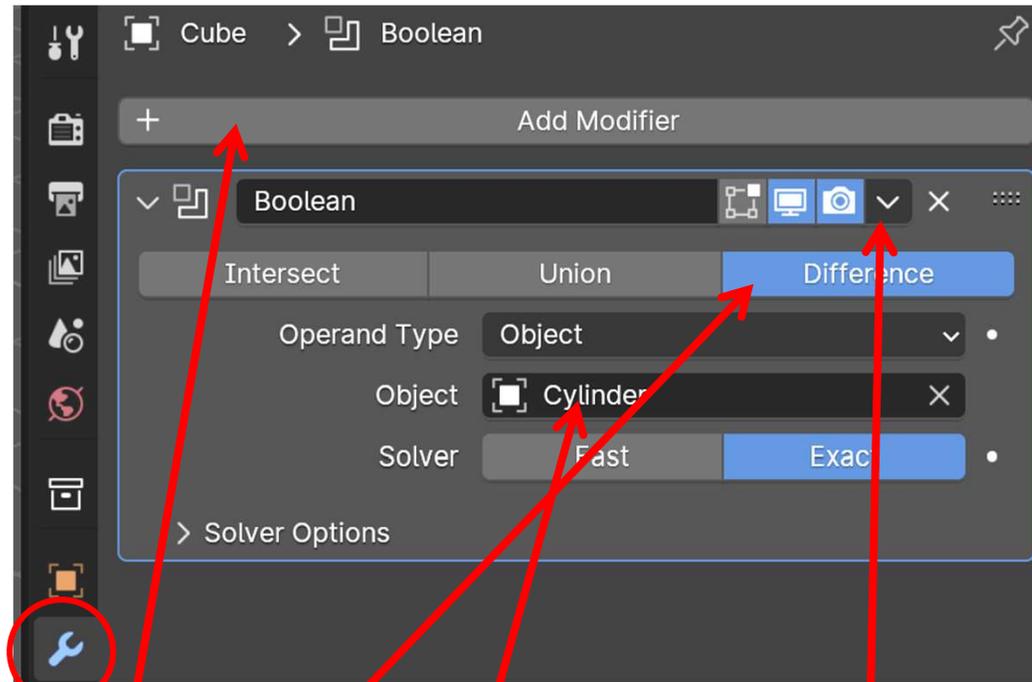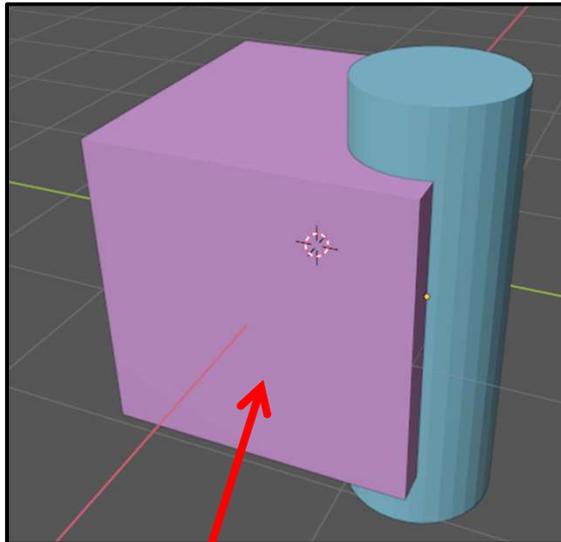


1. Select the cube
2. Click on **Modifiers**
3. Click on **Add Modifier** → **Generate** → **Boolean**
4. Specify the **Difference** Operator
5. Specify the **Cylinder** as what to the difference with


6. Click **Apply**

Boolean Modifier

Select the cylinder, hit it **g** (grab) and slide the cylinder away

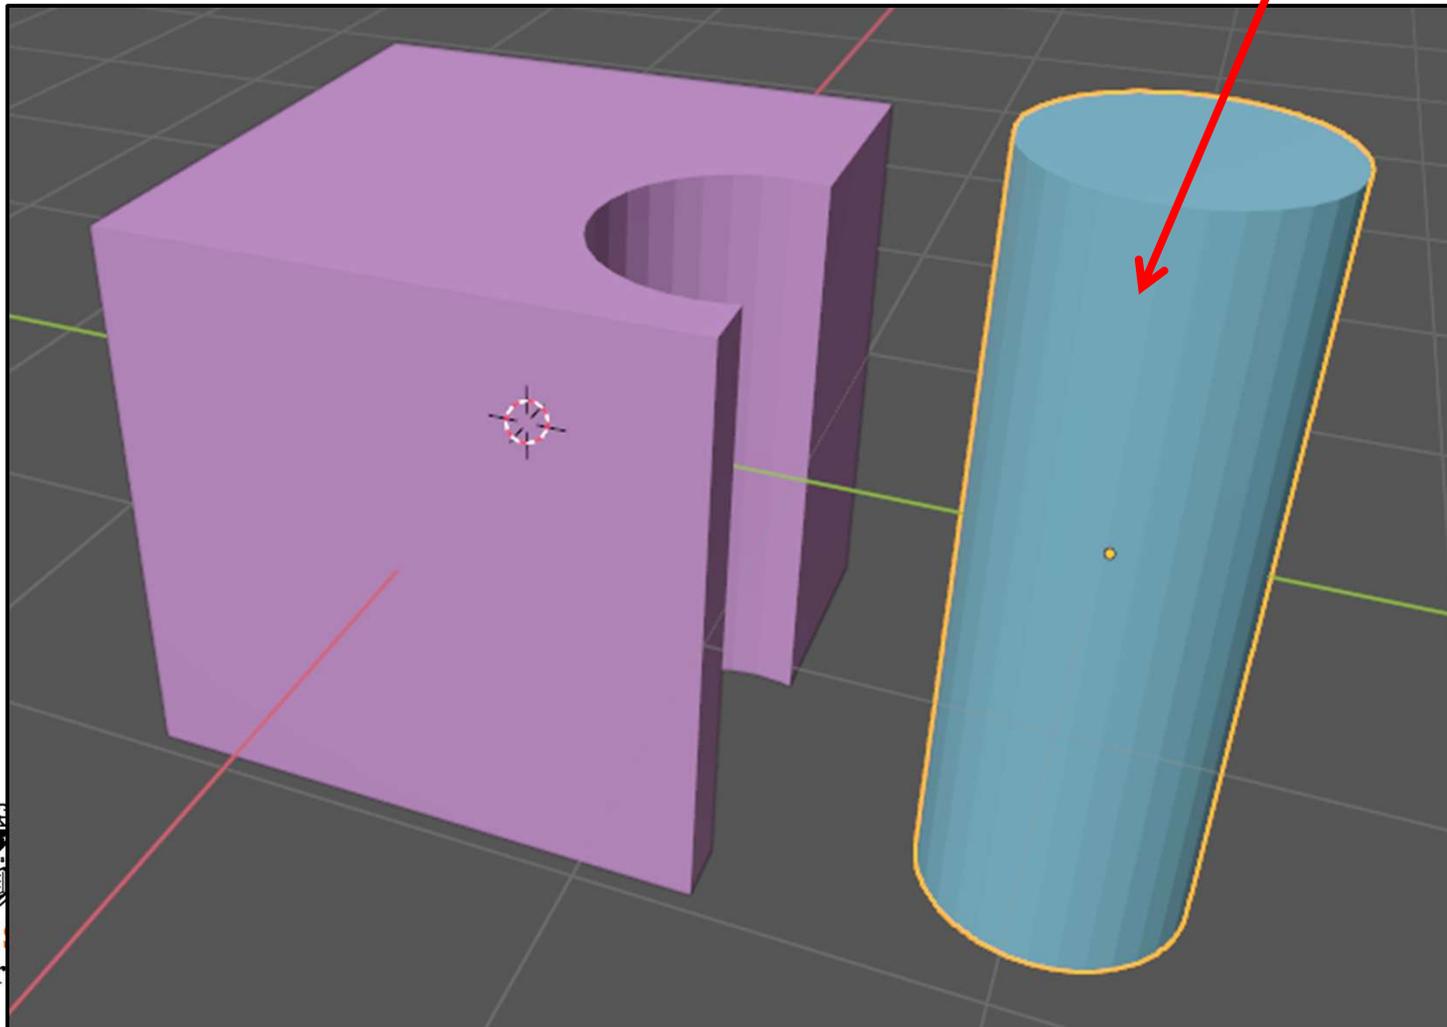

The Resolution of the Second Object Determines the Resolution of the Resulting Surface

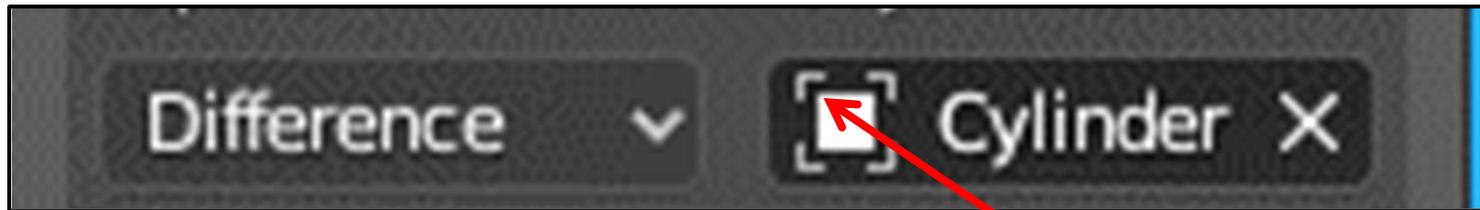

First object Resulting surface Second object




Remember 3D Text? One Fun Thing to do with Booleans is to Attach Text to a Block

Start with a block and the text:



Warning: if you want to use text with Booleans, do not Bevel the text. That is, leave the Bevel→Depth setting equal to 0.

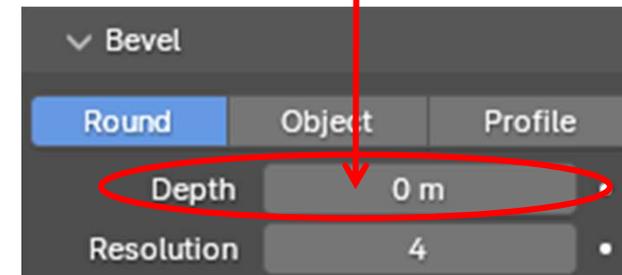


You cannot directly Boolean with text, so you must first convert the text to a mesh:

RMB→Convert To→Mesh




Oregon State
University

Computer Graphics

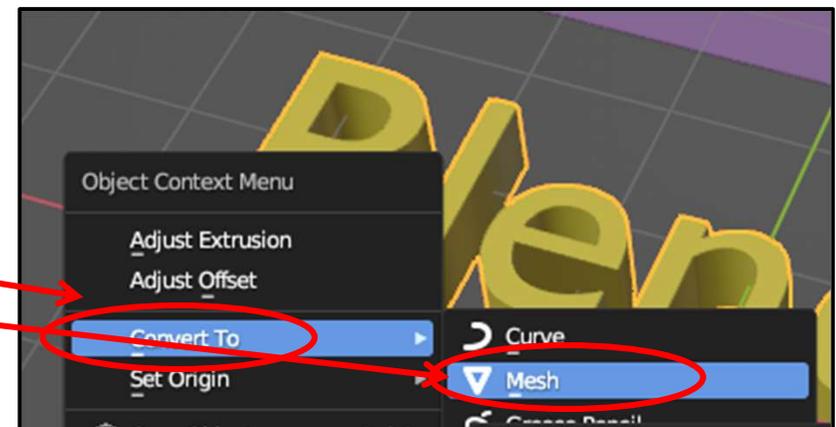


Now Boolean the Text with the Block

Union

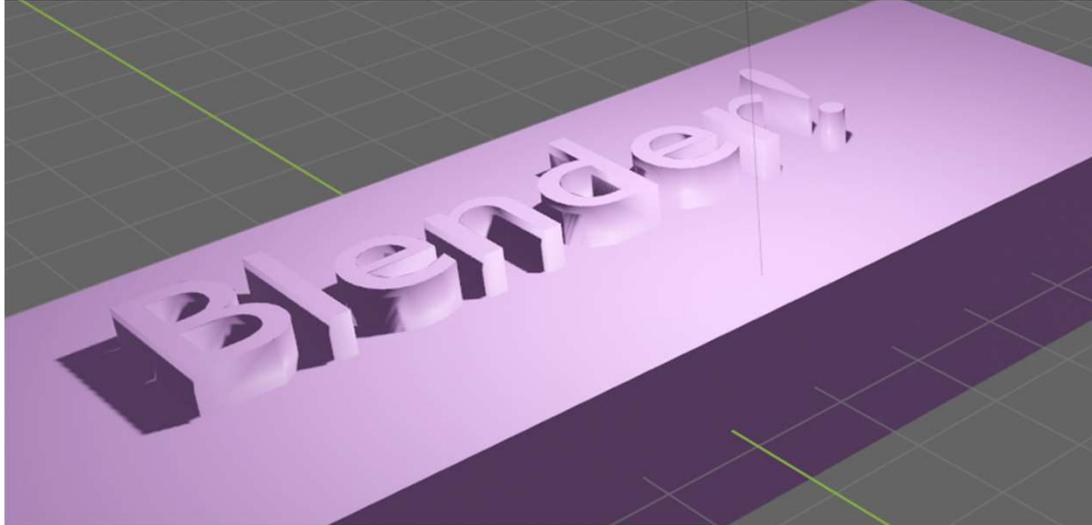


Difference

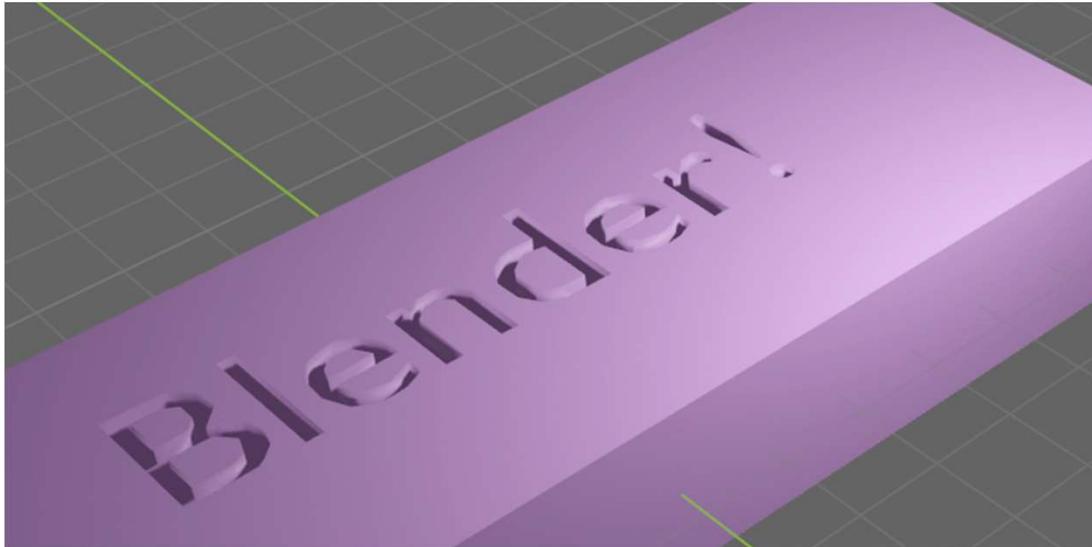

The Mirror Modifier

Let's say that you want to create a mirror image of the monkey, but by using a Modifier, the mirror monkey will be linked to the original monkey so that any edits you do to the original will automatically end up in the mirror object.

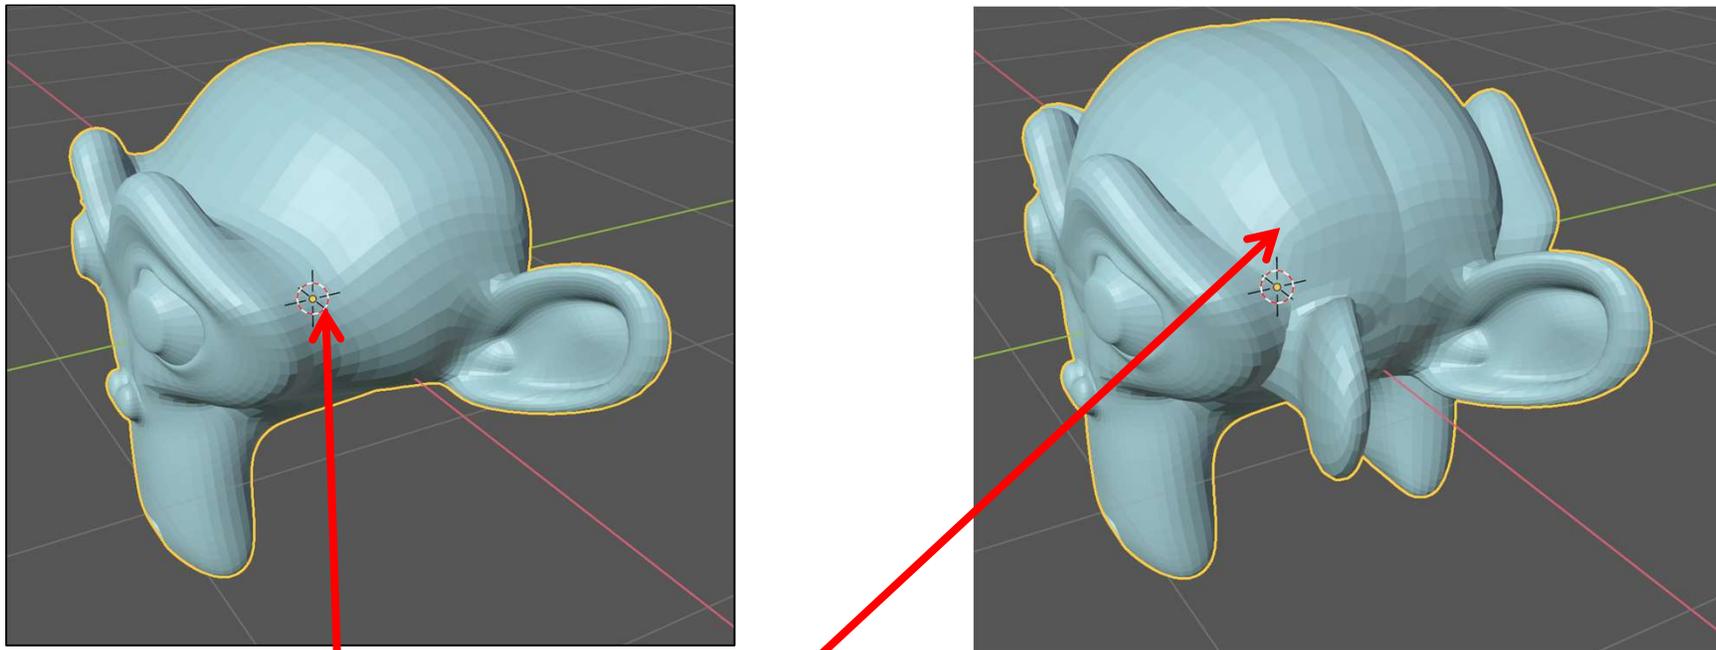


But, that mirrored object will reflect about the object origin, this little dot right here. Which means that you will end up with something like this, which is probably not what you wanted.




The Mirror Modifier

So, the first thing we need to do is to move the object away from the little dot. You do this by Tabbing into **Edit Mode** and grabbing all the vertices and sliding them (**gy**). In Edit Mode, the dot doesn't move when you do this:

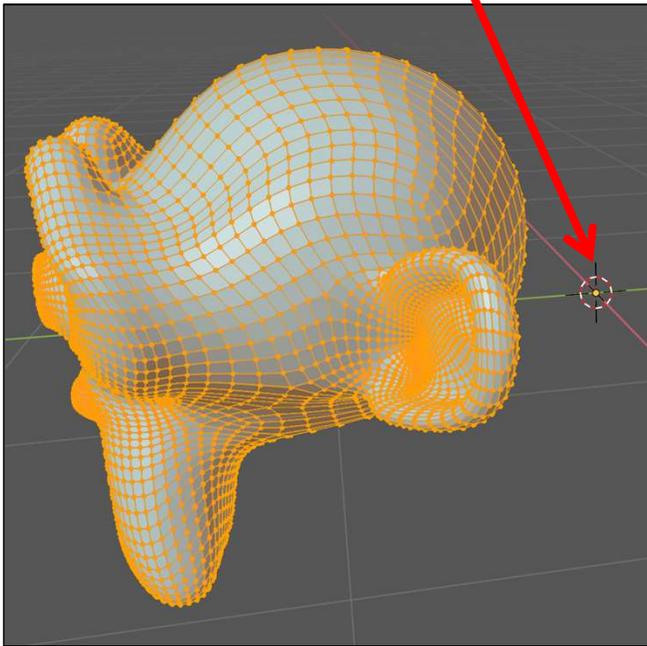


Now, Tab back to **Object Mode**, add the **Mirror Modifier**, and select **Y**.

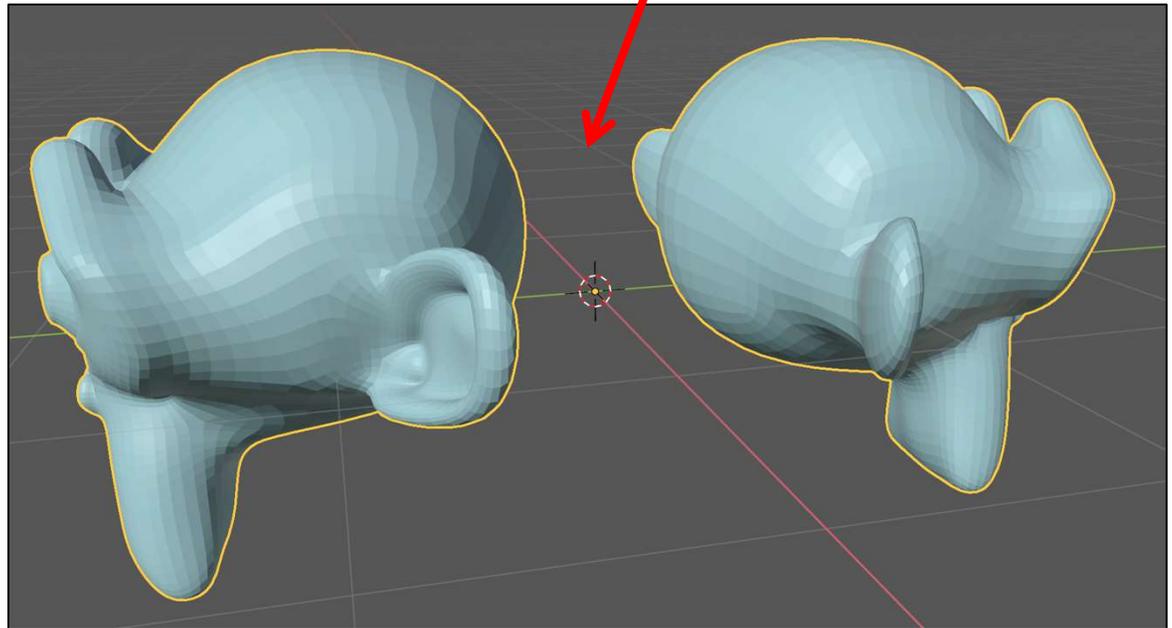

The Mirror Modifier


So, now if you sculpt the original object, the mirrored object will get the same edits.

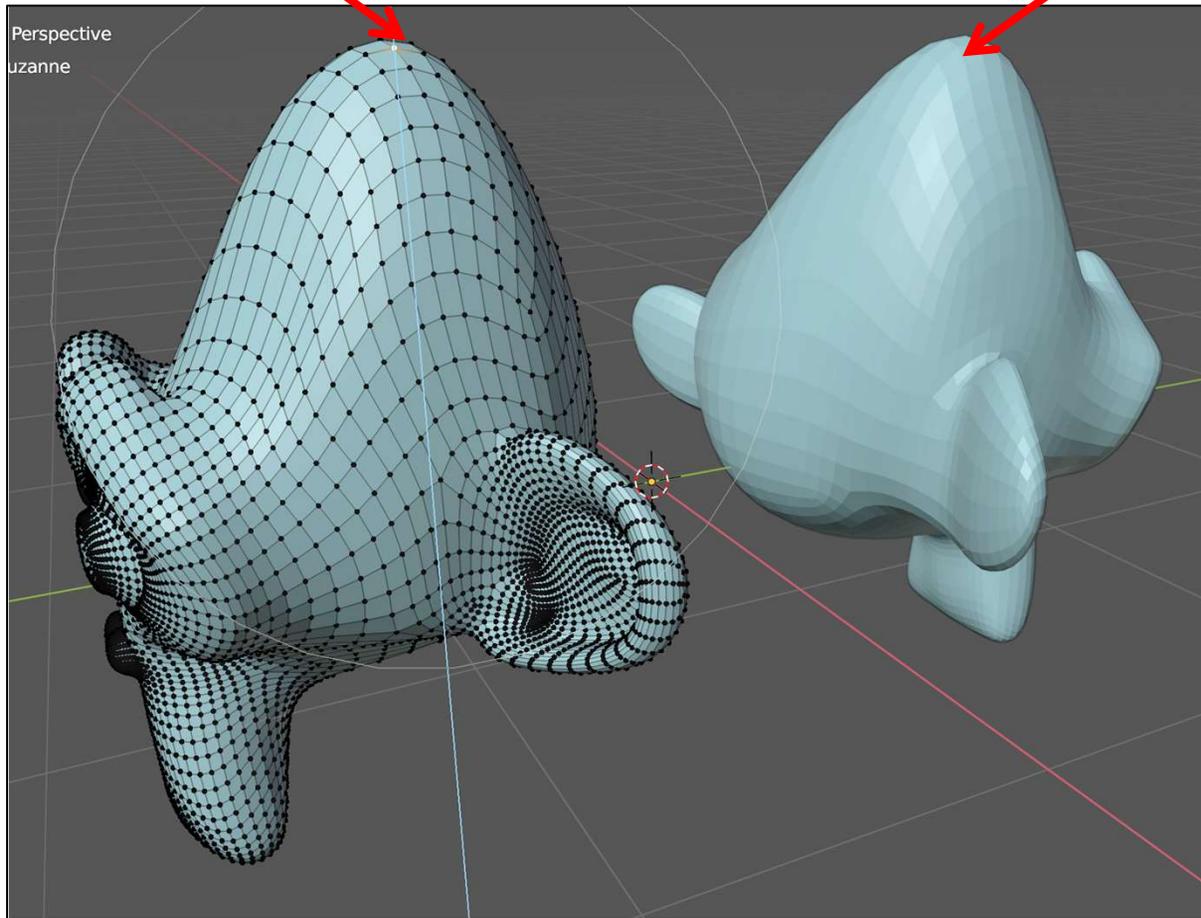

This is often good for creating a full object by only creating one half of it (e.g., a car) and mirroring it.

Array Modifier


The Array Modifier is used to duplicate an object according to a particular pattern. Suppose we want to turn a block into a staircase. We start with the block and add an Array modifier.

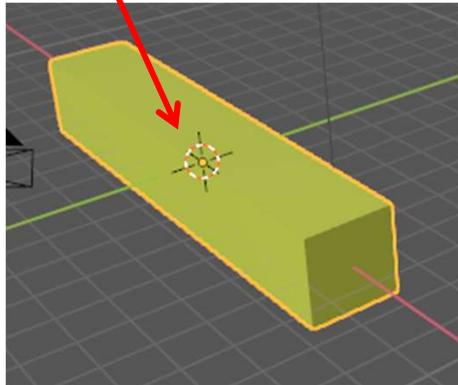

Apply button (if we want to make this permanent)


The duplication count

How much to offset each duplication. It can be Constant, that is, based on a number of units. Or it can be Relative, that is, based on a number of size-of-this-object


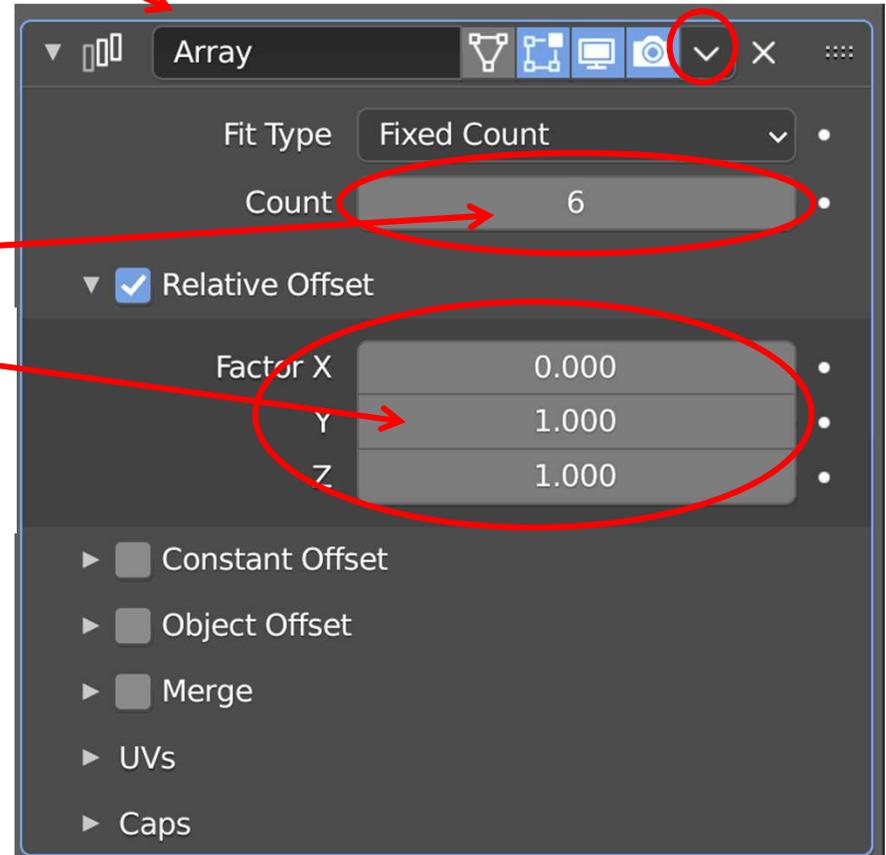


Array Modifier to Make Stairs


Move each block in Y and Z to make the next stair step →

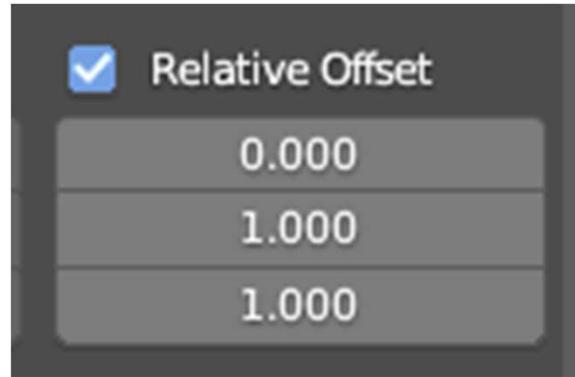

How many total steps to make →

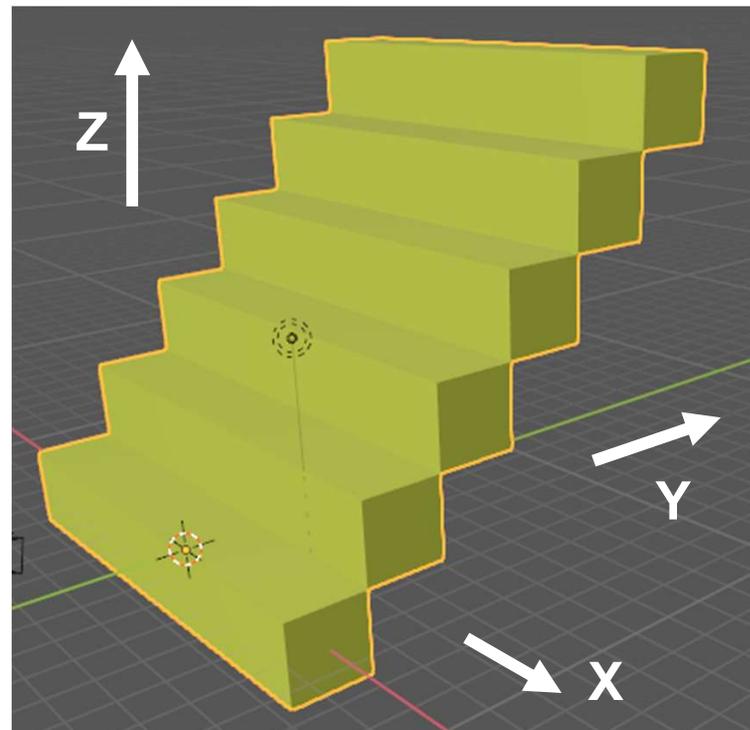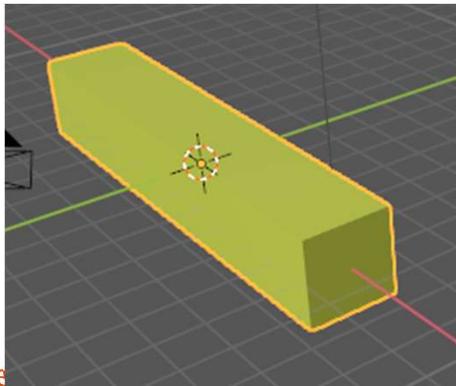

Screw Modifier

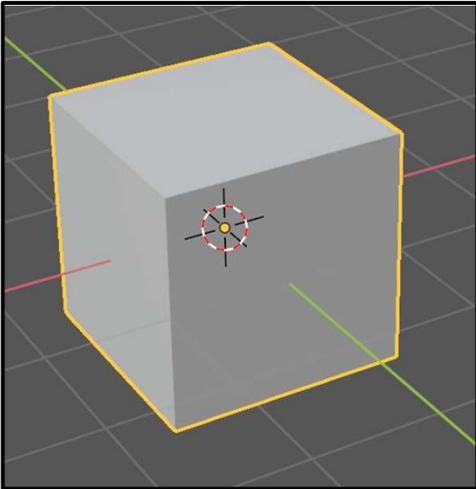

Before

Screw

Angle 400°

Screw 10 m

Iterations 1

Axis X Y Z

Axis Object []

Object Screw


Steps Viewport 16

Render 16

Merge 0.01 m

Stretch UVs U V




► Normals

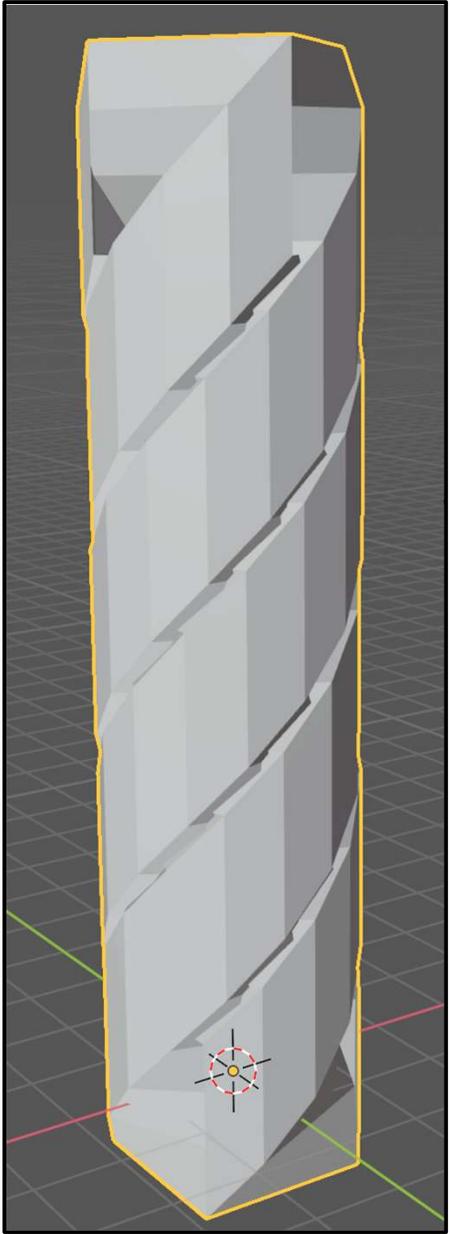

After

Wireframe Modifier

Turns each polygon into thick lines outlining each polygon

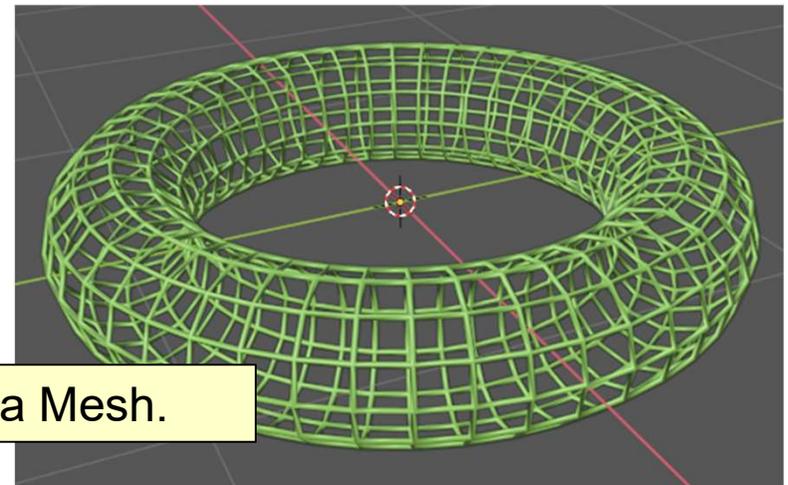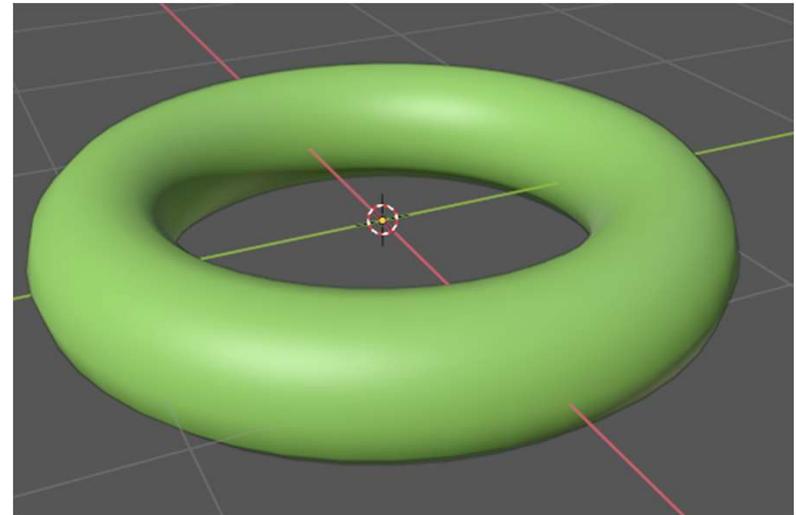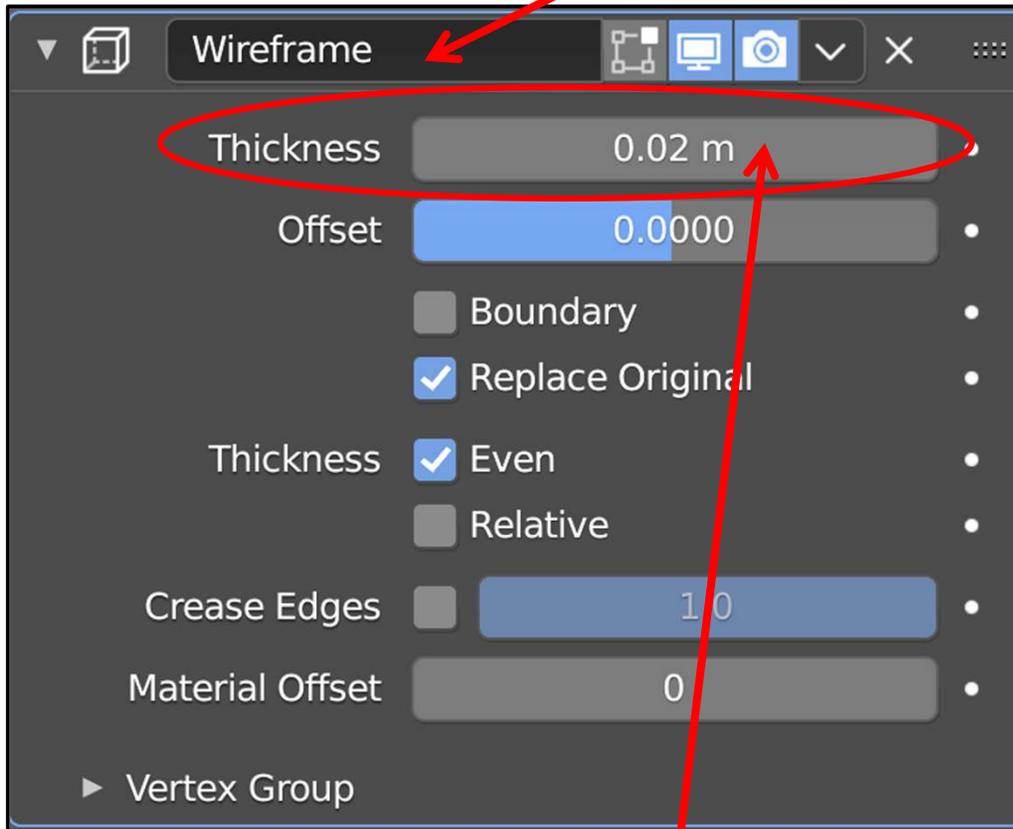


How thick to make the thick lines


But, these lines have thickness, keeping this as a Mesh.

Modifier Order Matters !

Subdivision Surface, then Wireframe

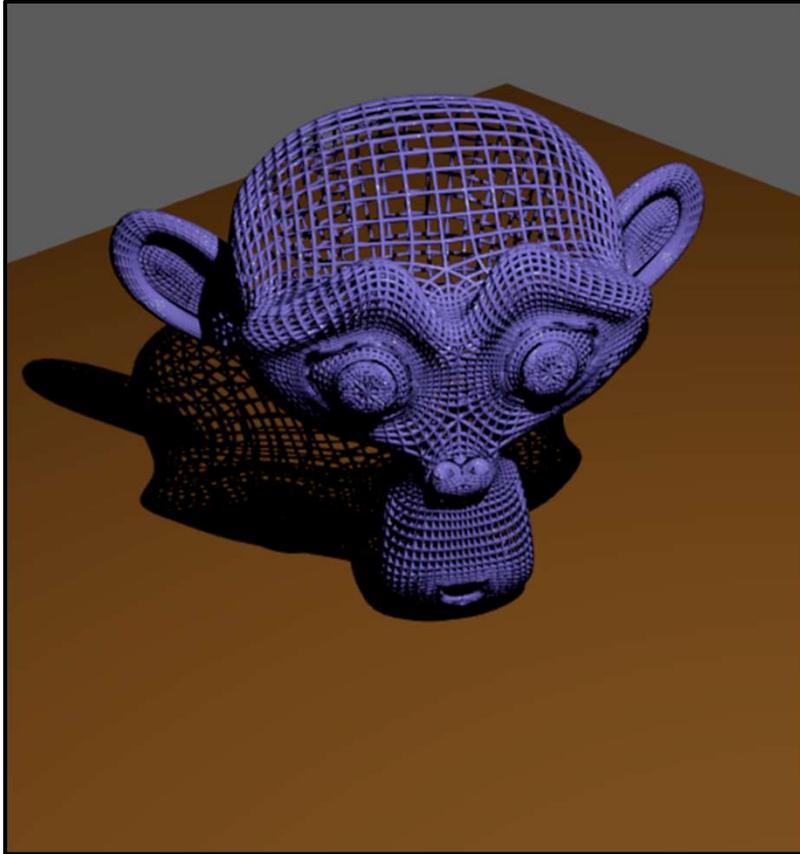


Wireframe, then Subdivision Surface

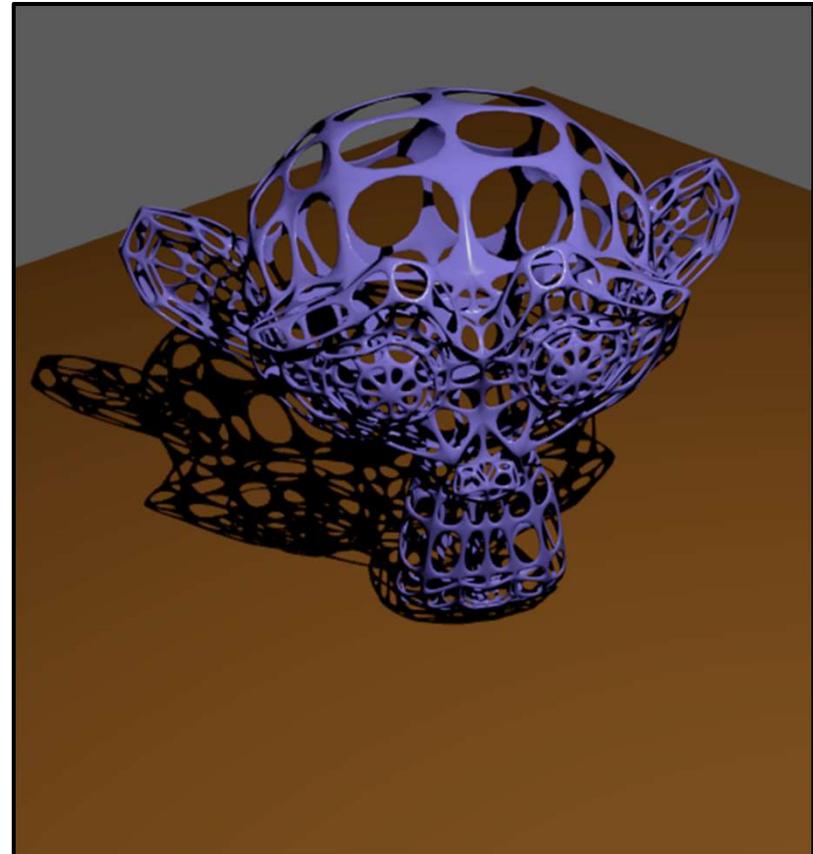



The Lattice Modifier

Add a **UV Sphere**

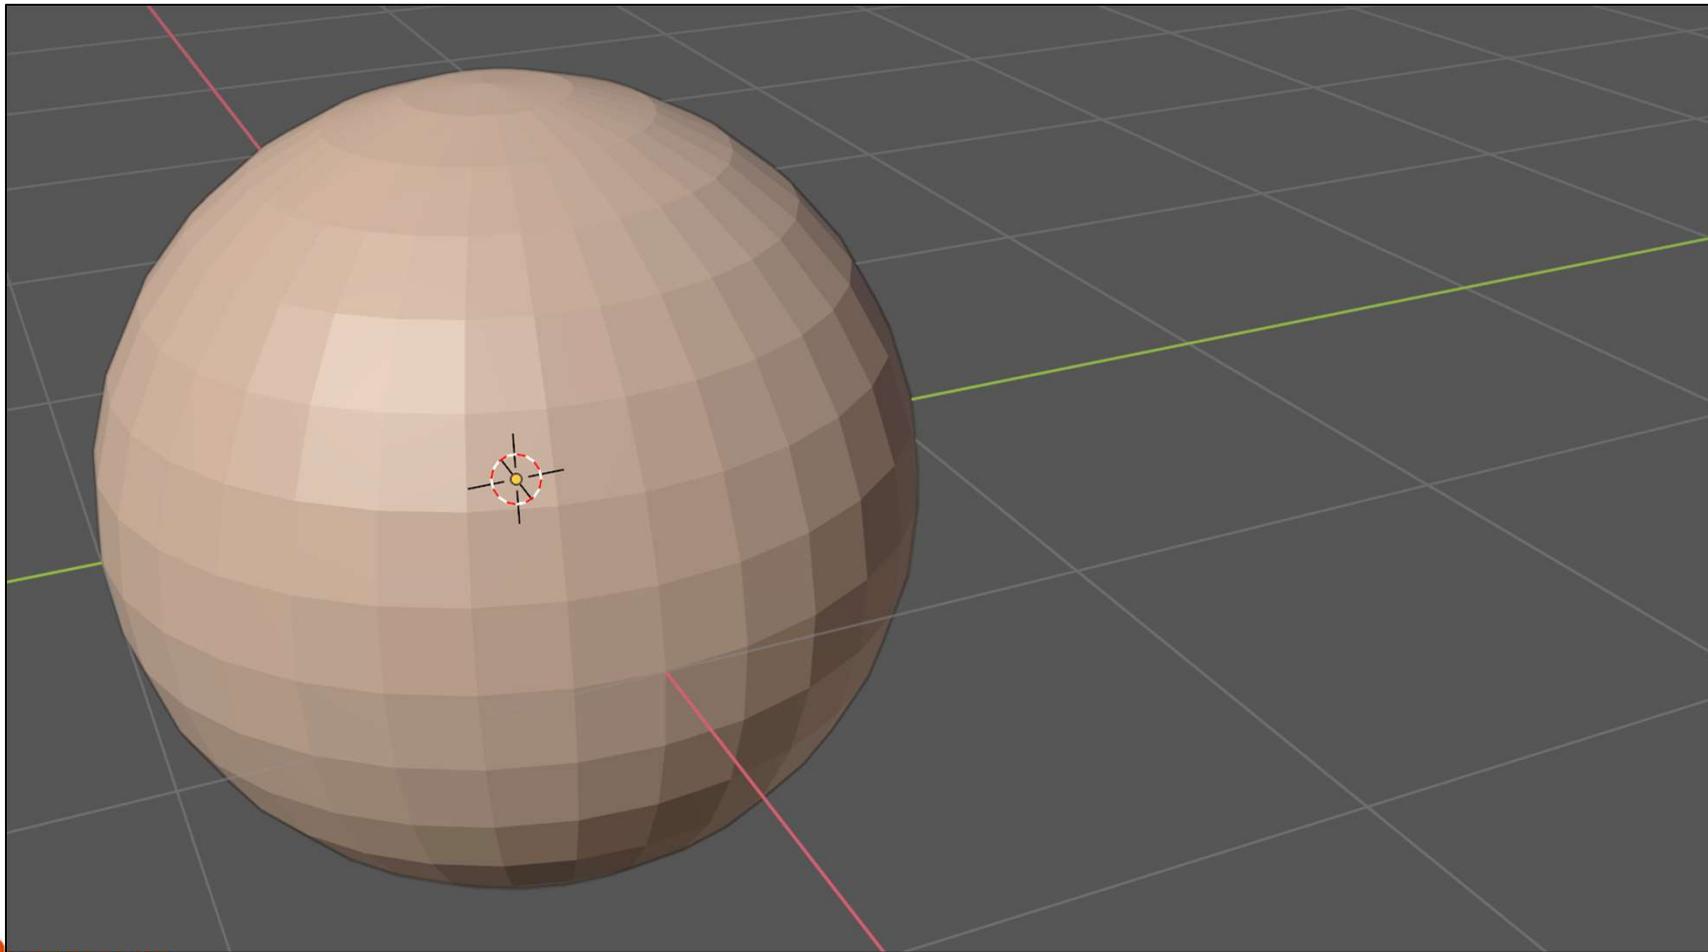

The Lattice Modifier

In **Edit Mode**, select a group of sphere vertices and assign them as a **Vertex Group**

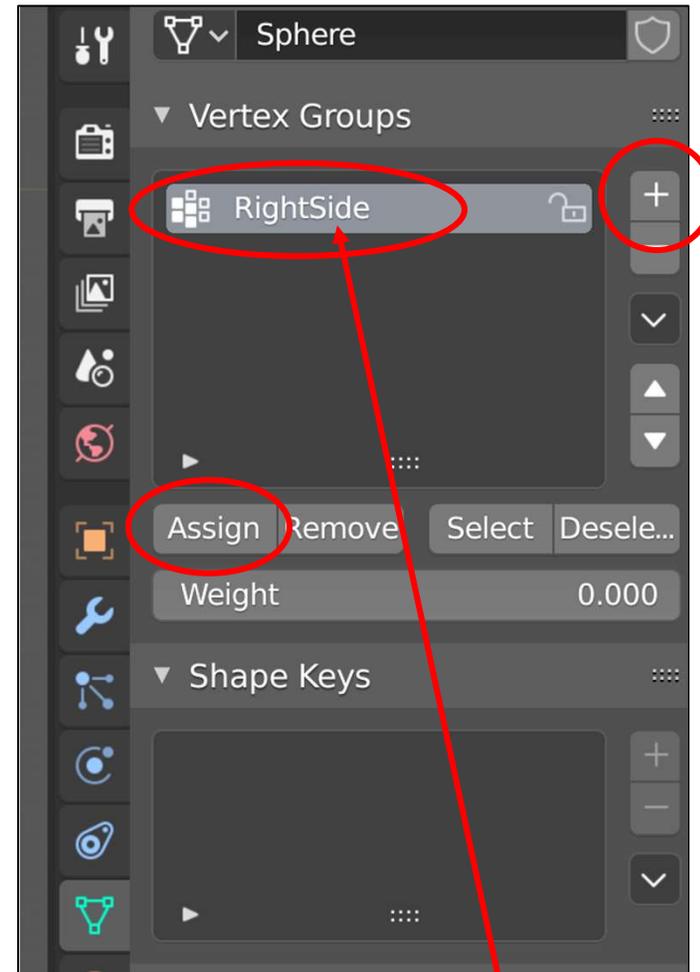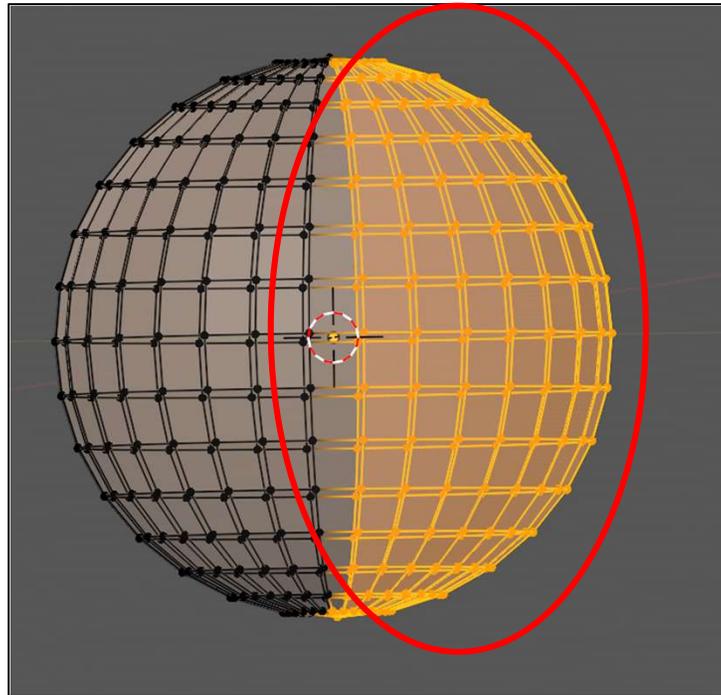



Hints:

1. Select the vertices in **Orthographic** and **X-ray** display modes
2. Double-click on the default name of the Vertex Group to give it a better name

The Lattice Modifier

Click the **Lattice** button and (perhaps) add more lattice detail.



Add a **Lattice** to the scene.

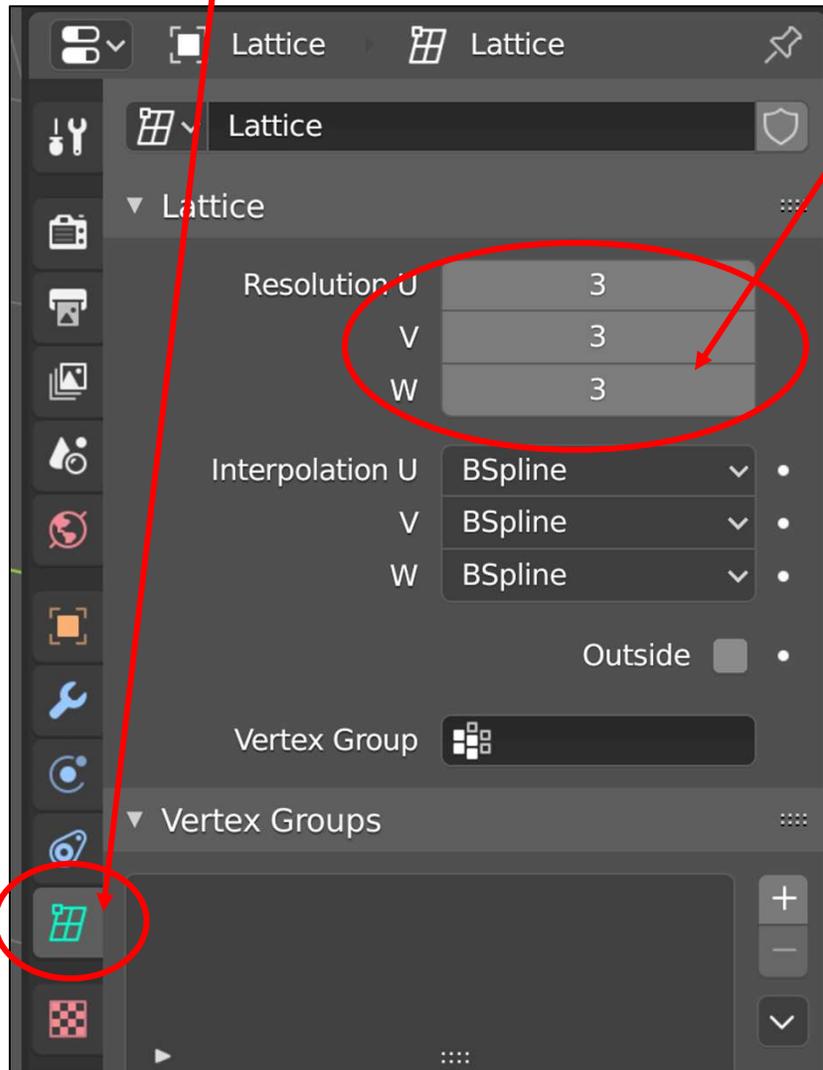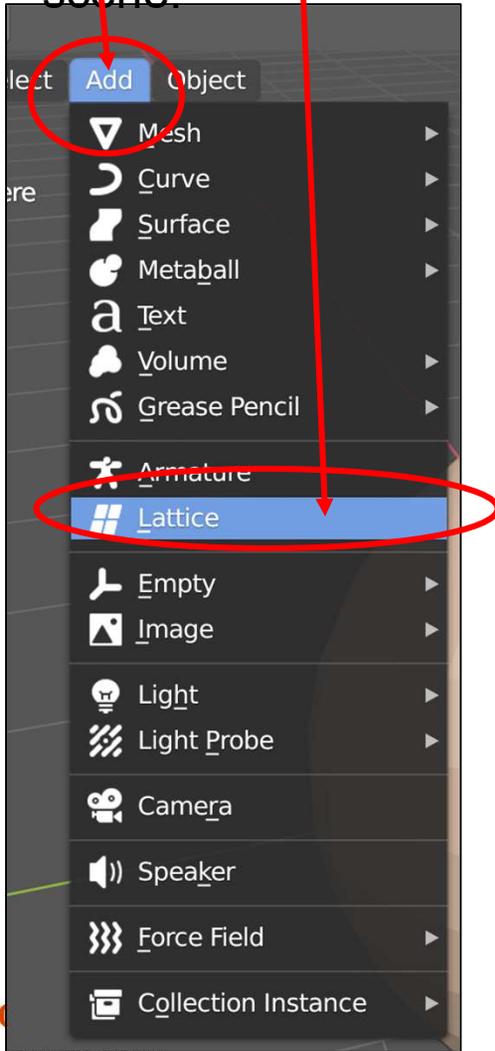

The Lattice Modifier


Add a **Lattice Modifier** to the sphere.

Tell it the name of the lattice and the name of the Vertex Group to use

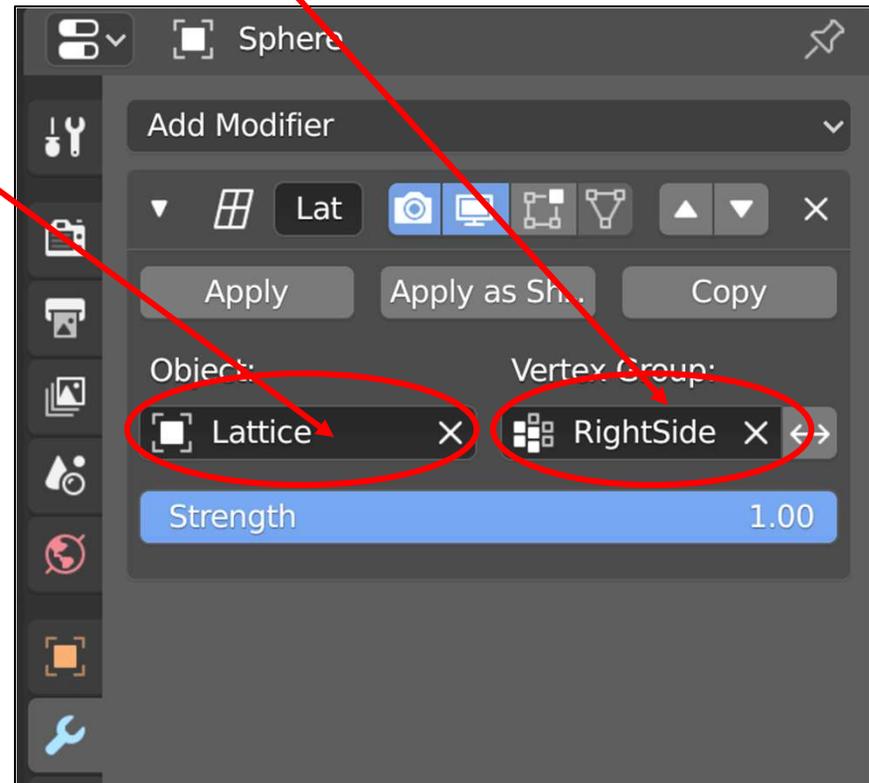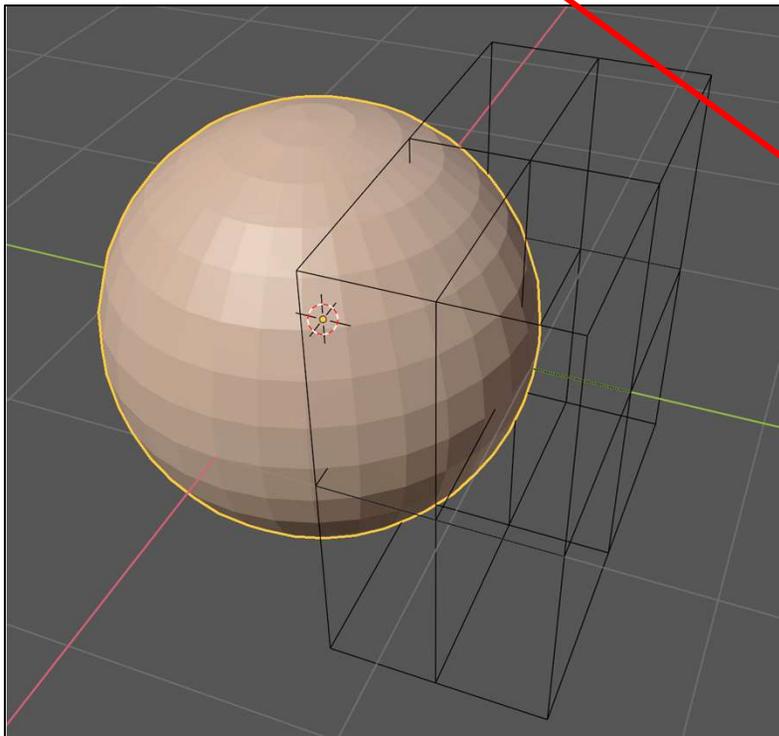


The Lattice Modifier

In Edit Mode, grab vertices and slide them:

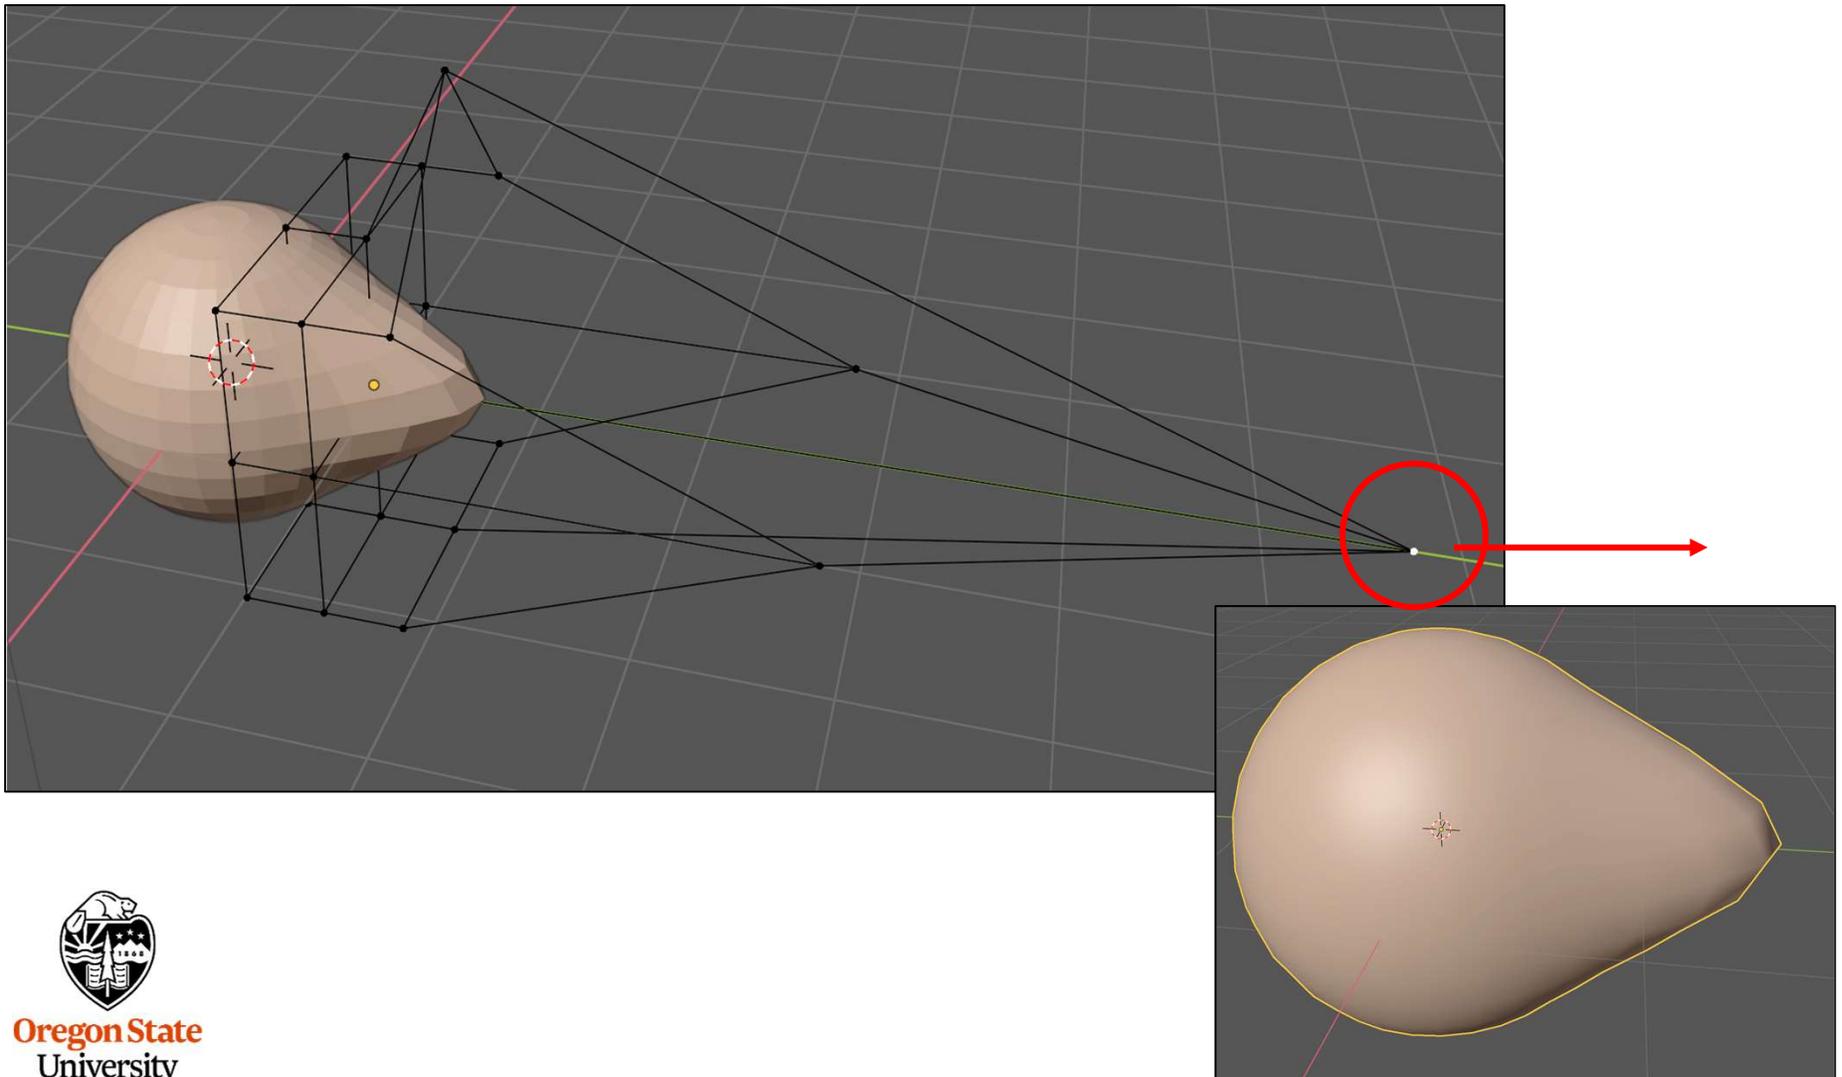


The Shrinkwrap Modifier

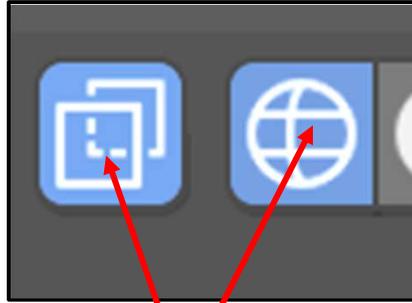

Turn on both **X-ray Mode**
and **Wireframe Mode**


Add a UV Sphere and a
Cone. Either scale the
sphere up or scale the
cone down so the cone is
inside the sphere.

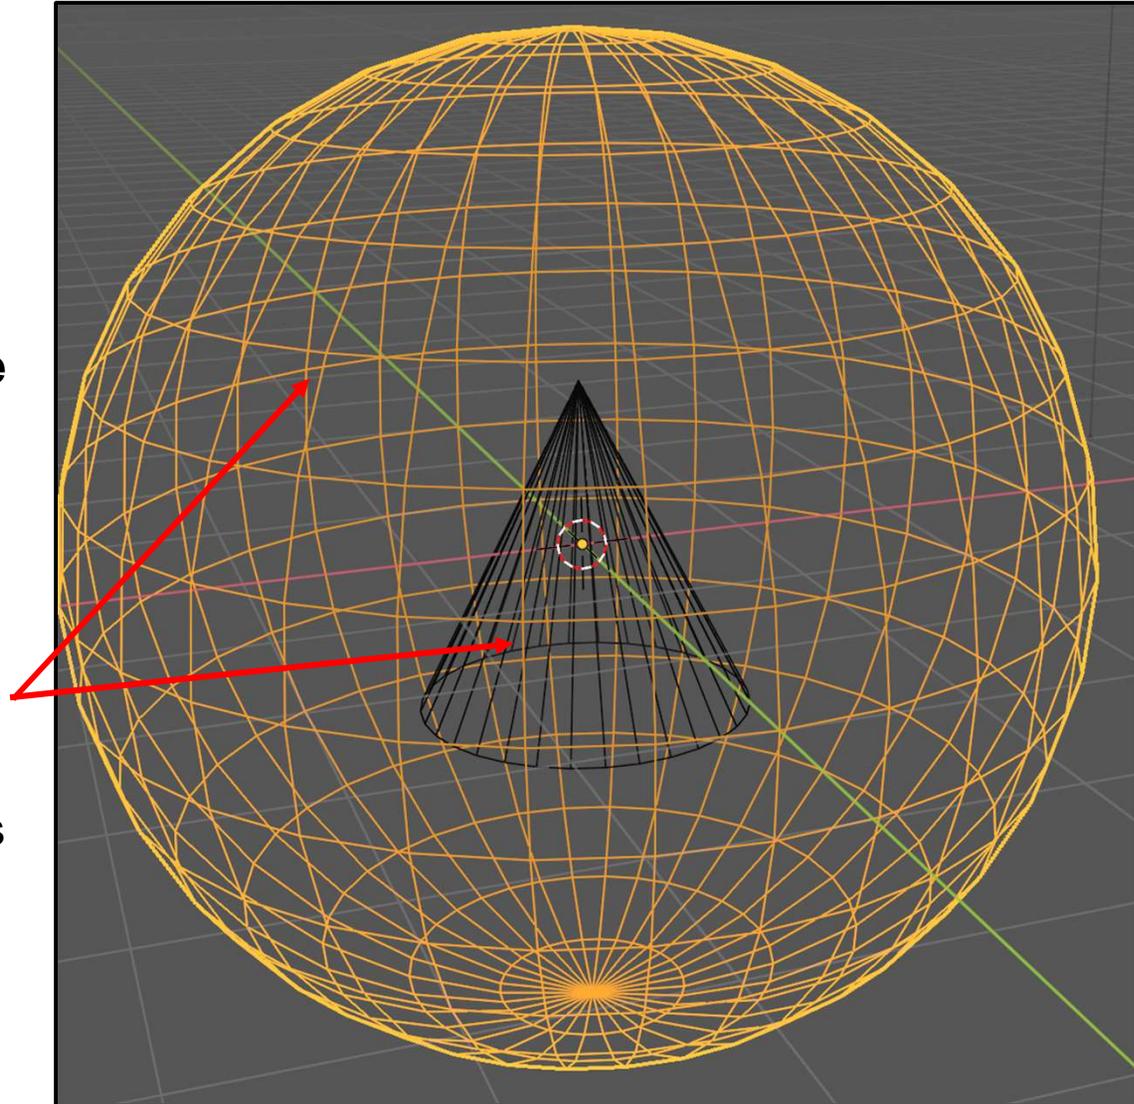

The Shrinkwrap Modifier


Click on the sphere and select the Shrinkwrap Modifier

Select the cone as the Target

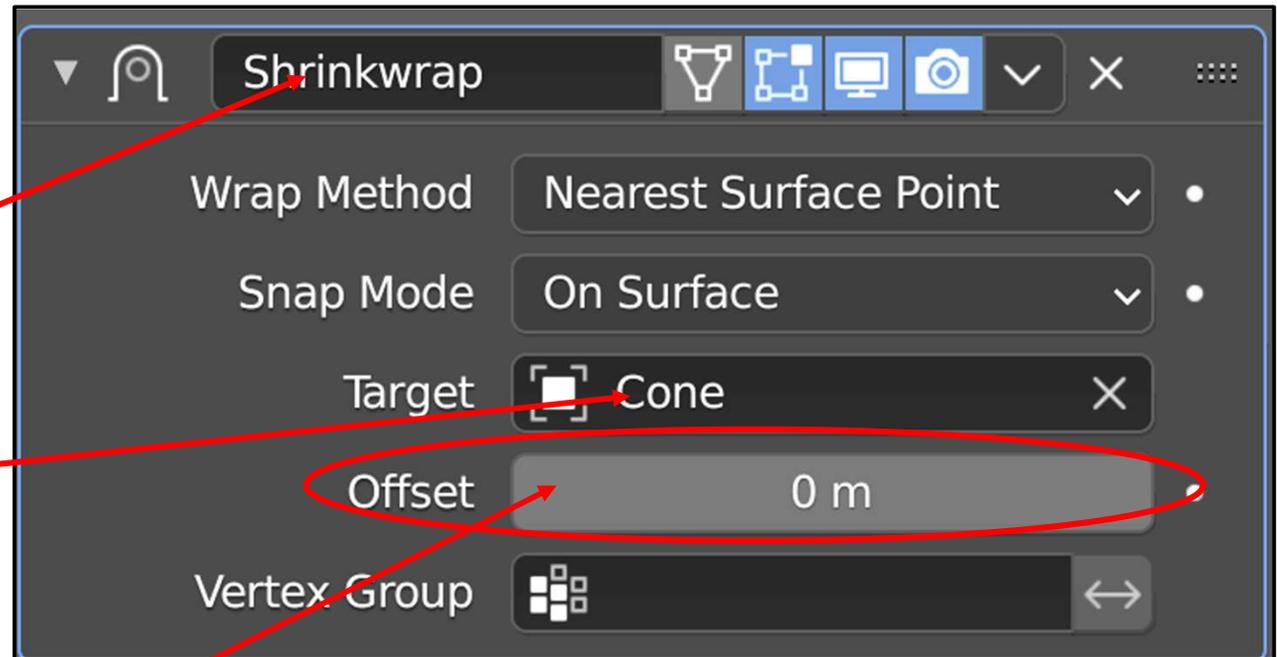


Adjust the Offset value. Positive values make most sense, but negative values are fun too!


The Shrinkwrap Modifier

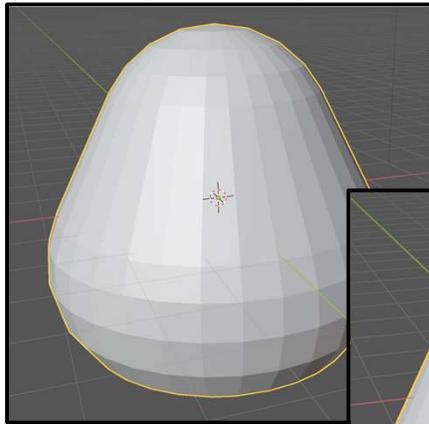


Offset = 2

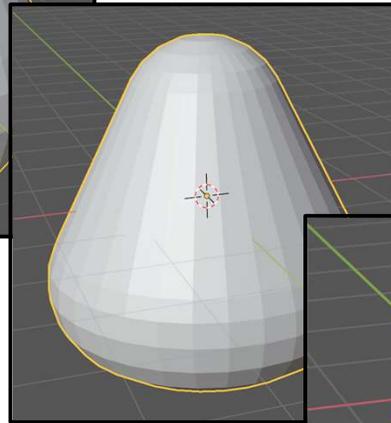


Offset = 1

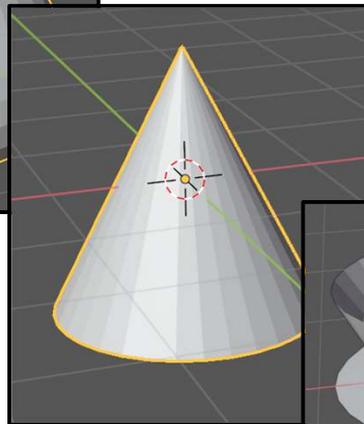

Offset = 0

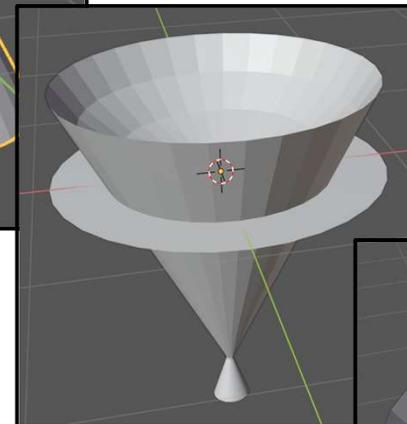

Offset = -1

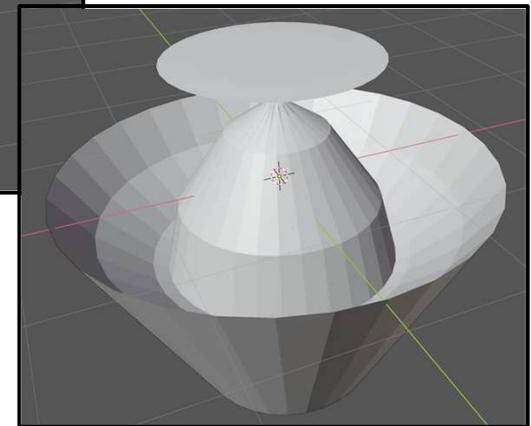


Offset = -2


The Build Modifier

I suspect this is more applicable to engineering-ish objects, but it fun no matter what. Let's use our old friend Suzanne the monkey.


Go to **Modifiers** → **Select Modifier** → **Build**
You get the following Modifer box. All the values are good defaults:

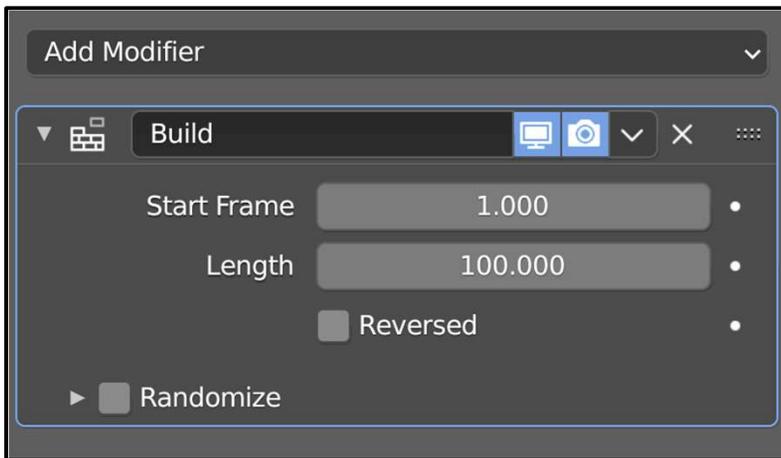

At this point, Suzanne has disappeared. What!? To bring her back, grab the blue animation time slider and slowly move it to the right:

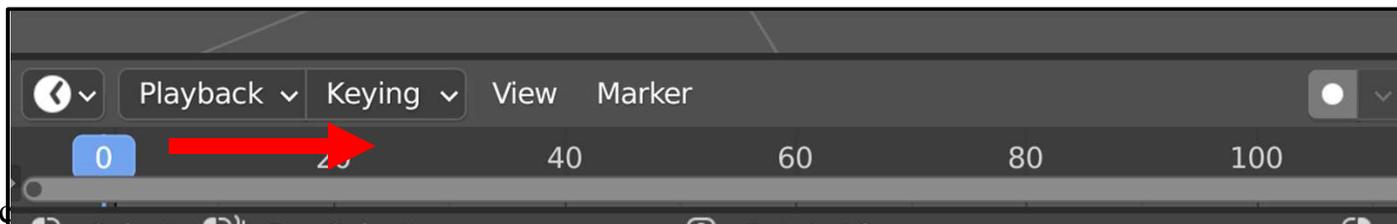



The Build Modifier

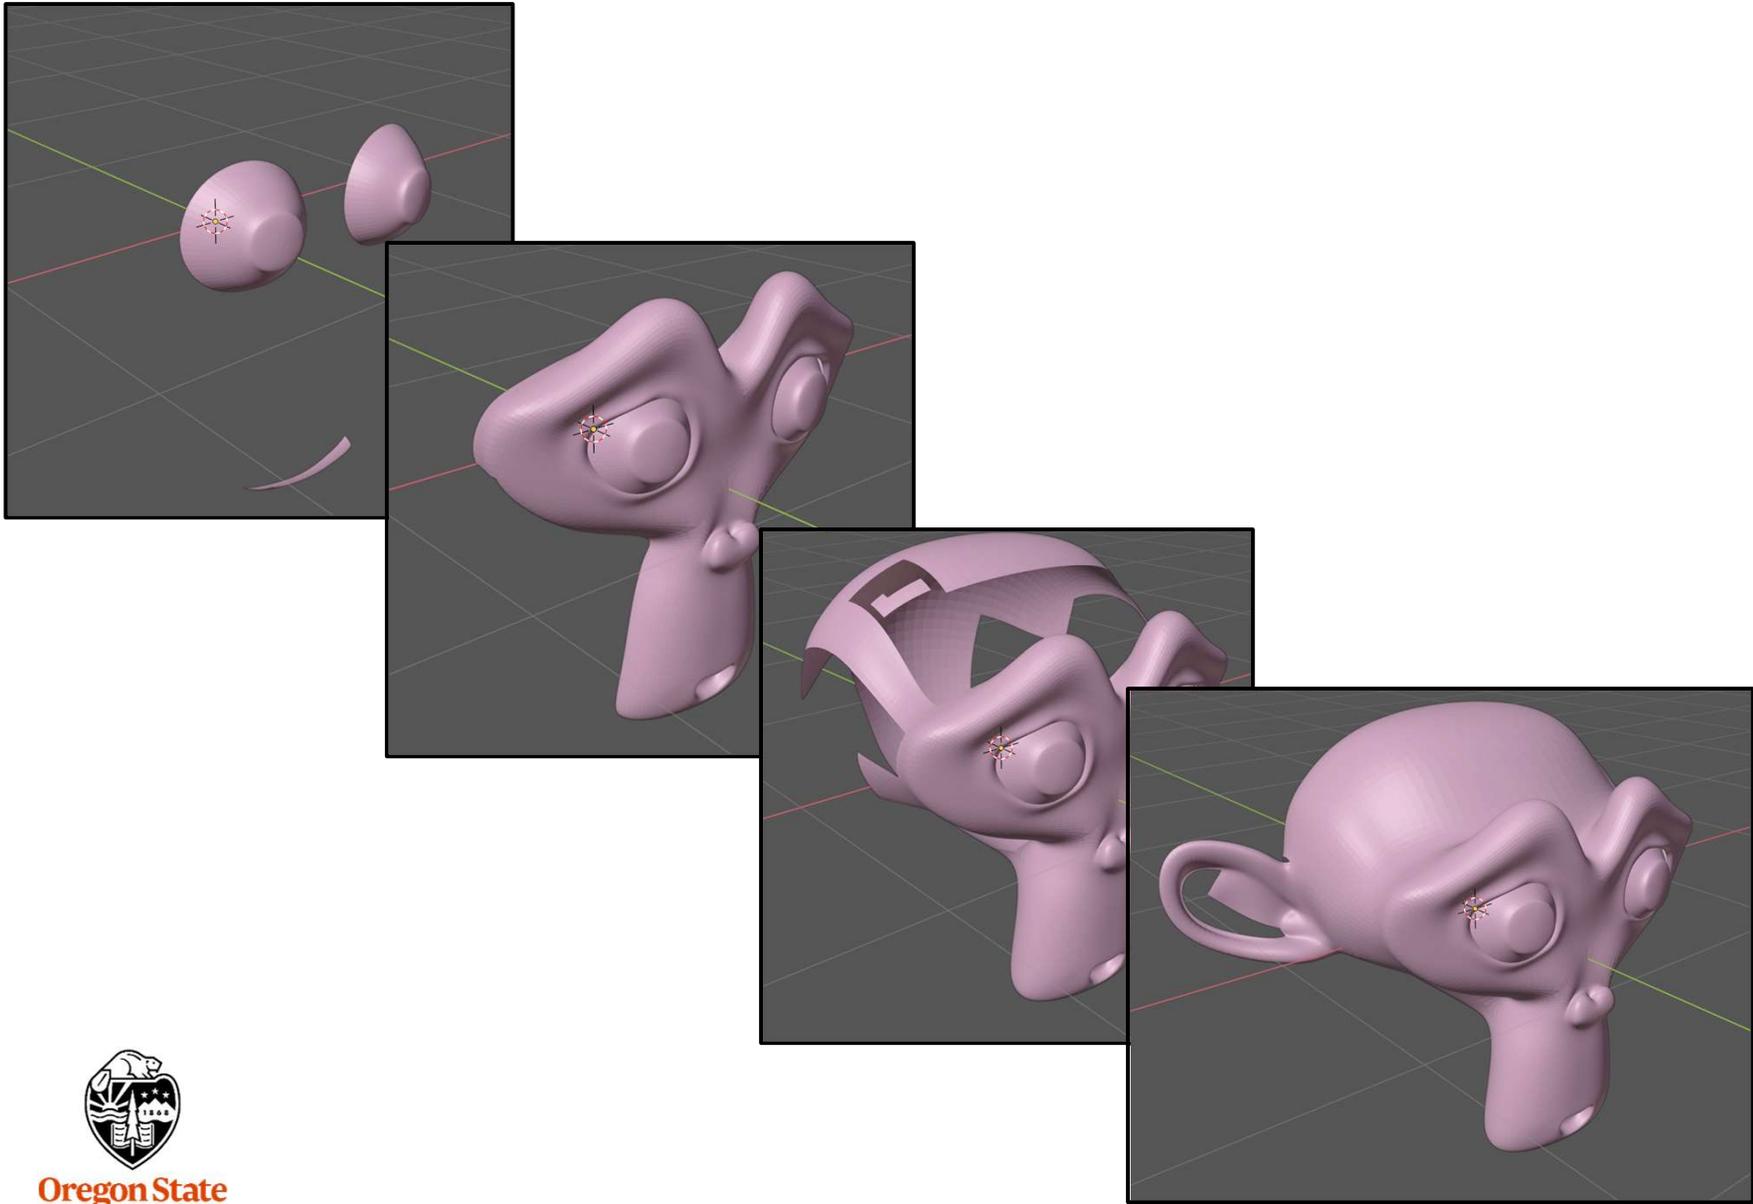

The Displace Modifier


This Modifier pushes vertices out perpendicular to the surface. I would describe it as “puffing out the object”.

Go to **Modifiers** → **Select Modifier** → **Displace**
You get the following Modifer box. If your object suddenly looks weird, don't worry! Set this value to **0**:

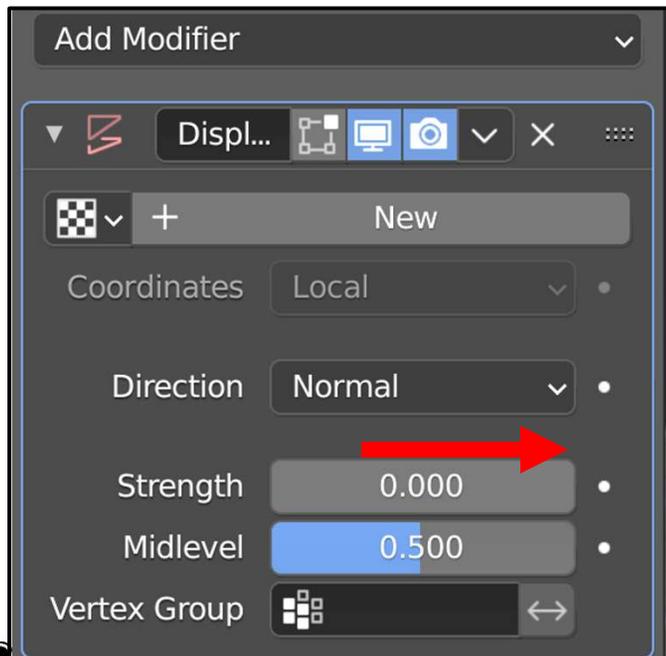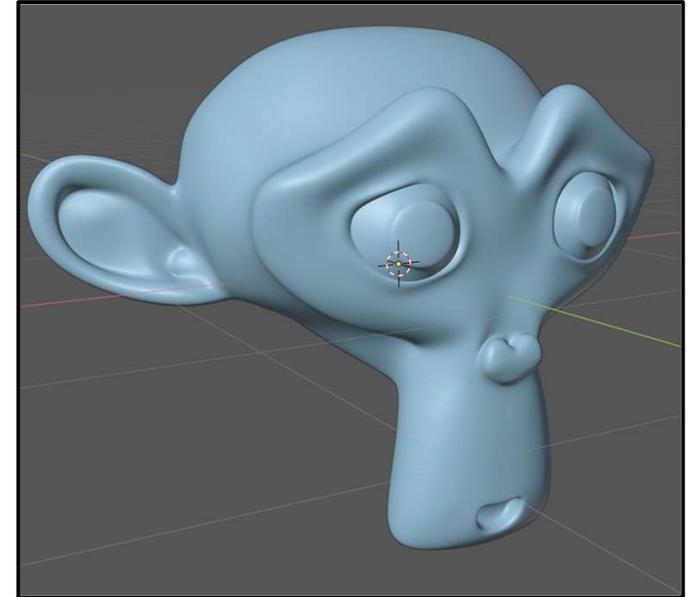


- 01 Now, slowly increase to Strength to be greater than 0. What happens? Is it possible to set it to a value less than 0? What happens?


The Displace Modifier

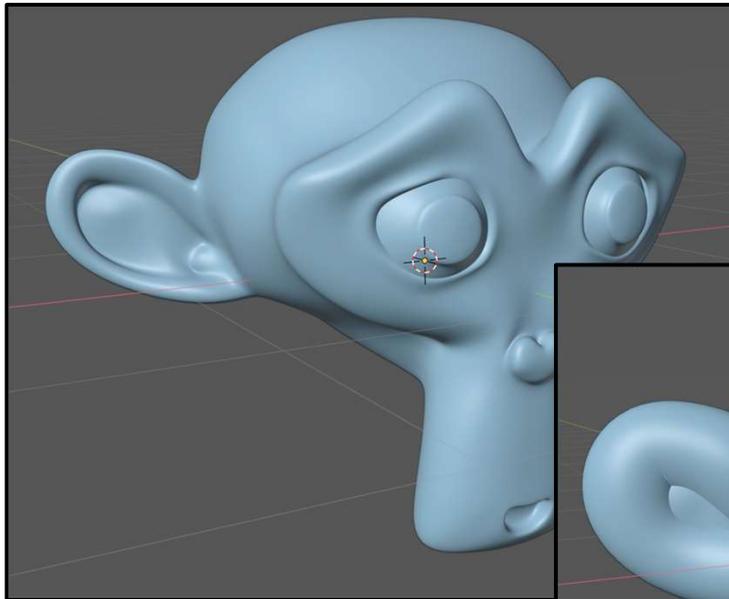

Strength = 0.0

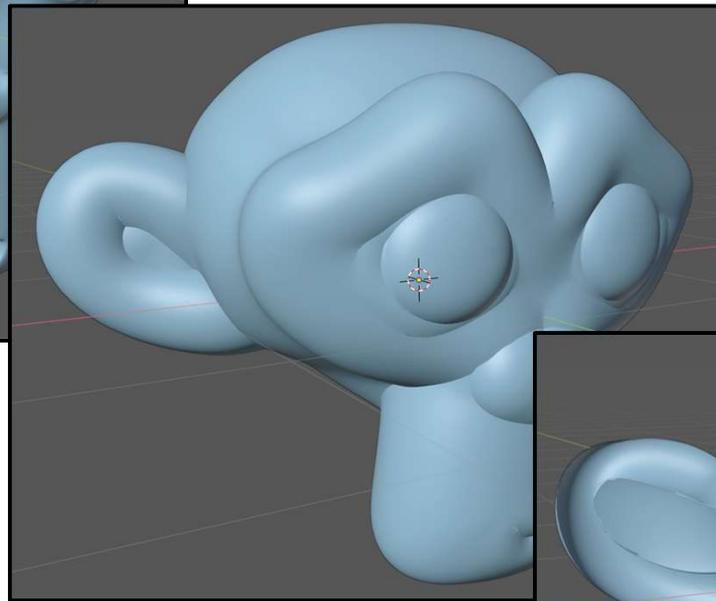


Strength = 0.3

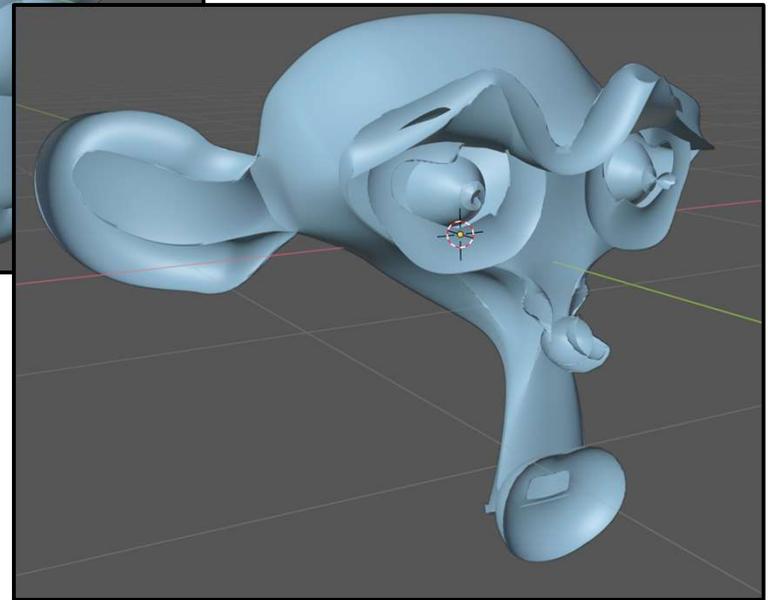

Strength = -0.3



Texture Pattern Displacements

Click on the **Texture Property** button

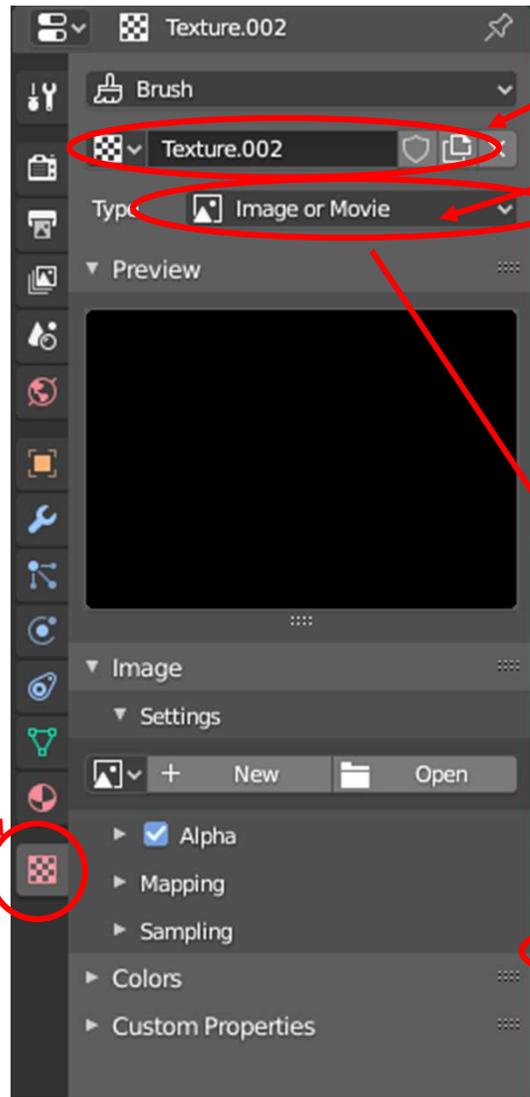



Remember the texture "name" (**Texture.002**) – you will need it later.

Select which texture you want for the displacement pattern.
I like **Voronoi** because of the cells

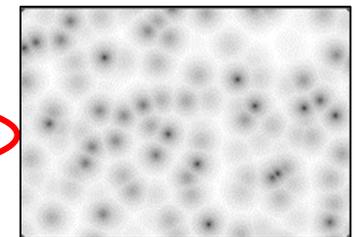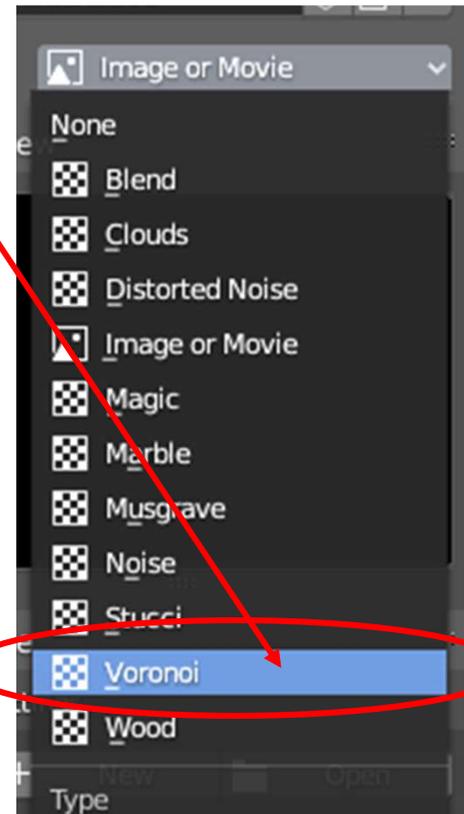


Texture Pattern Displacements

Create an object, add a couple of levels of **Subdivision Surface Modifier**, then add a **Displace Modifier**.

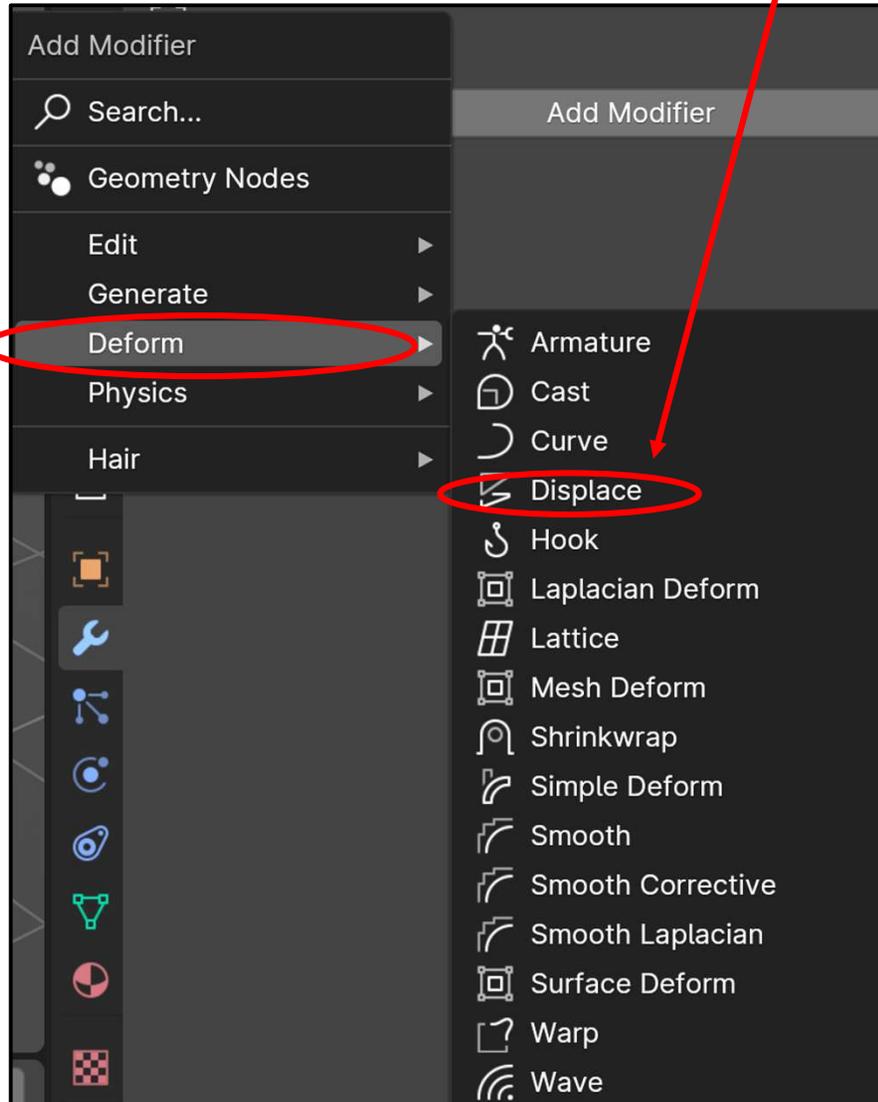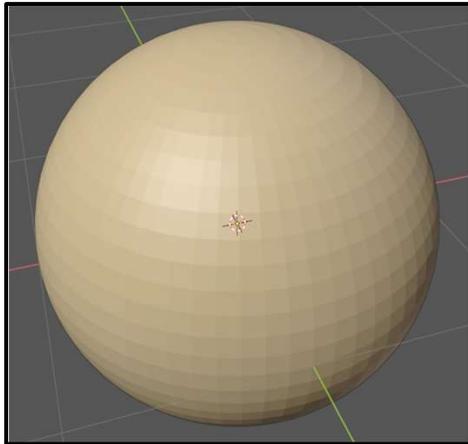

Texture Pattern Displacements

Displace Modifier

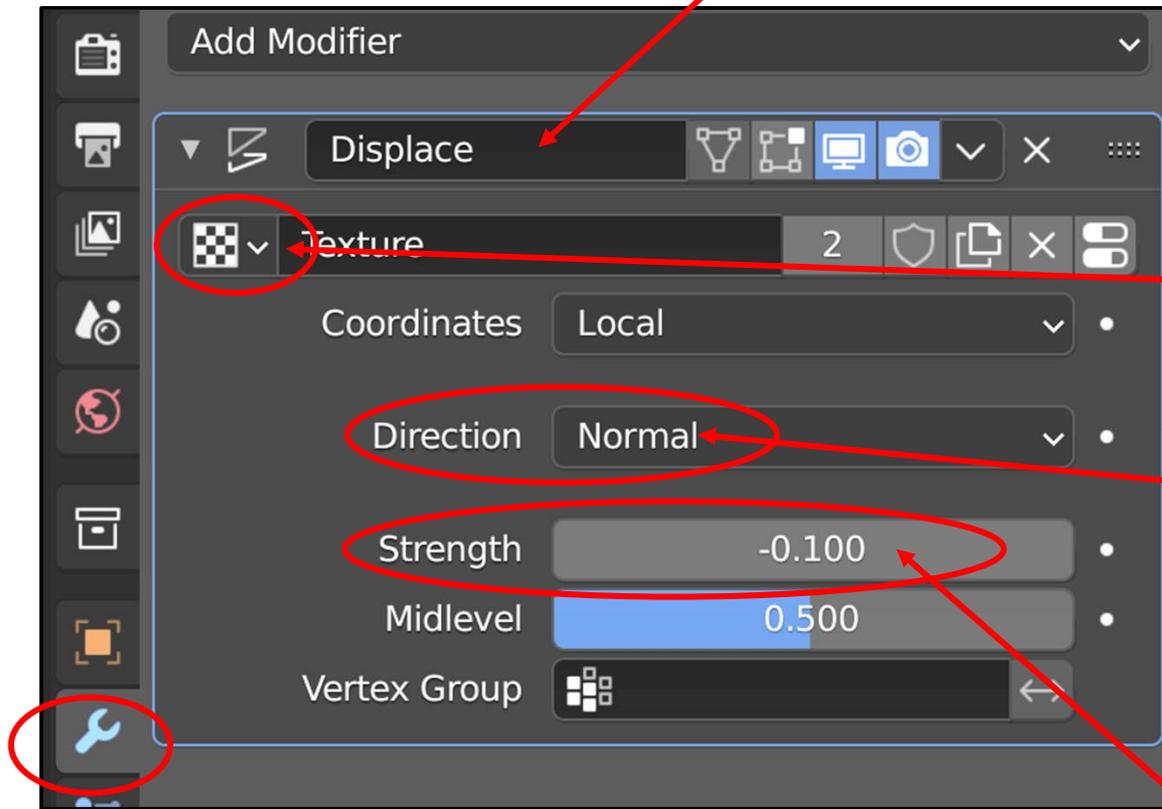


Click here and select the texture name from before.


Select **Normal** (in computer graphics, *normal* means “perpendicular to the surface”).

Experiment with different values of Strength.


Texture Pattern Displacements

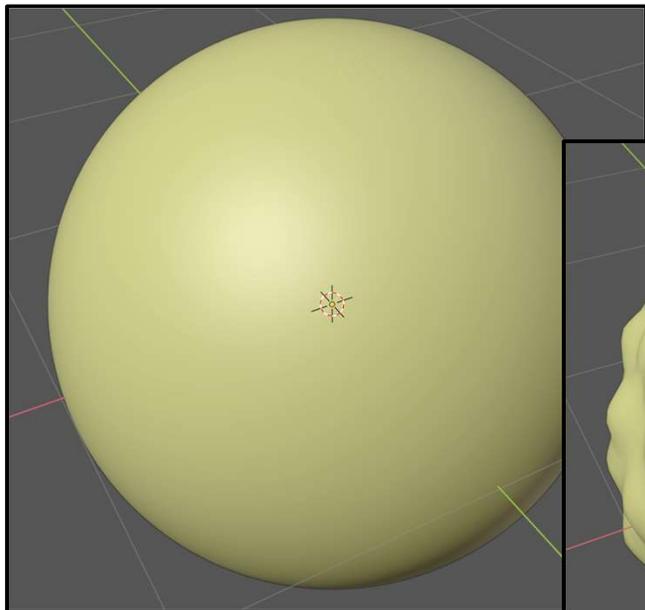

Strength = 0

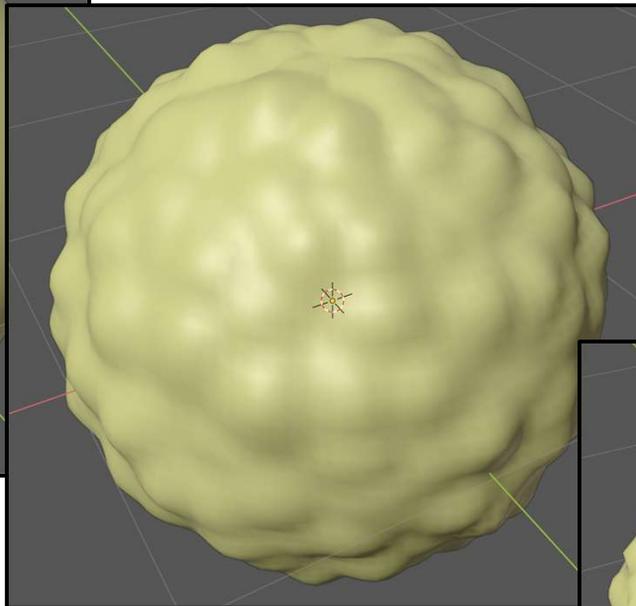




Strength < 0

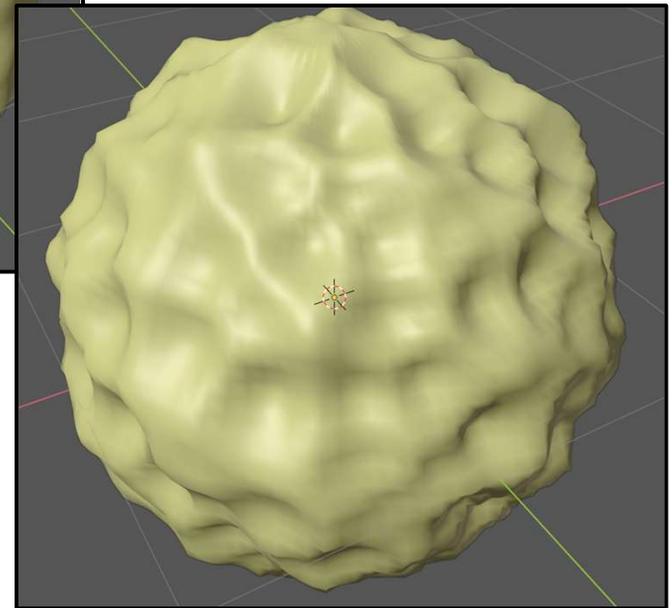

Strength > 0

Aren't you glad you didn't have to sculpt this yourself? 😊



You Can Also Go Back to the Texture Pattern and Change Some Things There

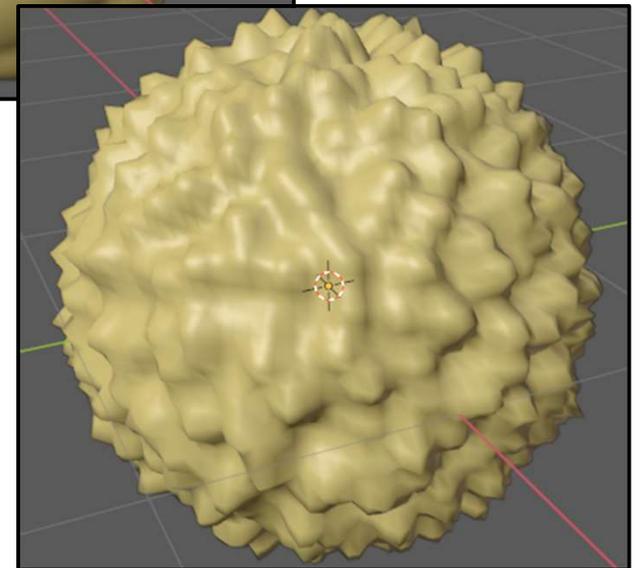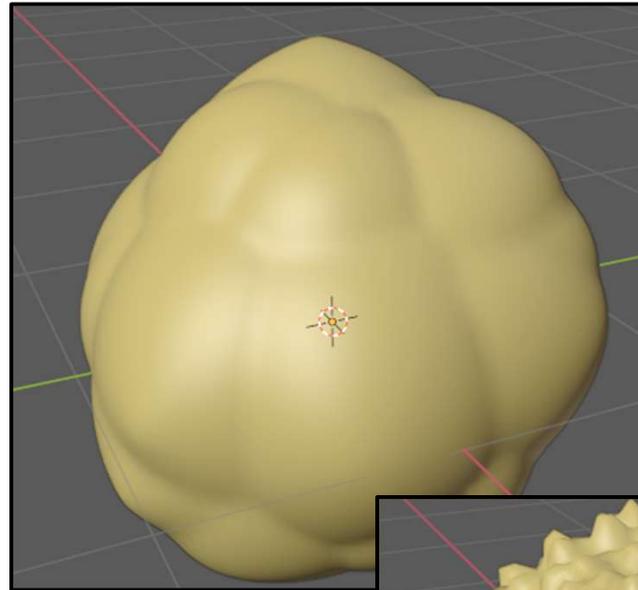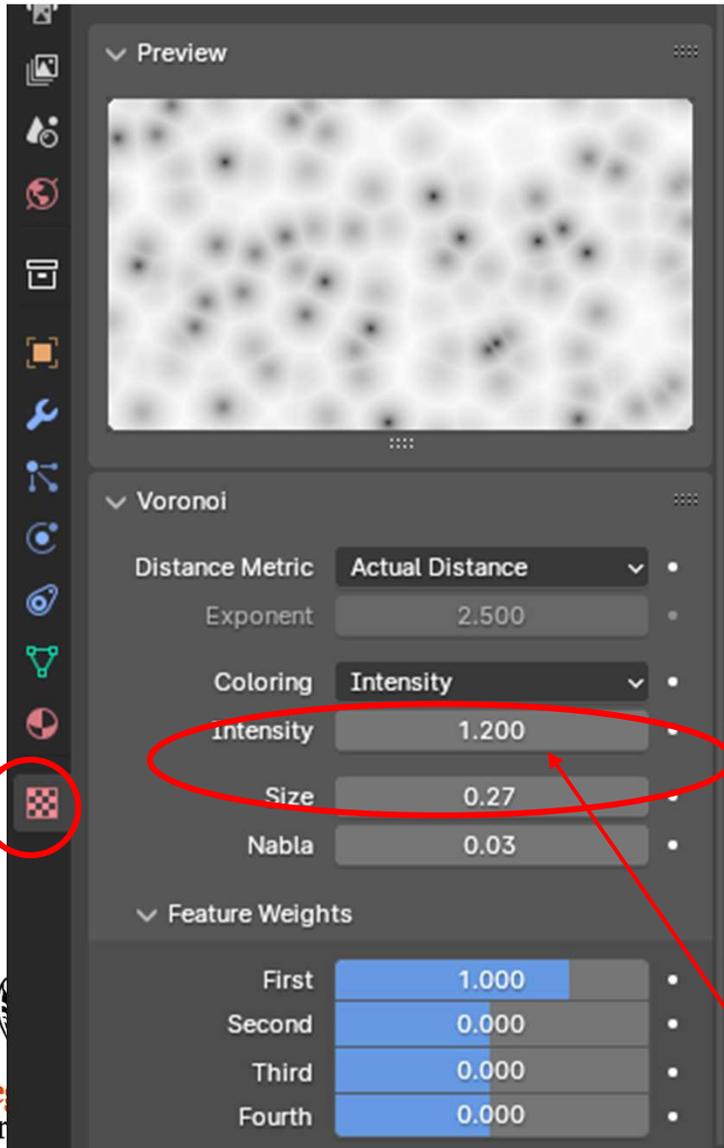

These two are especially fun to play with!


Metaball Objects

Metaball Objects are another way to 3D model:

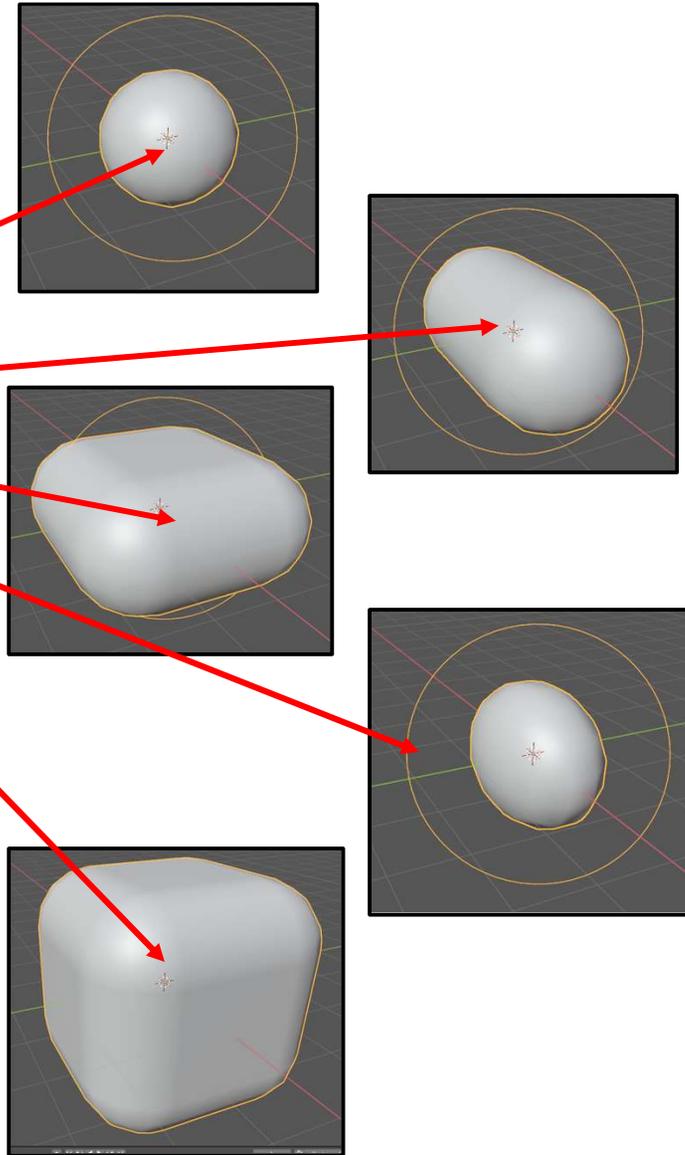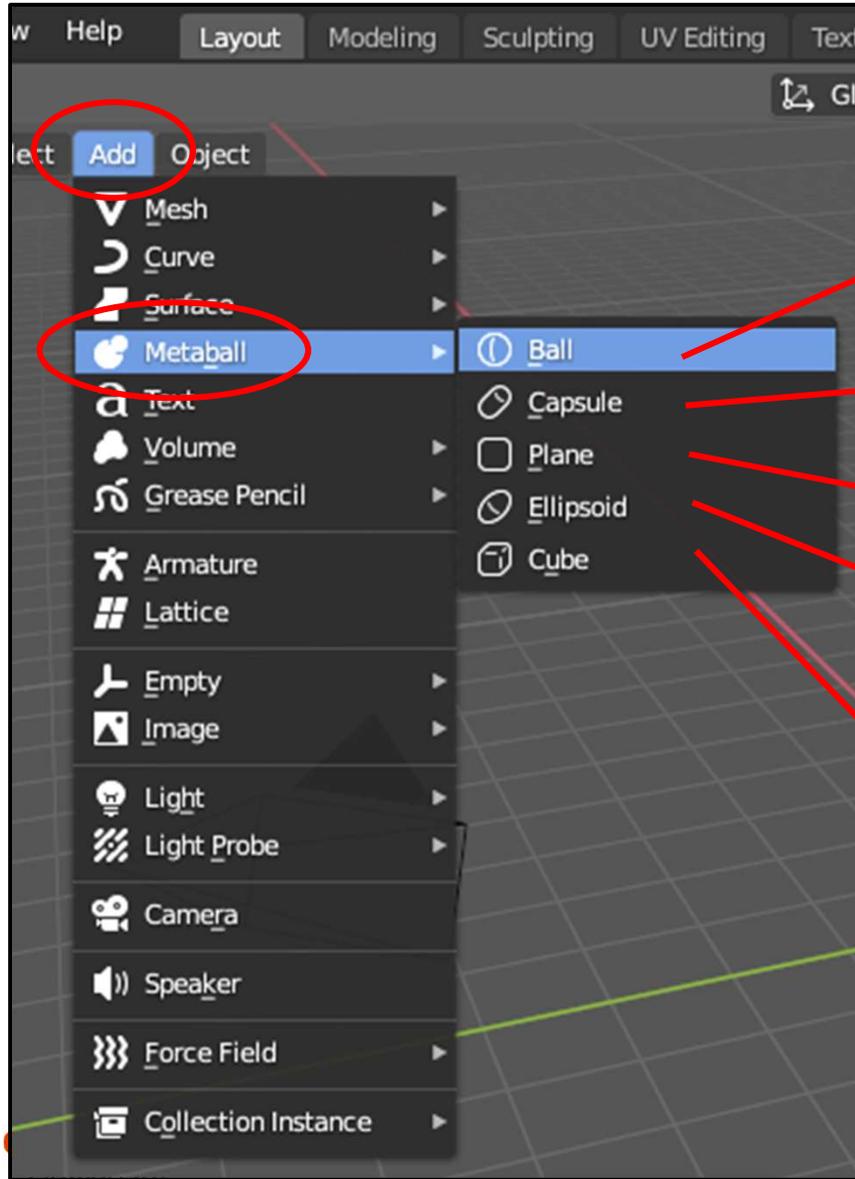


Metaball Objects

The cool thing is that, if you move (**g**) them close enough, they will “glom” into a single object

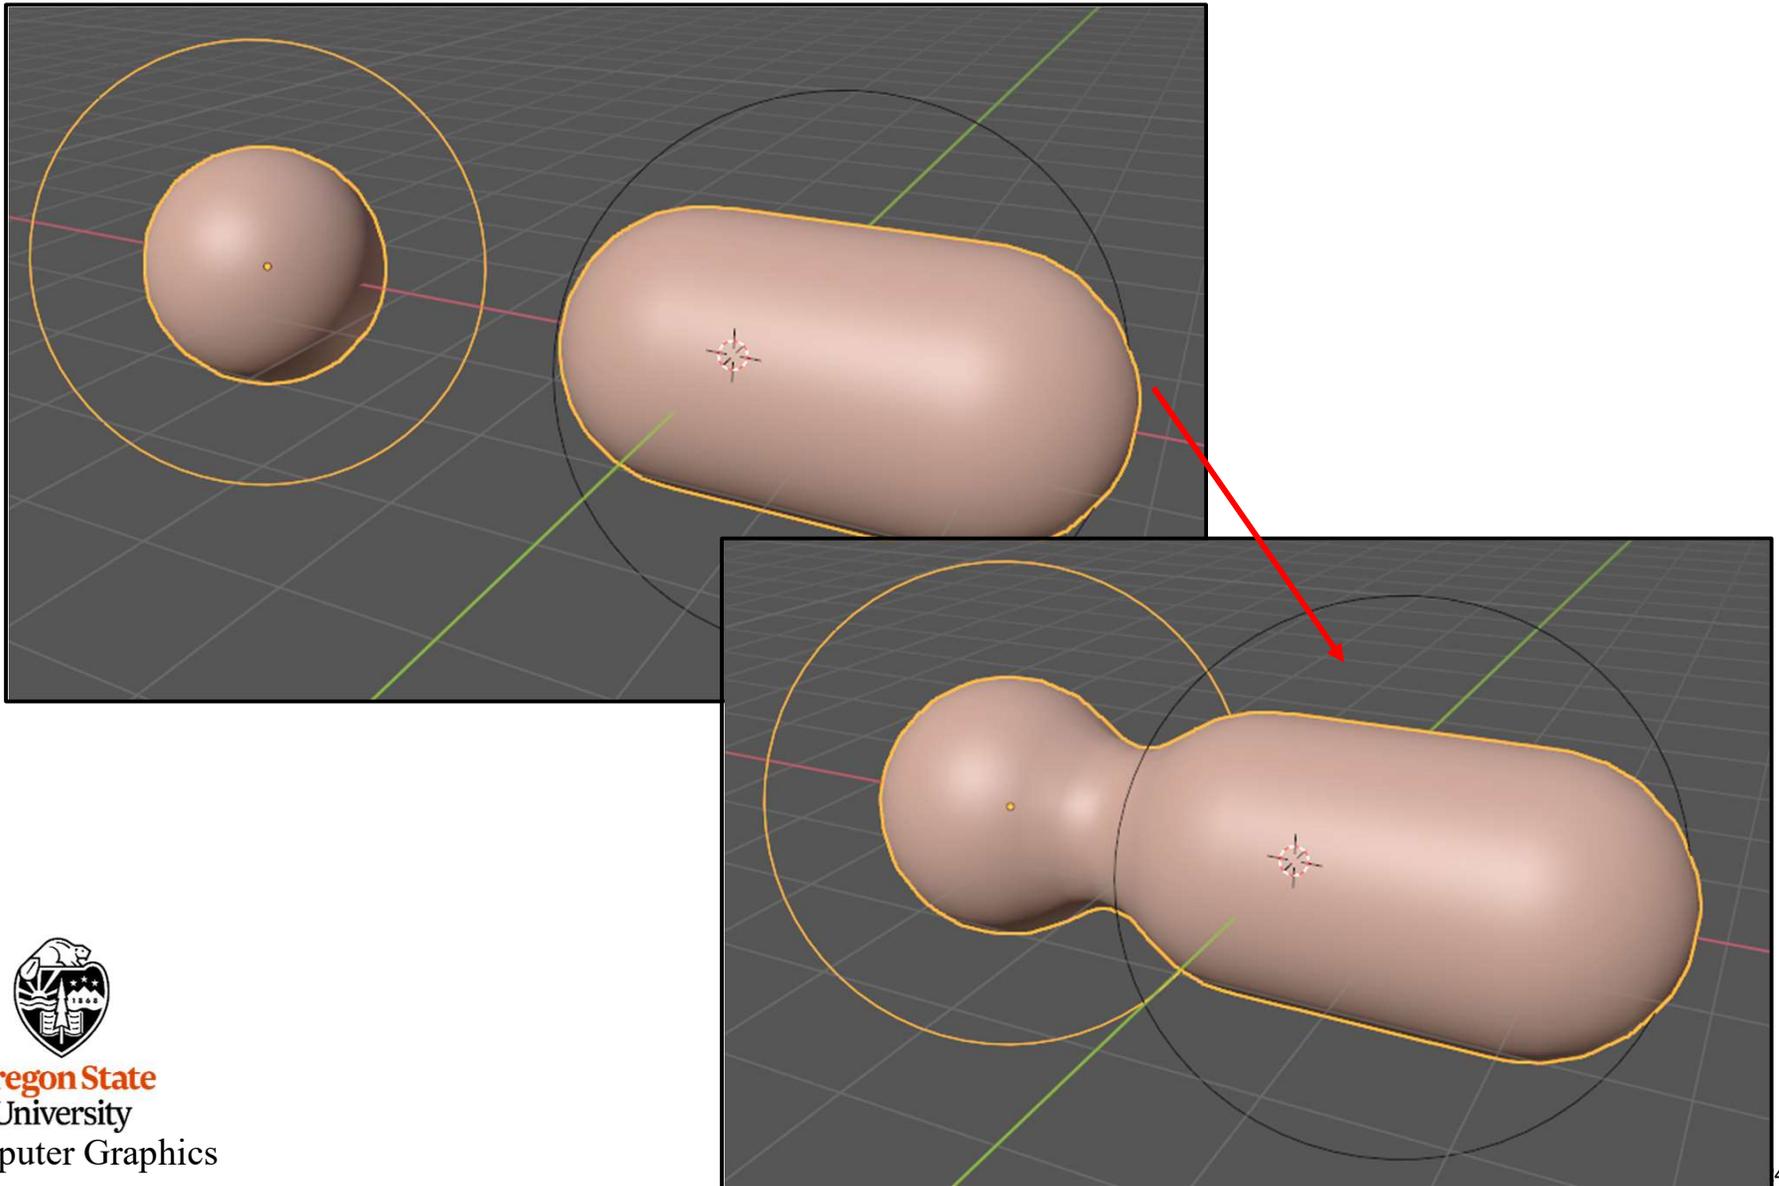



Metaball Objects

There is a special Metaball properties menu to control their characteristics:

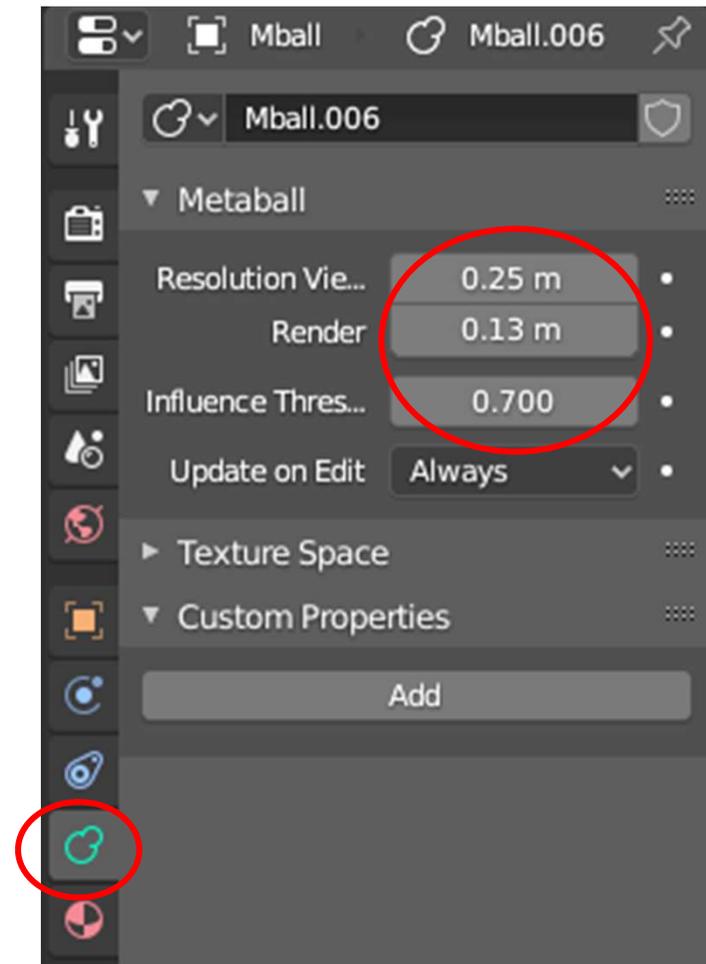

Metaball Objects


But, Metaball Objects are not meshes, so you cannot do a lot of the cool editing that you can with meshes. But, you can turn such an object into a mesh by selecting **Object** → **Convert To** → **Mesh from Curve/Meta/Surf/Text**

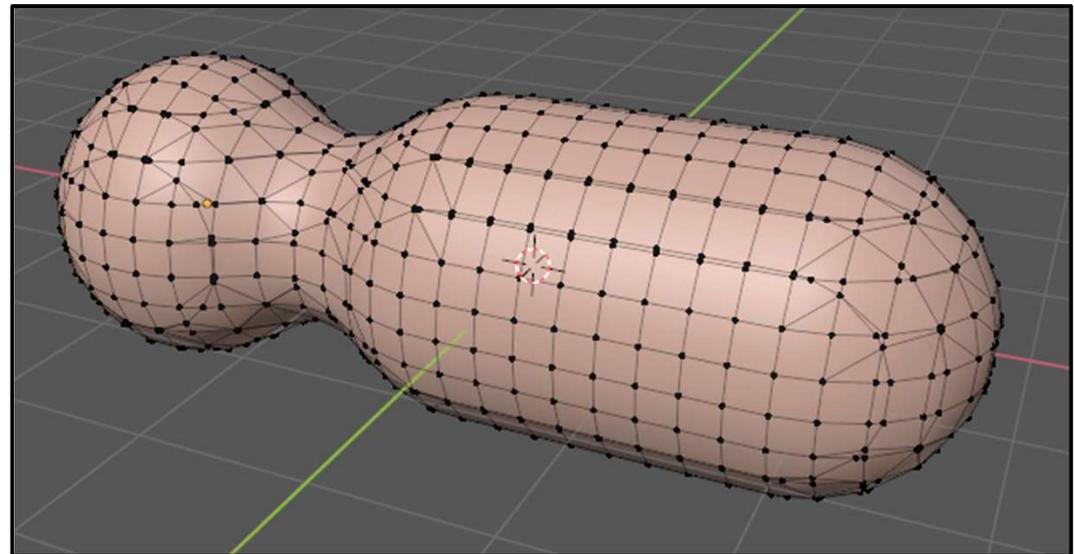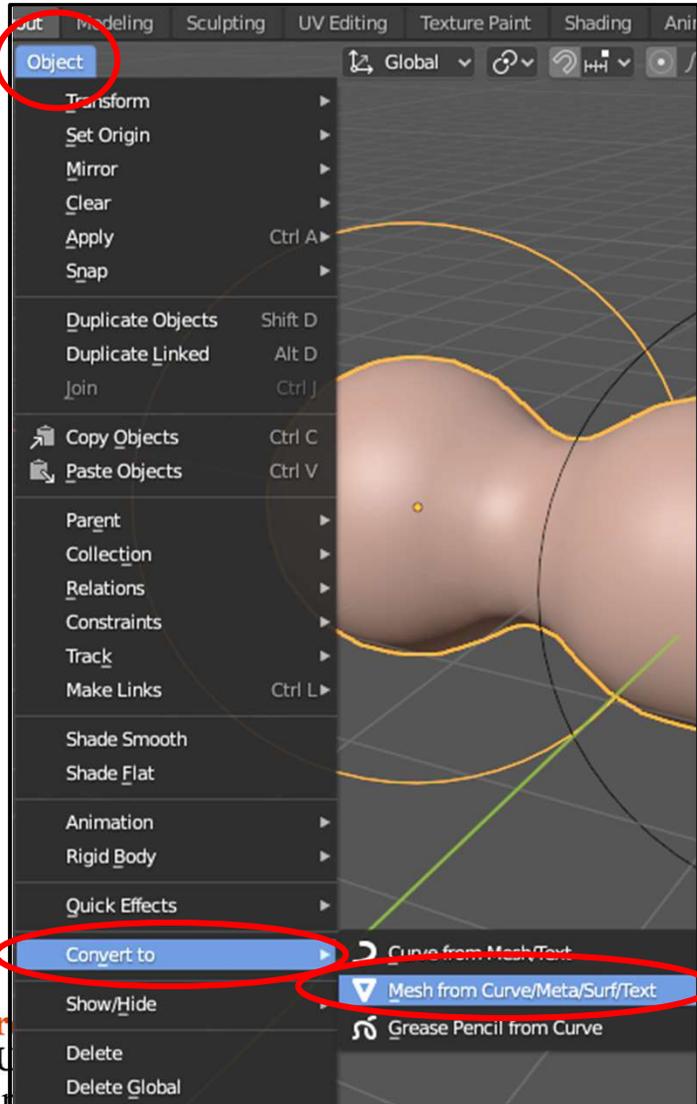

After tabbing into Edit Mode

Or
U
Comp

Parent-Child Relationships in Modeling

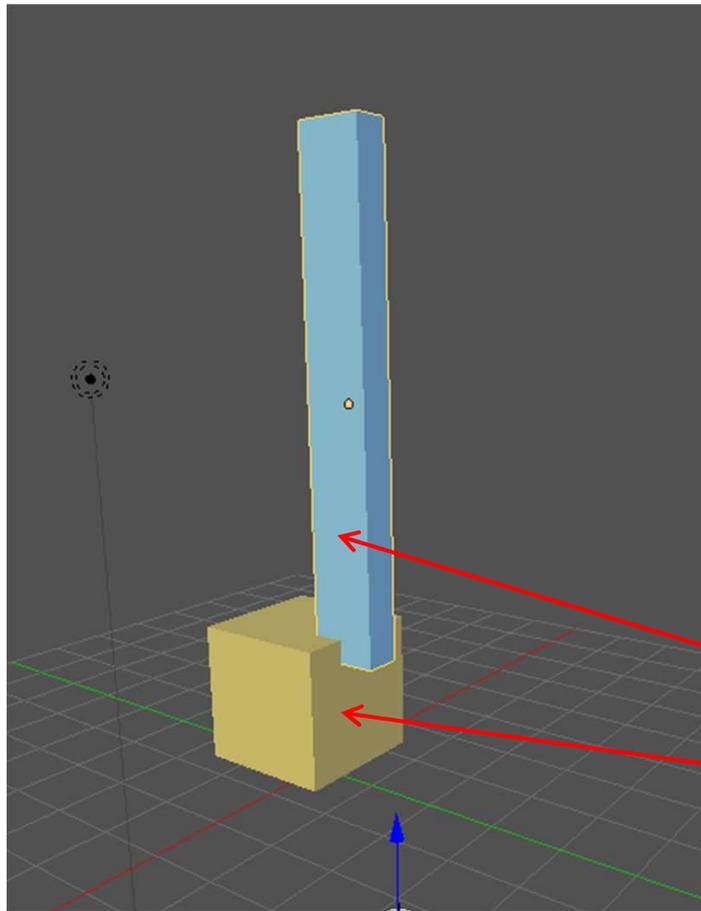

Many times, one object is connected to another object. In modeling, this is called a **Parent-Child relationship**. (It is also sometimes called a Hierarchical Relationship.)

When the Parent moves, the Child moves with them.

When the Child moves, the Parent is unaffected.

This is *really* useful !

Child

Parent


To do this in Blender:

1. Move the Child's pivot-point to where you want it connected to the Parent
2. Select the Child piece
3. Shift-select the Parent piece
4. Hit **Control-'p'** on the keyboard

You can create as many levels of Parent-Child relationships as you want: As the song goes:

“The foot bone's connected to the ankle bone, the ankle bone's connected to the leg bone, the leg bone's connected to the thigh bone, ...”


Parent-Child Relationships in Modeling

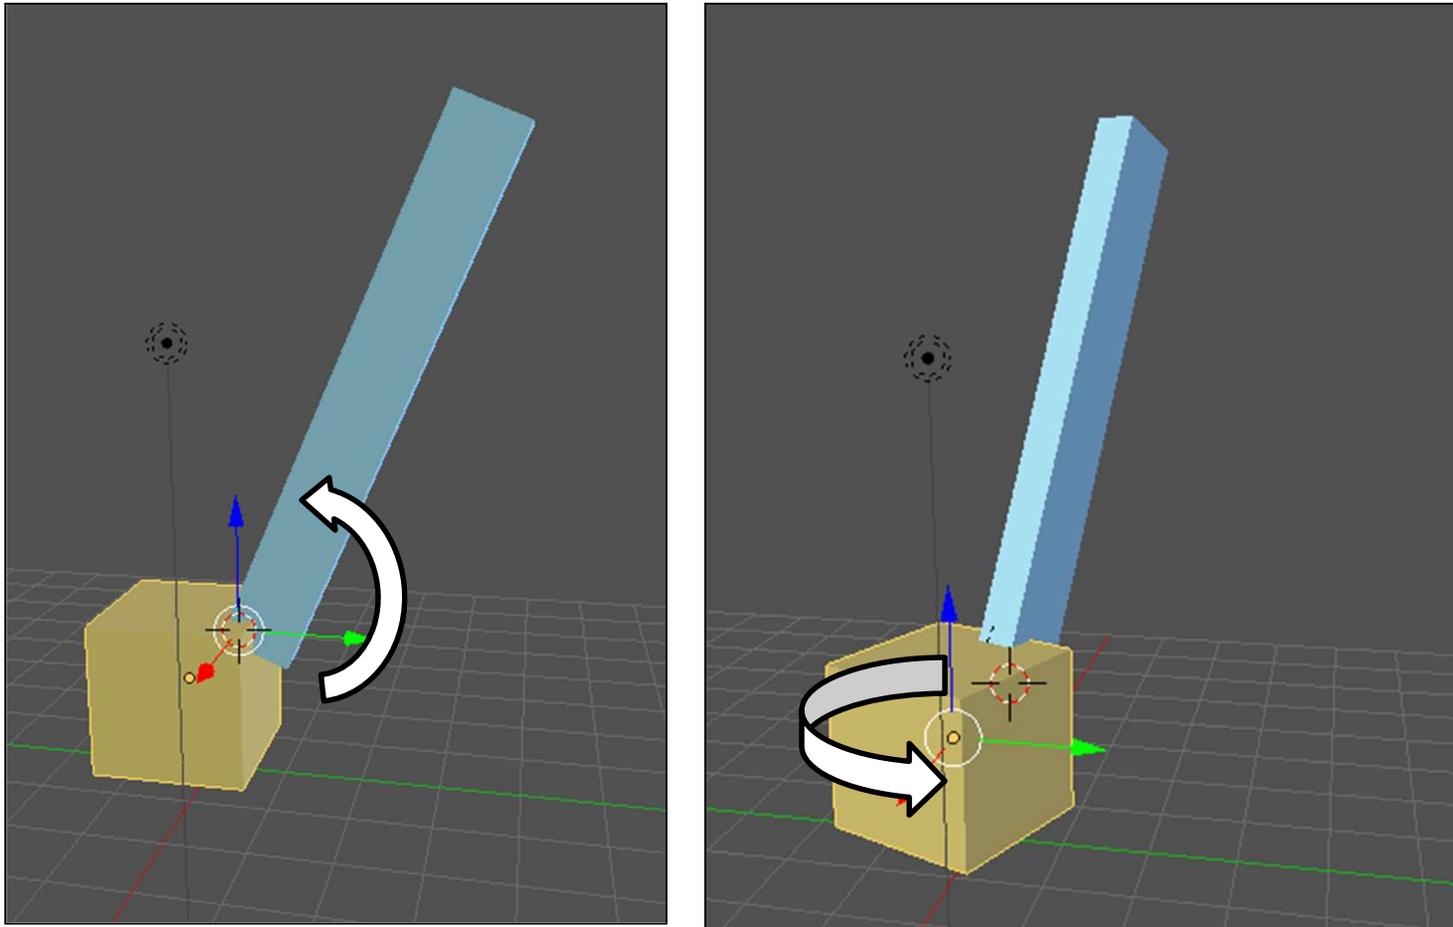

If you rotate the blue (child) piece, then just it will move

If you rotate the yellow (parent) piece, then both it and the child piece will move

Importing Objects from Other Places

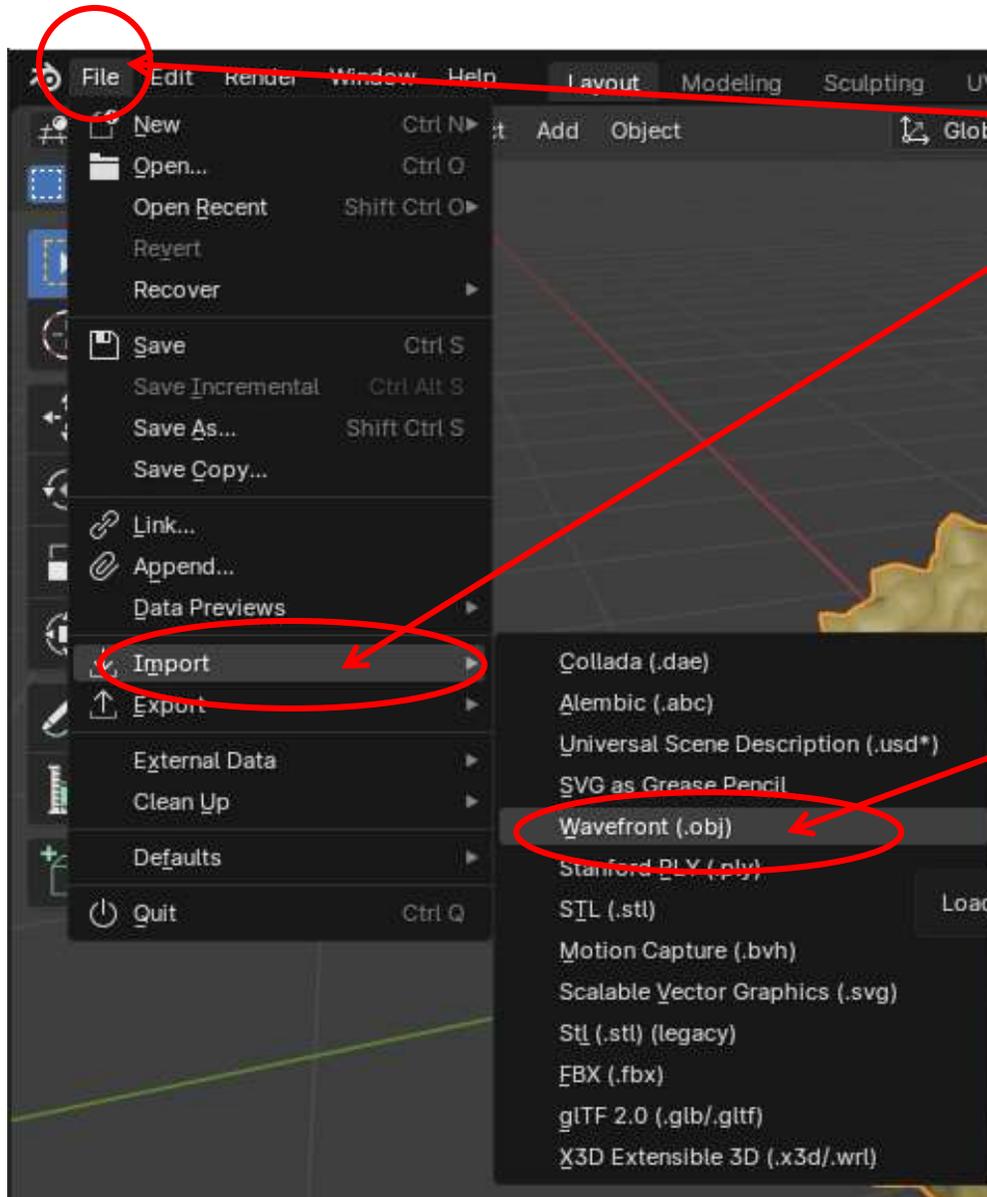

Select **File** → **Import**

Collada = export format from game modeling systems

Stl = 3D printer format


3ds = format from Autodesk 3D Studio

Obj = Probably world's most common export format There are a *ton* of .obj models for free on the Internet! Google the phrase:

free obj files

.obj files are also pretty straightforward to create. So, if you have a shape in mind and can write a computer program to generate it, you can write your own .obj file and Import it into Blender.

Importing Objects from Other Places

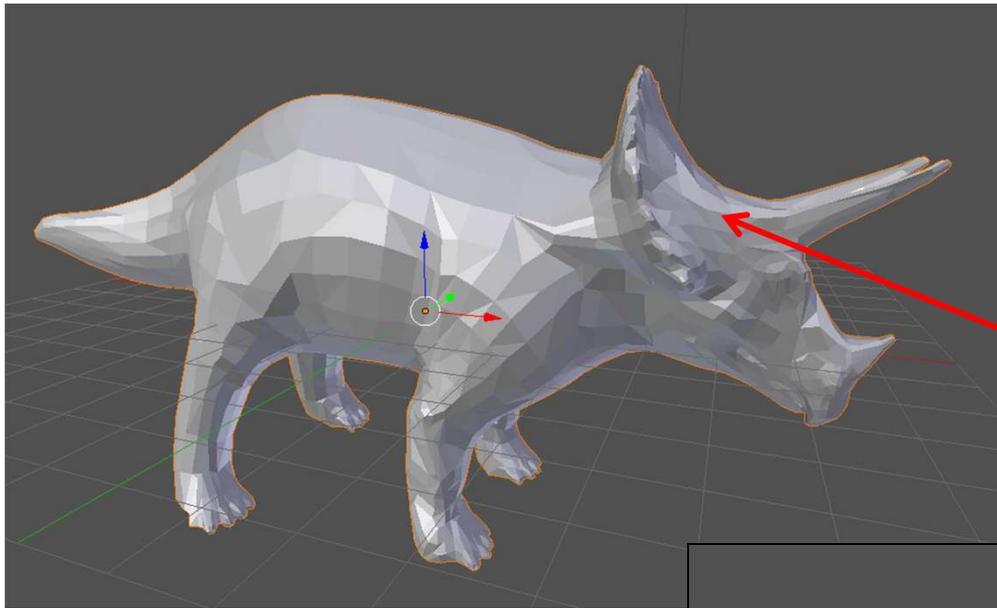


File = **dino.obj**

You can get this file from the web page:
<http://cs.oregonstate.edu/~mjb/blender>


As-is, flat shaded

Subdivision surfaced
+
Smooth shaded

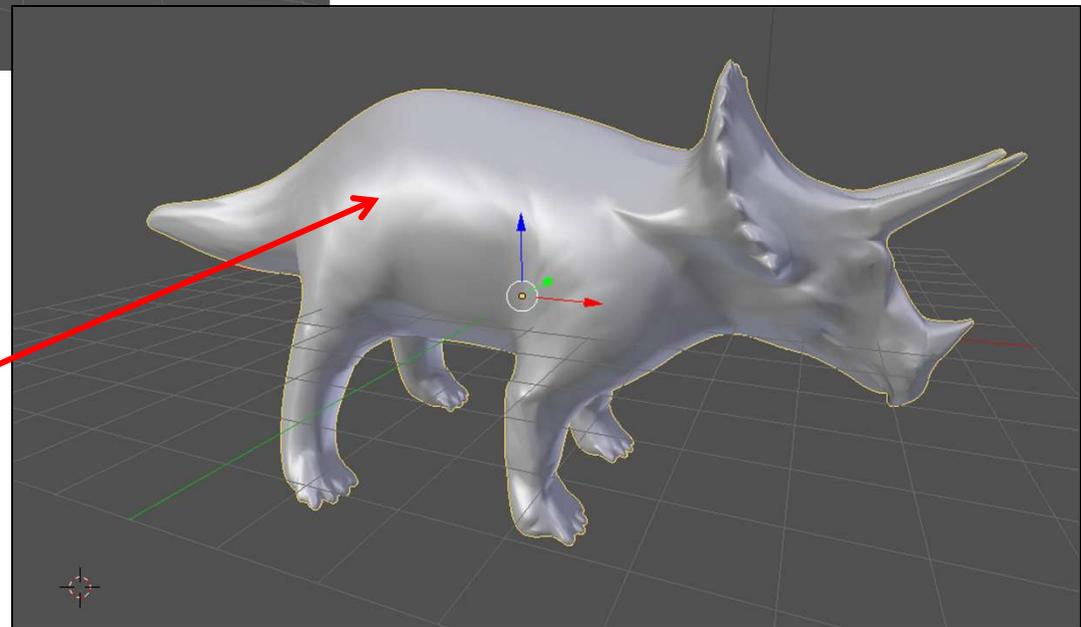

Importing Objects from Other Places

Abusively edited

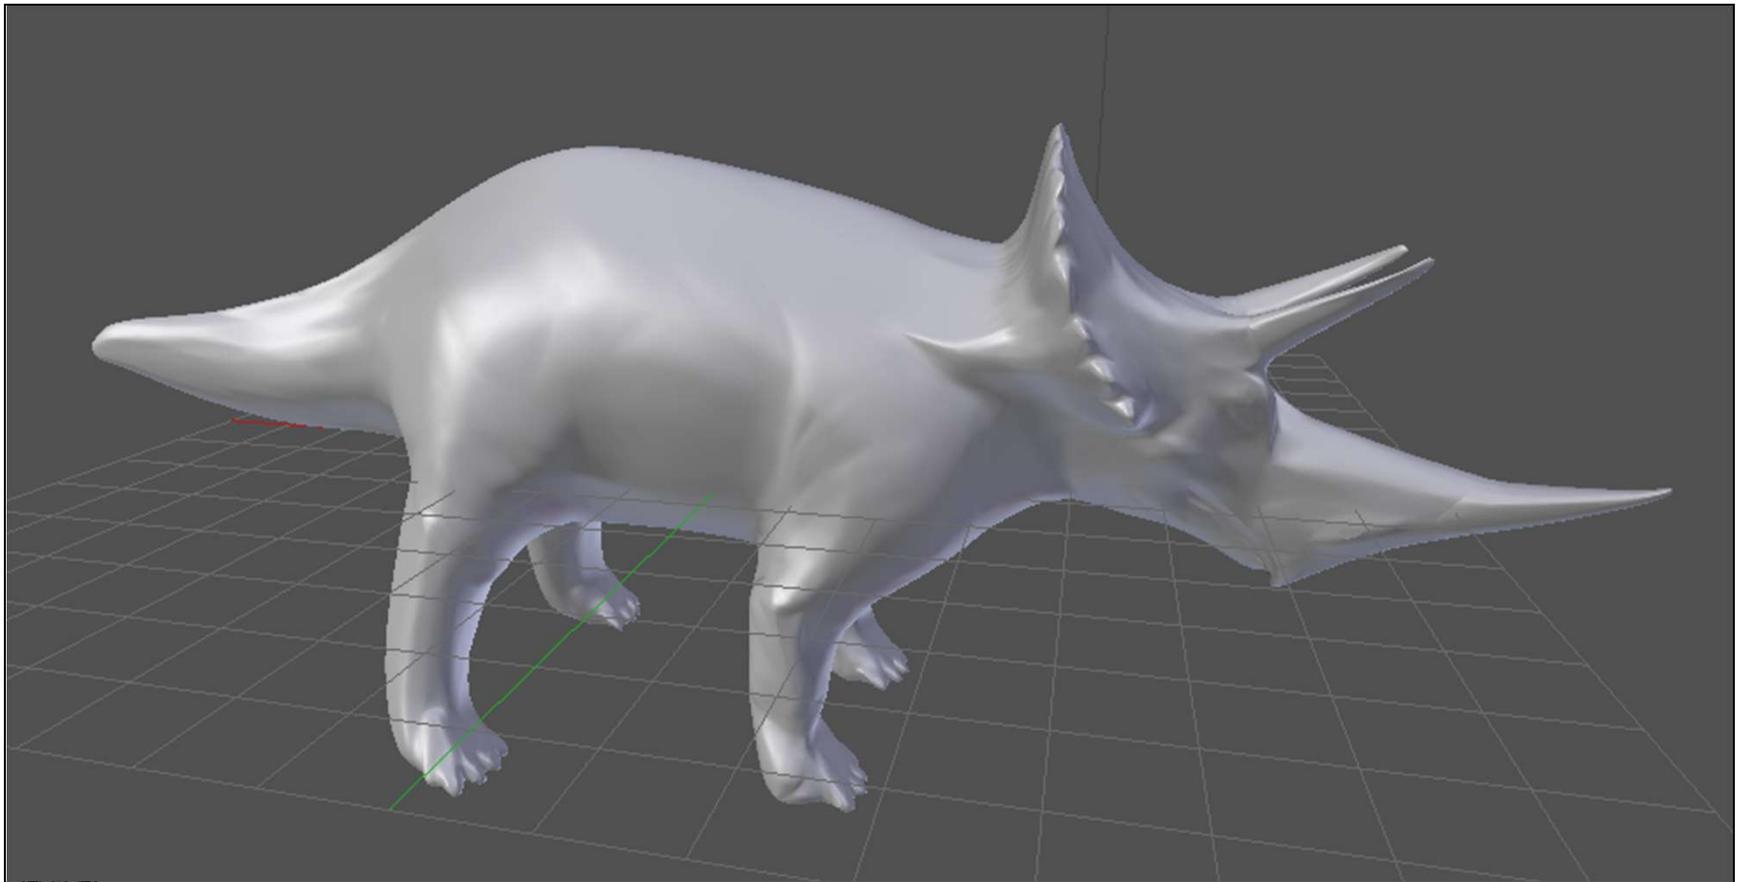

Importing Objects from Other Places

Here are some places to find OBJ files to use yourself:

- https://www.blenderkit.com/asset-gallery?query=category_subtree:model%20order:-created
- <https://polyhaven.com/>
- <http://thefree3dmodels.com>
- <https://free3d.com/3d-models/star-wars>
- <http://lodbook.com/models>
- <http://people.sc.fsu.edu/~jburkardt/data/data.html>
- <https://sketchfab.com/features/free-3d-models>
- <http://www.turbosquid.com/Search/3D-Models/free/obj>


Links checked: July 12, 2024

Or Google the phrase: **"free obj files"**

The ***blenderkit*** link also provides a Blender plugin. If you install it into Blender, then you can search for OBJ files without ever leaving Blender.



Exporting Objects to Other Places

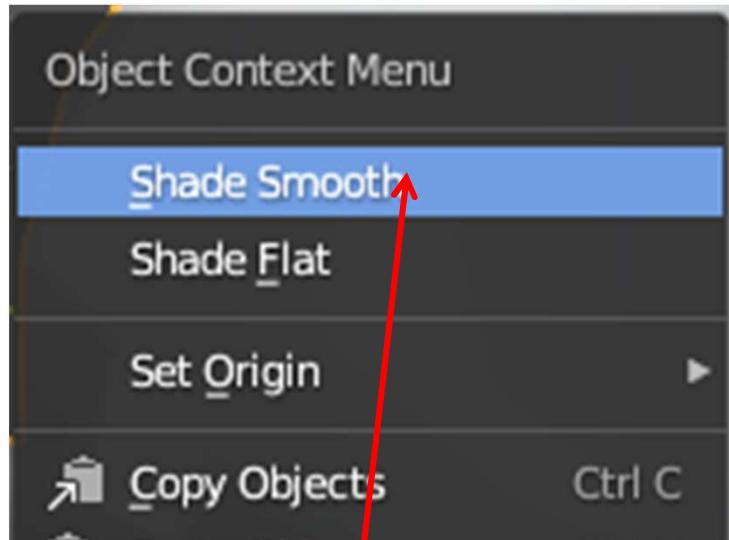


Blender has a number of file formats it knows how to export to. If you are looking for a nice, general one to experiment with, try the **.obj** format.

Just be sure to use the RMB menu to select **Shade Smooth** first

Select **File** → **Export** → **Wavefront (.obj)**




Exporting to an OBJ File

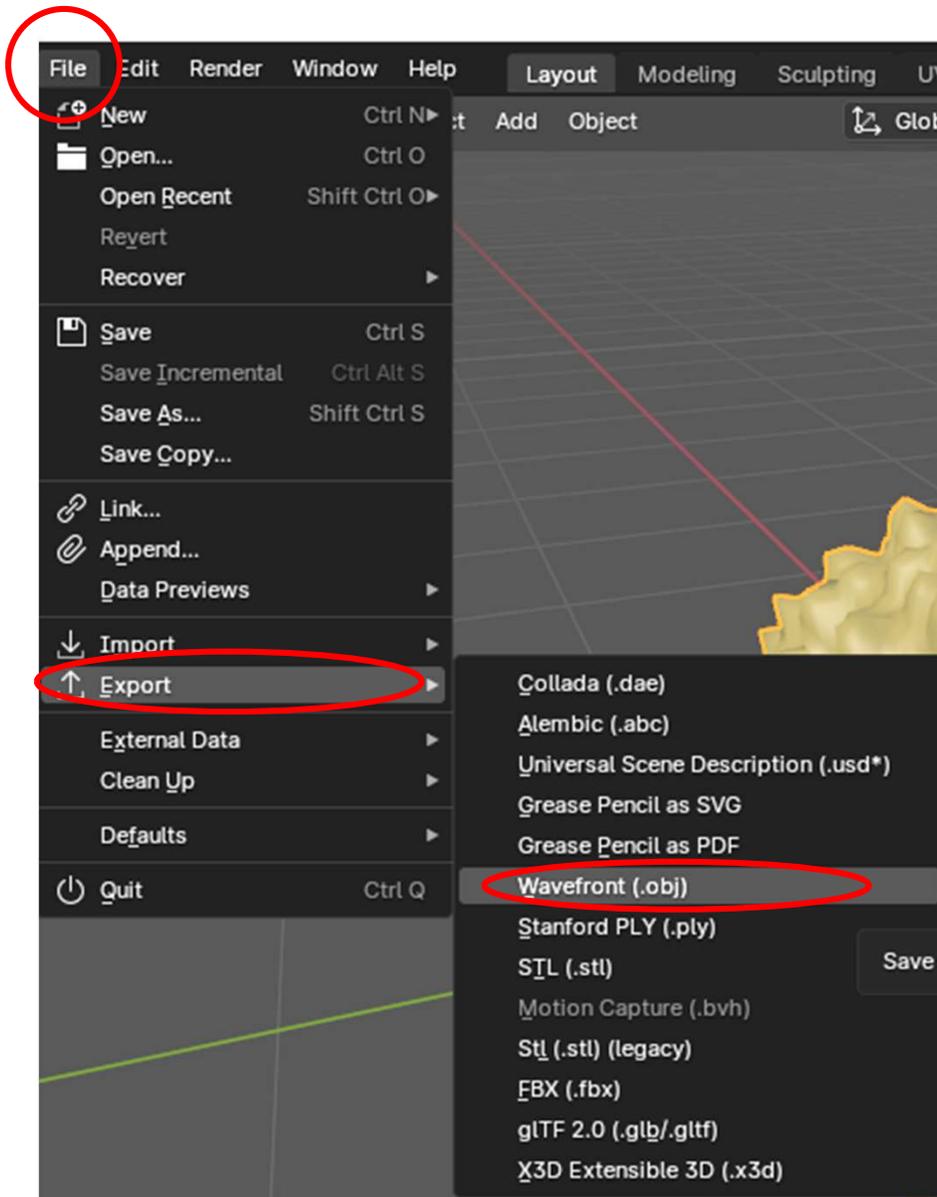

Exporting to an OBJ File

This is the Blender file-output selection dialog box:

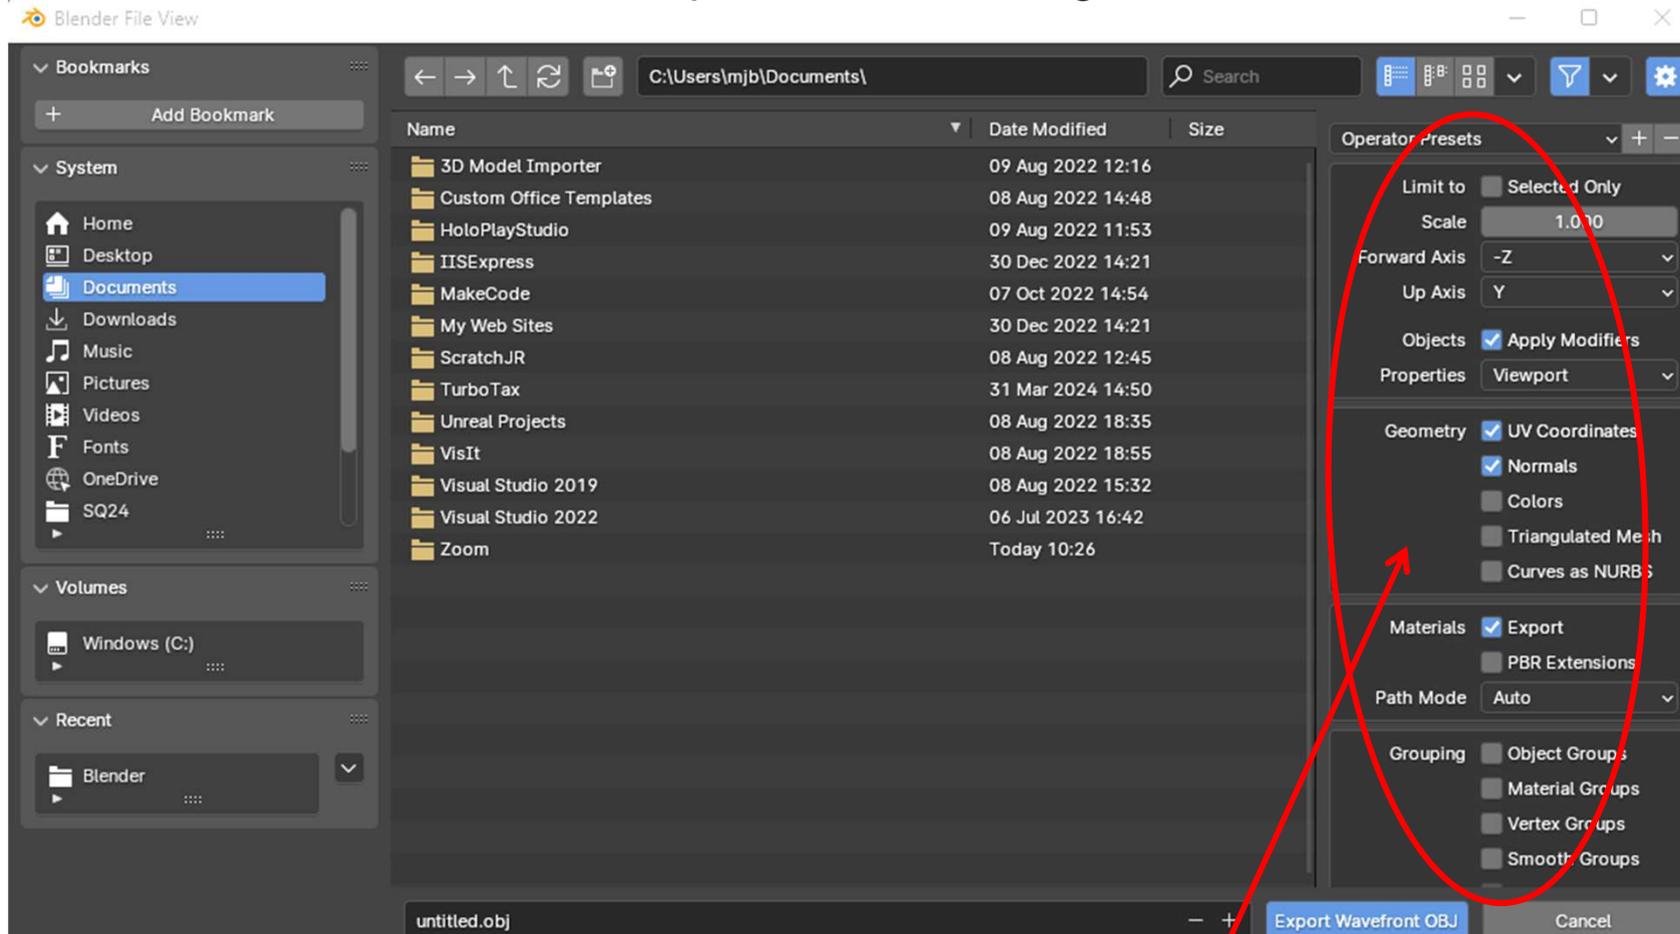


OBJ-specific settings
(see next slide)


OBJ-Specific File Settings

In the export dialog, be sure to click on



- **Write UV Coordinates**
- **Write Normals**
- **Write Triangulated Mesh**

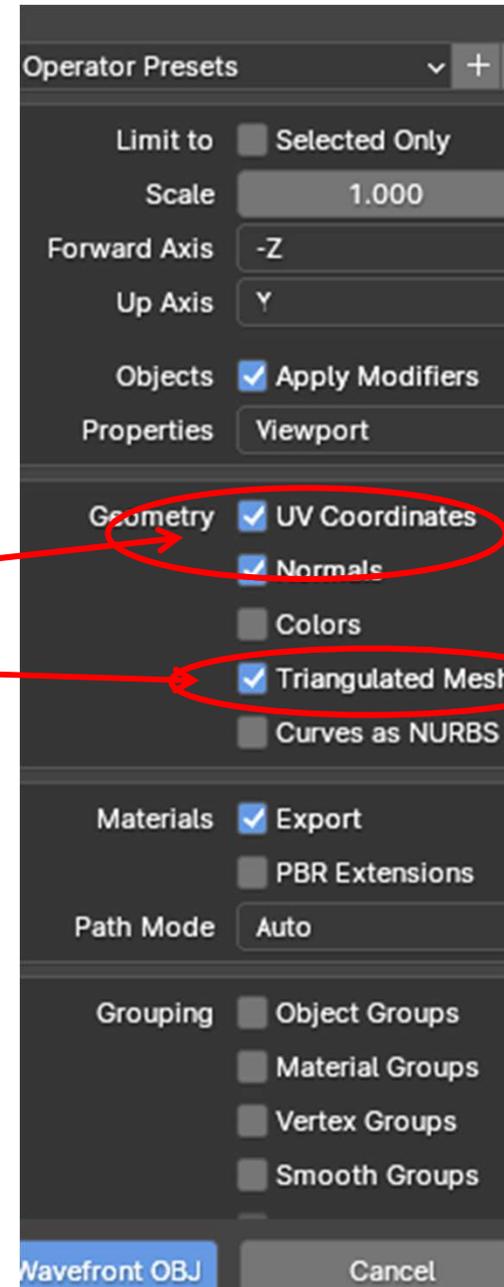


7. Rendering

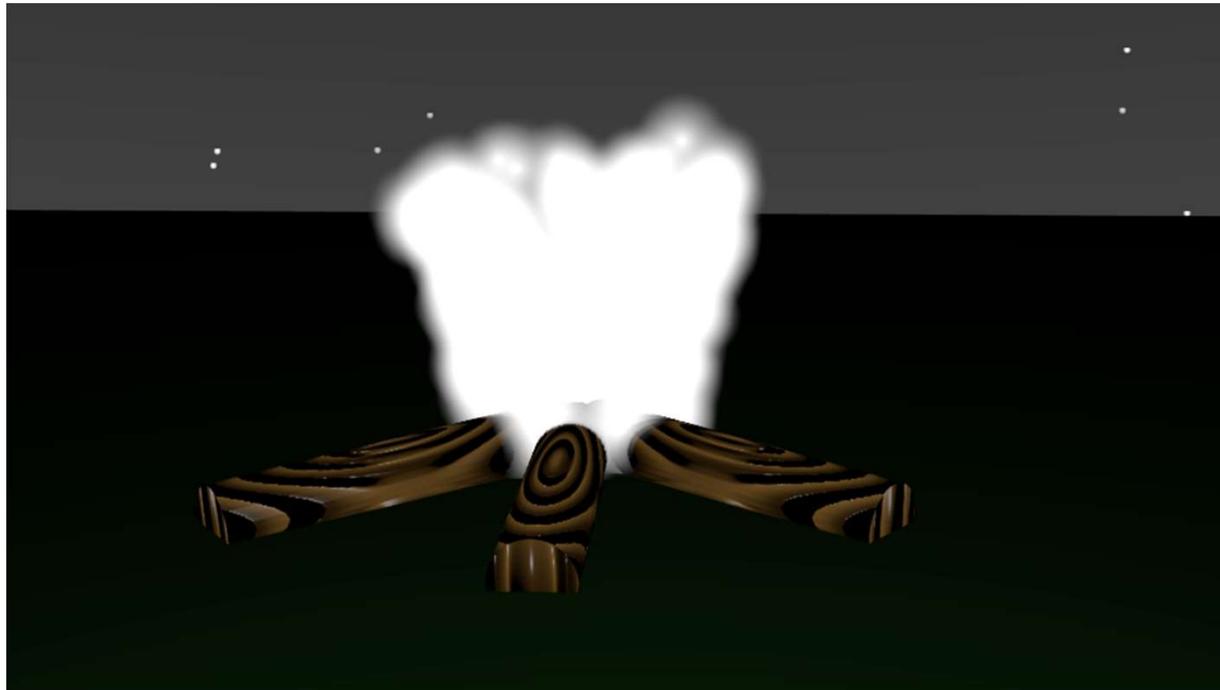

On-screen Rendering Mode

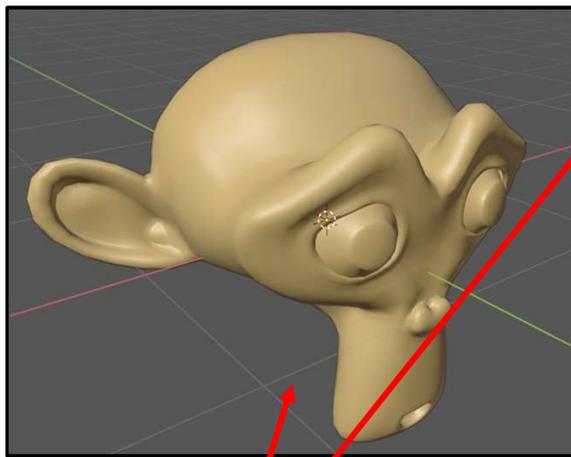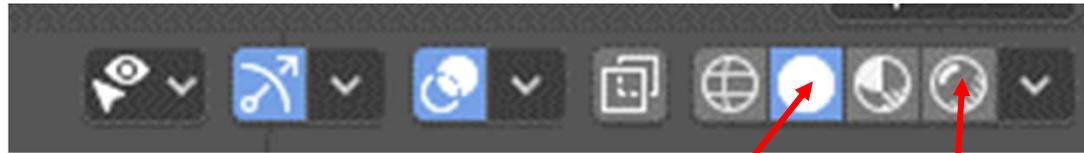


We have been using this one. This one gave you good generic lighting so you could model without worrying about light sources.

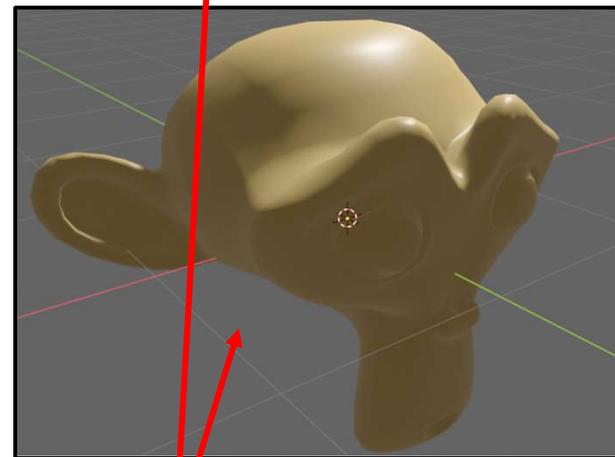




Now switch to this one. This one will give you a pretty-good preview of what happens when you actually render the scene. But, we now have to deal with Rendering specifics.

Rendering

“Rendering” is Blender’s process for creating *really* high-quality images. Click on **Render** → **Render Image** or hit the **F12** key (you might have to hit the **fn** key at the same time). The rendering operation can often take some time, depending on how complex your scene is.

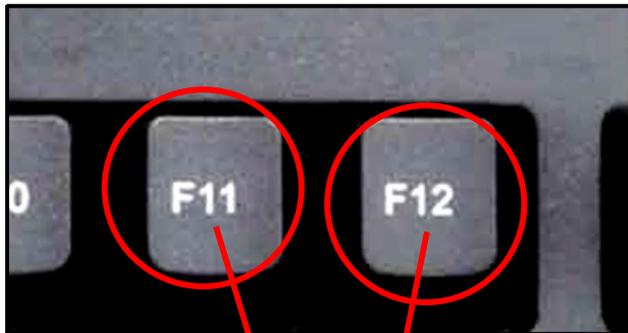

scene.blend

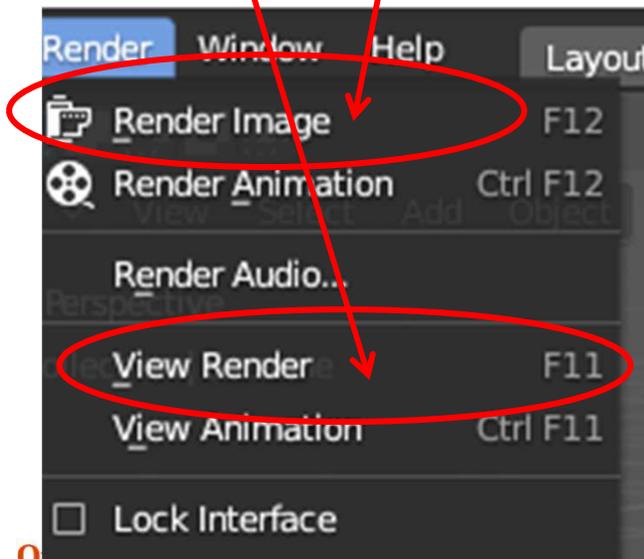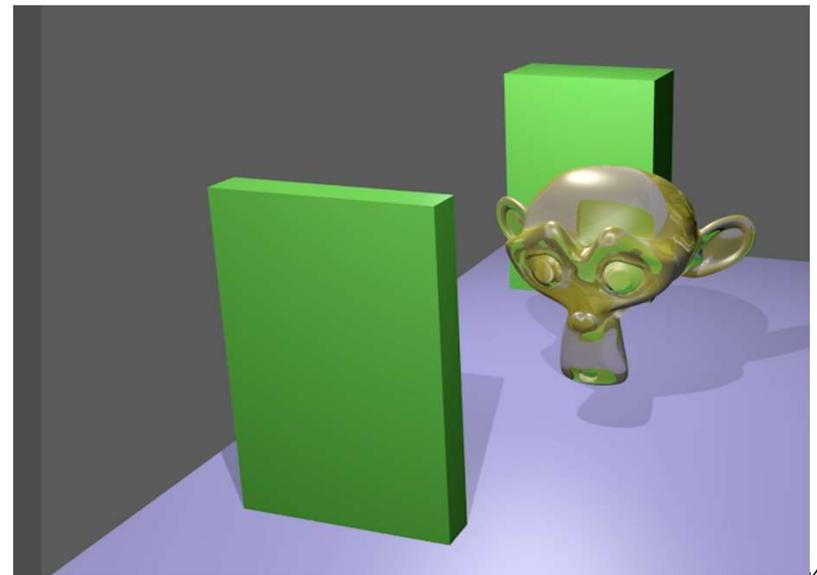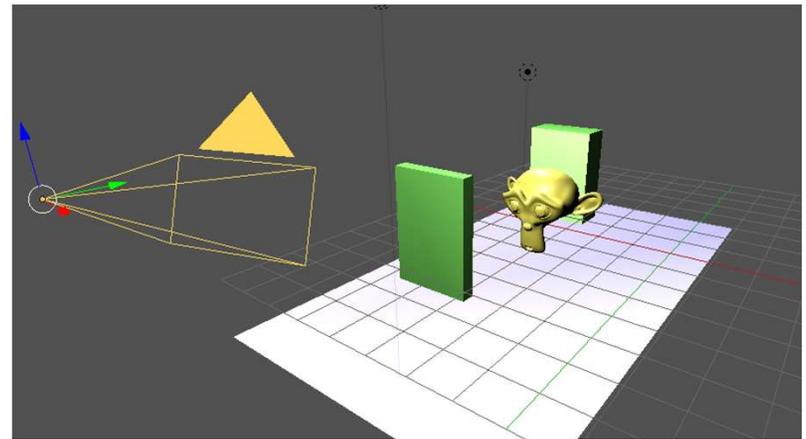


Rendering Properties

Clicking on the **Rendering Properties** button will allow you to set various rendering parameters. The one you care about the most is Sampling resolution.



You want at least some **Anti-Aliasing**, which is done by making more than one sample per pixel. 64 and 16 are good values.

The rest of these are interesting, but not needed right now.

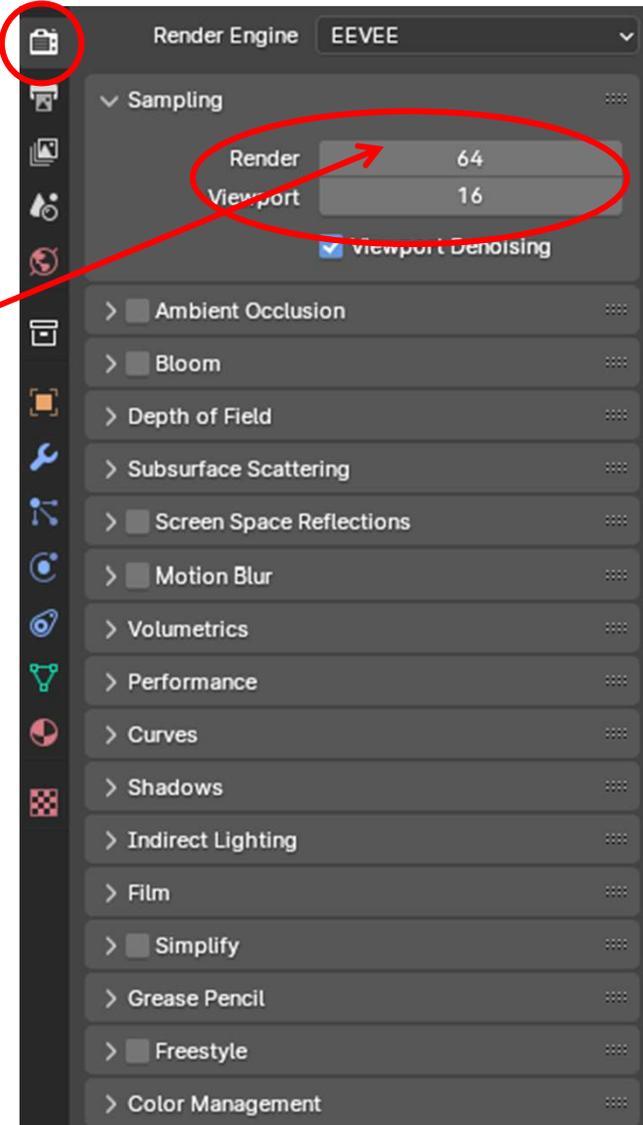

Output Properties


Clicking on the **Output Properties** button will allow you to set various rendering parameters. The one you care about the most is pixel resolution.



These are OK values, but you can improve your rendering speed by making them smaller. Don't make them smaller by changing the 1920x1080, make them smaller by changing the **100%**.


Notice that the image aspect ratio being used here is 16:9 (=1920:1080). This is the most common aspect ratio today for TVs and computer monitors.

The rest of these are interesting, but not needed right now.

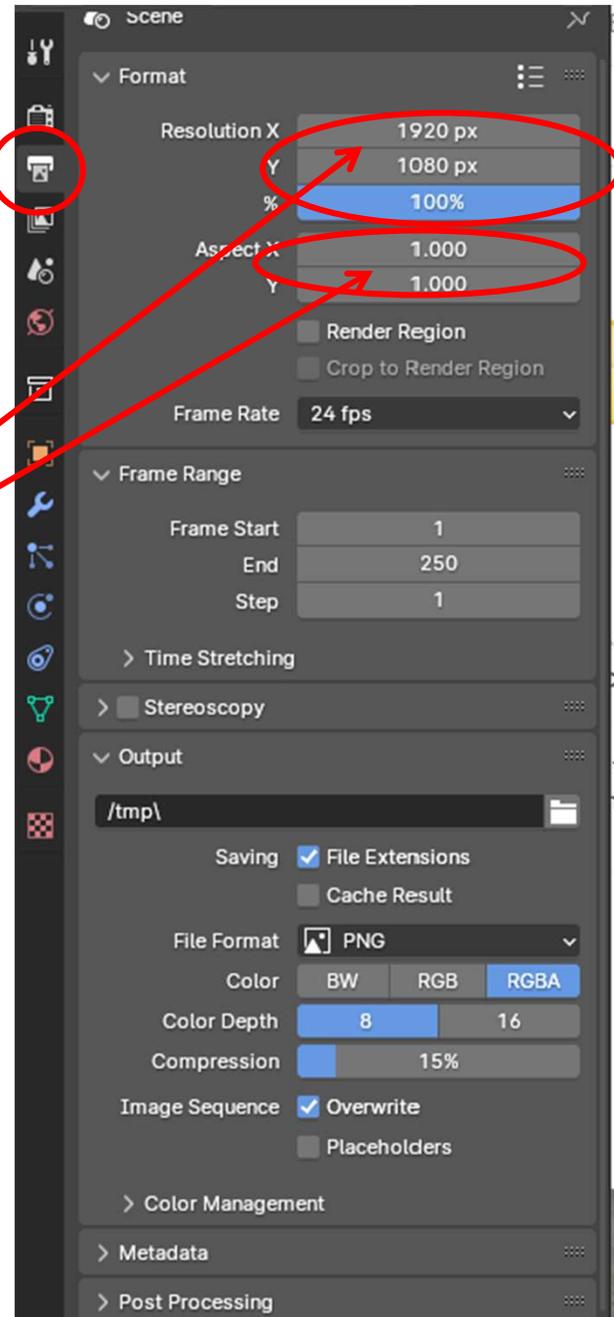


What is Anti-aliasing?

Not Anti-aliased

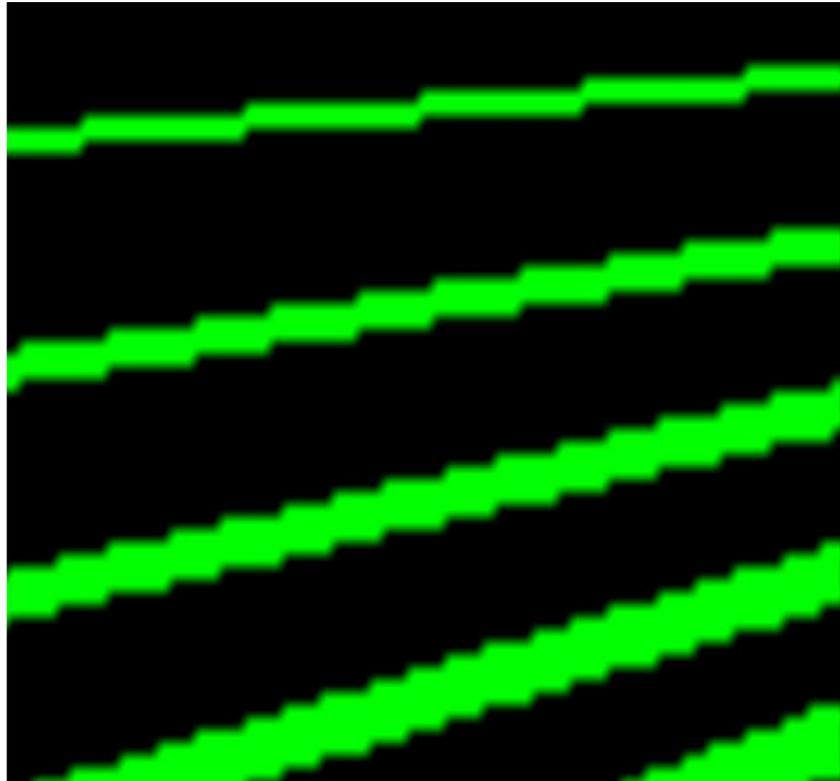


Anti-aliased

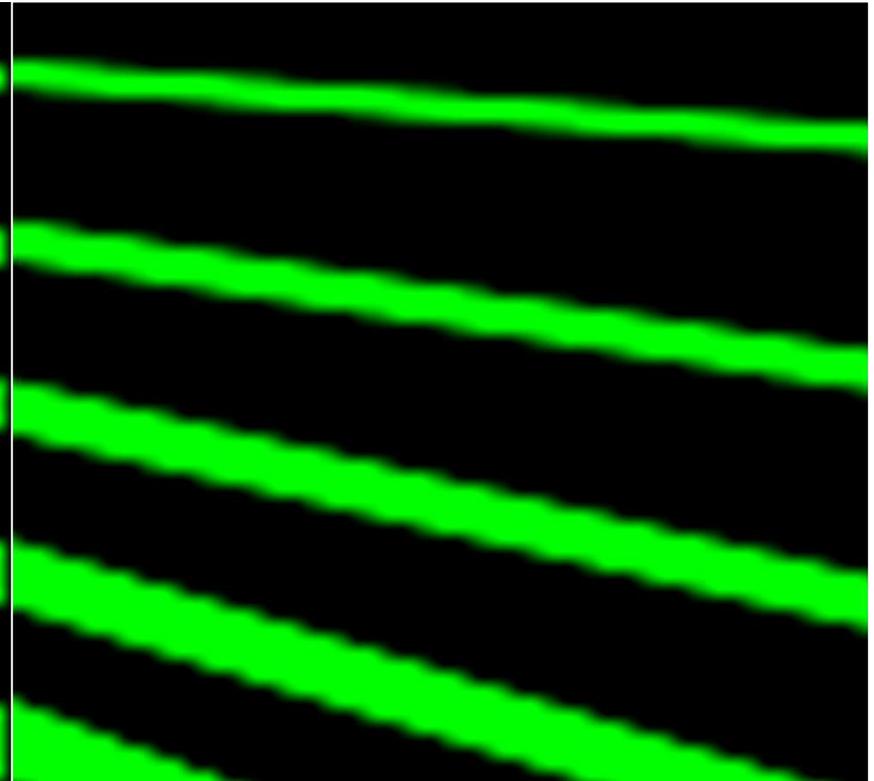


Anti-aliasing is a good-news bad-news joke.
Good news: the scene looks much smoother
Bad news: the scene takes longer to generate
Good news: you probably want to do it anyway

Anti-aliasing is Implemented by Oversampling within Each Pixel

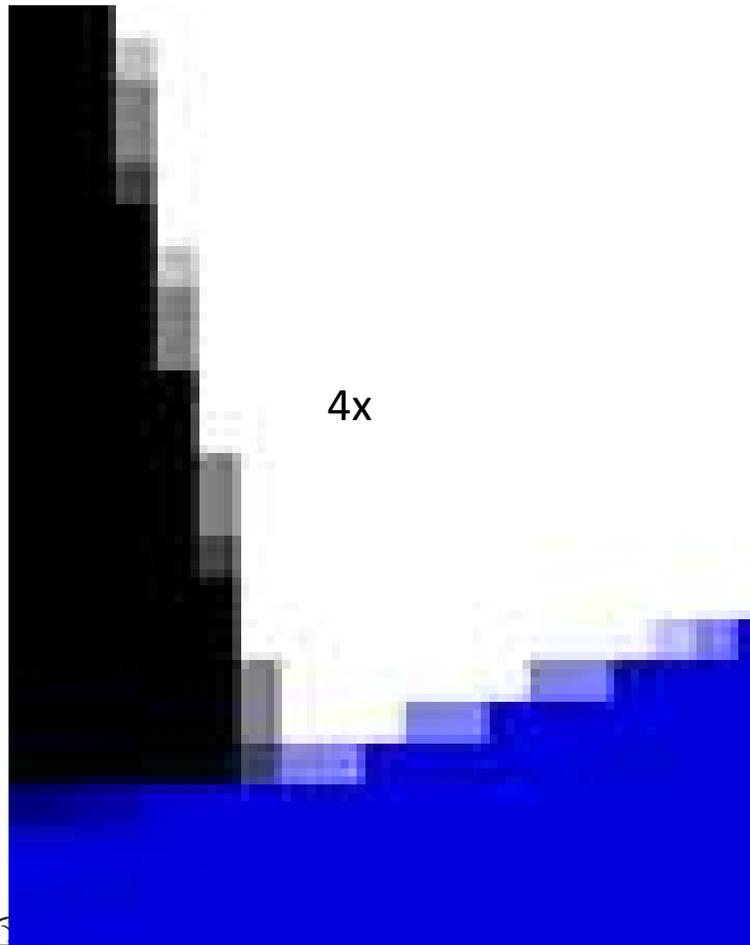

4x

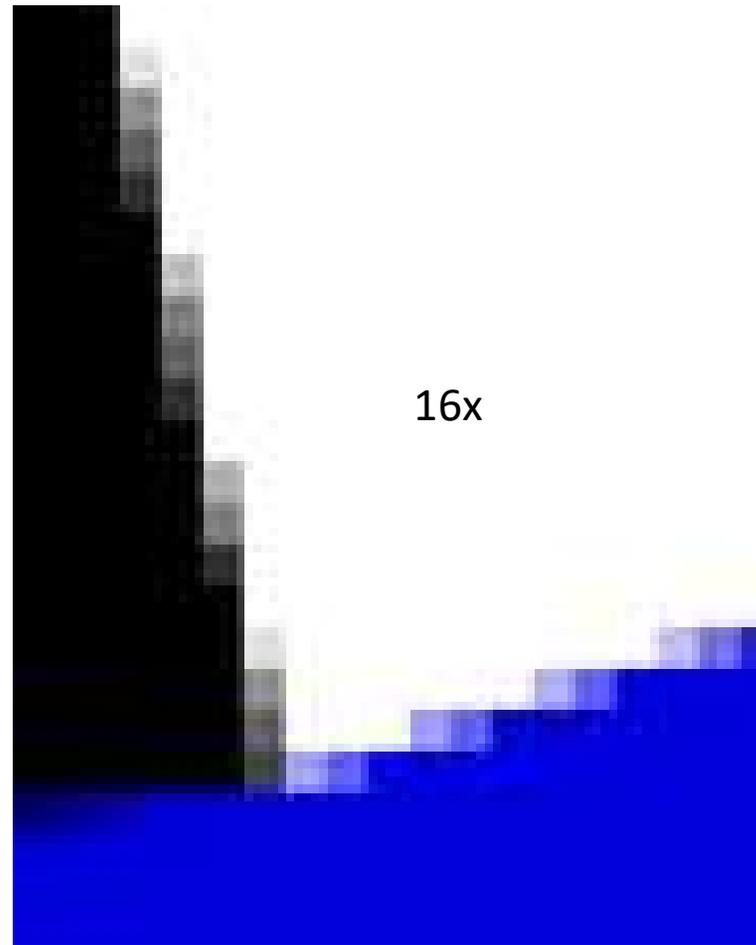


16x


NVIDIA



Lighting

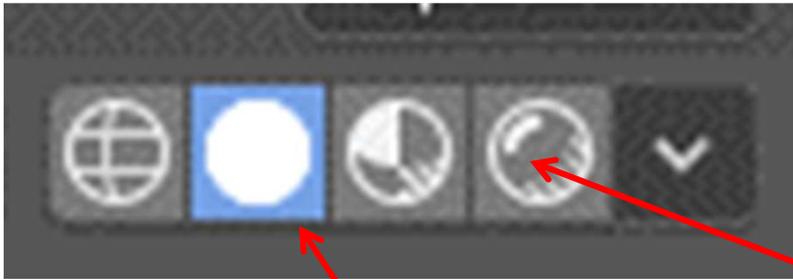


Let's say that you are in **Solid Shading Mode** and your scene situation looks like this

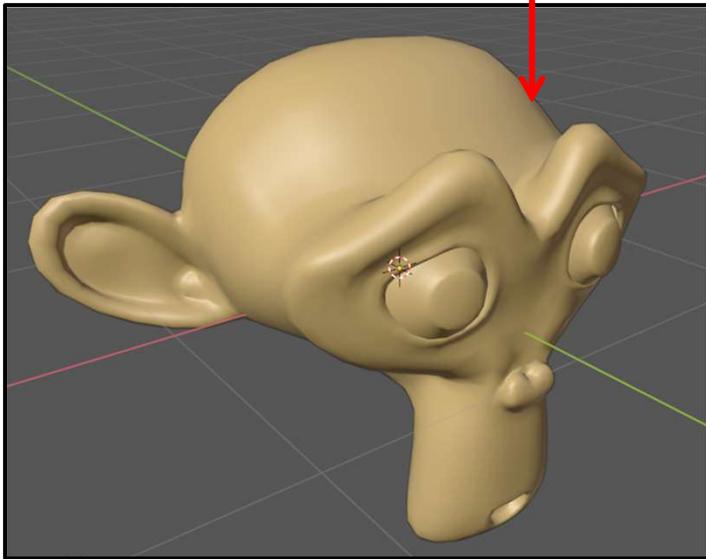


Oregon State
University
Computer Graphics

You now change to **Render Mode** and get this:

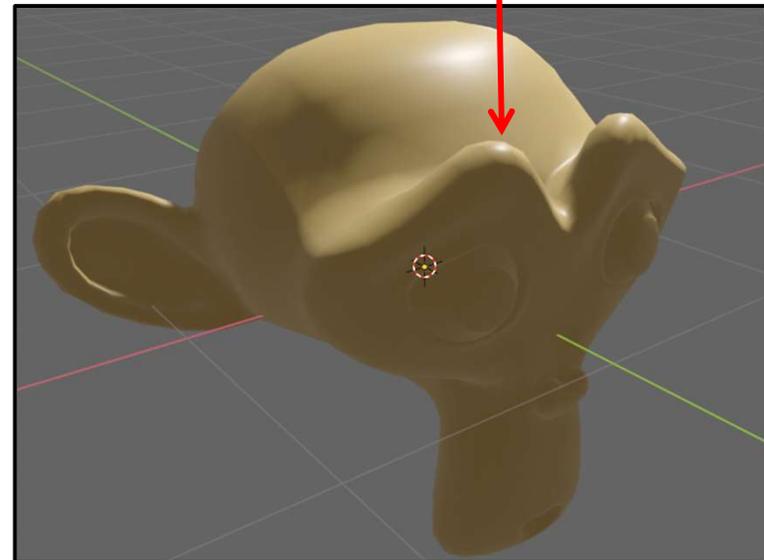


Blech! Why is the bottom part of my scene so dark?


Lighting

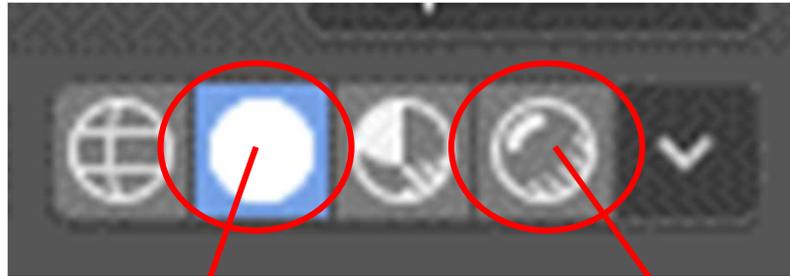

The answer is that **Solid Shading Mode** doesn't require your scene to be lit but **Render Mode** does.

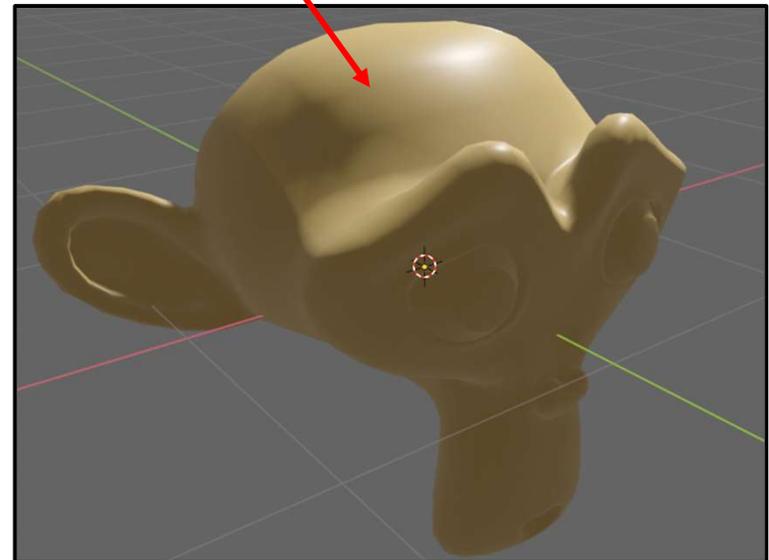

Lighting

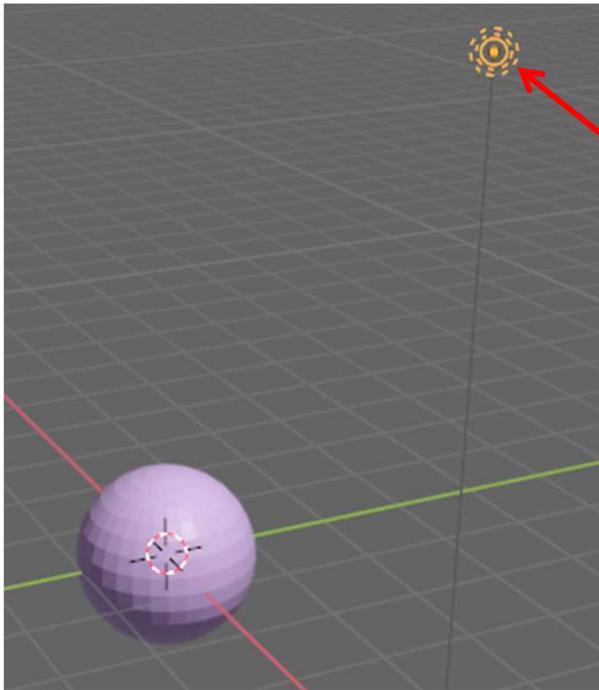


By default, your scene has a single light in it. It looks like this.


If you can't find it, try zooming out.

If you still can't find it, select it in the **Outliner**.

This is like any other object.

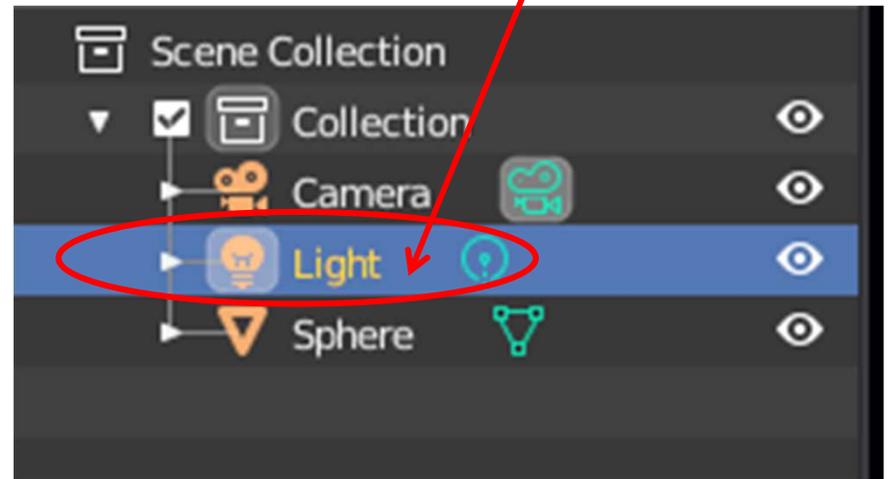


Lighting

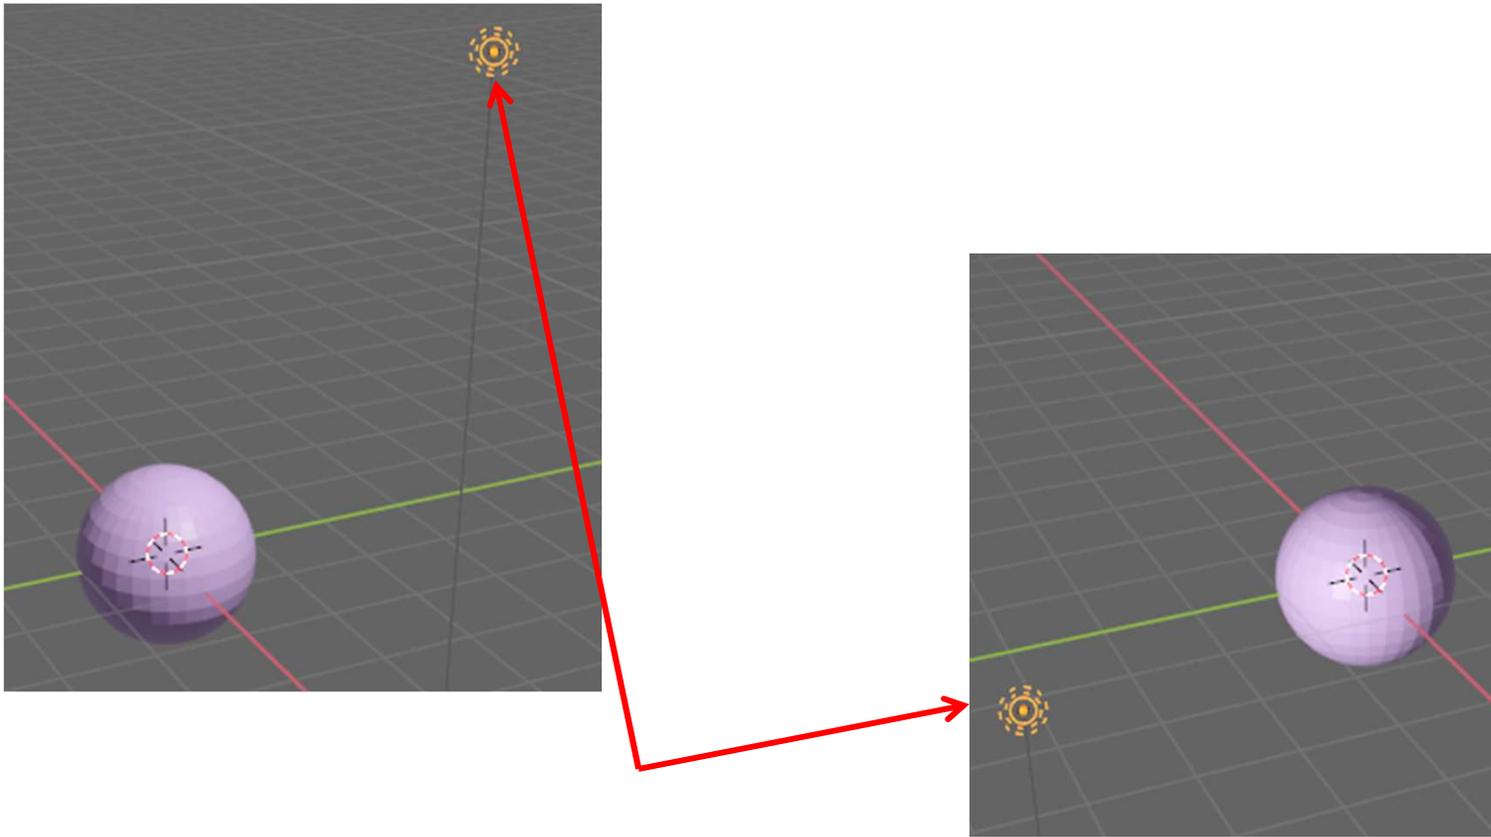


A light is like any other object. It can be LMB clicked on (or selected in the **Outliner**). It can be grabbed (**g**) and moved around. Moving it around will change how the lighting looks.

Lighting

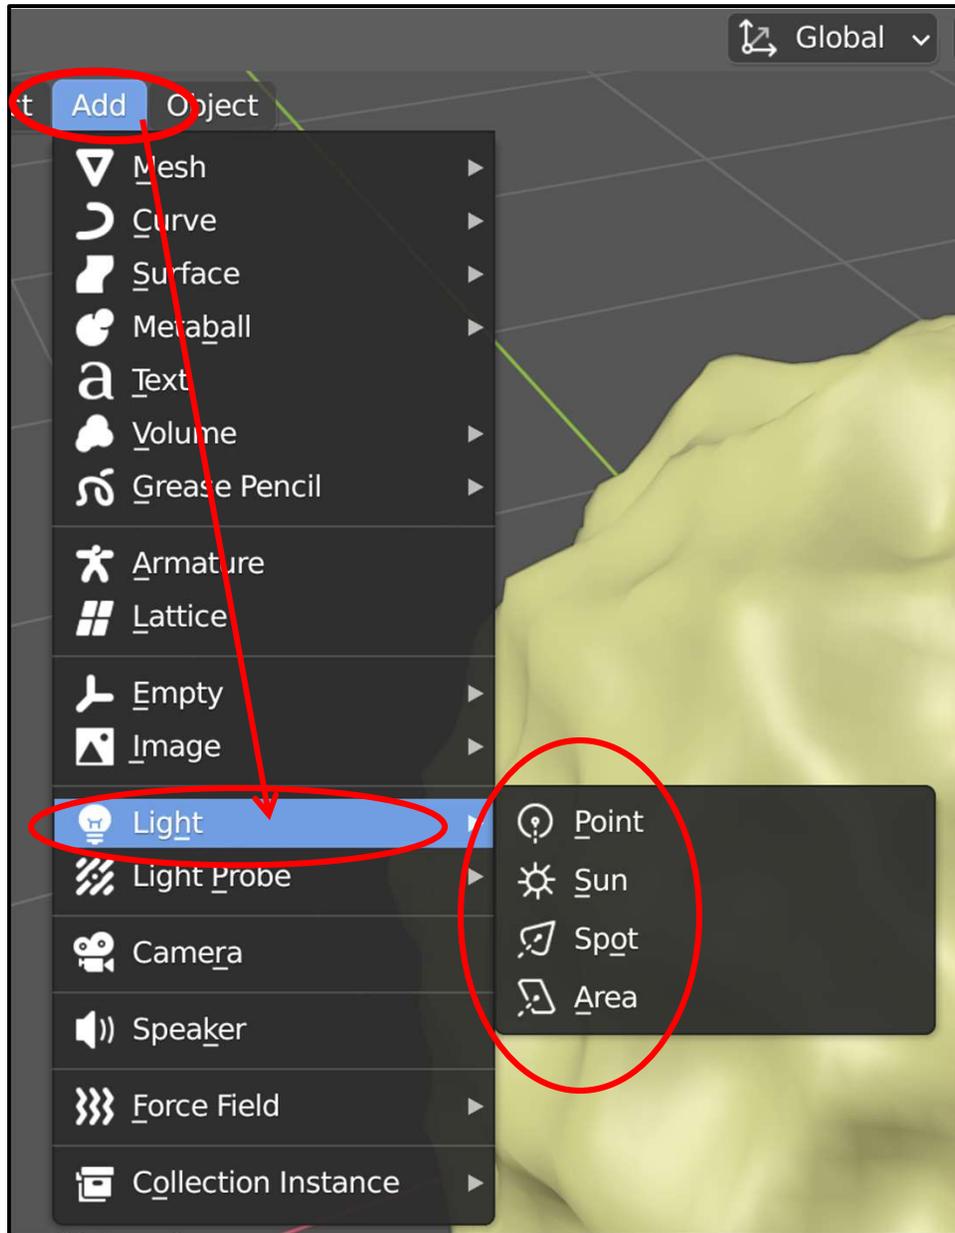

But, to make this work better, you probably want to add more lights.

Lighting


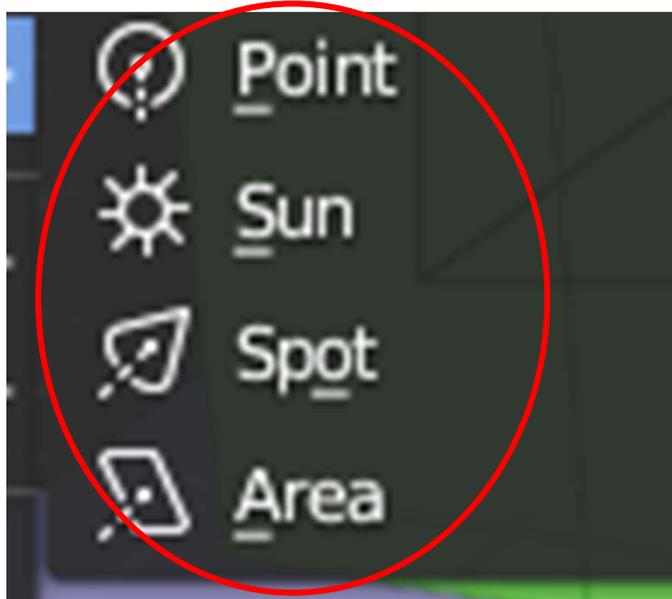


There are four types of **Lights** that you can **Add**



1. A **Point** Lamp shines light in all directions. The light is local to the scene. This is usually the best type of light to start out with.
2. A **Sun** Lamp appears to come from a single direction and its rays are parallel. This acts as if the light is very far away.
3. A **Spot** Lamp is like a Point Lamp, but only shines in one particular direction.
4. An **Area** Lamp is light coming from a finite surface, like most lights really are.

Lighting – try this


1. Add another Point Light
2. Position the Light ('g').
3. The Point Light has no obvious local coordinate system, so it just uses the global coordinate system.
4. As you move the Light, you will see the lighting of the scene change
5. You will probably have to rotate the scene (MMB) to get the light position where you think it should be. Or, you can also toggle the **Quad View** mode (Control-Alt-q).

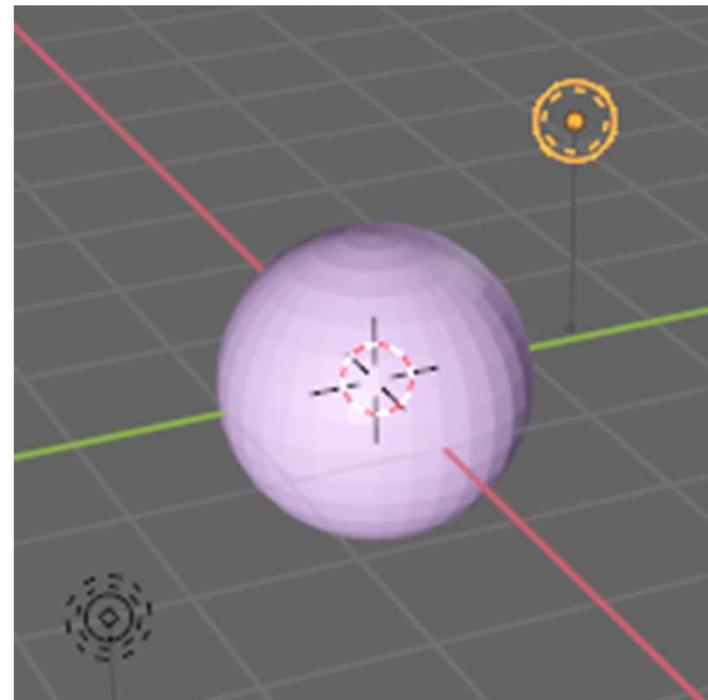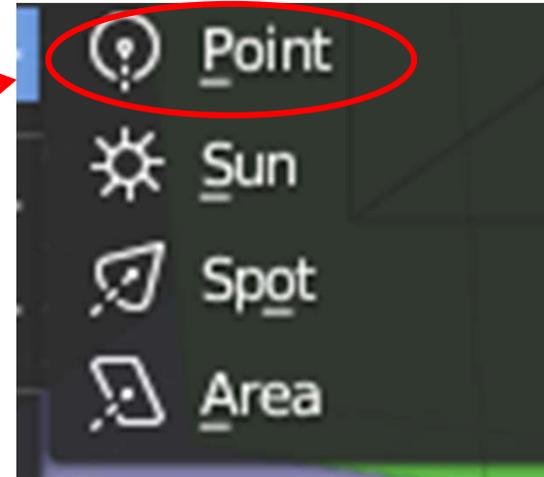


Lighting – Quad View

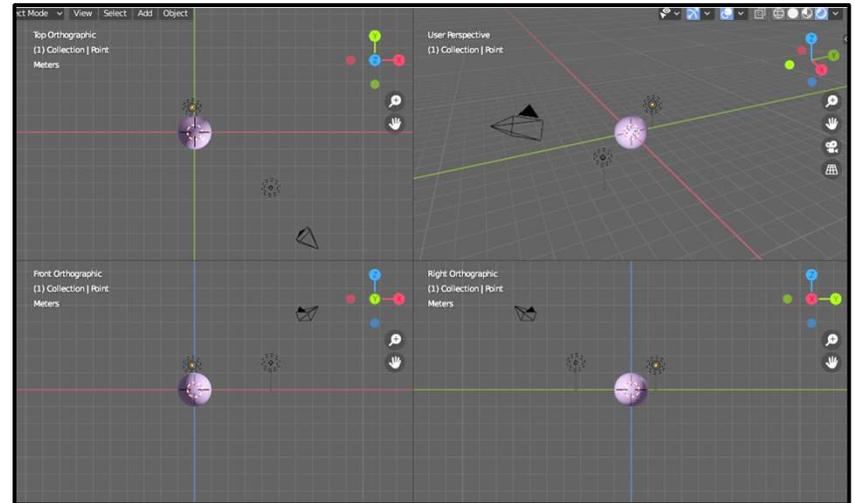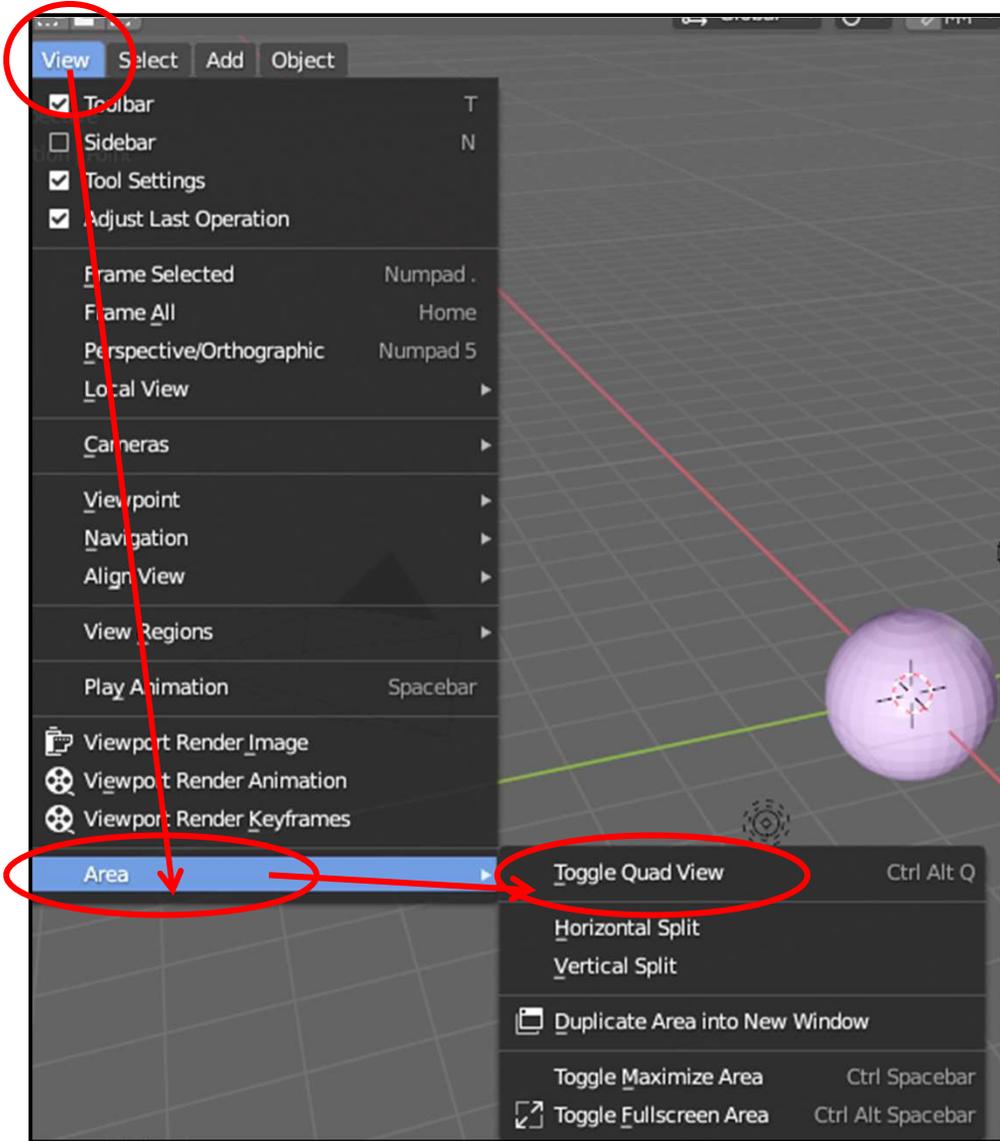

Lighting – Quad View

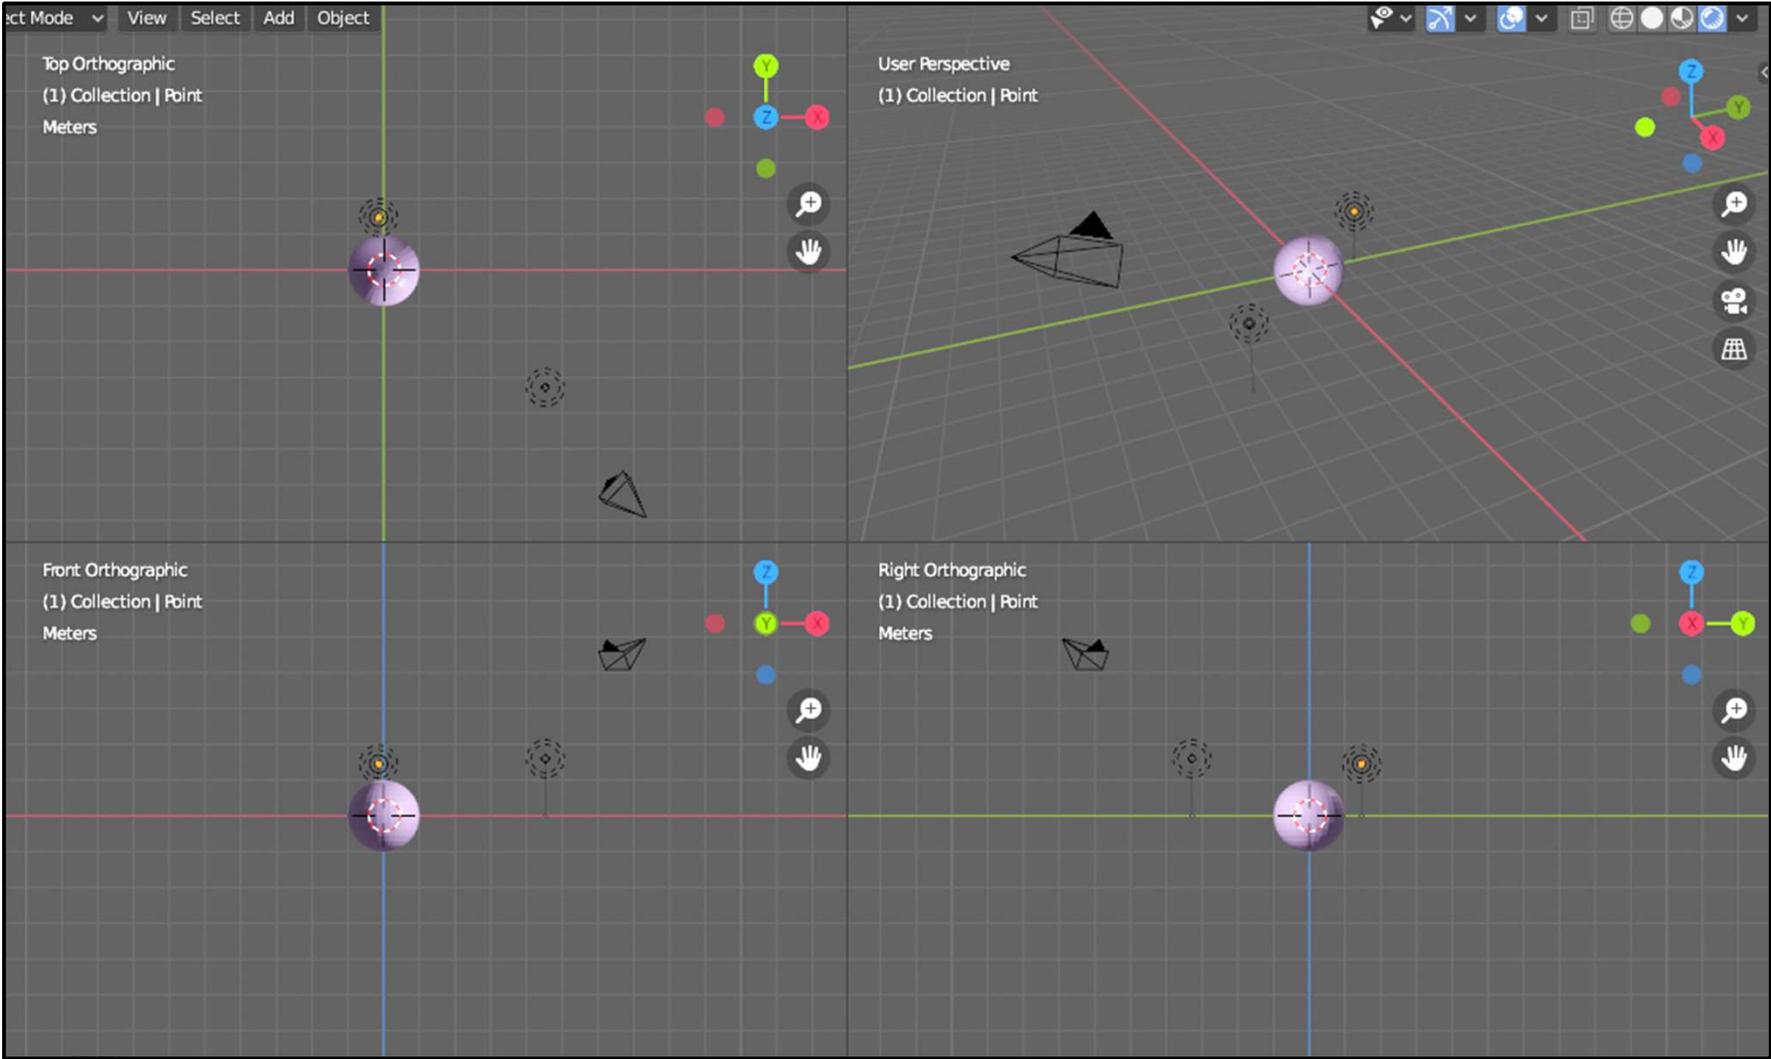

Lighting – Properties

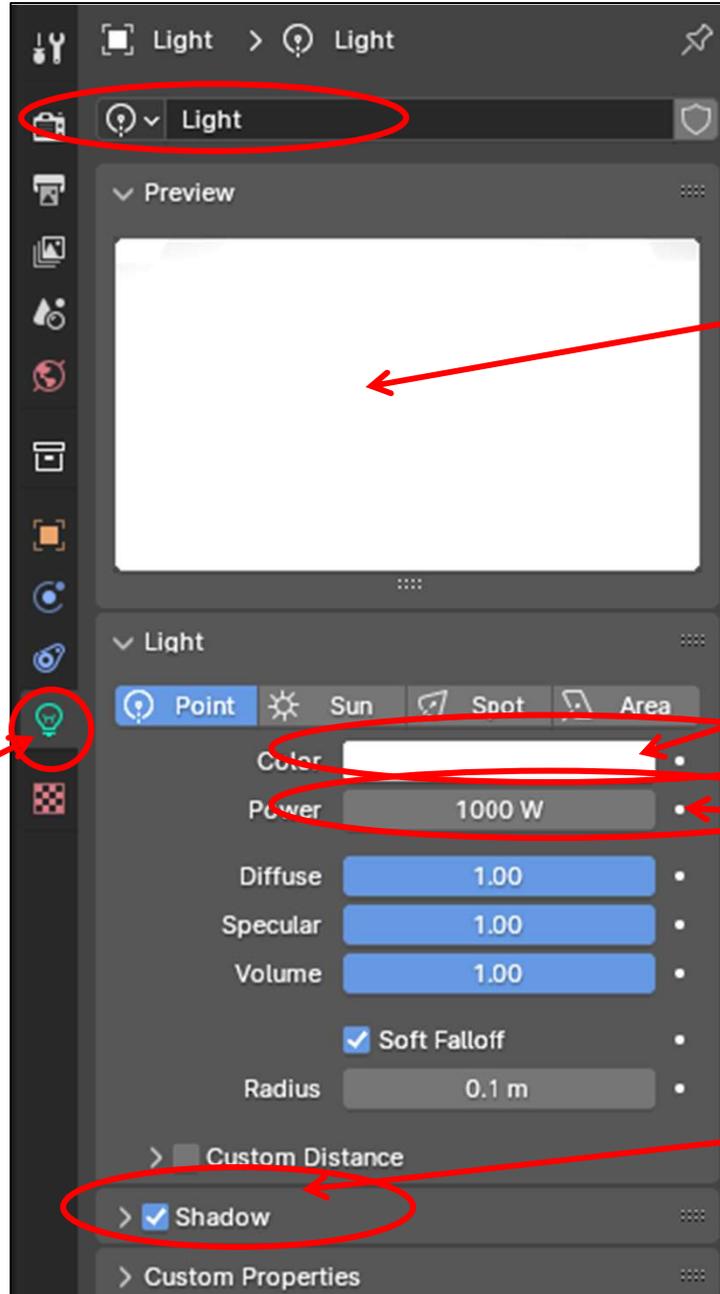

This preview shows how the Light spreads out


What color to make the Light

How bright to make the Light shine.

Be sure this is clicked on in order to get this light to cast shadows






Lighting – What does it Mean to Have a Colored Light? 213

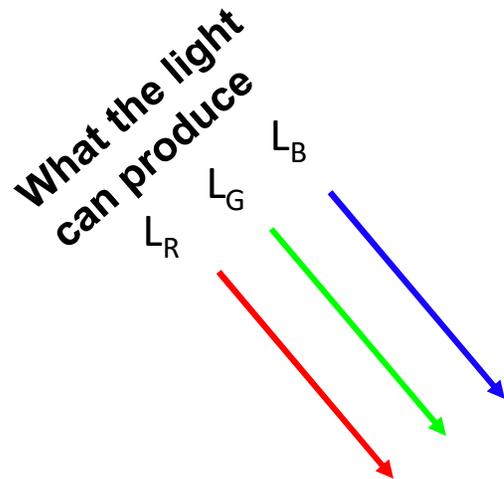

What the eye sees



What the material can reflect

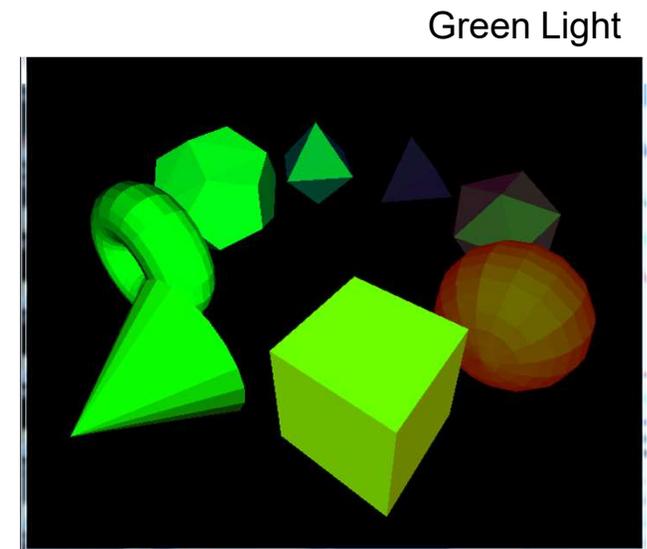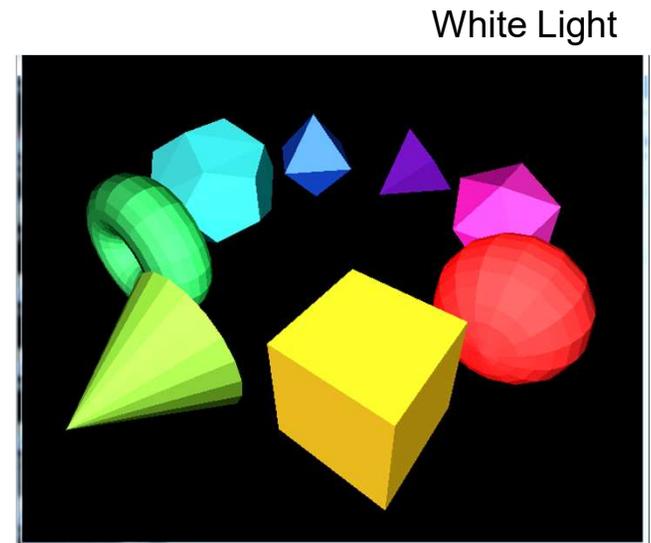

$$E_R = L_R * M_R$$


$$E_G = L_G * M_G$$

$$E_B = L_B * M_B$$

In modeling, rendering, and animation, there are two major roles that lights play:


1. Key
2. Fill

Let's say we want to put a spotlight on the Monkey (and who doesn't?). We add a Spot Light. We position it over the Monkey and angle it down, like this. This is our "Key Light". It does what we most want to do.

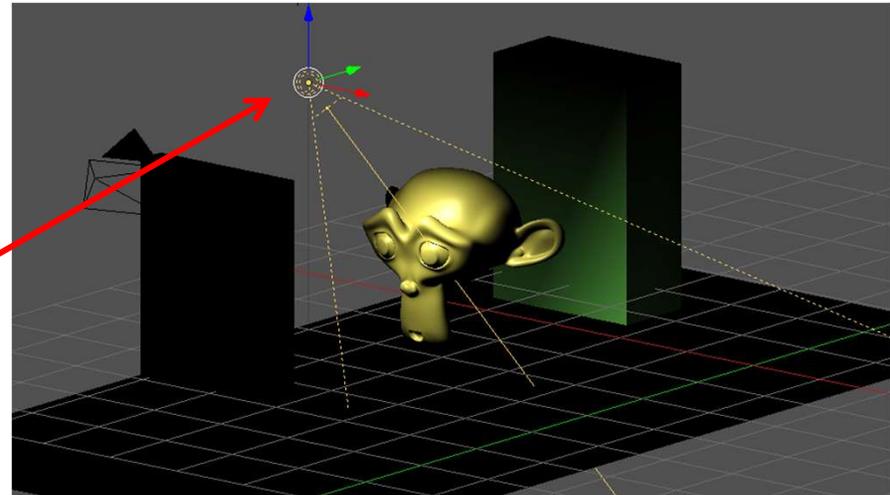



We render and get this.

The Key Light is working really well, but the rest of the scene is too dark. We now need to use one or more Fill Lights.

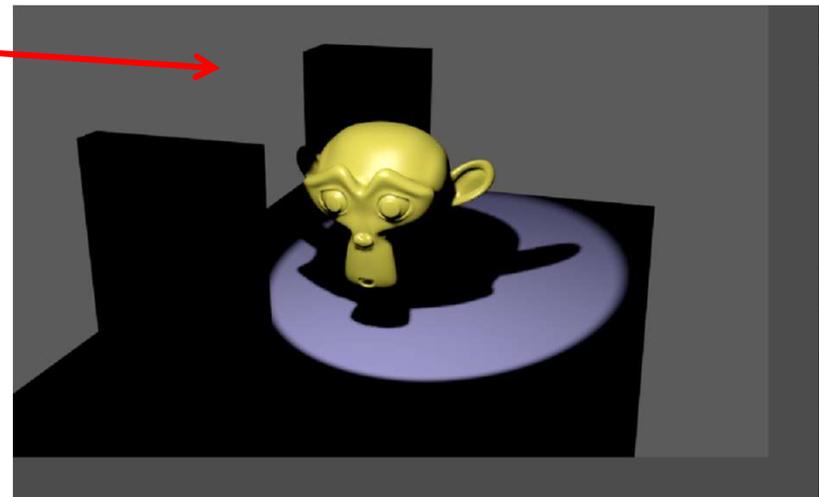

Lighting – Principles


We Add a Point Light and position it over the scene. Because we are in Render Mode, we can interactively see when we have it positioned well.

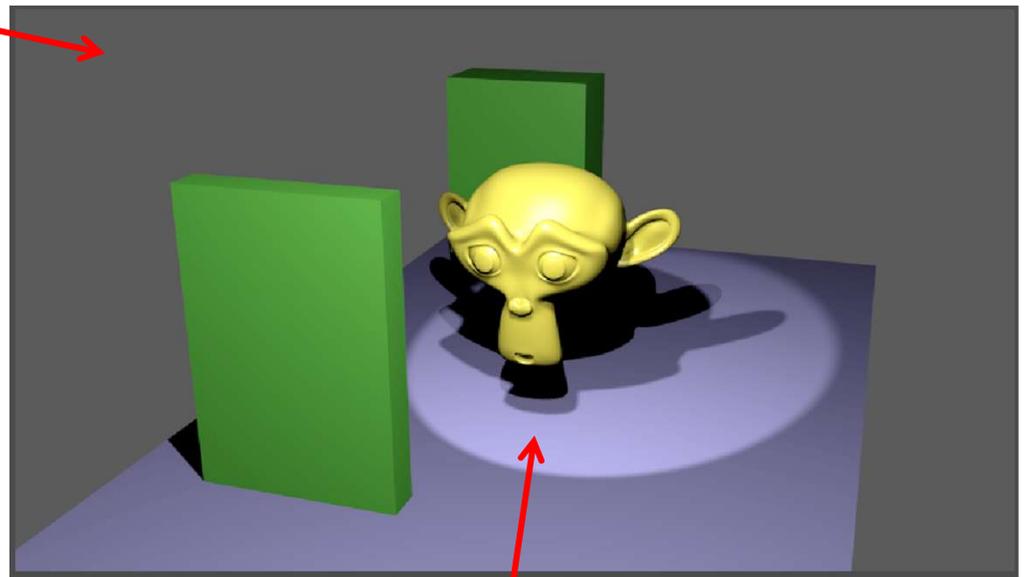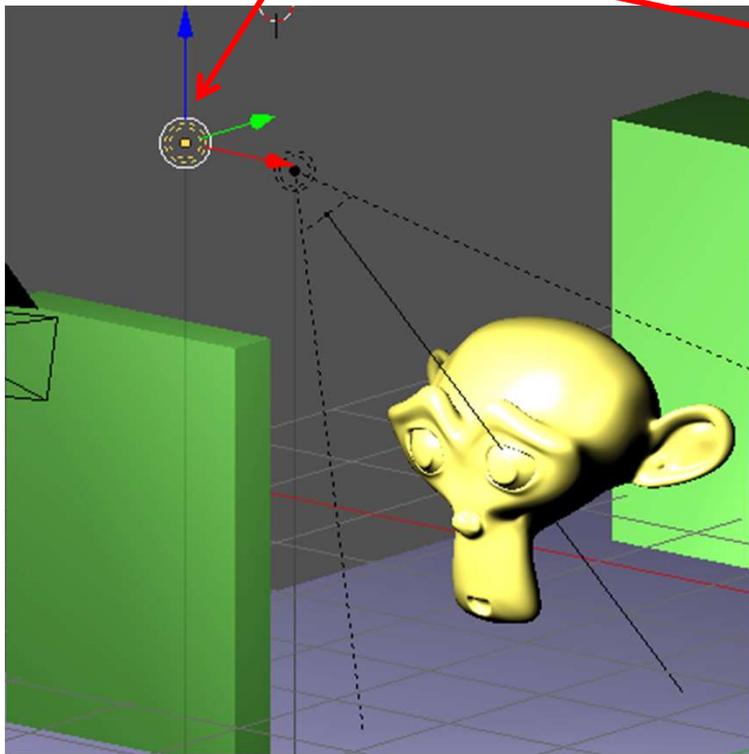

The scene looks much better. But, there are still two problems.

1. The rest of the scene is now bright enough that our “star” is no longer highlighted.
2. The Fill Light is casting another shadow which is distracting.


Lighting – Principles

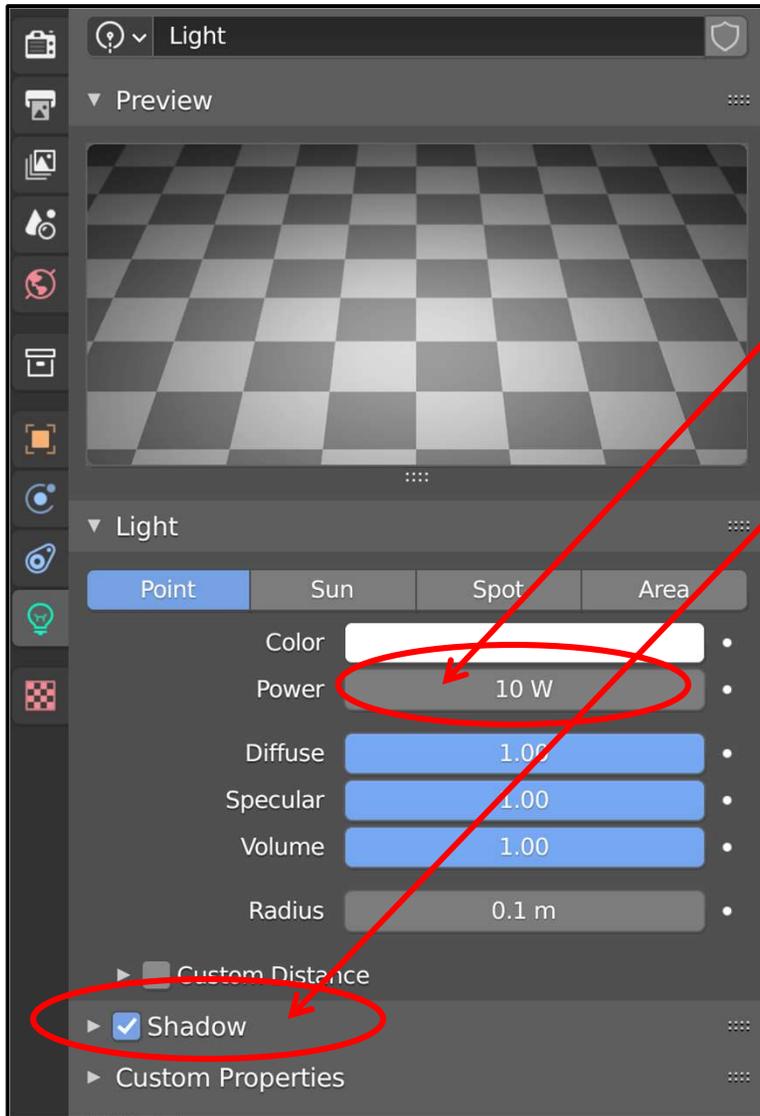

So, we make two adjustments to our Fill Light:



We lower its brightness.

We un-click here to force it to not cast shadows.

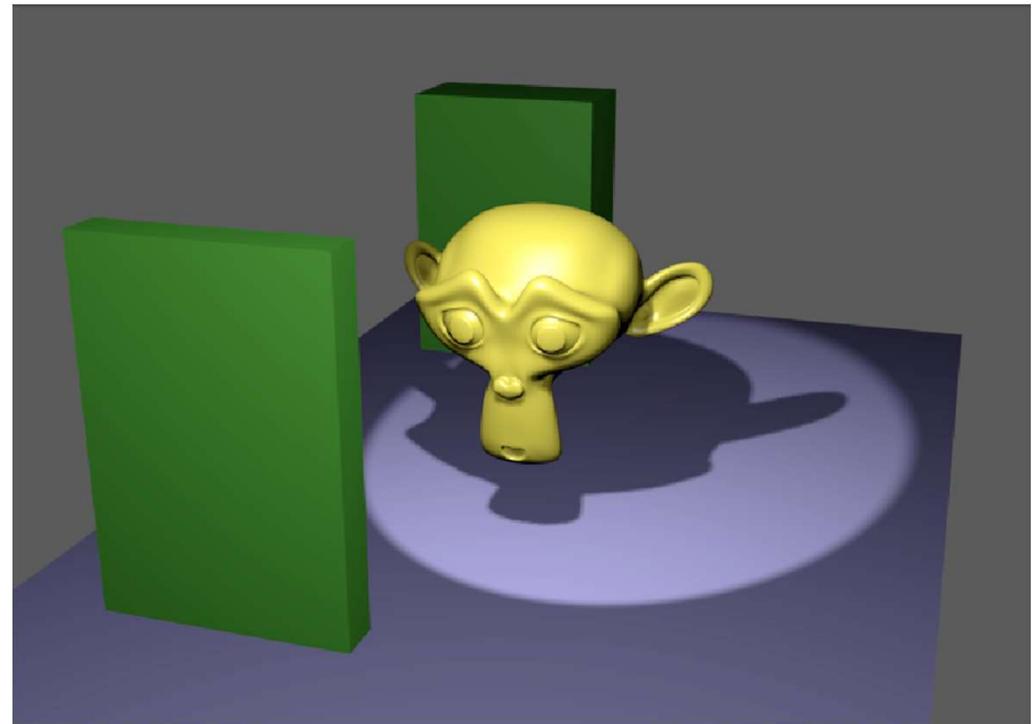


Rendering


The view that is rendered is not the same orientation that you see on the screen. It is from the **Camera position**, which needs to be set separately.

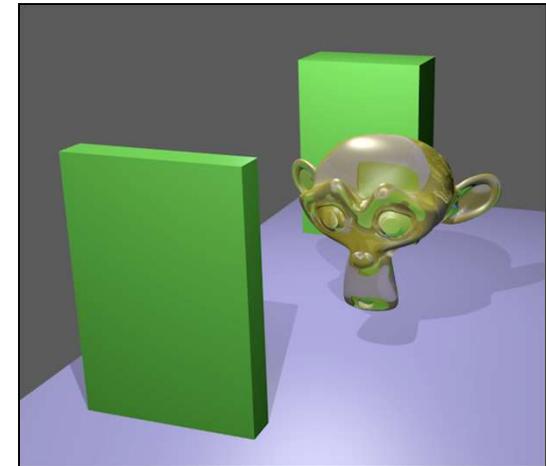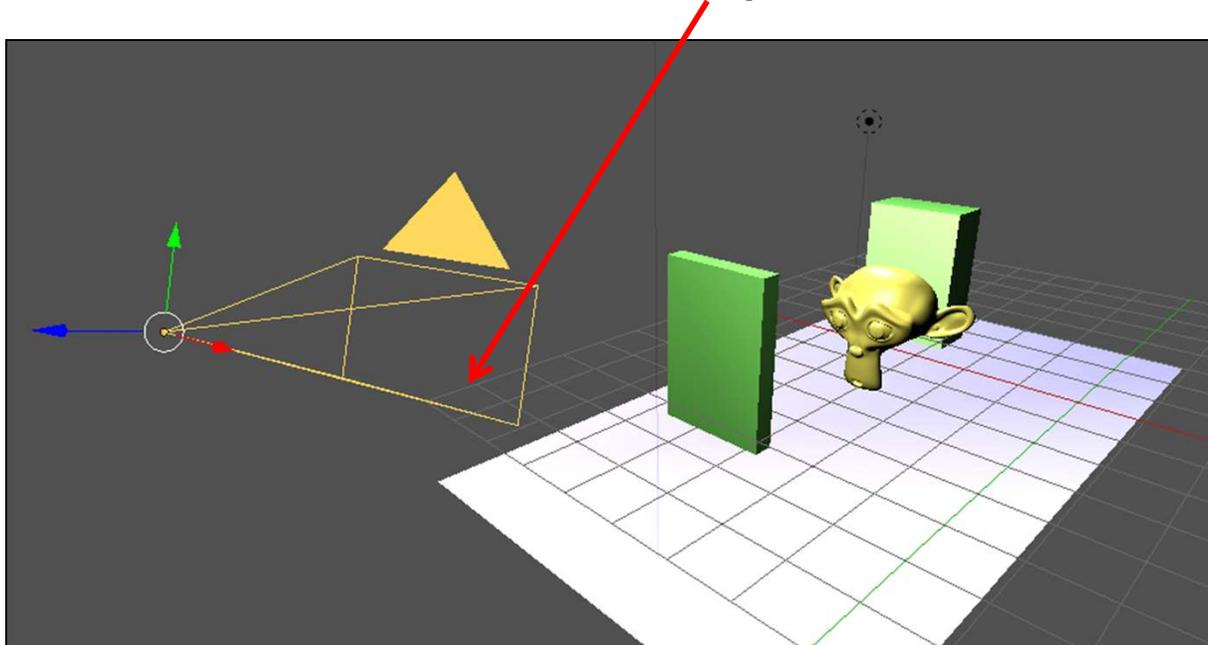

If you the Camera icon, LMB click on it.
If you don't see it, zoom out some. If
you still don't see it, click on the Camera
in the Outliner.

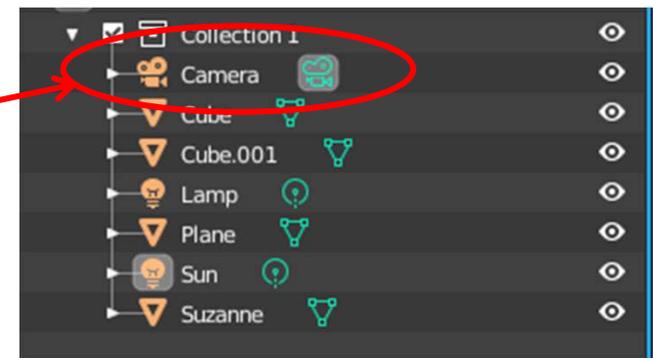

The Camera

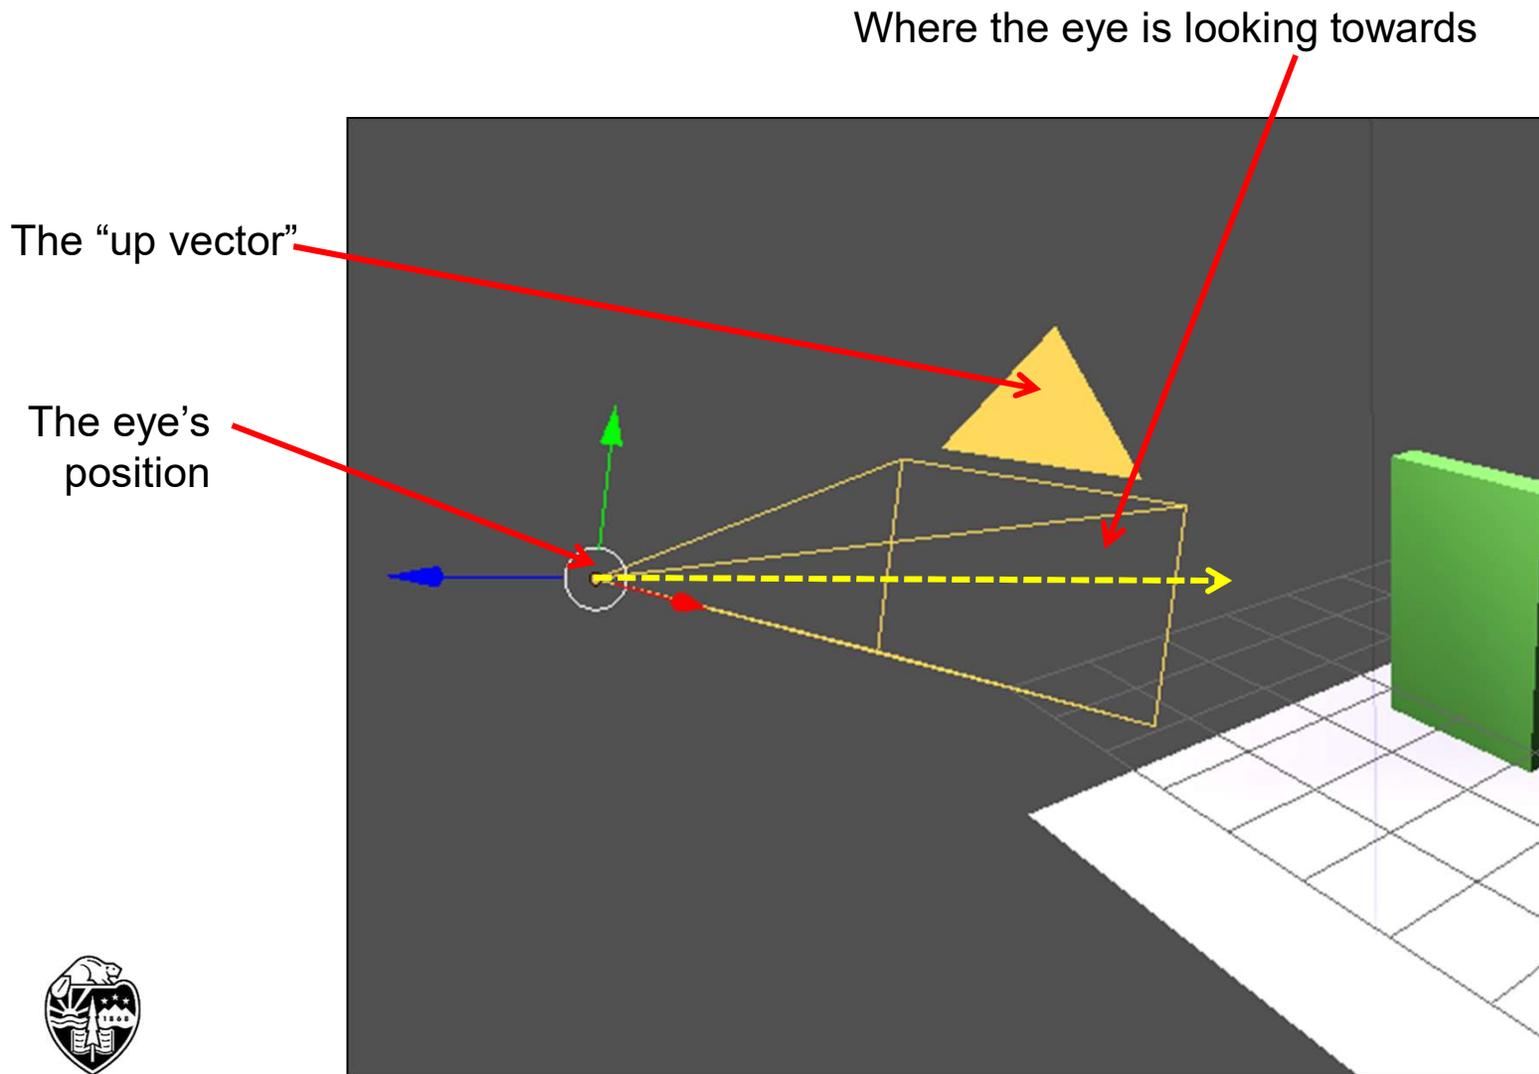

The camera is just like any other object in the scene.


1. It can be selected with a LMB click
2. It has its own local coordinate system attached to it.

Note the local coordinate system for the camera:

- X is to the right of where the eye is looking
- Y is the up-vector
- Z is opposite of where the eye is looking

This is useful to know. For example, to dolly the camera in or out, select it and then move it in its local coordinates:



g → z → z

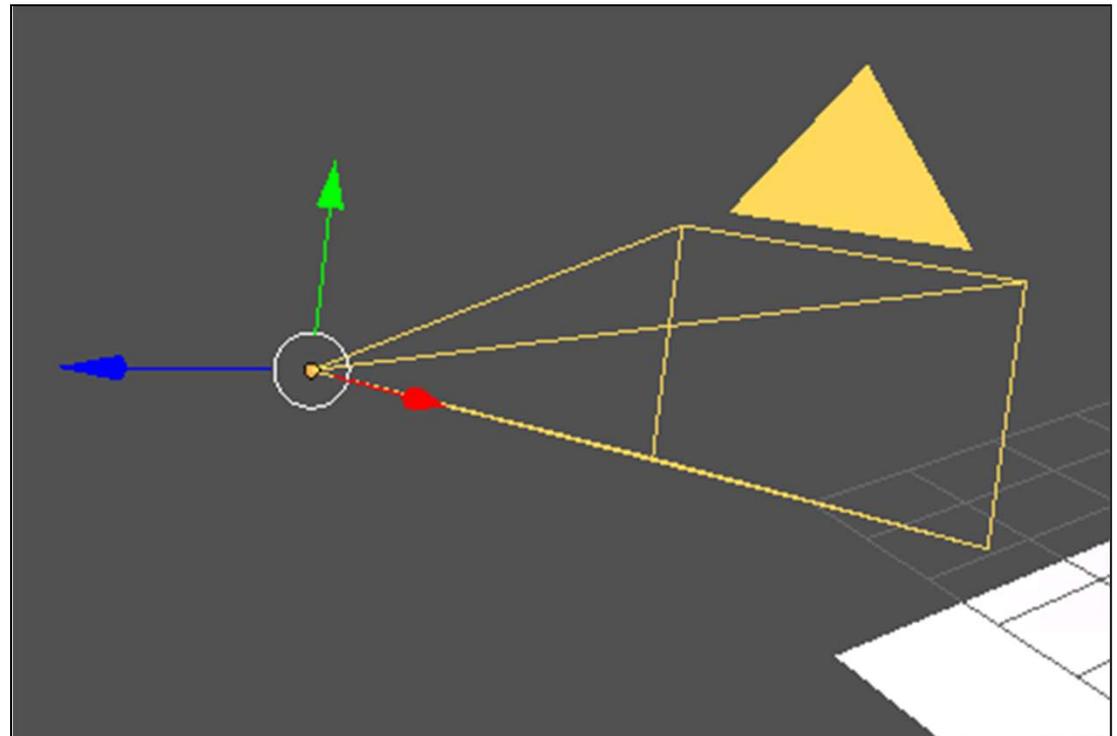

Aligning The Camera to Your Current Screen View

But, if you like your current screen view and want to move the camera there, just do this:




View → Align View → Align Active Camera to View

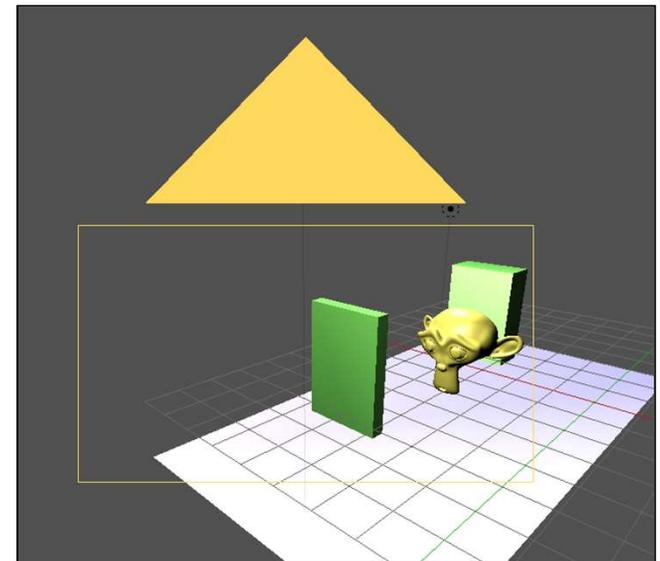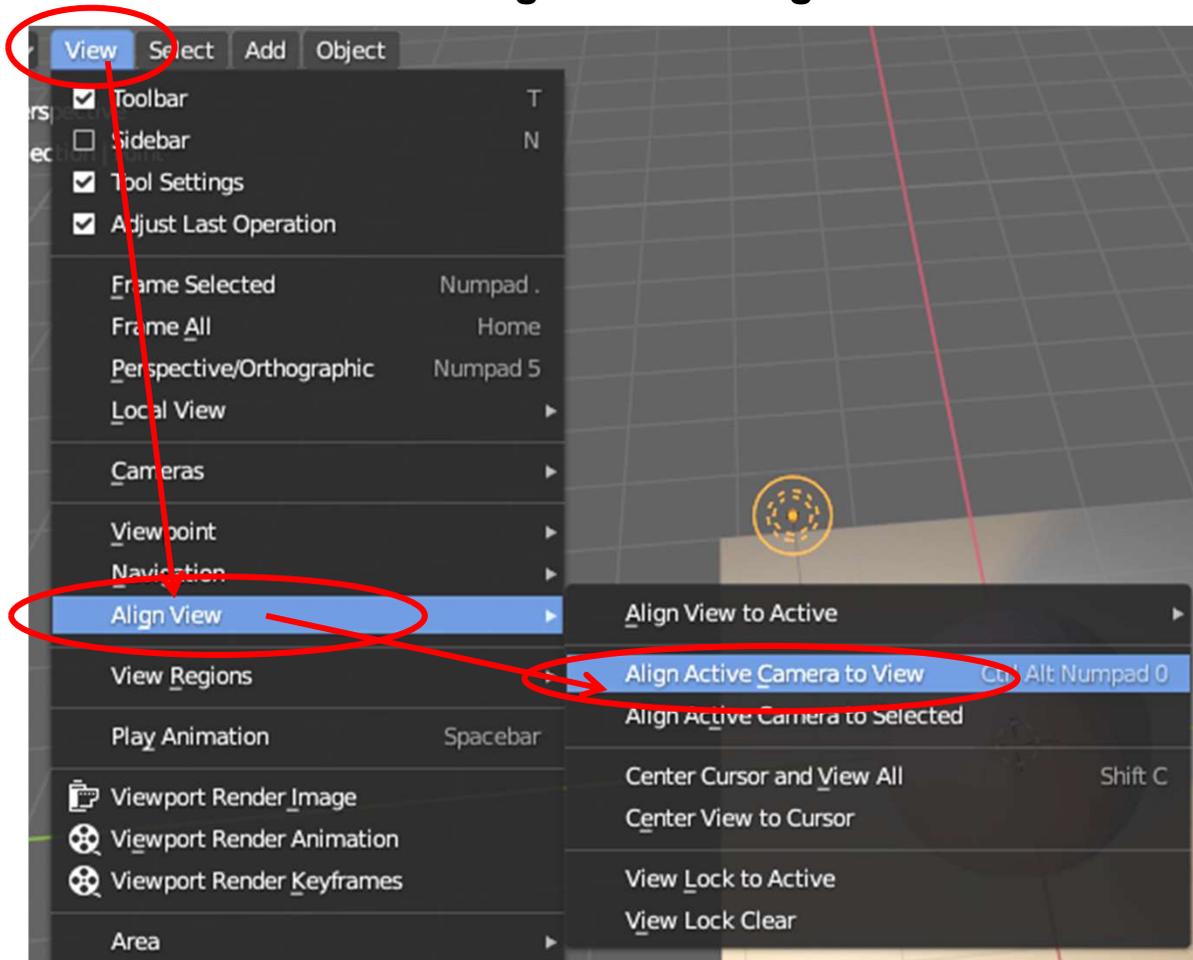

Setting a Background Color



Click on the **World Properties** button

Click on **Color** and dial in the background color

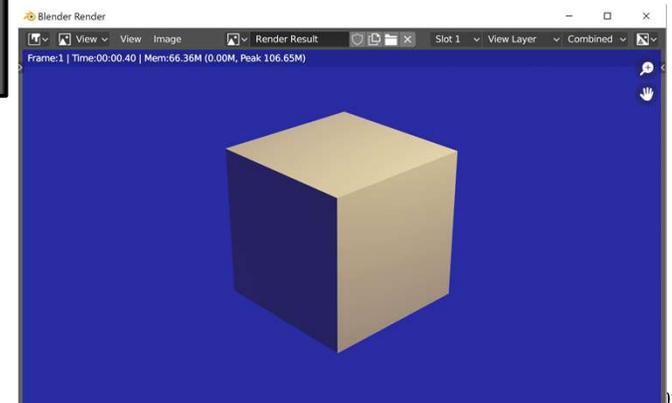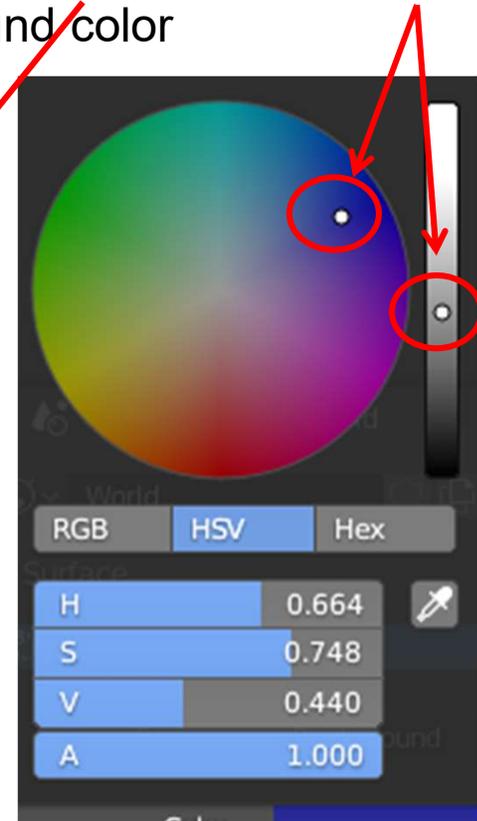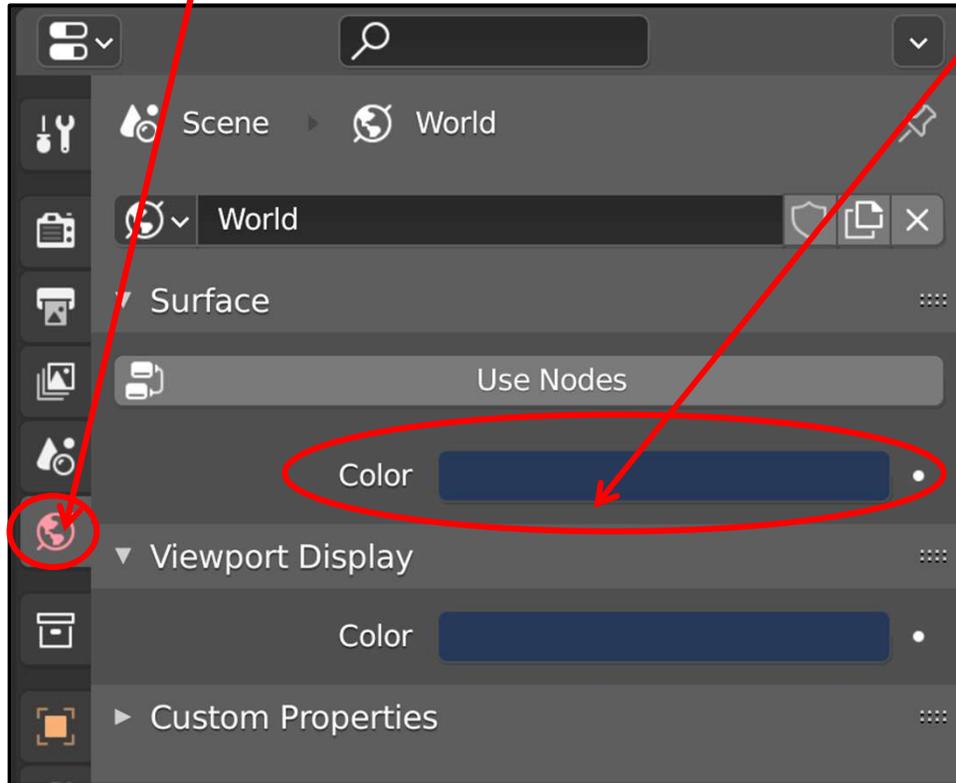


Screen Space Ambient Occlusion


Ambient Occlusion is a great computer graphics trick in which crevices are artificially darkened, heightening the sense of 3D-ness. You must be using the **Eevee** renderer to make this happen.

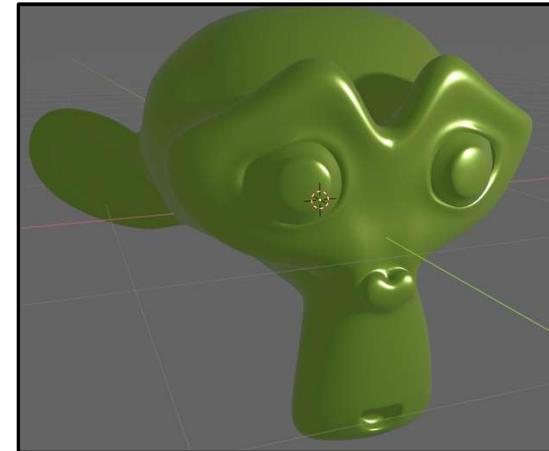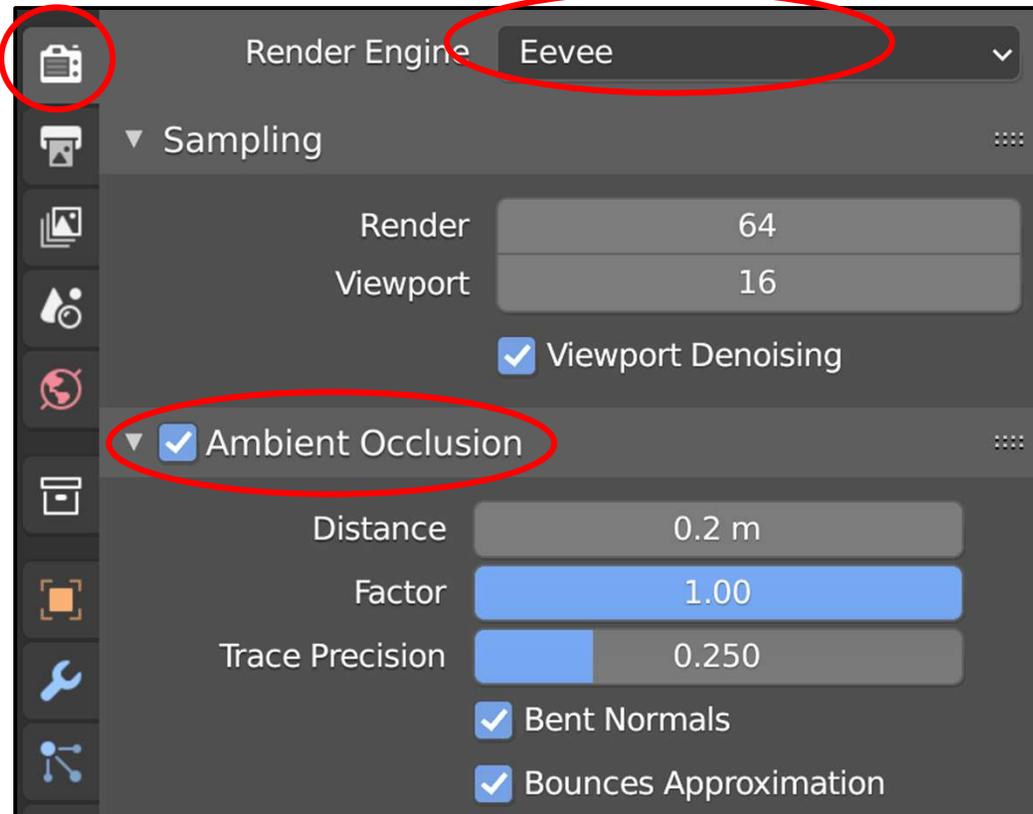

Before


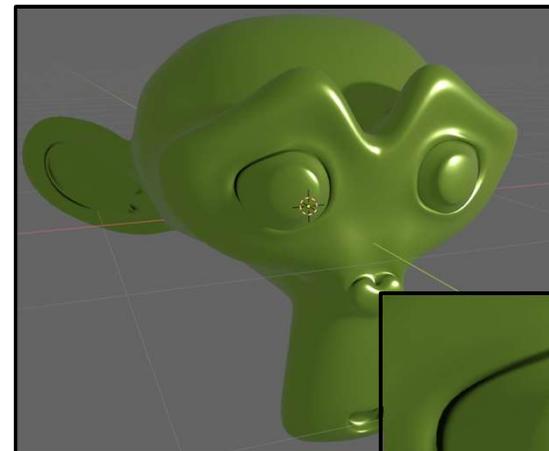


After

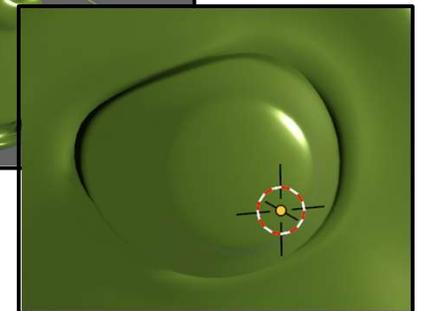


Bloom

Bloom is a rendering technique that emphasizes lighting “flares”. You must be using the **Eevee** renderer to make this happen.

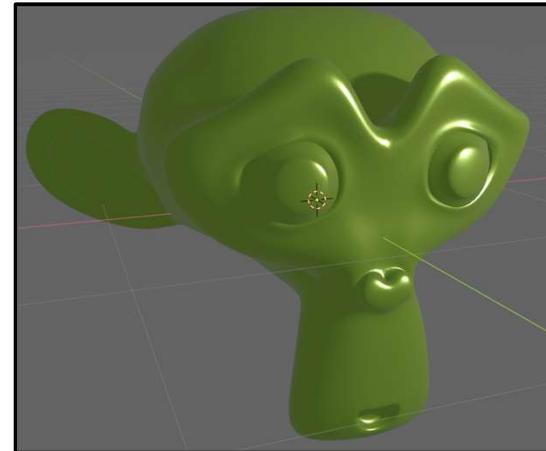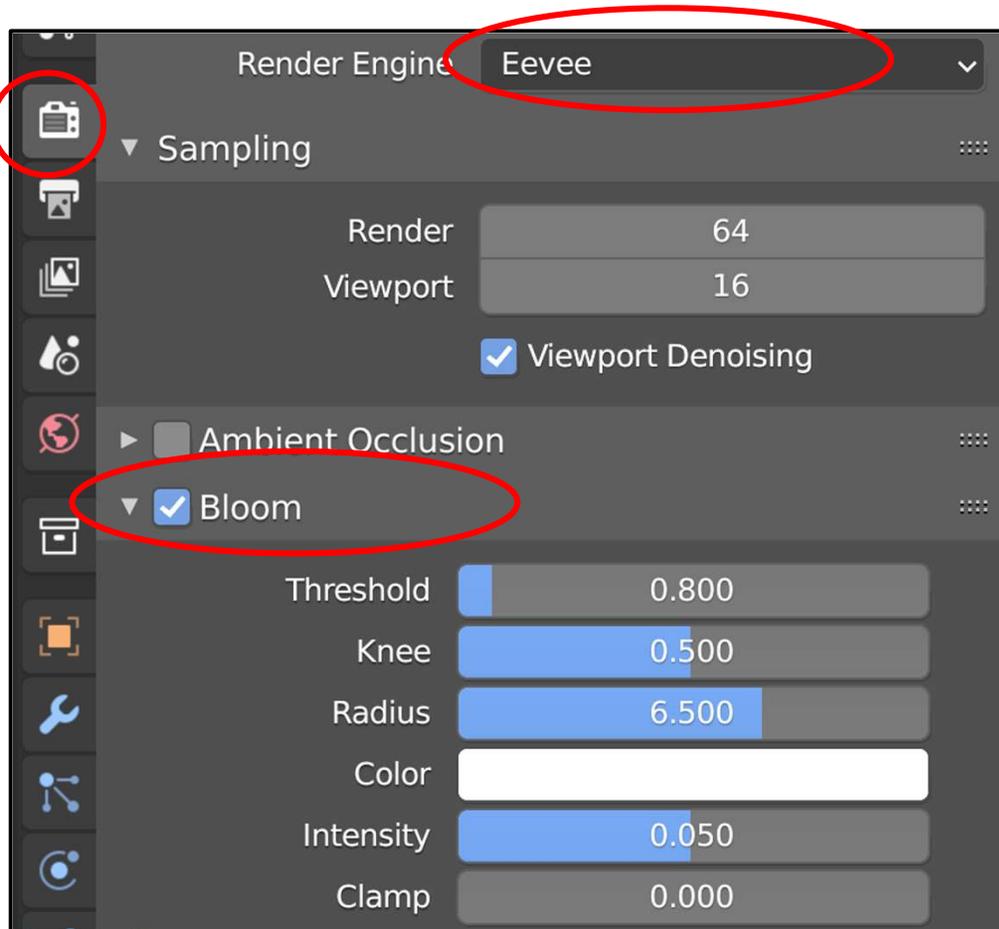



Before

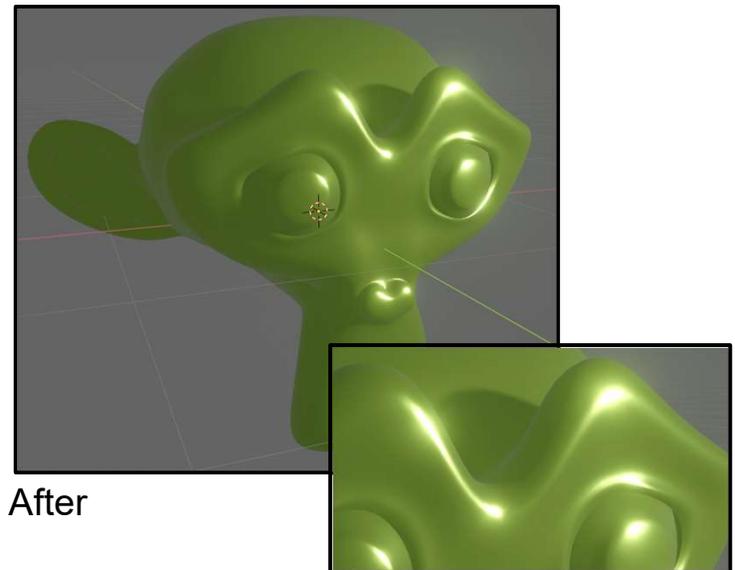


After

Screen Space Reflections


Screen Space Reflections are a quick way to generate the appearance of internal reflections in your object. You must be using the **Eevee** renderer to make this happen.

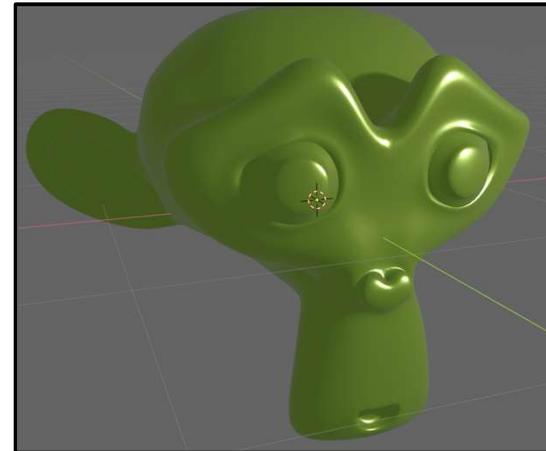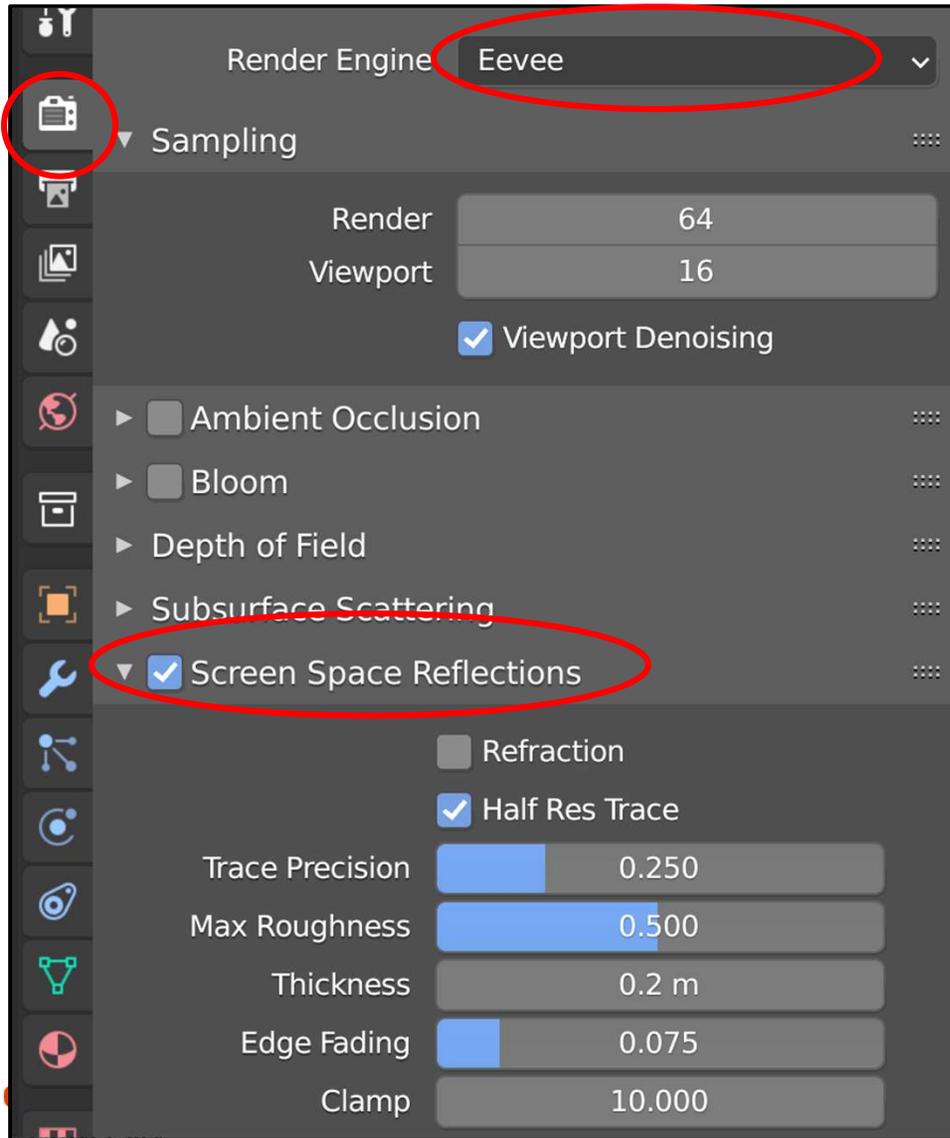

Before


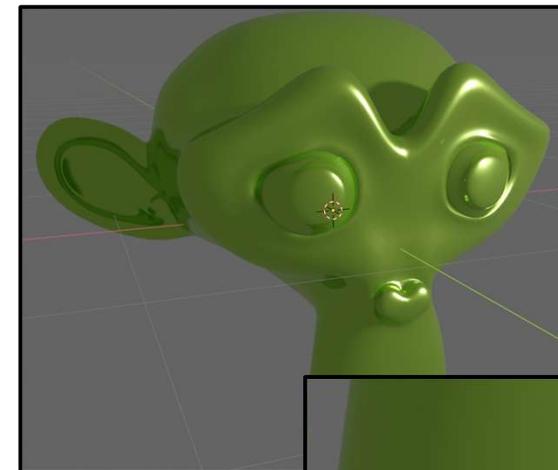


After

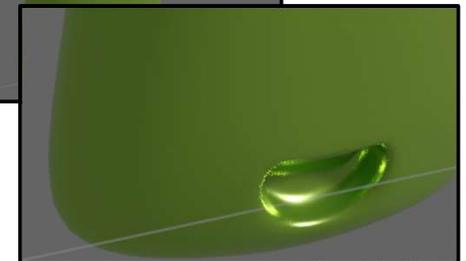


Superimposed Wireframes

I don't know why I find this so pleasing to look at. I just do.

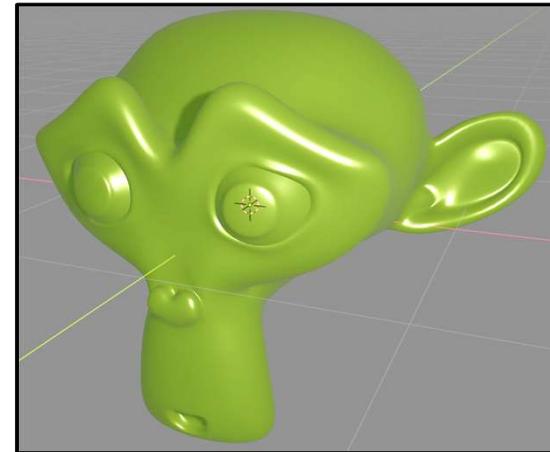
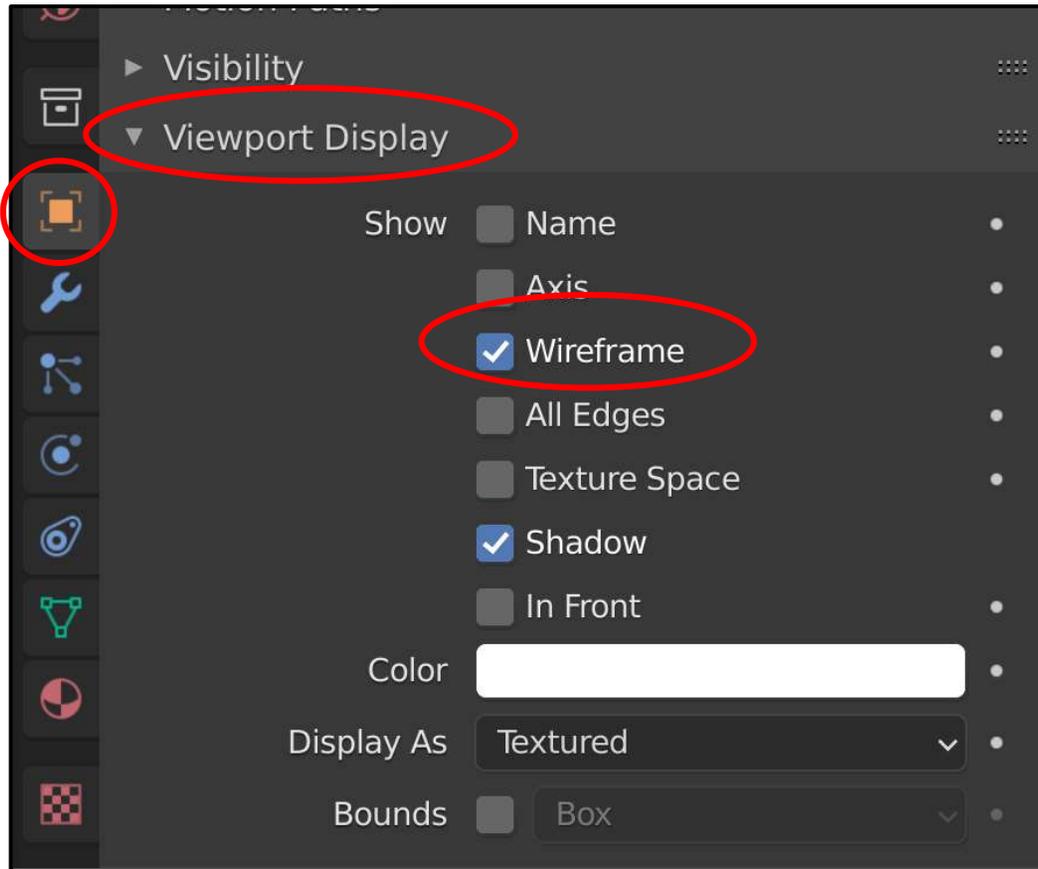


Before

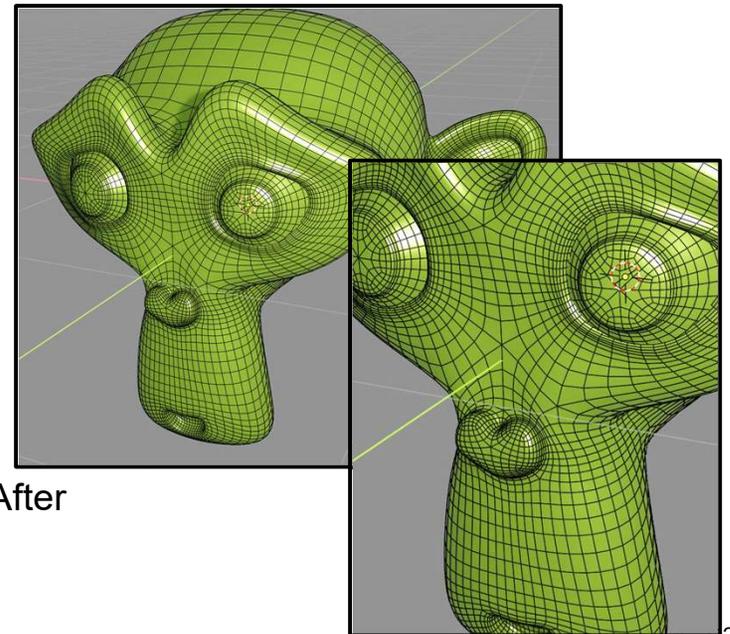


After

Triggering a Rendering

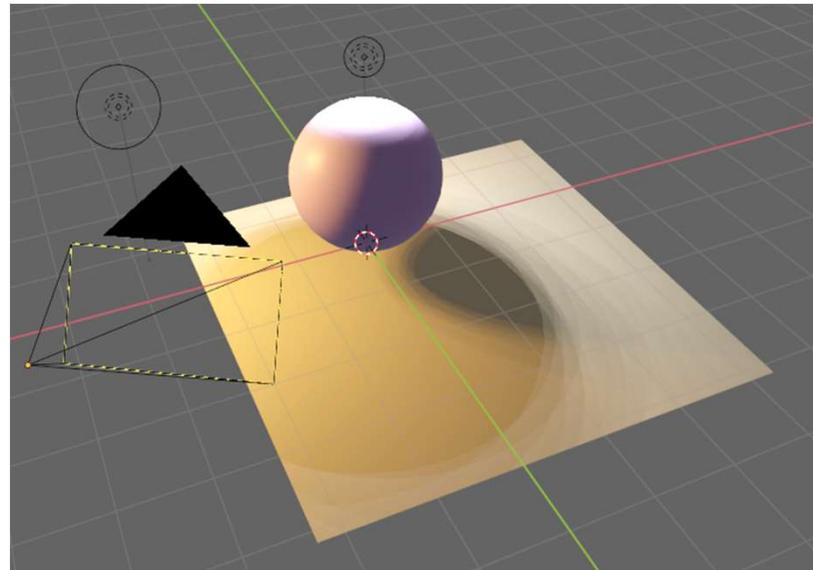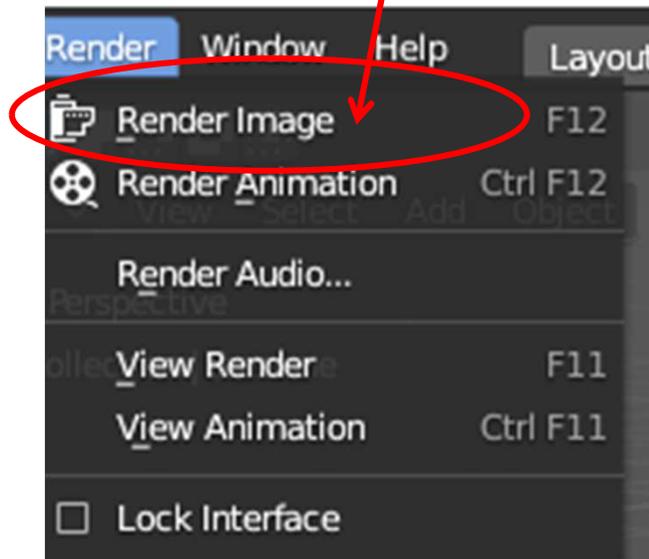


What you see on your screen

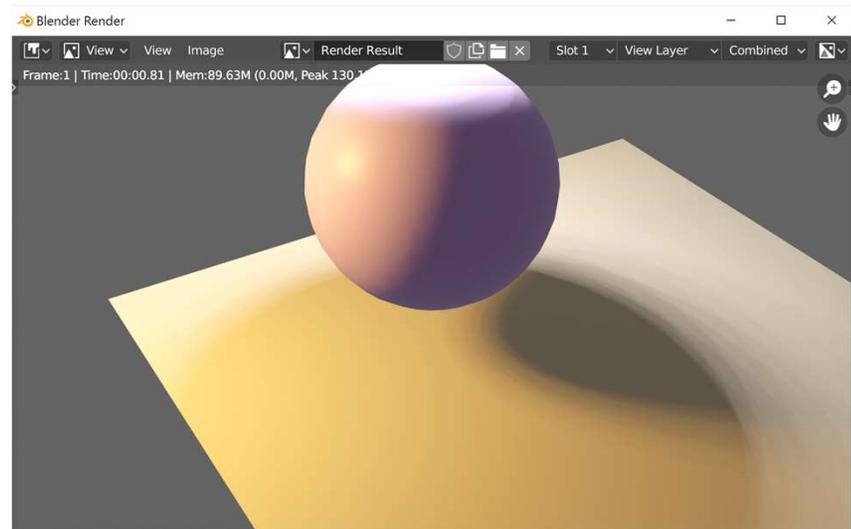


What you see on the separate render window

What You See in the Separate Render Window

227

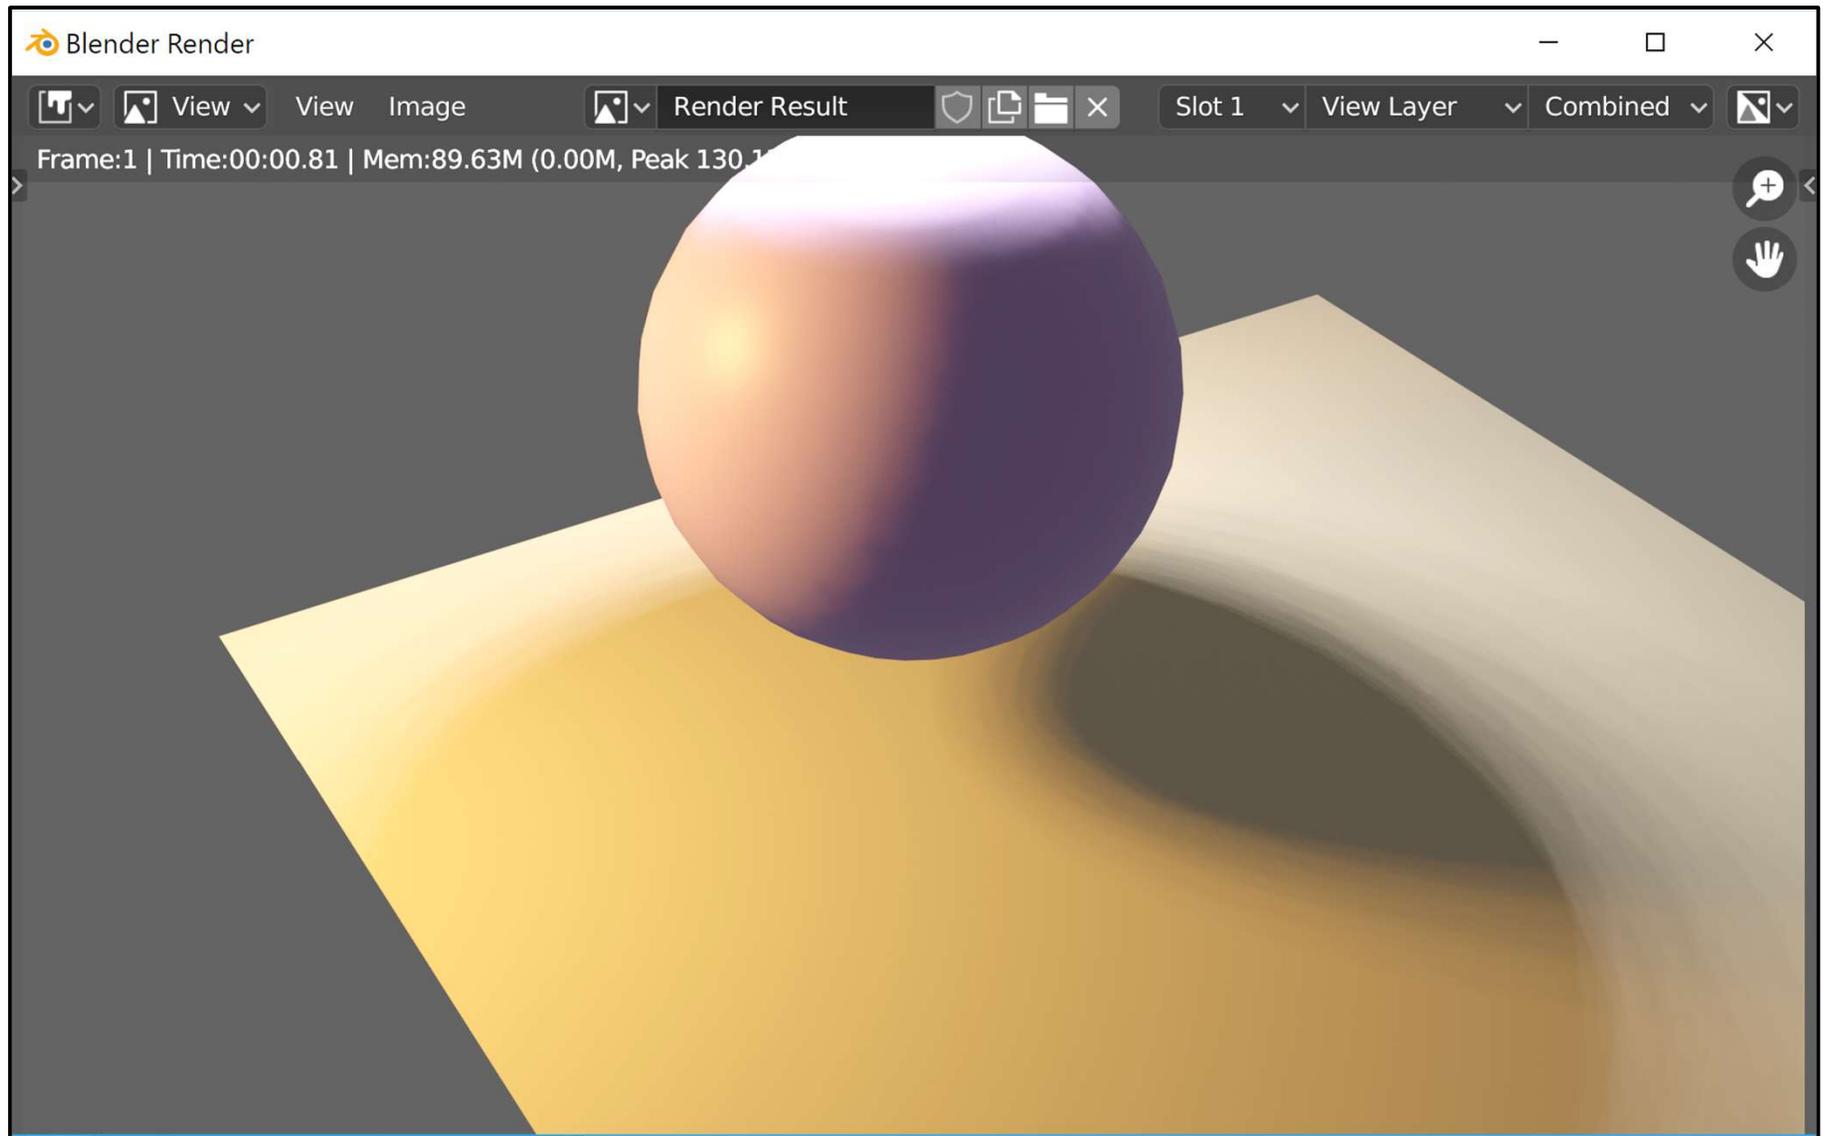


Saving a Rendered Image to a File

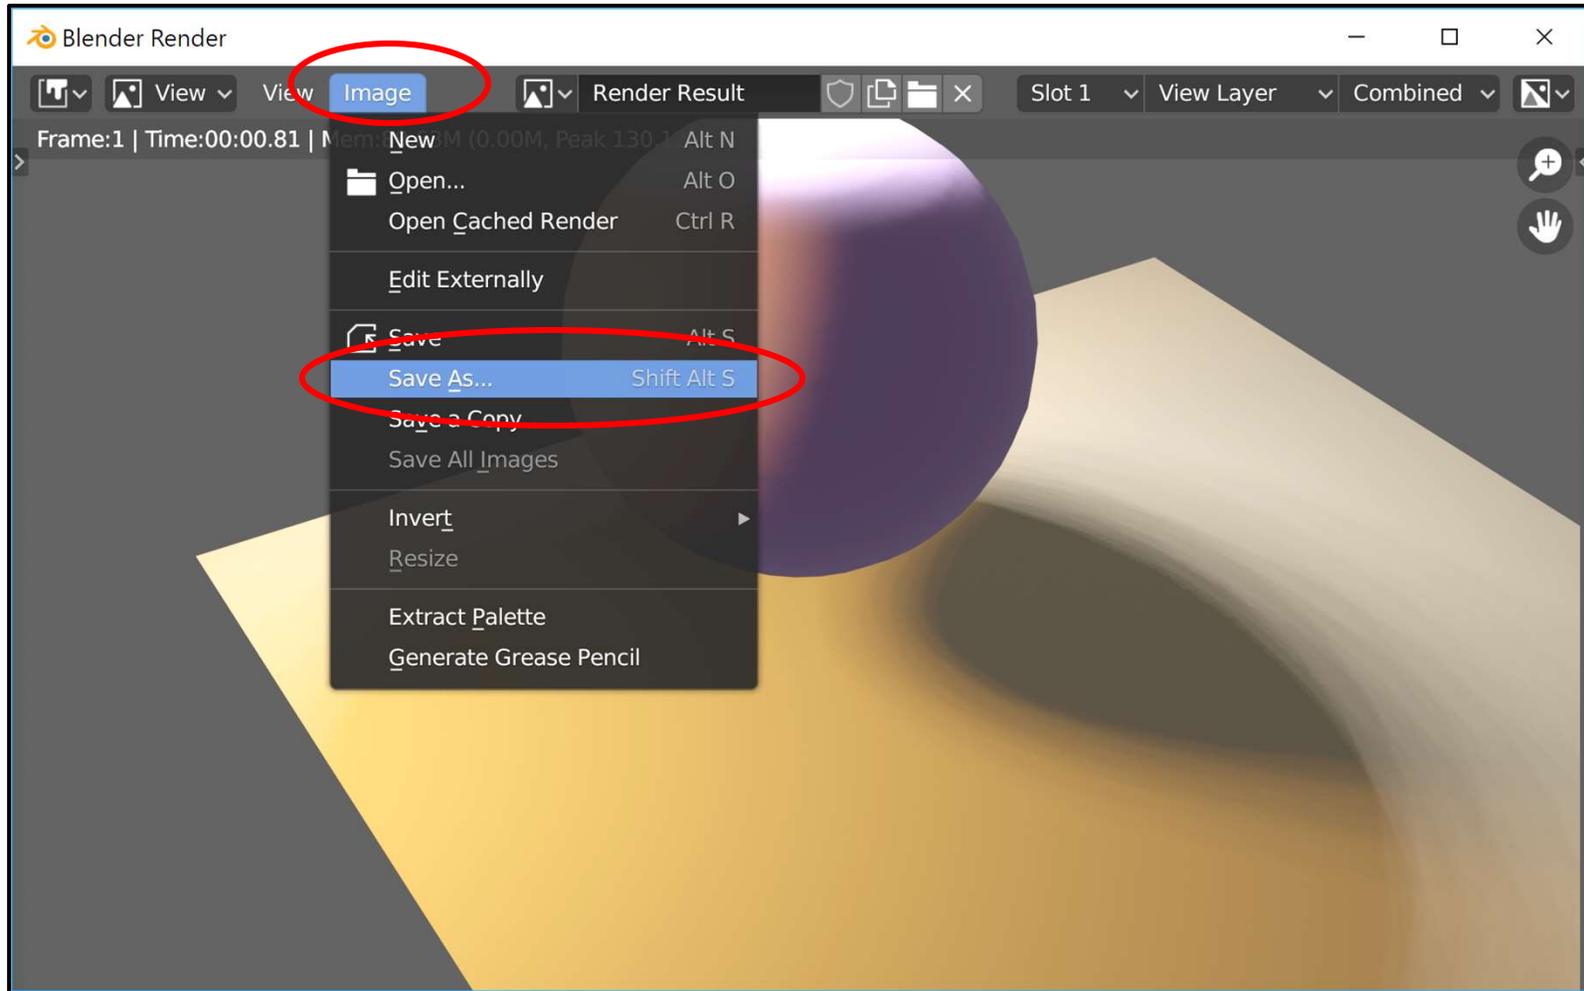

Saving a Rendered Image to a File


Amount of compression

Image file type

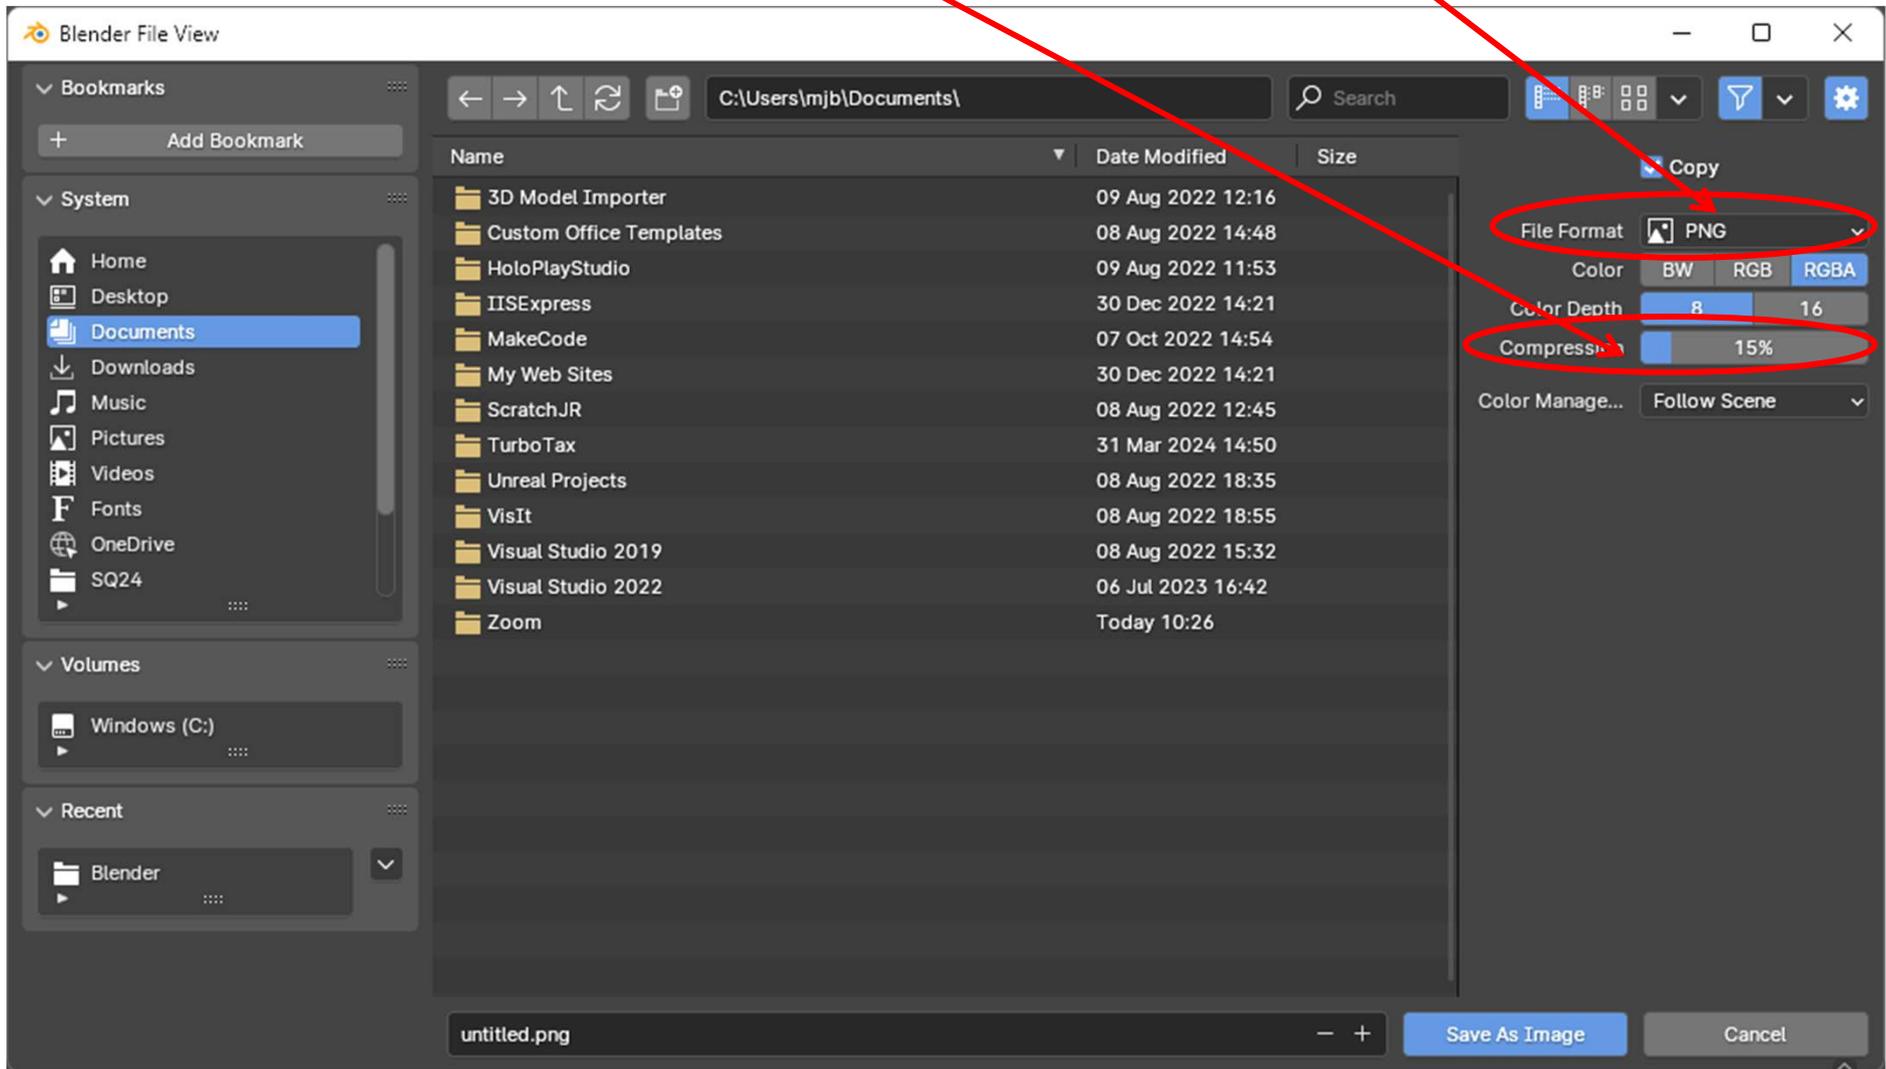

Saving a Rendered Image to a File



Different image file types
(PNG is good if you don't have any preference)

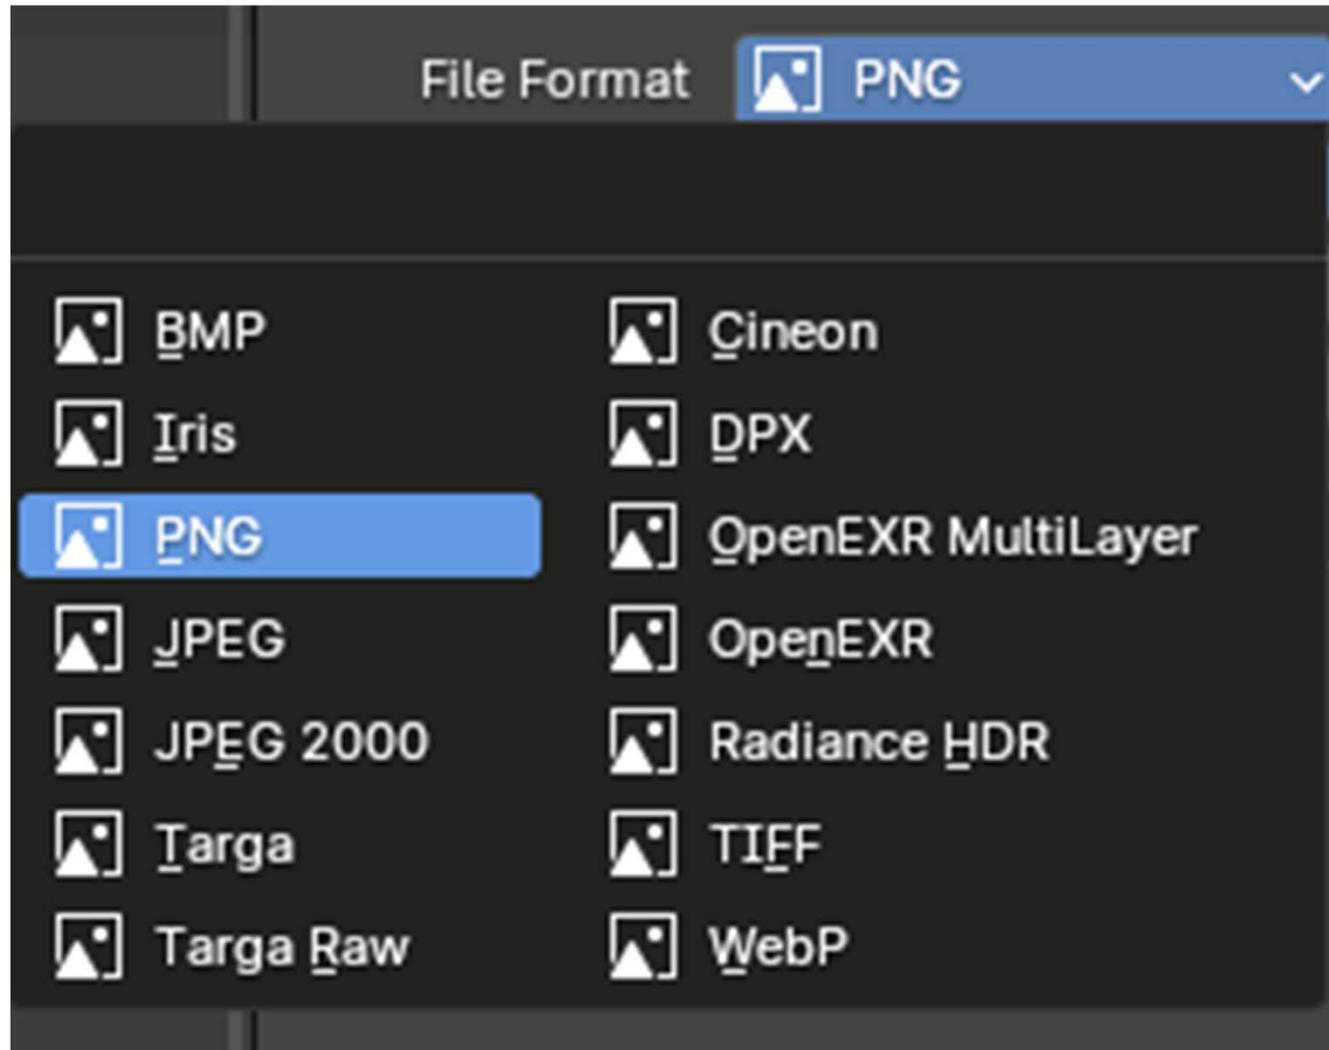

Saving a Rendered Image to a File

If this is called **Compression**, then smaller numbers will give you a larger image file with greater image quality.

If this is called **Quality**, then larger numbers will give you a larger image file with greater image quality.

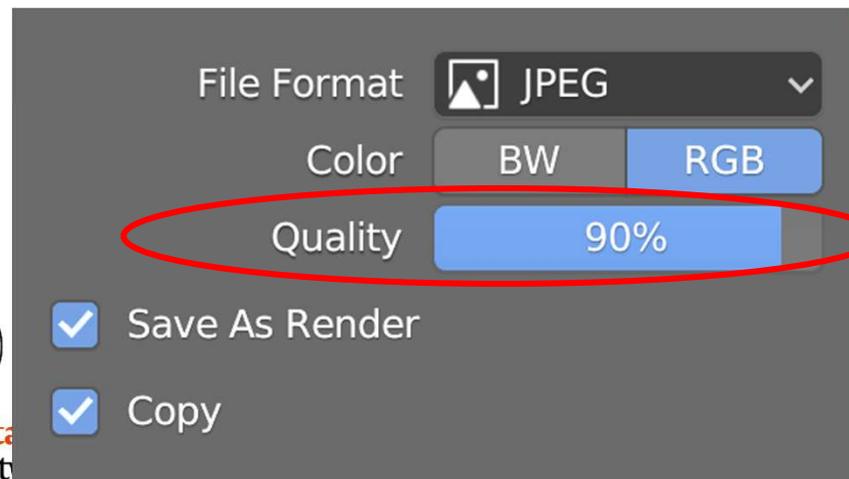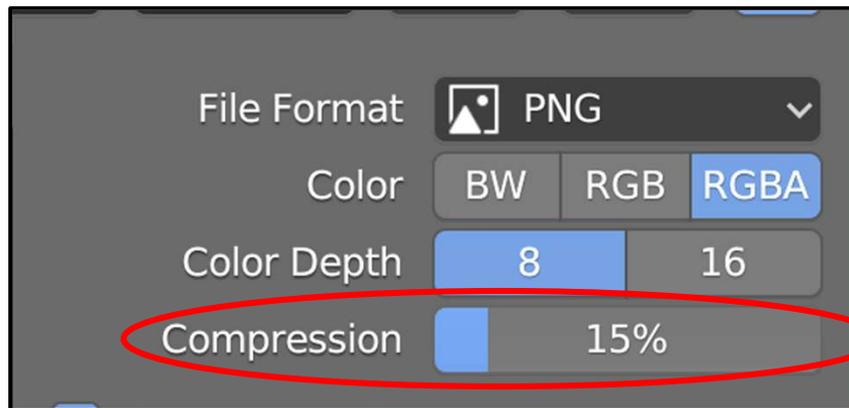


Oregon State
University


Computer Graphics

Saving a Rendered Image to a File

There is an important trade-off between image file size and the image **Quality** you set. There is also a trade-off between image size and web page download time.

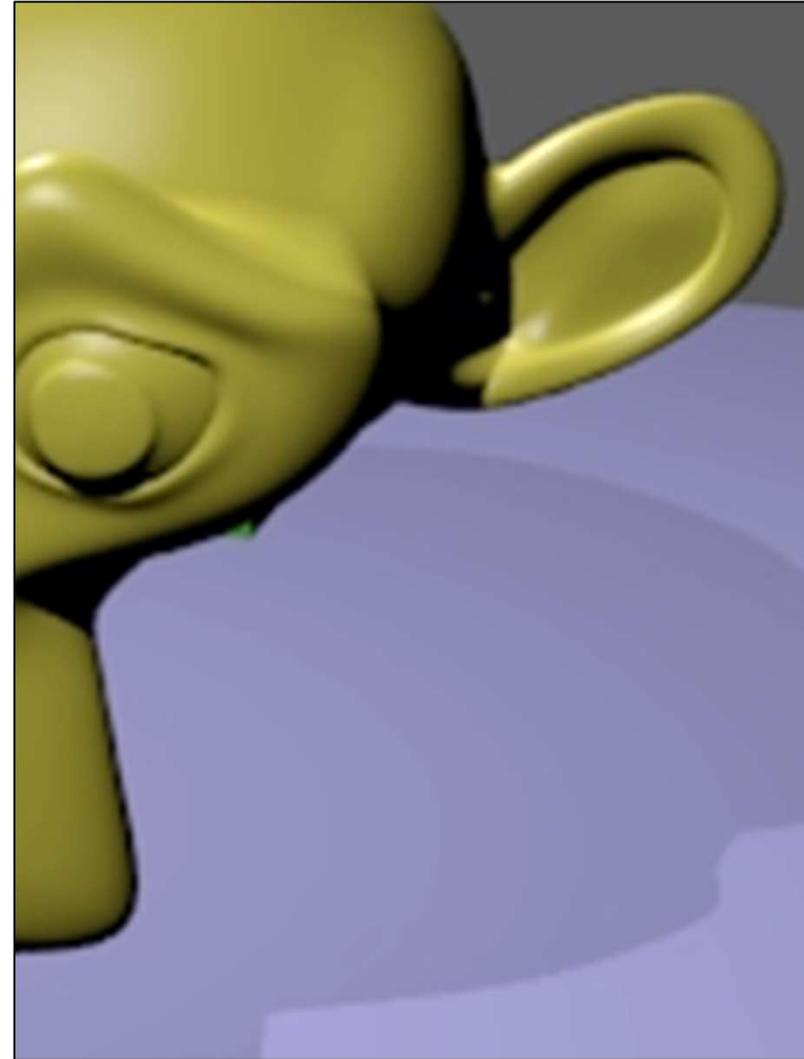

Importing an Image into PowerPoint

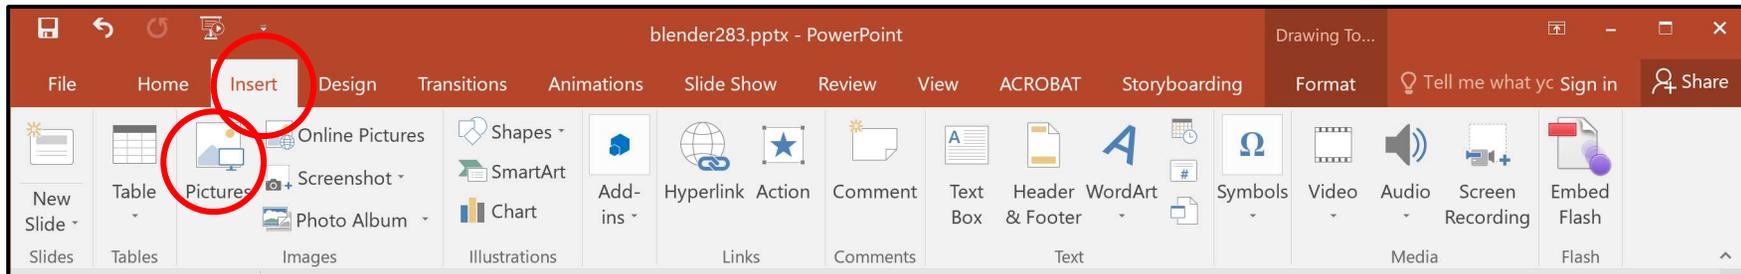

Importing an Image into HTML (i.e., a web page)


Add this line to your HTML file:

```


```

Another Type of Rendering

There is an additional internal renderer called *Freestyle*. Suppose you start with this scene:

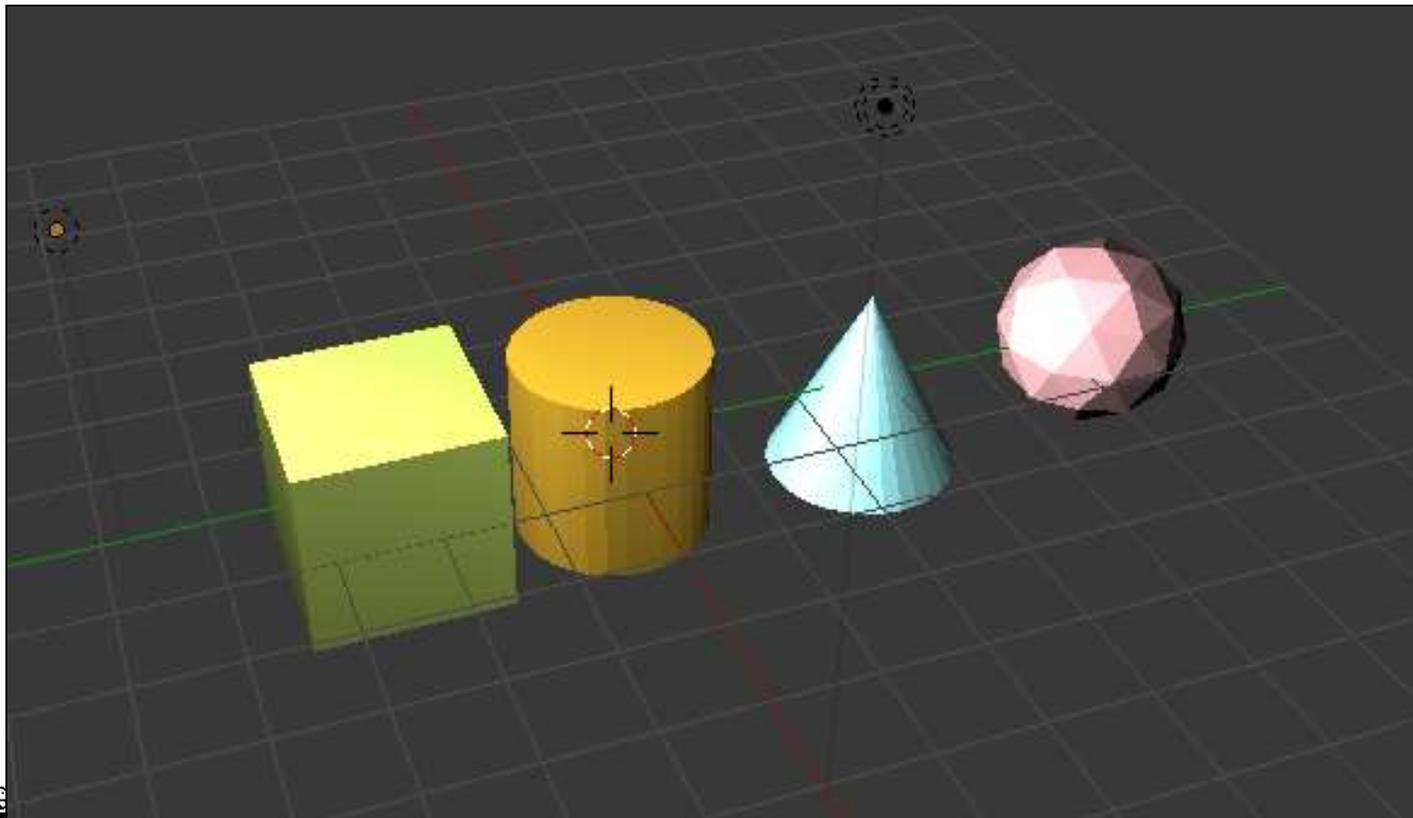



Another Type of Rendering

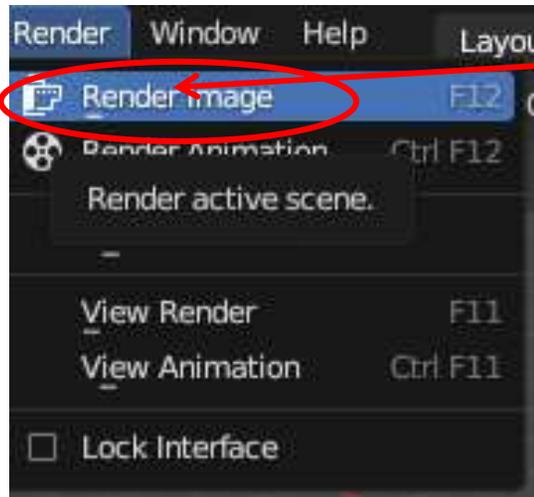

You render it, and the image looks like this:




Now, go to the **Render Properties** menu and turn on **Freestyle**

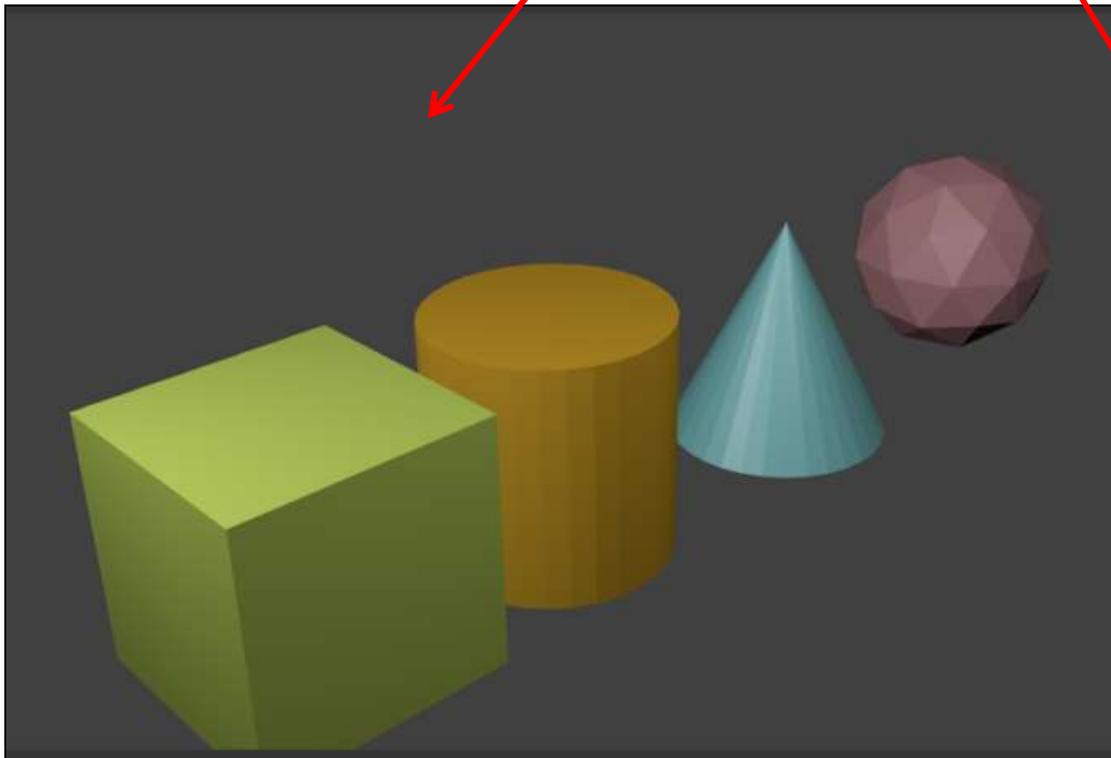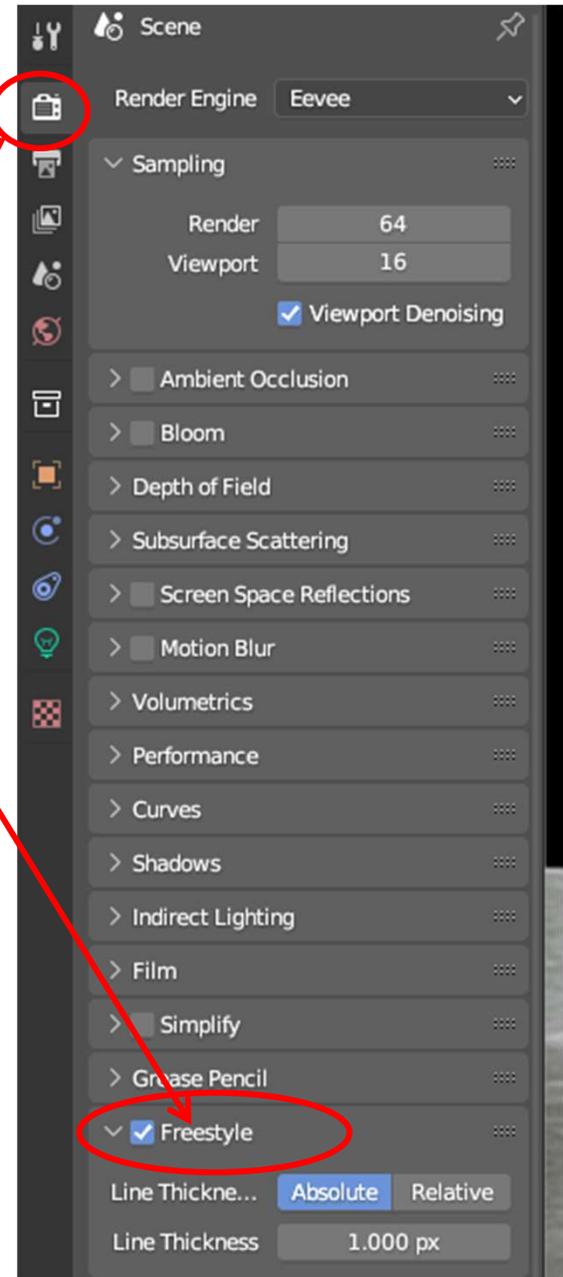

Freestyle Rendering



You render it again, and now you get this:

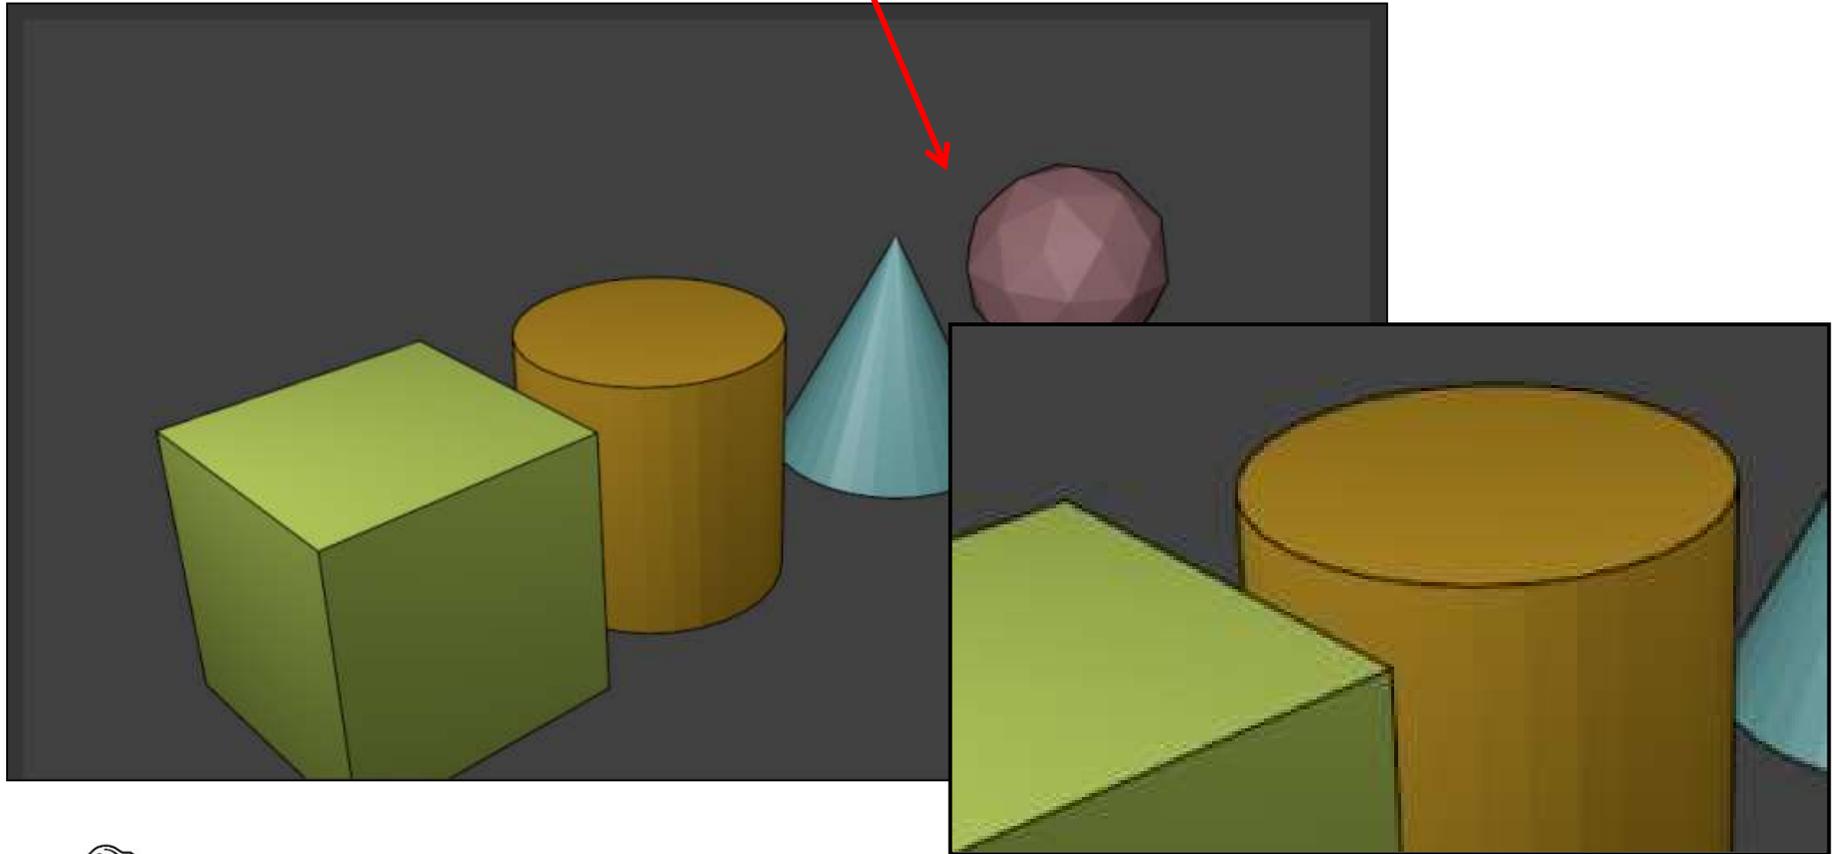


The computer graphics world calls this **Non-Photorealistic Rendering**, or **NPR**. It is good for illustrations where you want to see objects and outlines more than you want to see realism.


Freestyle Rendering



If you look under the **View Layer Properties** button, you will find a lot of Freestyle adjustments that you can make.

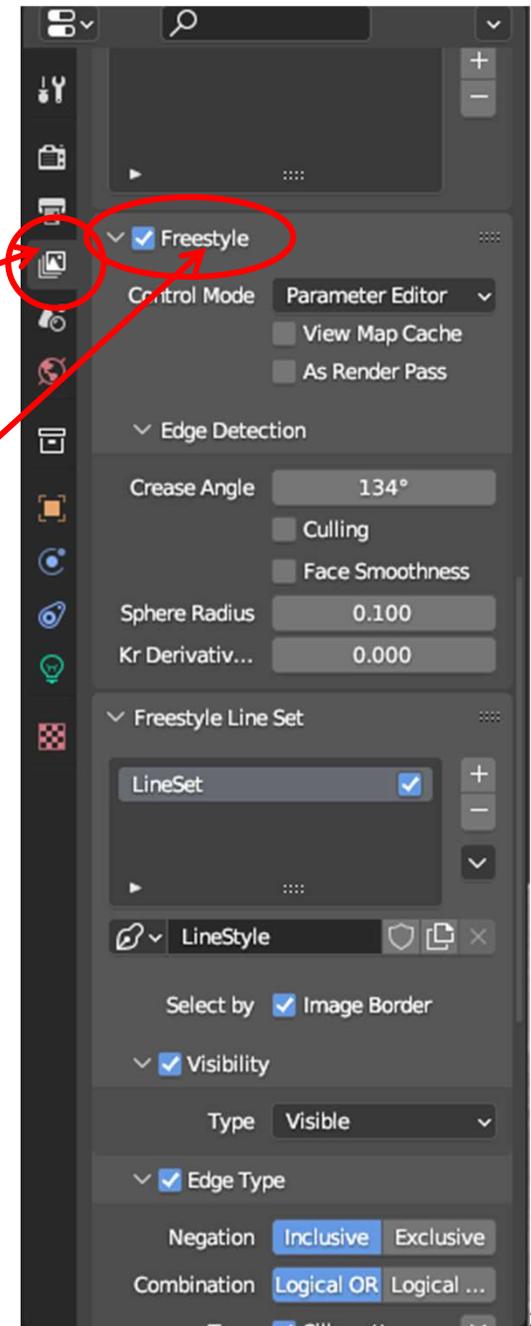


8. Particle Systems

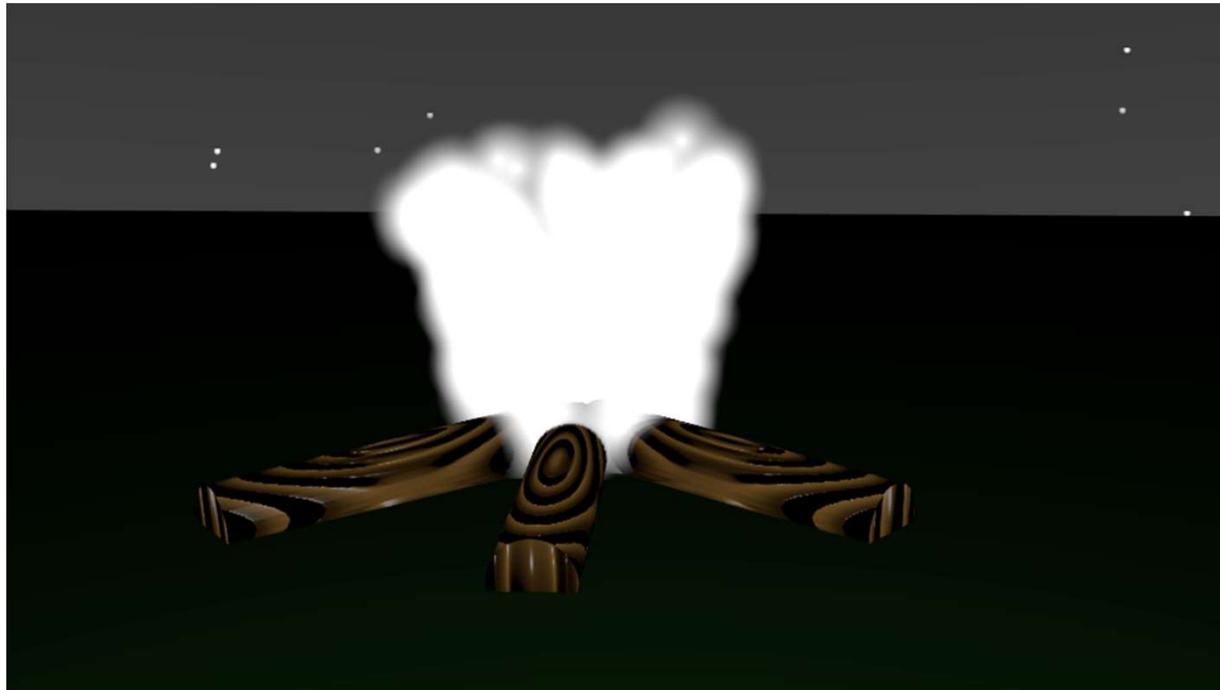

Particle System Examples

Paramount

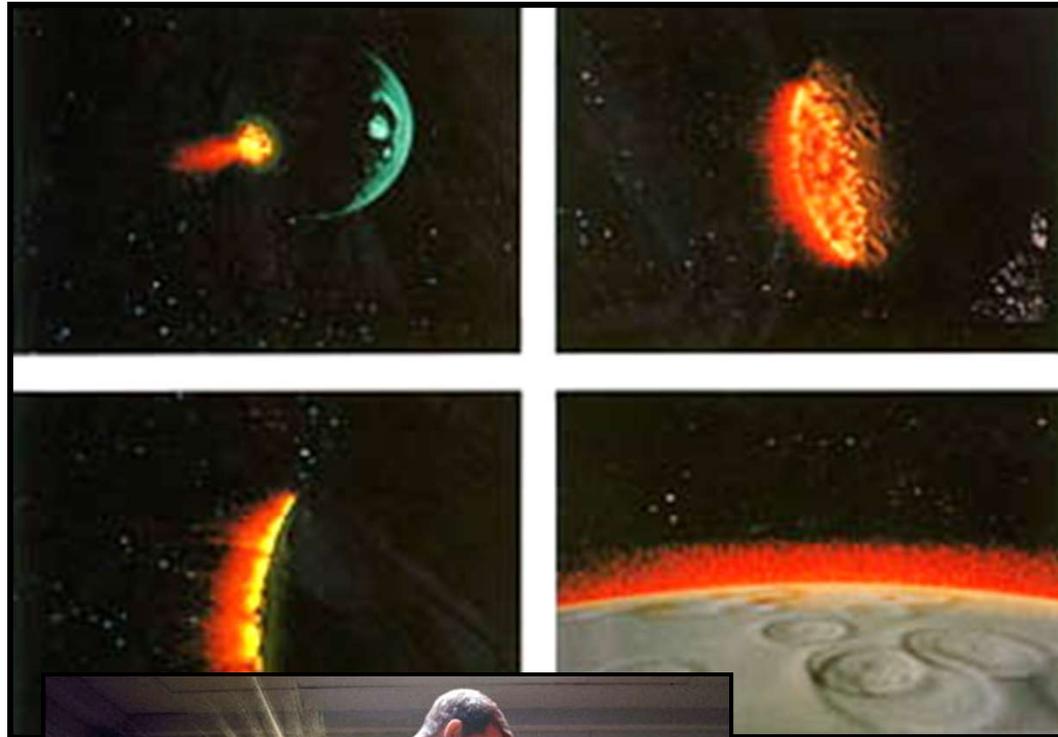

Pixar



Disney/Pixar



Sony/Marvel

Particle System Examples

(Particles don't have to actually *be* particles.)



20th Century Fox




Disney



Disney


Particles Bouncing Off Other Objects

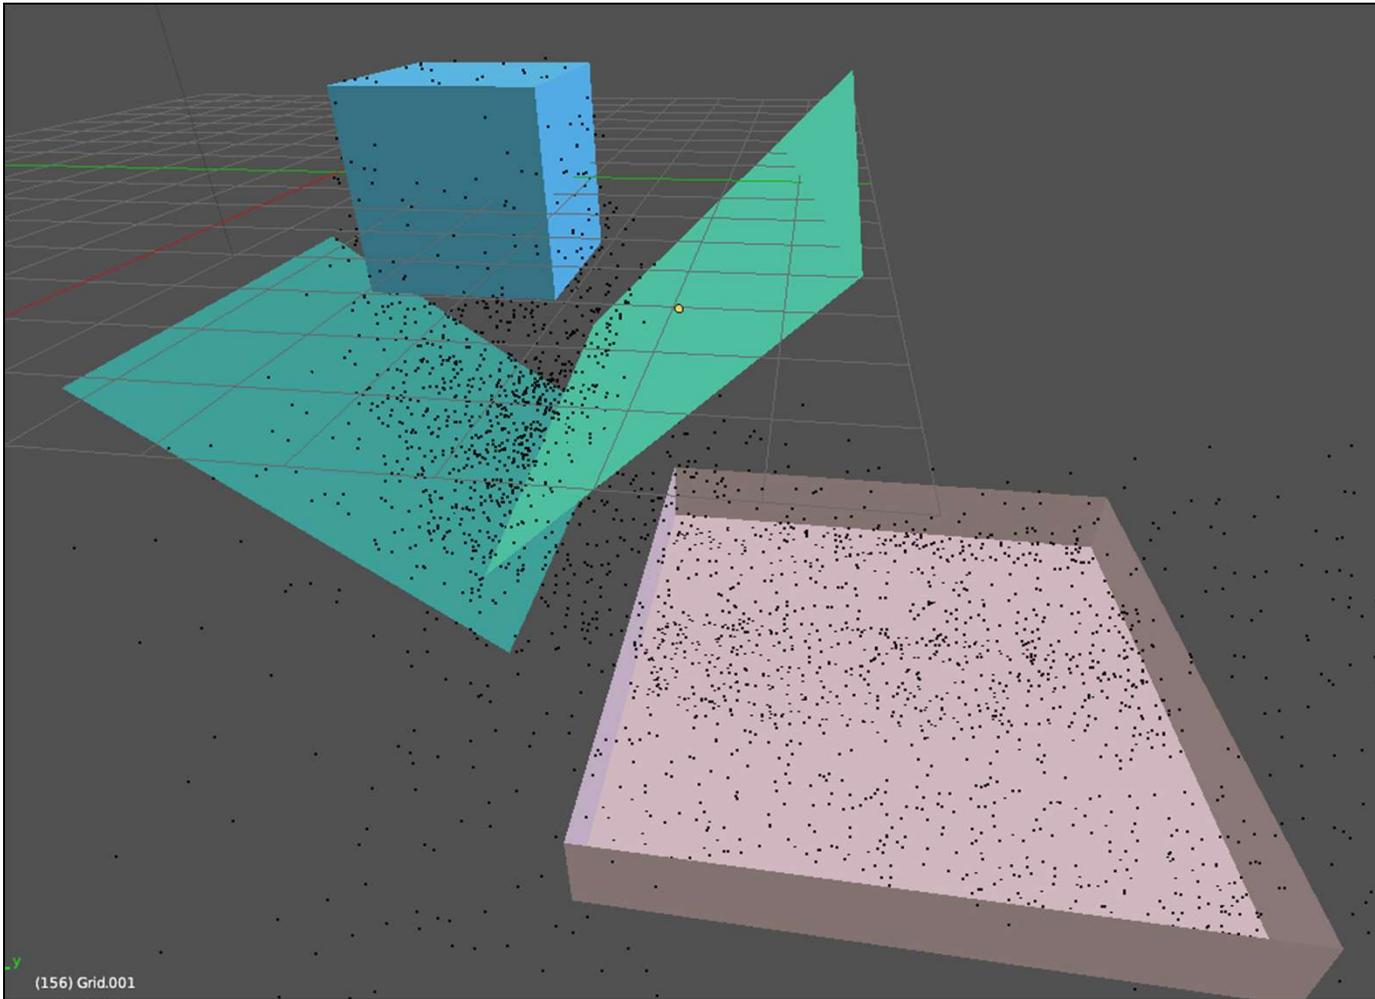


particles.blend

Particles– The Setup

1. Select the object to emit the particles from, then click this property button



2. Click the + sign to start a new particle system

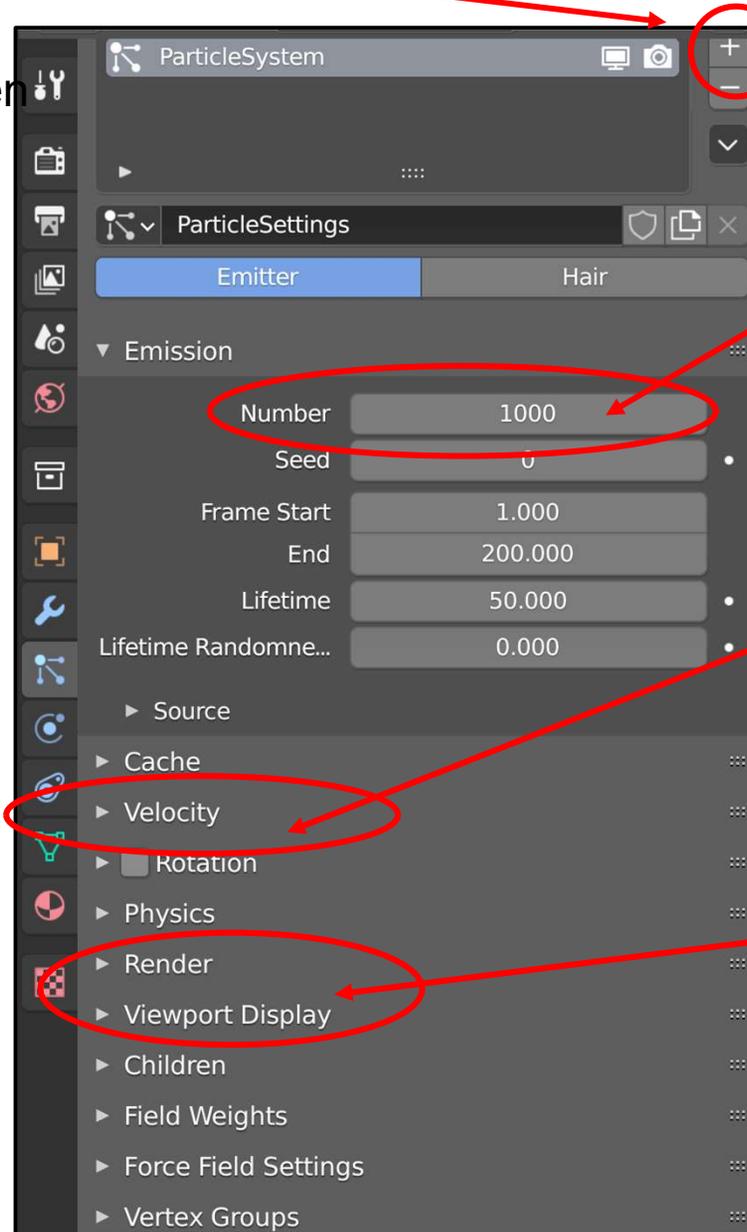


3. Set the number of particles

Optional: Set the particles' initial velocities – see the next slide

Optional: Set the rendering properties -- see two slides from here

Particles – Expand the *Velocity* Dialog Box

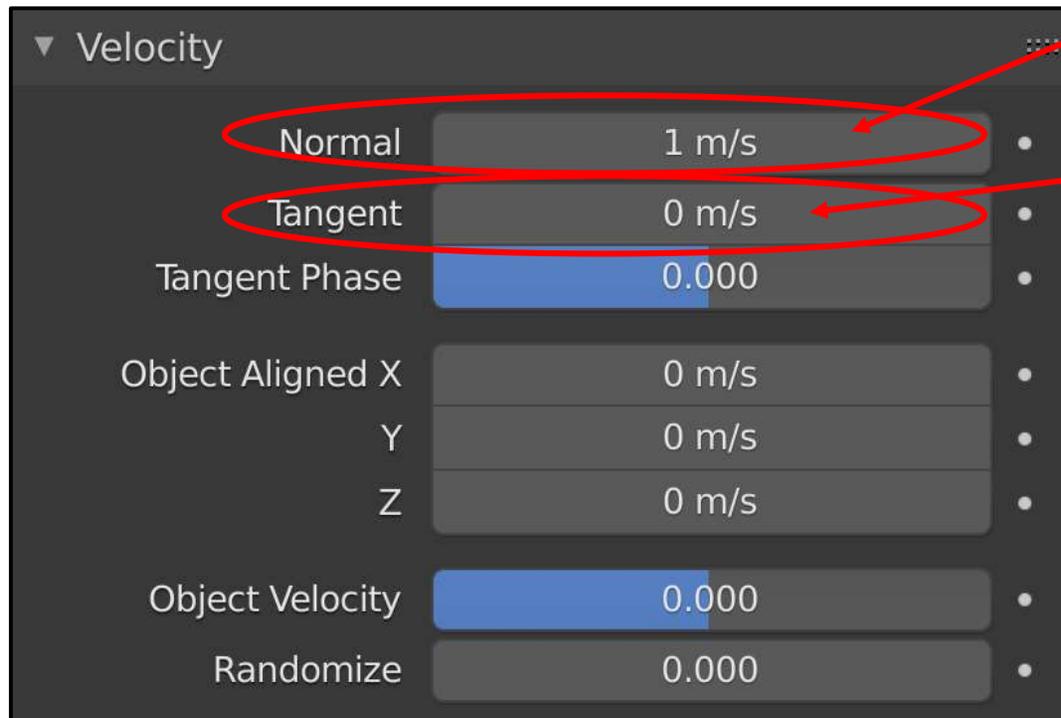


The velocity perpendicular to the surface

The velocity parallel to the surface



Particles – Expand the *Render* and *Viewport Display* Dialog Boxes

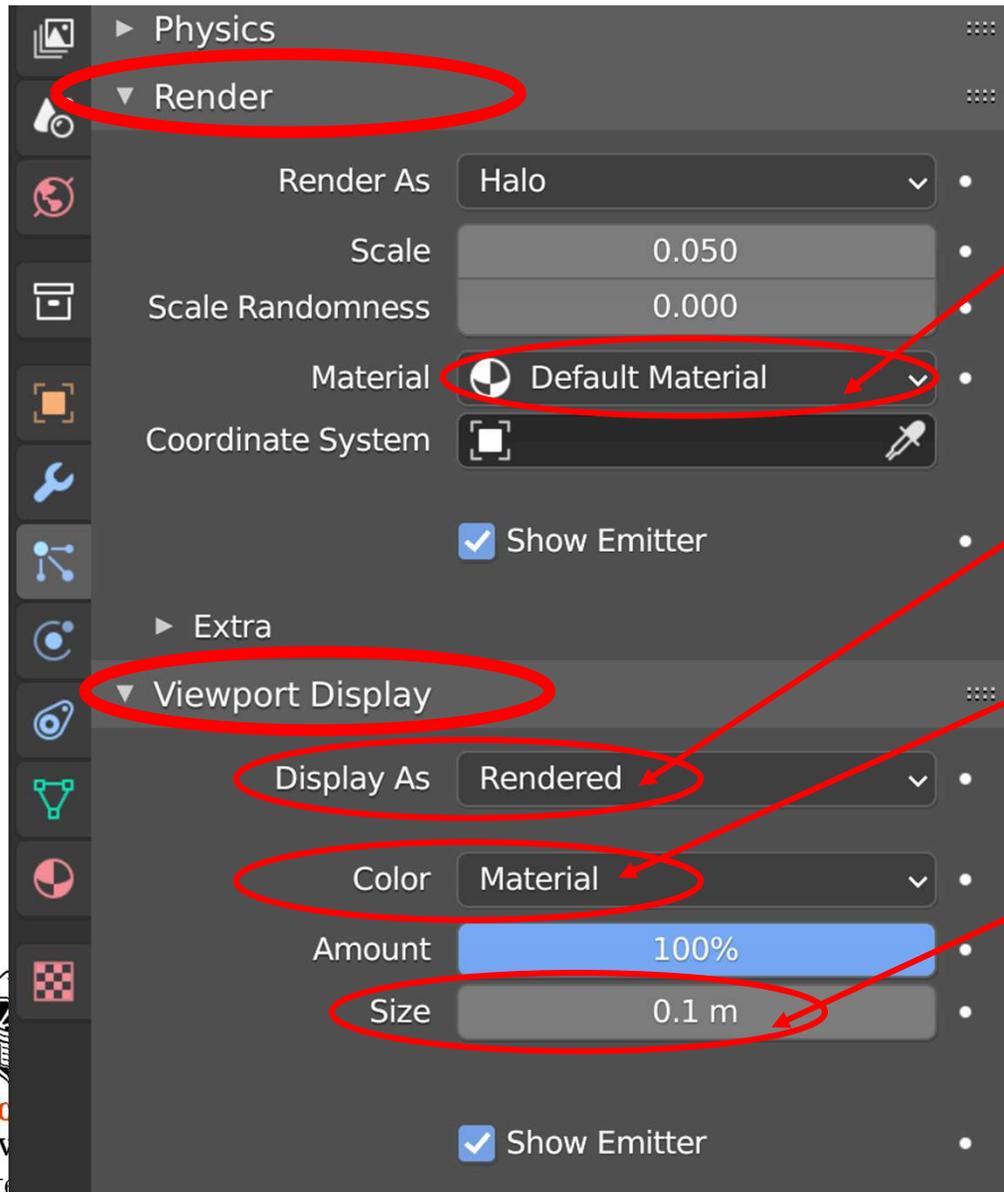


What material definition to color the particles with

What particles to draw (this is fun to change!)


If you like physics, change this to velocity

Start with a small size, like this, but then experiment





Click here to at the bottom
of the screen start the
particle animation

Hit the **ESC** key when you
want it to stop

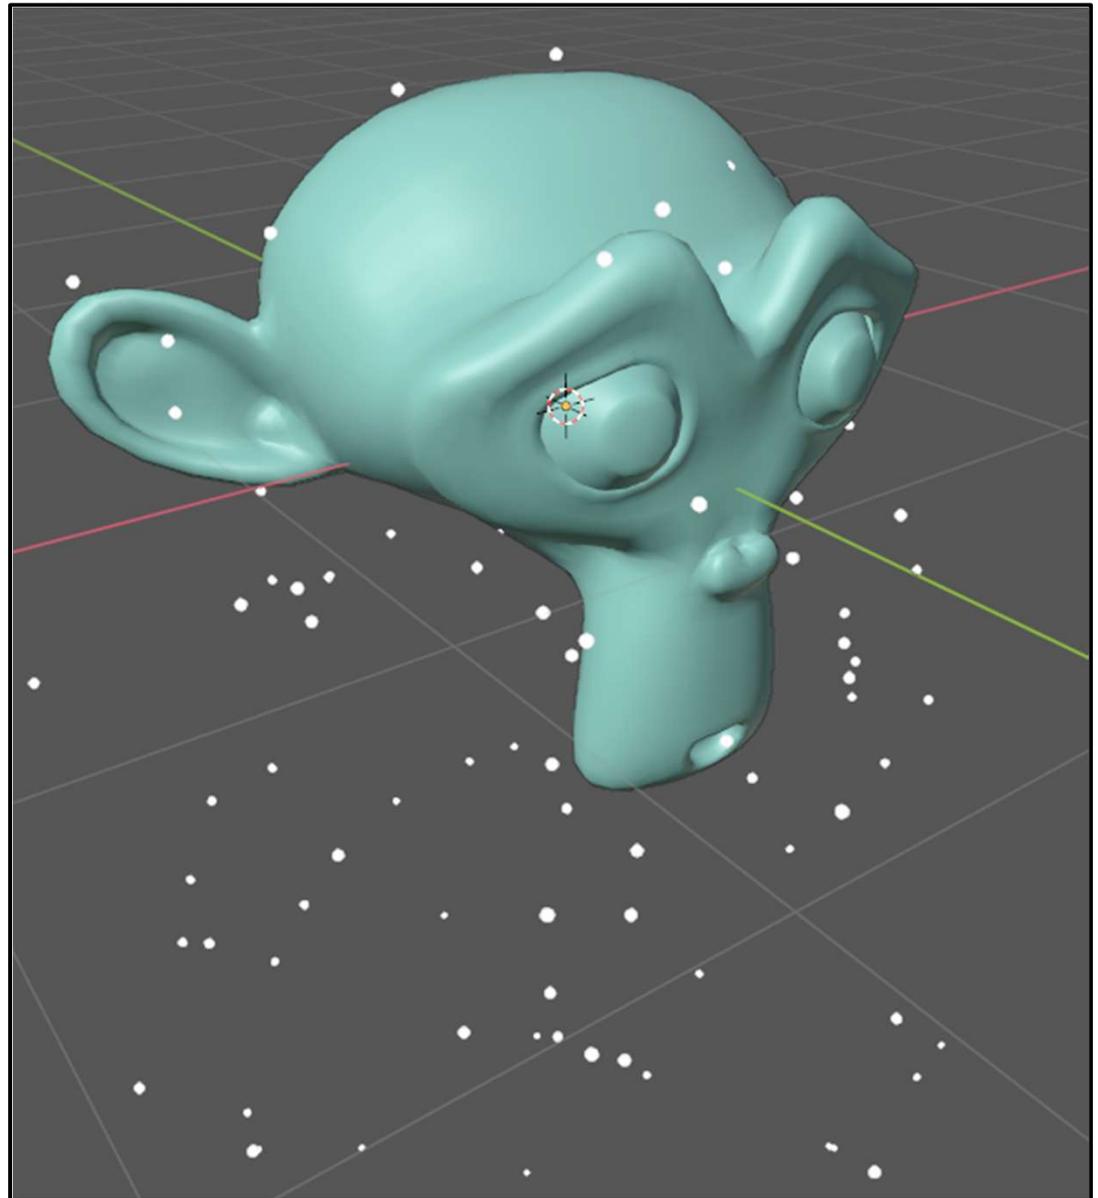


Particles Bouncing Off Other Objects

1. Draw a plane to bounce particles from
2. Click the **Physics Property Button**
3. Click on the **Collision** option
4. Turn on the animation

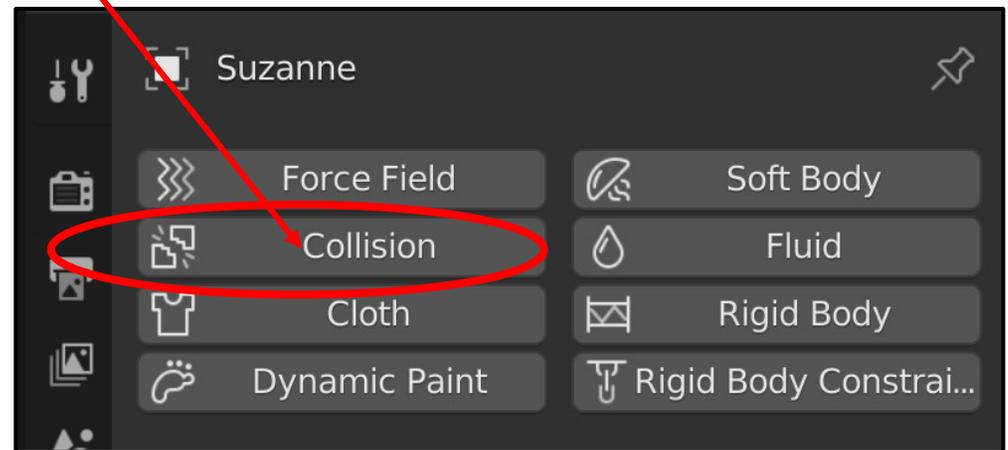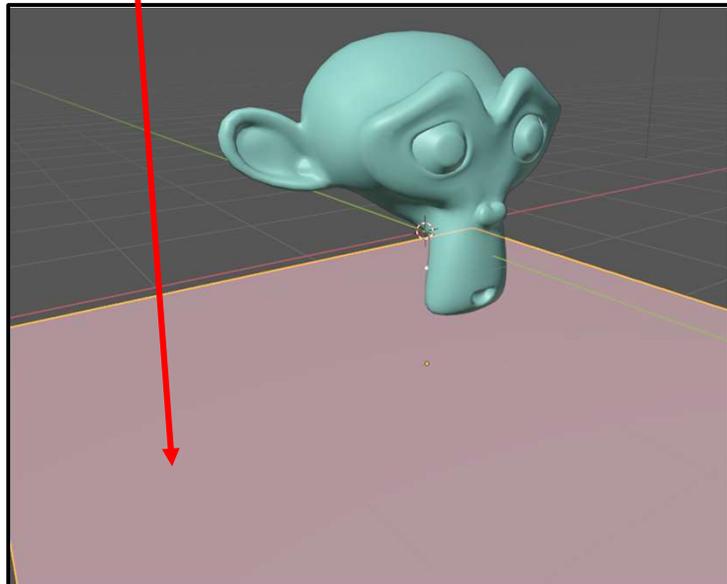


Particles Bouncing Off Other Objects

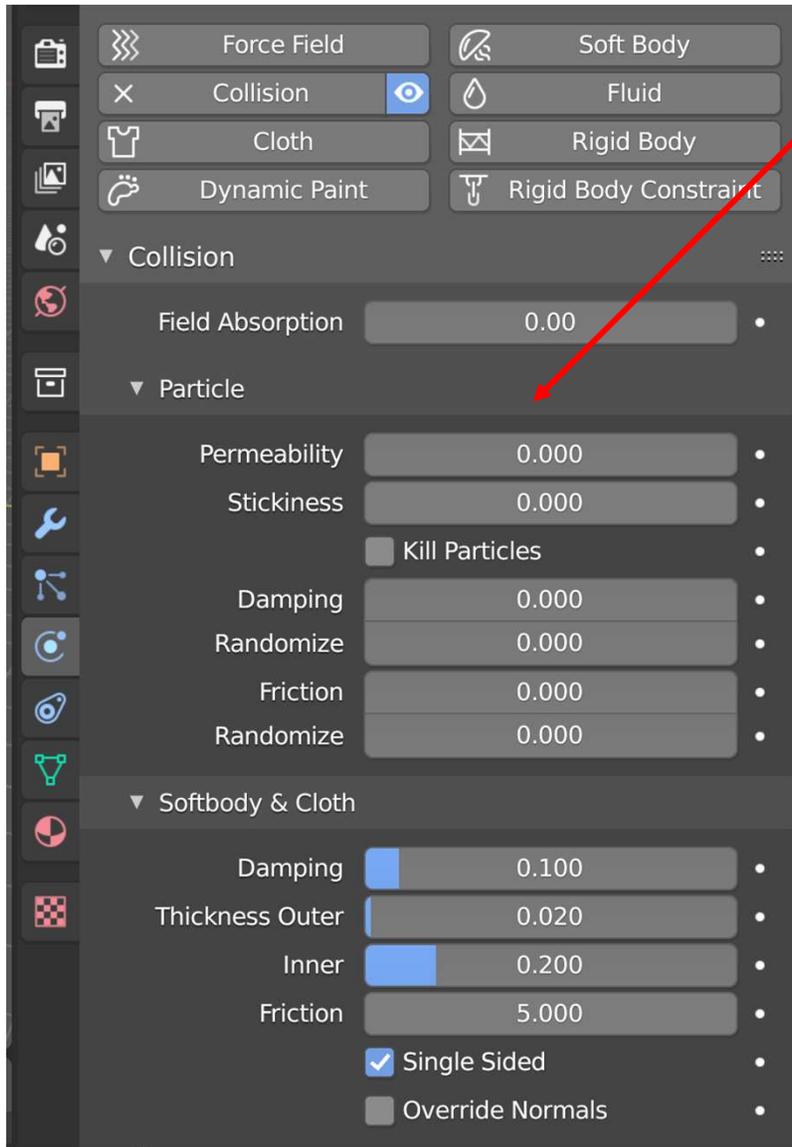


The image shows the Blender Properties Panel for a particle system. The 'Collision' tab is active, and the 'Particle' sub-tab is selected. The 'Collision' section includes 'Field Absorption' (0.00) and 'Particle' settings: 'Permeability' (0.000), 'Stickiness' (0.000), 'Kill Particles' (unchecked), 'Damping' (0.000), 'Randomize' (0.000), 'Friction' (0.000), and 'Randomize' (0.000). The 'Softbody & Cloth' section includes 'Damping' (0.100), 'Thickness Outer' (0.020), 'Inner' (0.200), 'Friction' (5.000), 'Single Sided' (checked), and 'Override Normals' (unchecked). A red arrow points from the 'Collision' section to the 3D view.

Physics properties of the surface being bounced off of


Bouncing particles

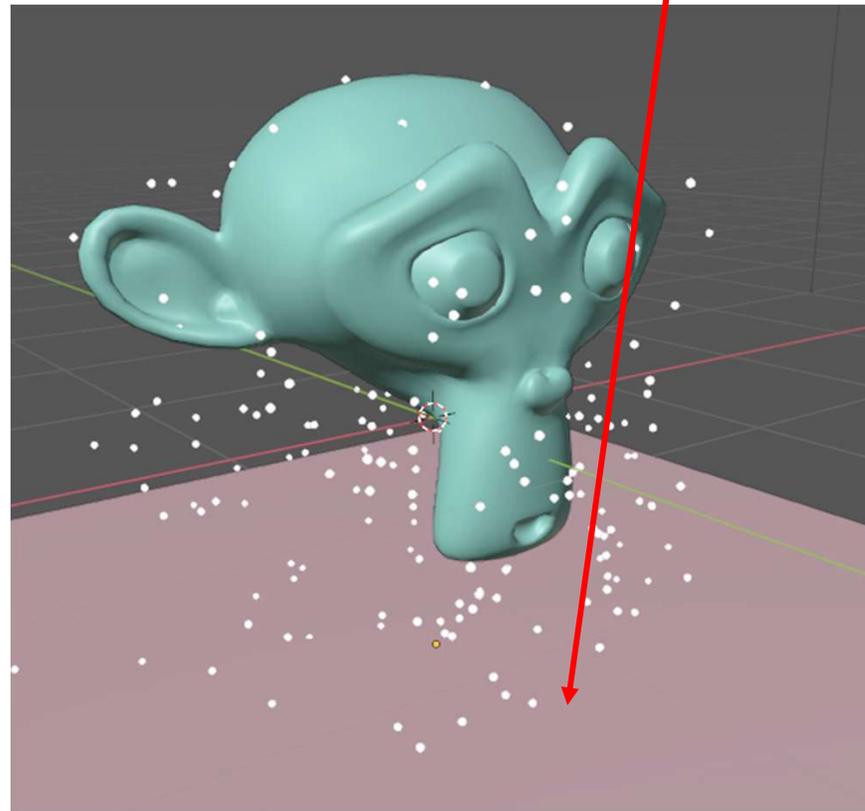

Something fun – Tip the Plane


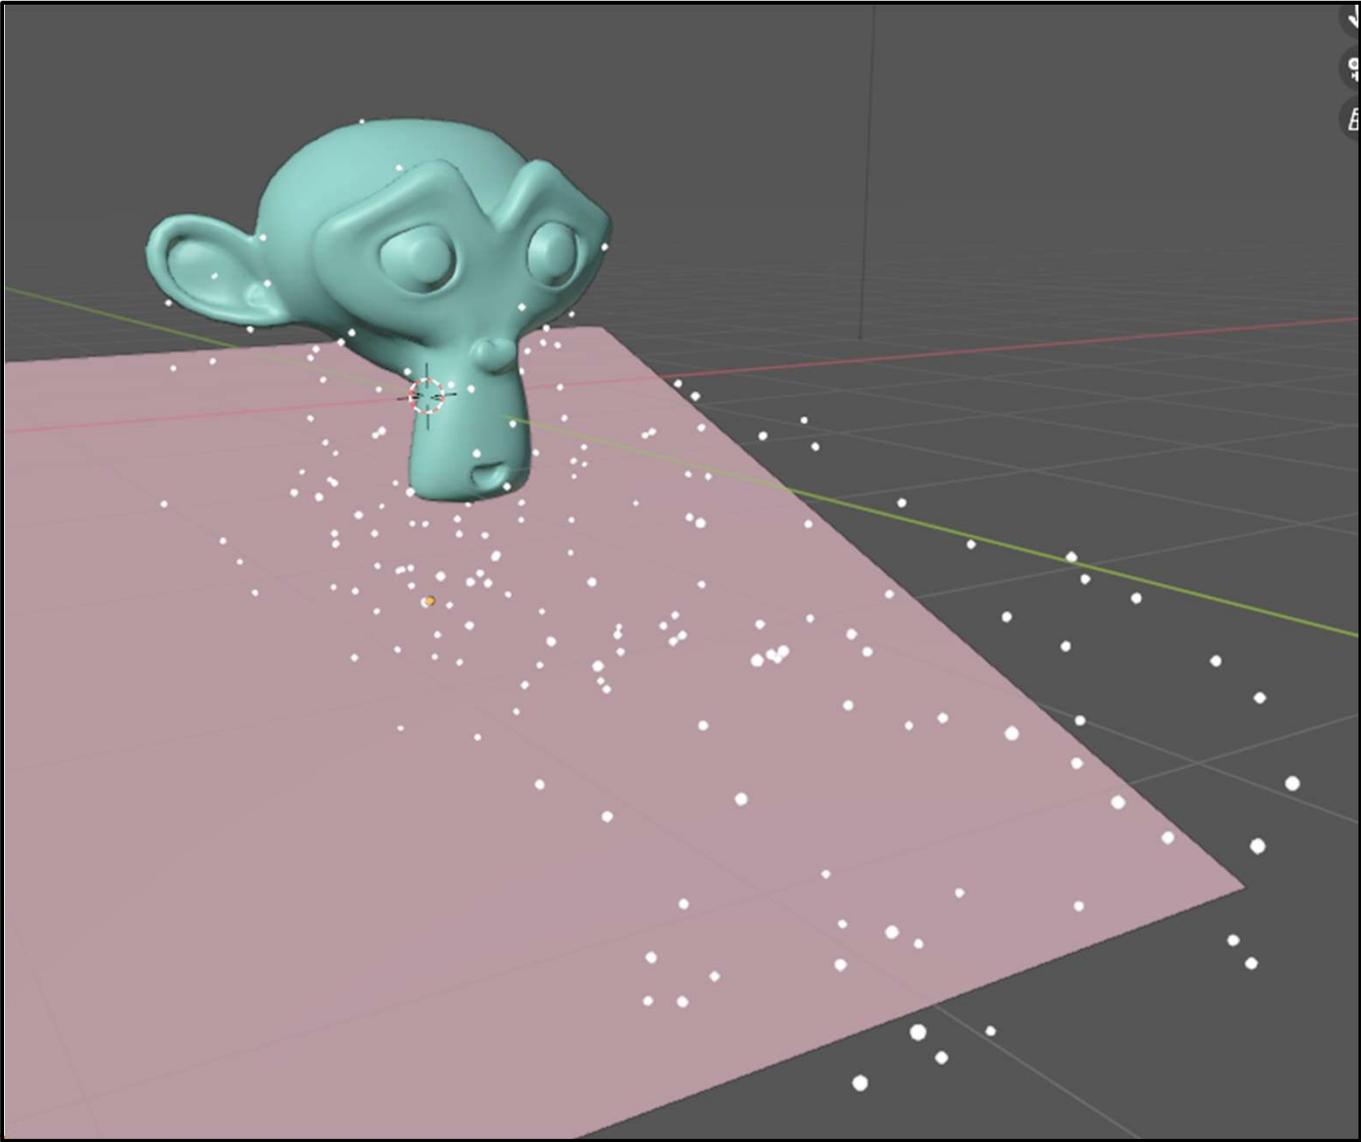


Something Fun – Put Something Else in the Way

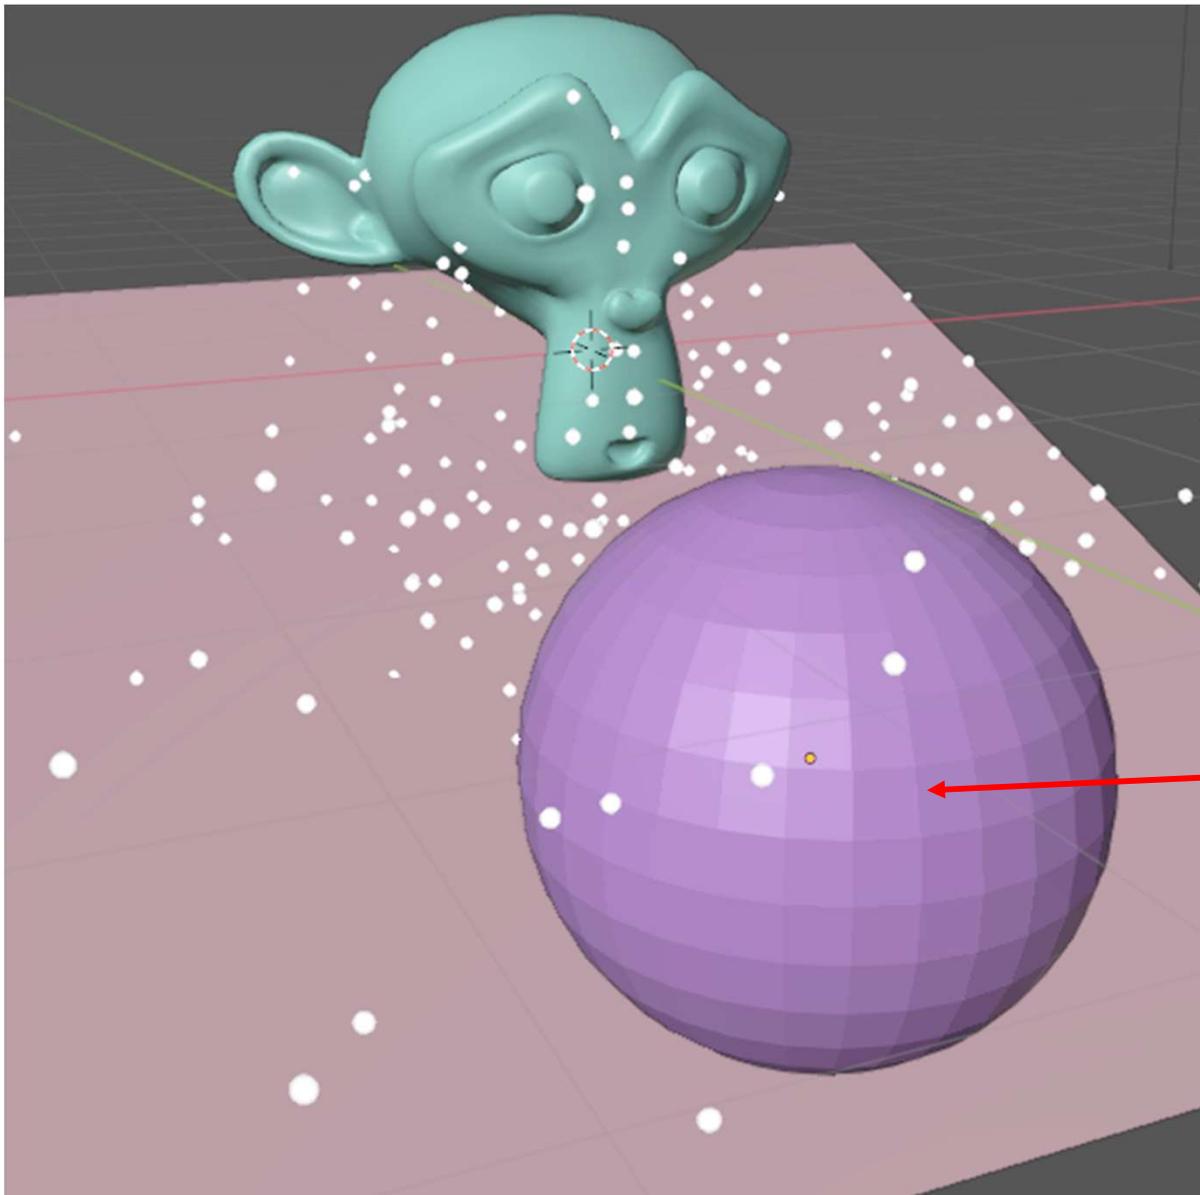


Need to make it a
Collision surface too.

More Fun – Make the Particles Another Object

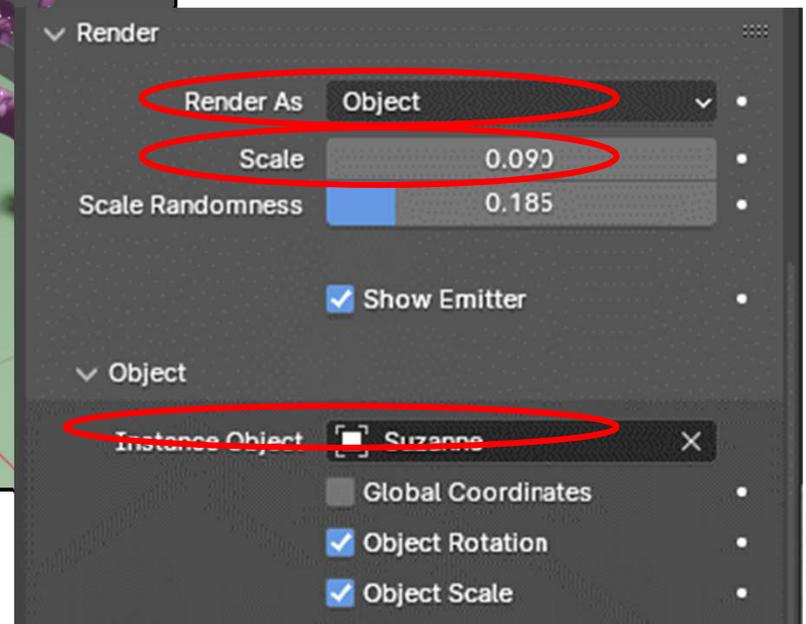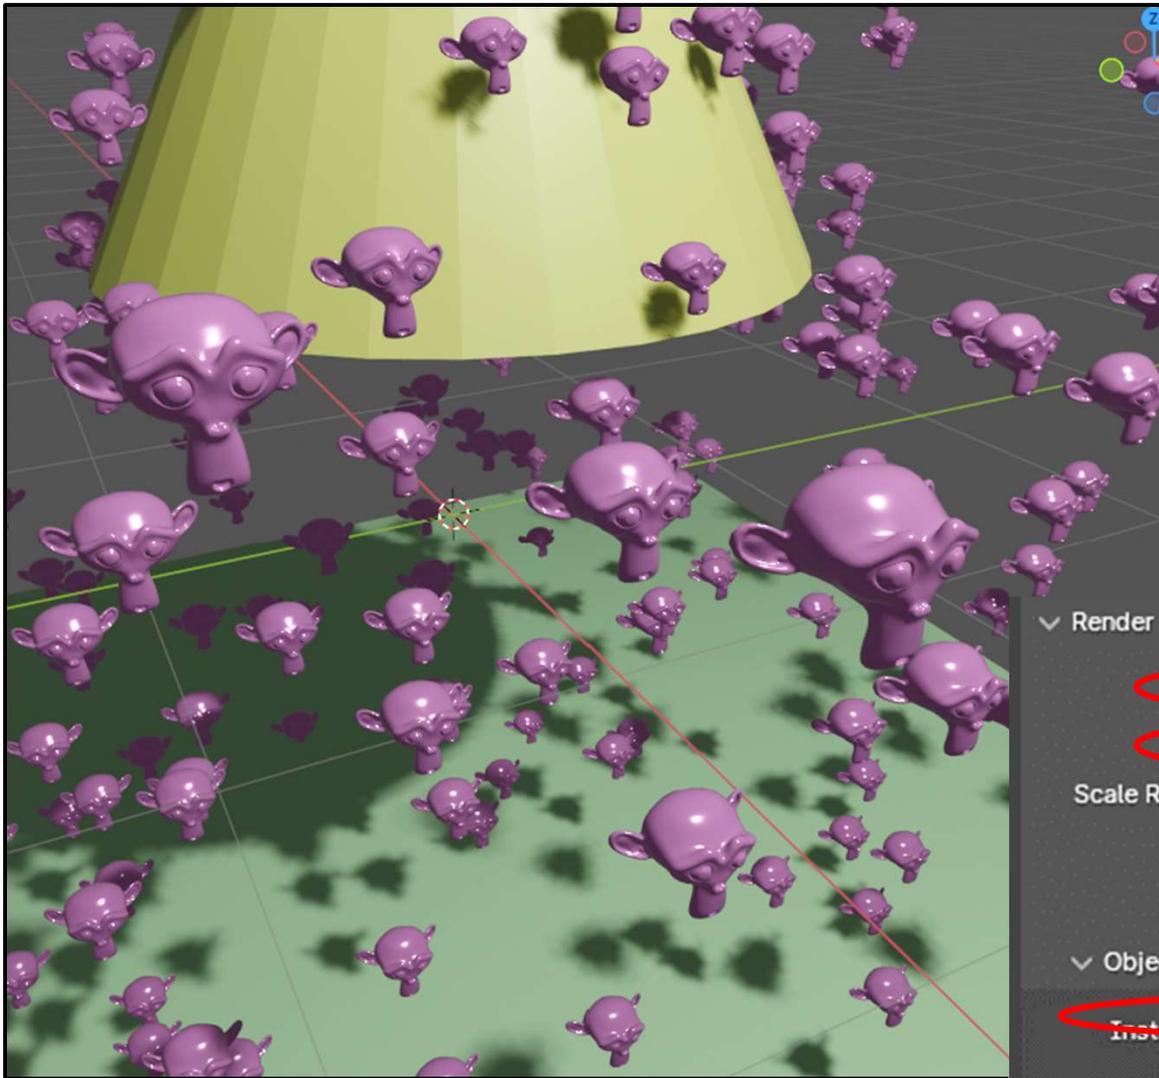

To Blow particles, We need a Force Field – Attach it to an Empty Object

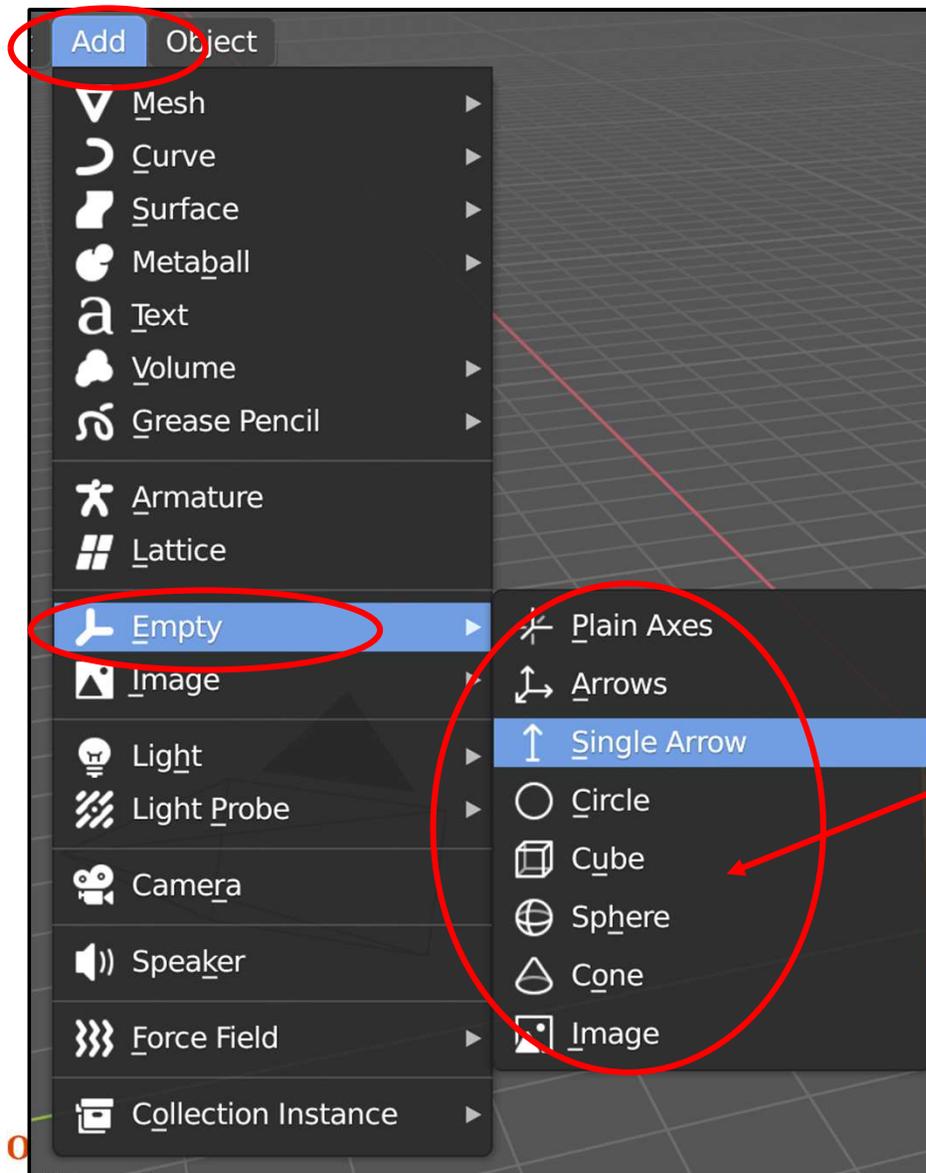


Ironically, one of the most useful objects is the one you can't see. Blender calls this an **Empty**.

It's invisible on the screen, but you can treat it like a real object, and can attach forces to it. These forces will influence the behavior of other objects.

Find the **Empty** under the **Add** tab at the top of the screen. When you click on it, this sub-menu pops up.


We need a Force Field – Attach it to an Empty Object

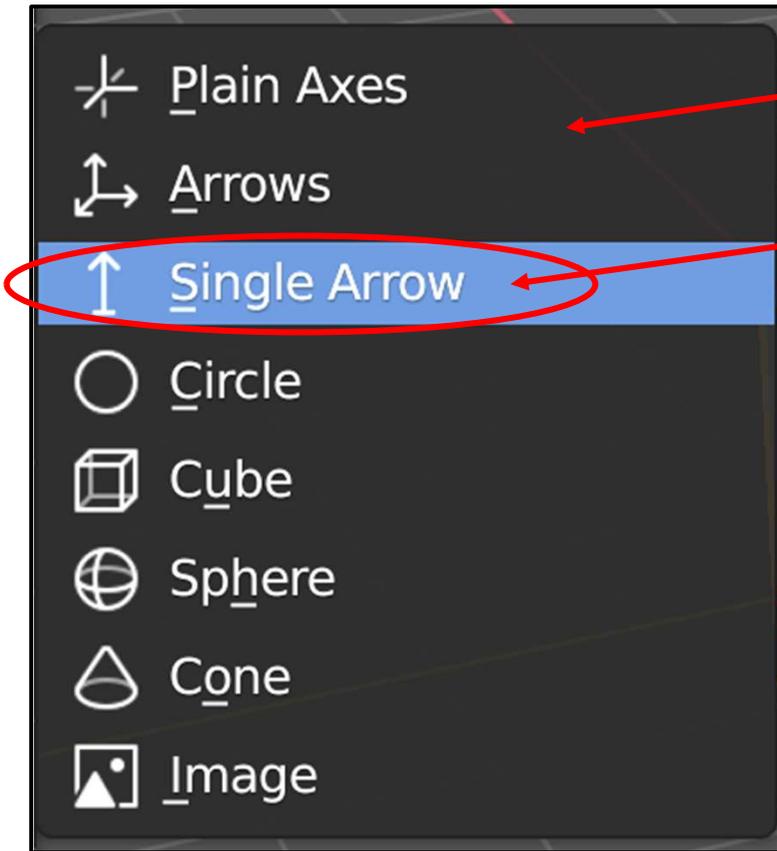


Surprise! Even though it is invisible, an **Empty** has a shape!

For this exercise, pick the **Single Arrow**

On the screen, it will look like this:.

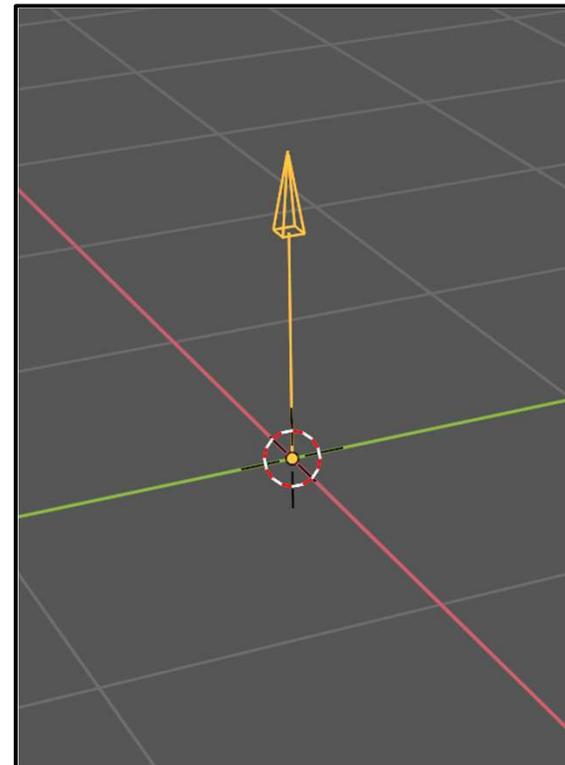

Blowing the Particles -- Force Fields

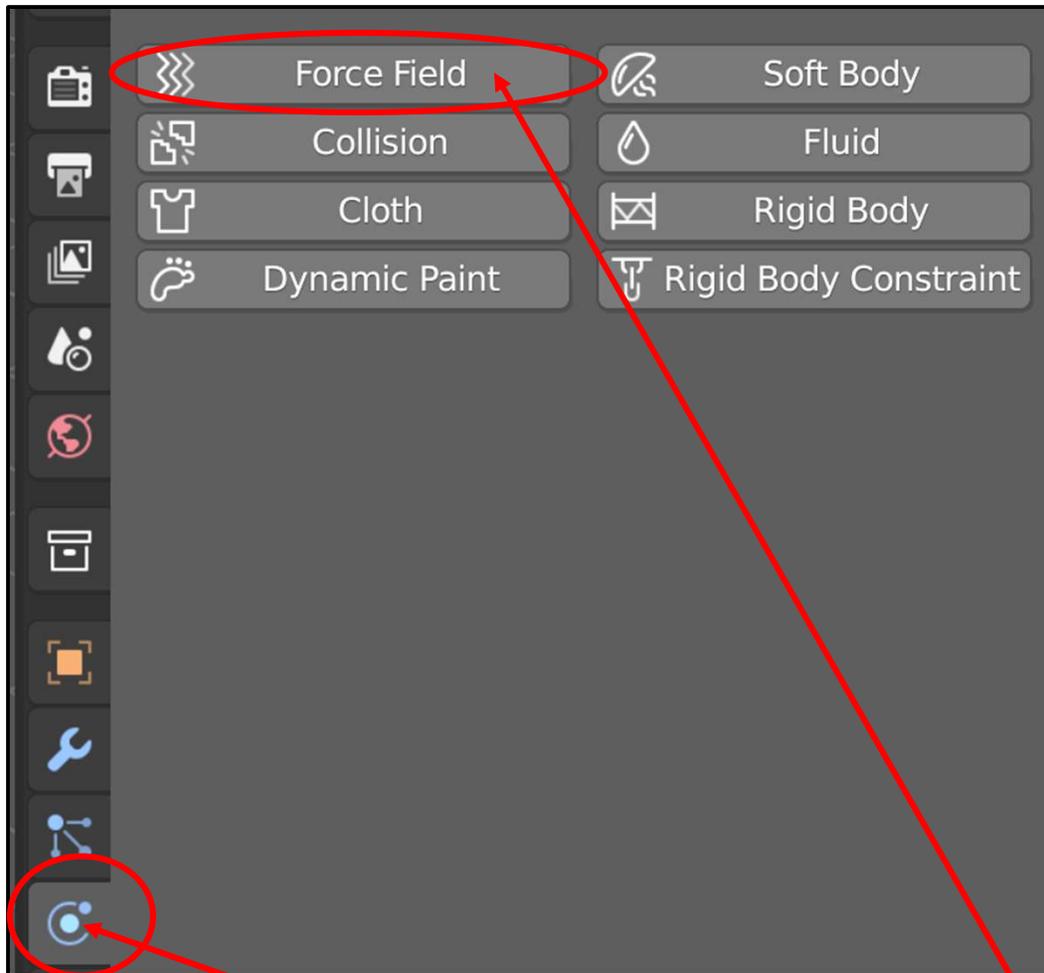

A really good use for **Force Fields** is to blow particles and cloth around

With the **Empty** Object selected, click on the Physics icon and then click on **Force Field**

Position and Orient the Empty



Using the usual object-rotate commands, orient the **Empty** so that it is pointing at the particles.

Hint: it is easiest to *position* it in Global Coordinates ($g \rightarrow x$) and easiest to *rotate* it in Local Coordinates ($r \rightarrow x \rightarrow x$).

And, under **Force Field Type**, select **Wind**



You will use this to change the **Strength** of the wind

It will look like this on the screen:

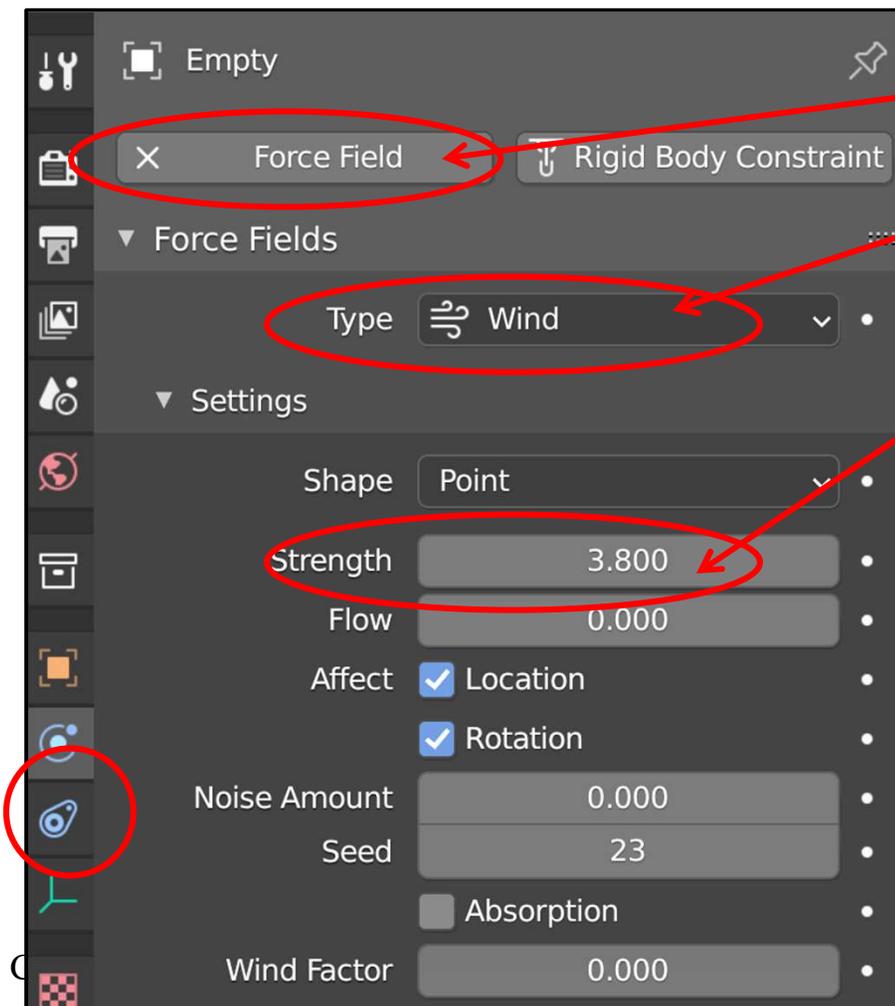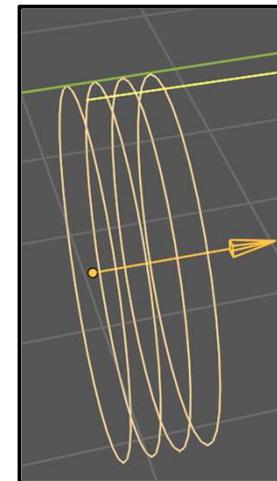

Blowing the Particles

Turn on the animation (Control-'a'). You can adjust the orientation and the **Strength** of the Wind while the animation is playing to get just the effect you want.

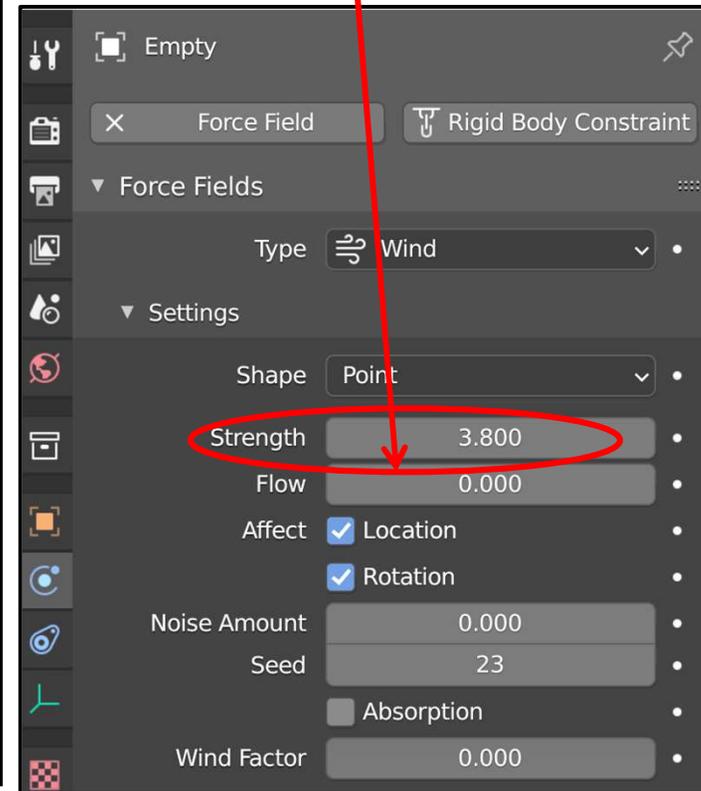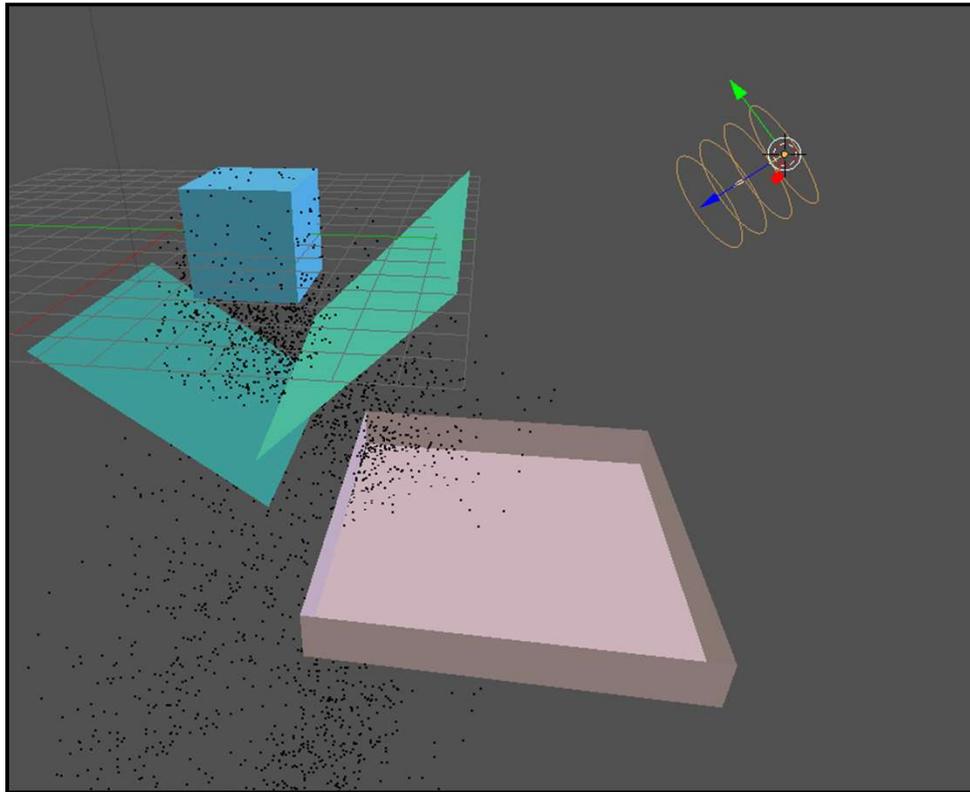


Particle Systems for Hair

1. Select the object to emit the hair from, then click this property button



2. Click the + sign to start a new particle system

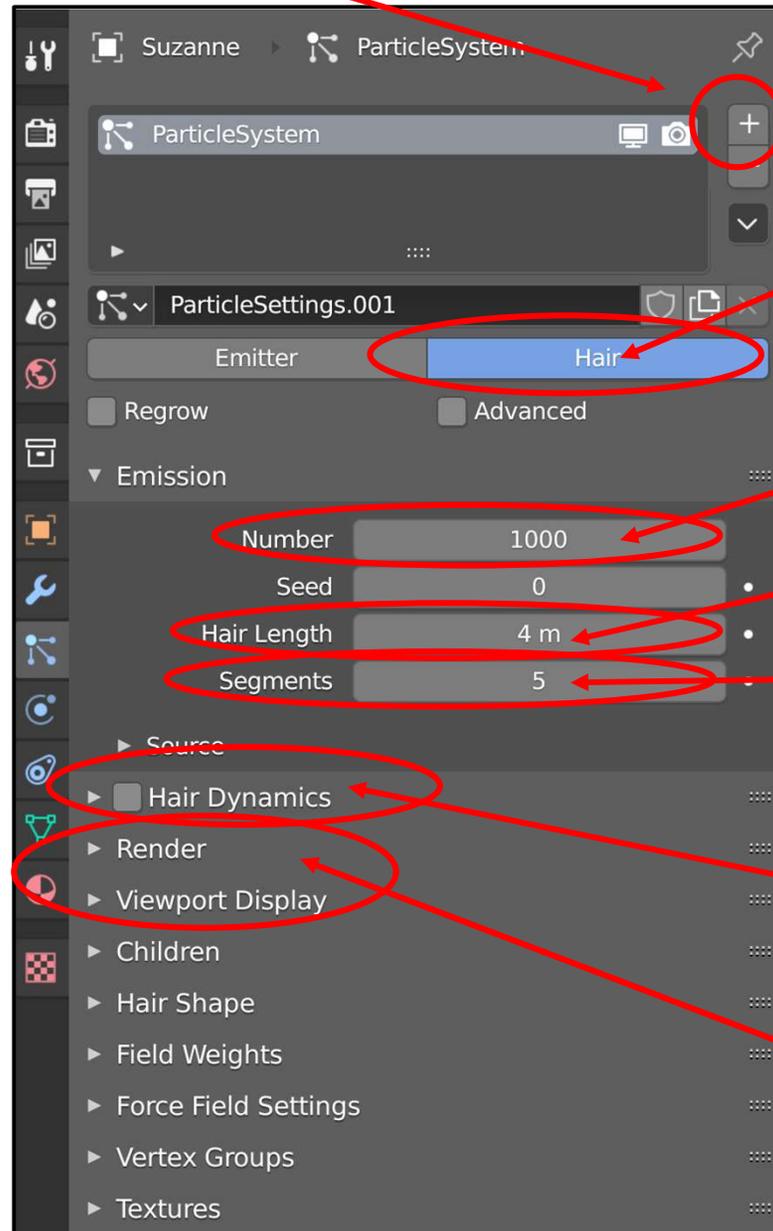

3. Select **Hair**

4. Set the number of strands


5. Set the hair length

6. Set the number of segments per strand

7. Apply physics to the hairs


8. Set the rendering properties

It Will Start Out Looking *Terrible*

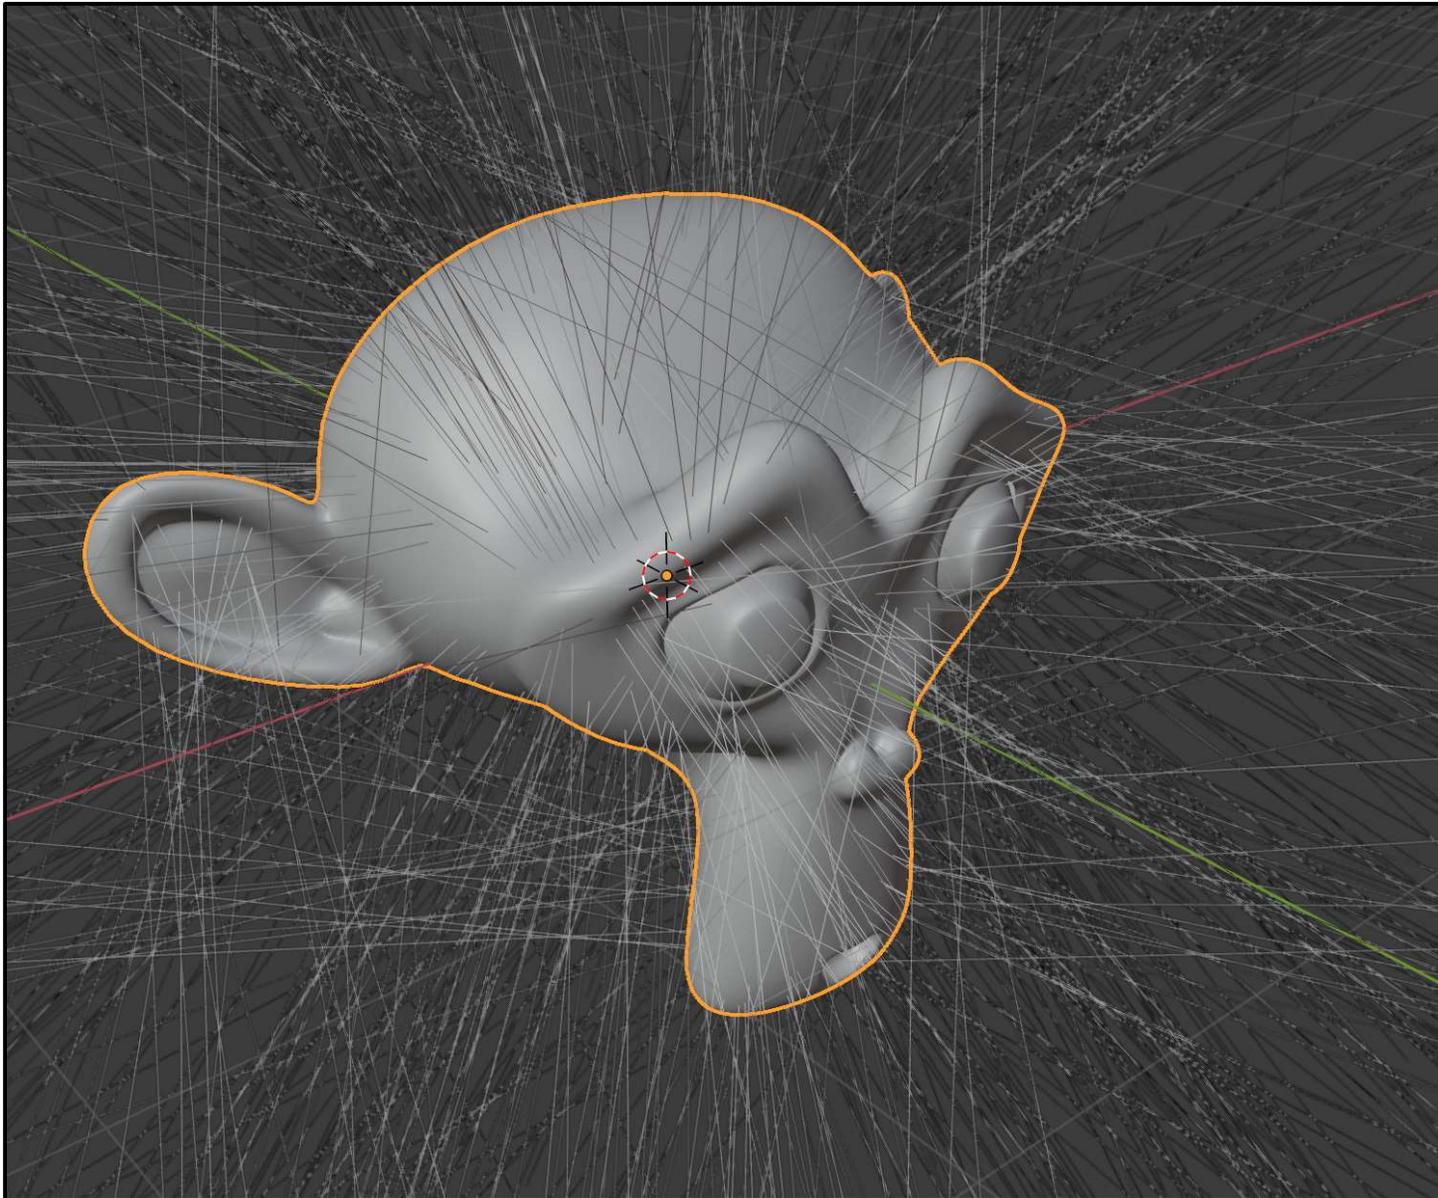


Try setting the **Hair Length** to something small-ish like **0.5** or **1.0**

Making the Hair Droop

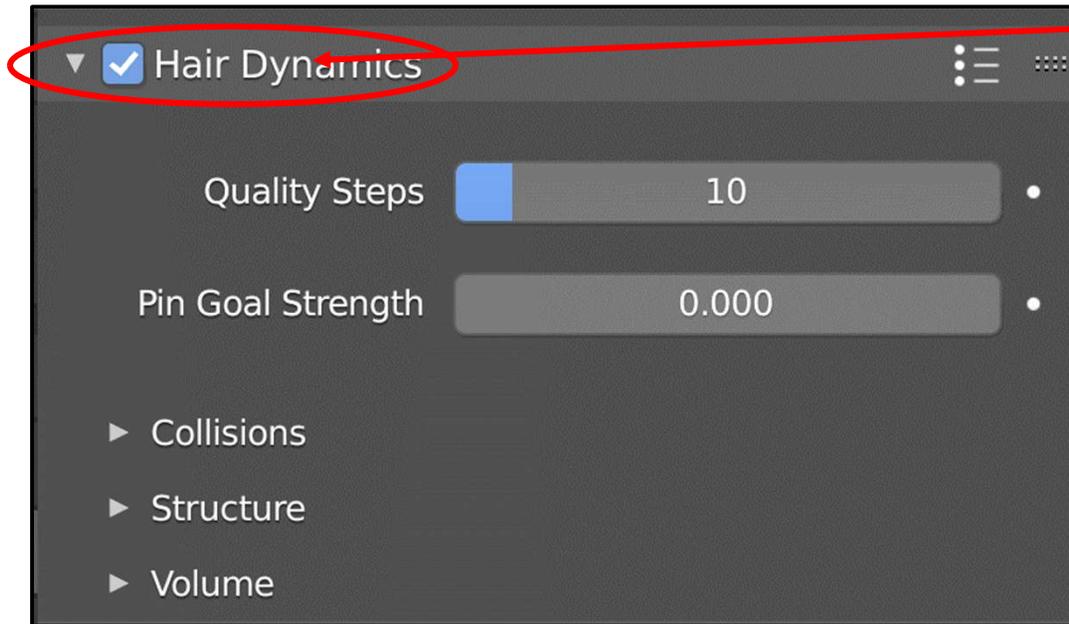


Turn on and expand **Hair Dynamics**

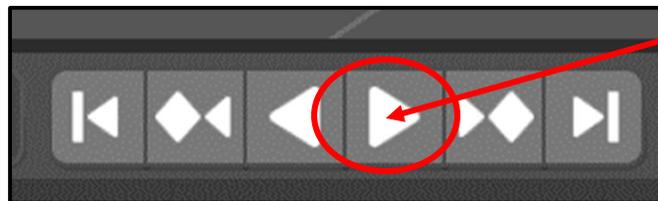


Start animating to start the hair-droop simulation

Animating the Object and the Hair

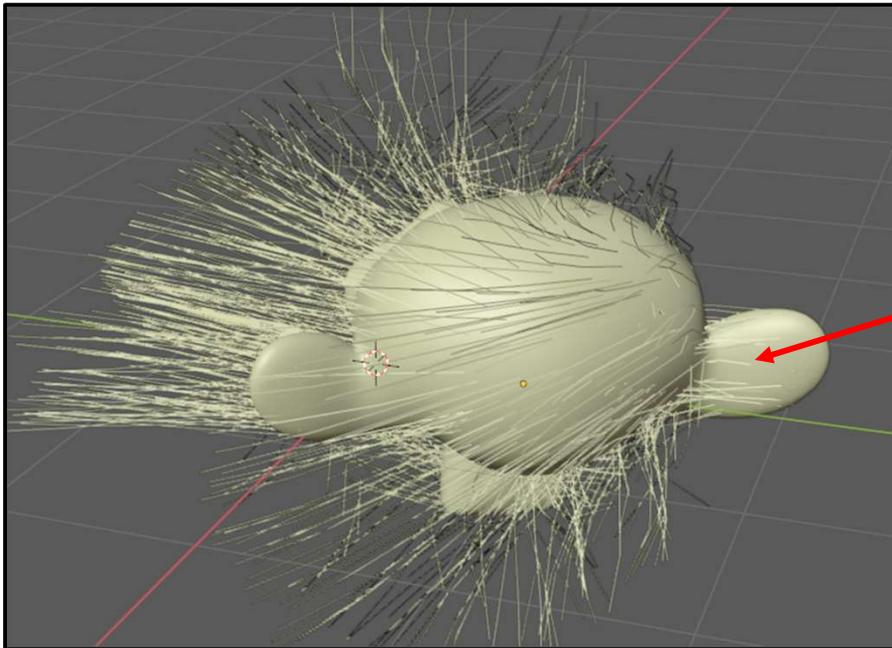


At this point, I like to keyframe-
animate the object with the hair.
Here Suzanne is translating and
rotating, as the hair movement
is showing.

Start animating

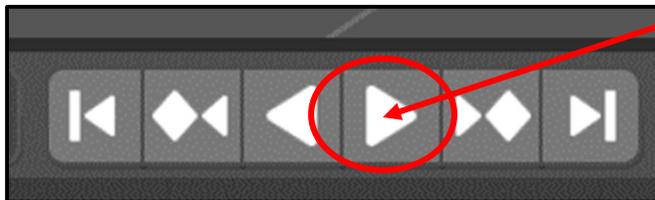

Making the Droop Permanent

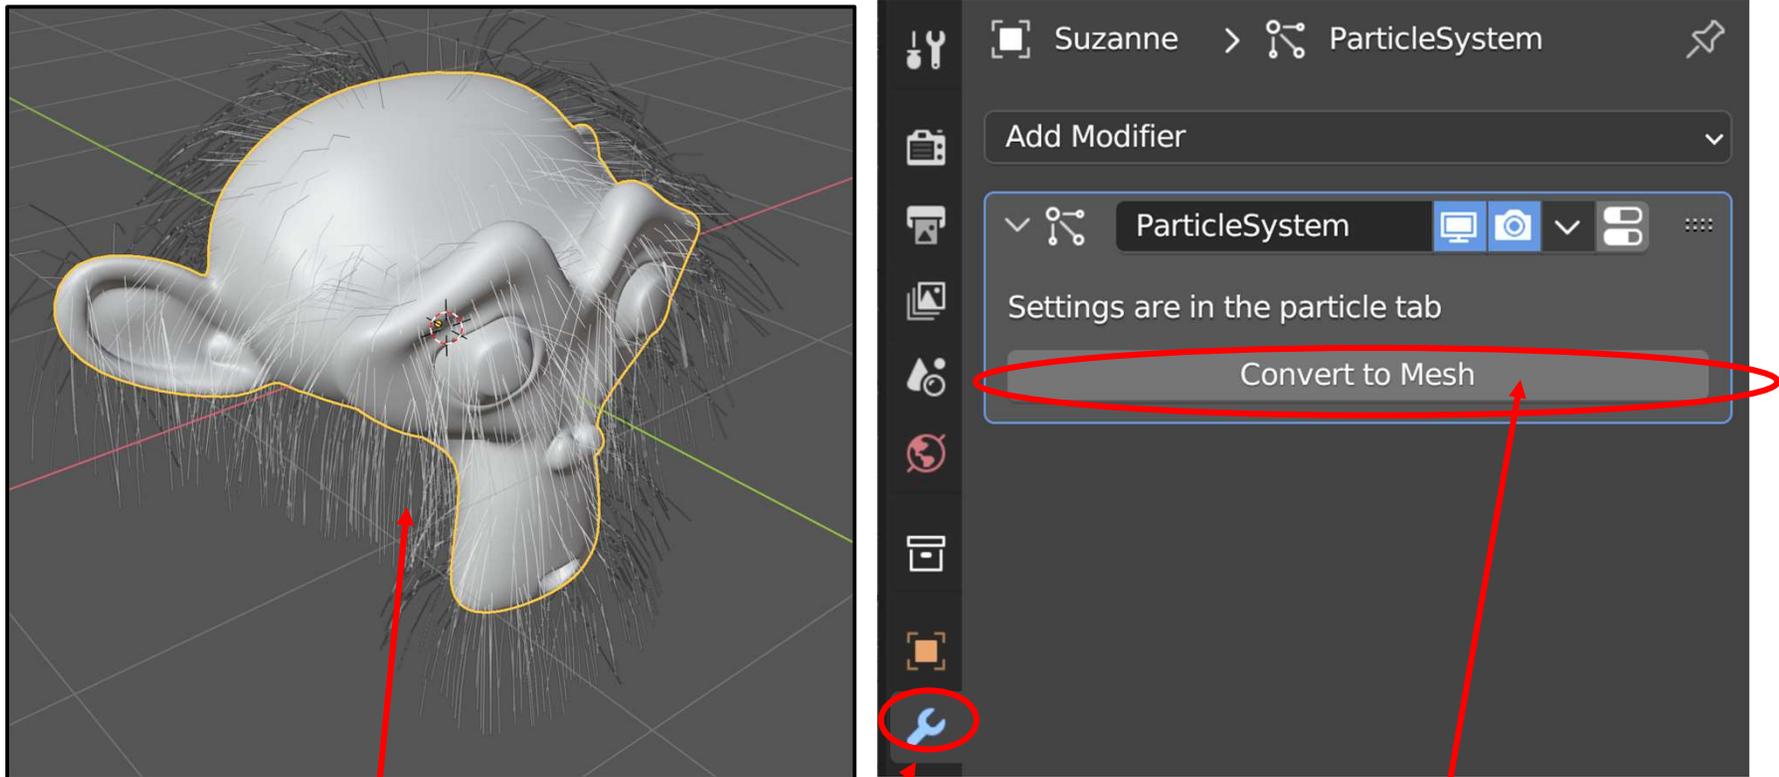


Get the droop the way you want it

Select **Modifiers** – a ParticleSystem modifier will already magically be there

Click on **Convert to Mesh**. This will turn the hair into a mesh object.


Making the Droop Permanent

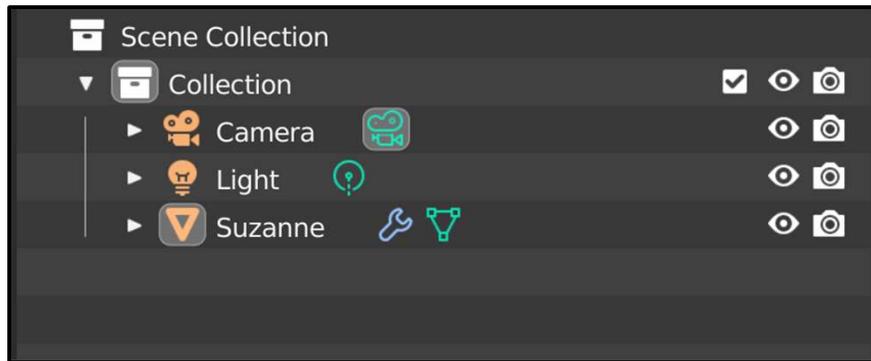

Before clicking **Convert**



After clicking **Convert**

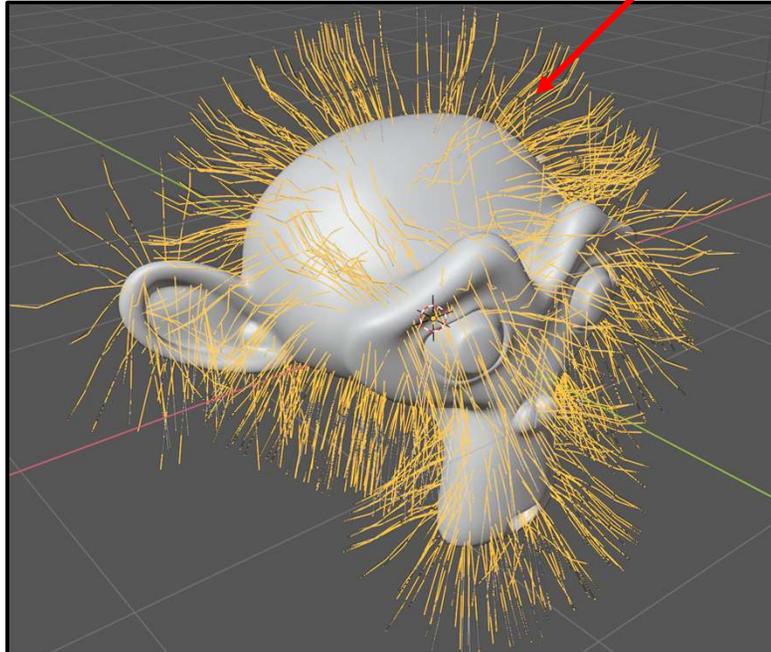

But this new mesh is *independent* of the object that particle'd it. To make them one object again, select both and hit **RMB**→**Join** (or **Control-j**)


Making the Droop Permanent



Boids Particle Systems

Boids are a special particle system technique to simulate living things that naturally want to group together such as flocks of birds, schools of fish, etc.


As before, create an object and attach a particle system to it. Select **Emitter** for the type. Under the **Physics** tab, change Newtonian to **Boids**.

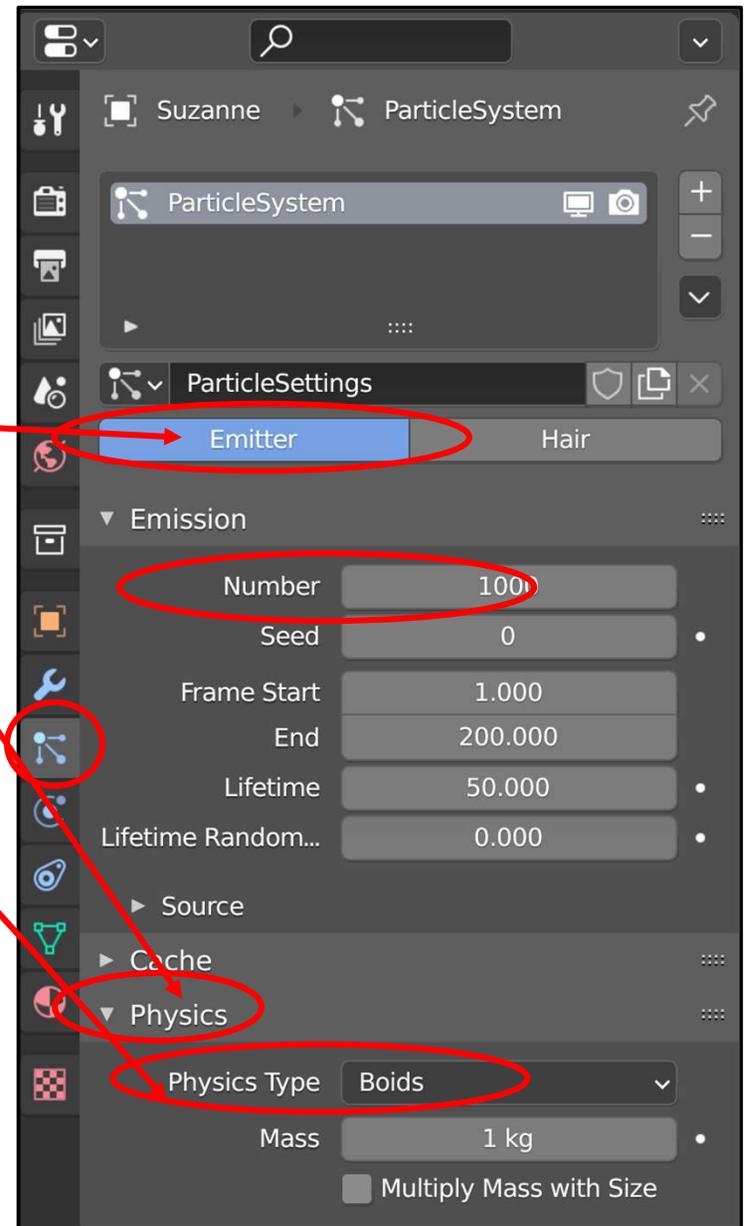

Boids Particle Systems

Select the **Boid Brain** tab.

Click the **plus sign (+)**,
Select **Follow Leader** from the menu,
and use the **arrow symbols** to move it to
the top of the list

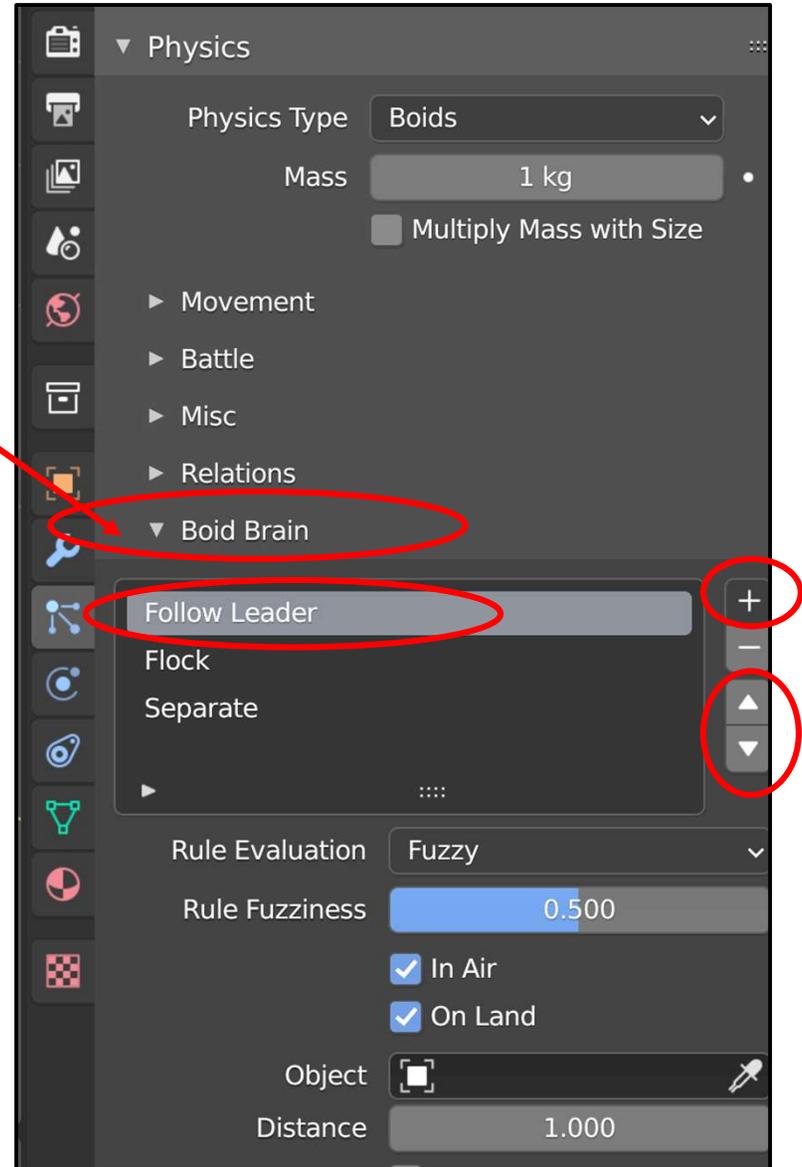


Boids Particle Systems


Create a new object and animate it (keyframe or physics). This will become the “leader” that the boids will follow. If you want to see it, leave it visible. Otherwise, turn its eyeballs off in the **Outliner**.

Now select the object that the boids were created from. In the boids menu area, click in the **Object** area and select the name of the object you animated.

Now, turn on animation and watch the boids follow that object.

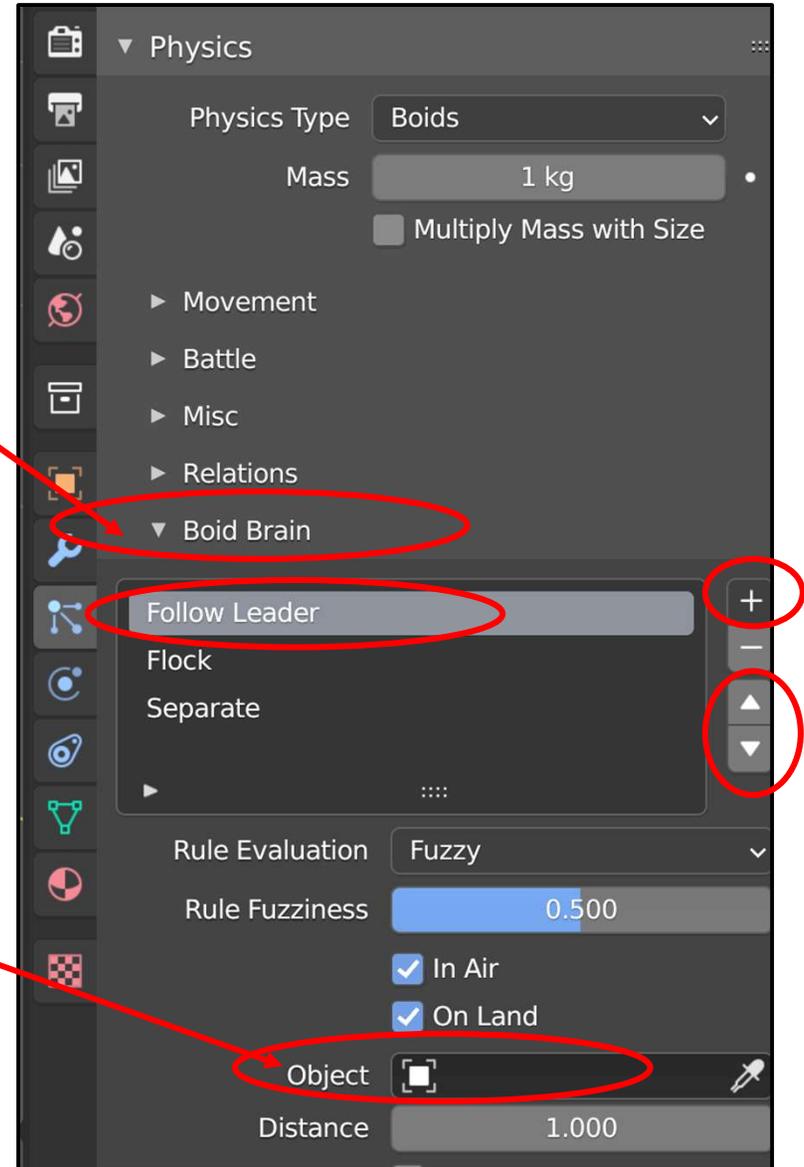


Boids Particle Systems

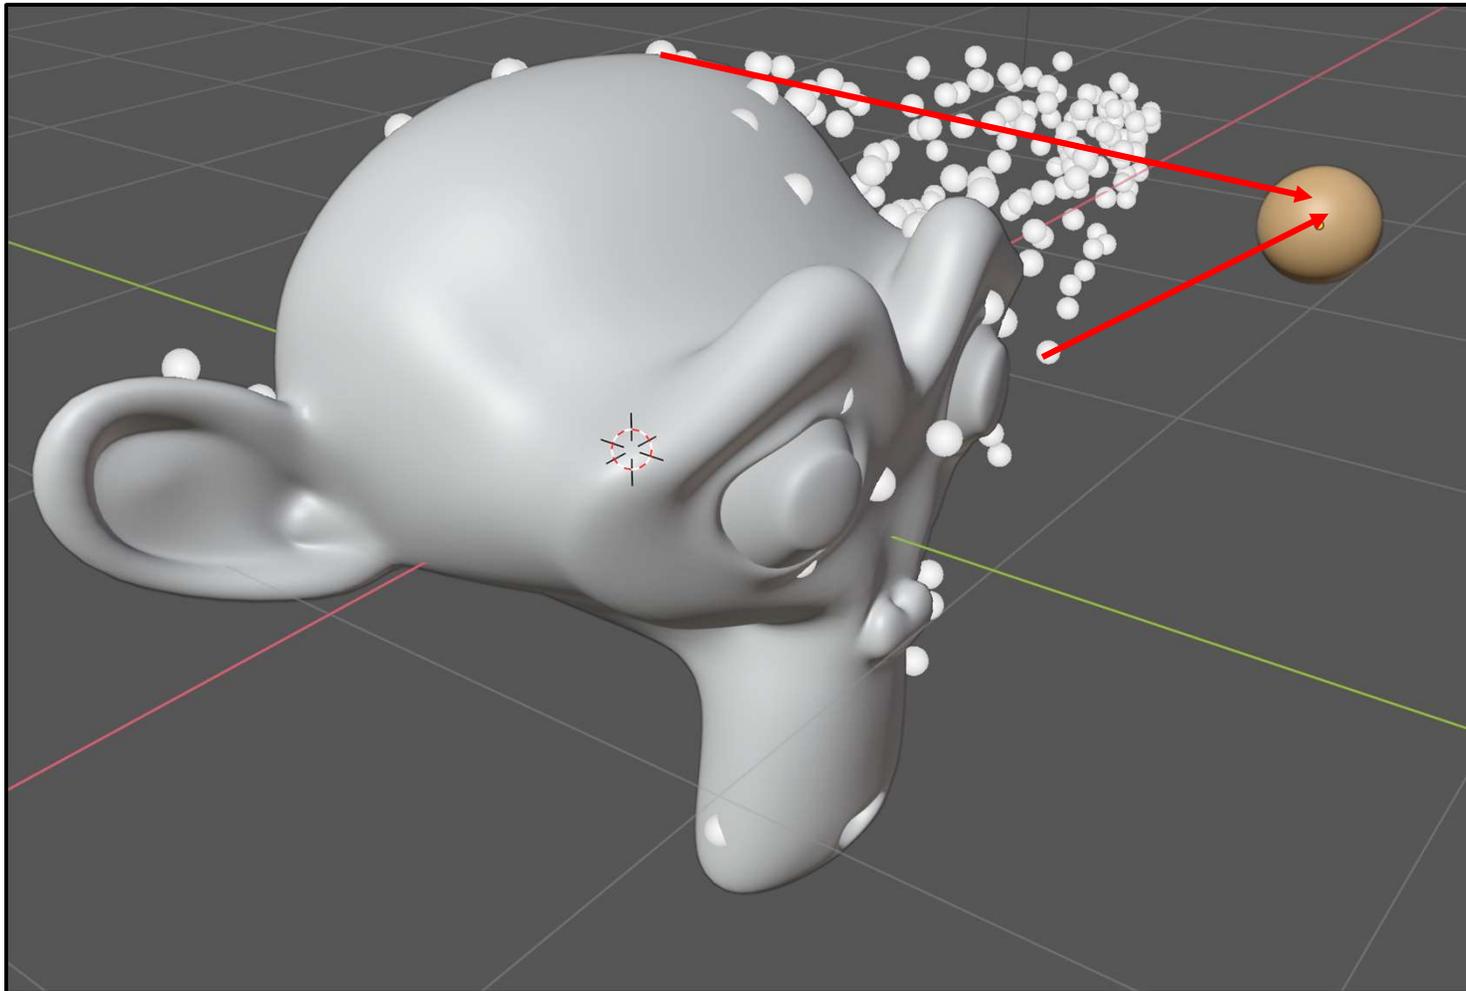


The boids now follow the leader


Boids Particle Systems

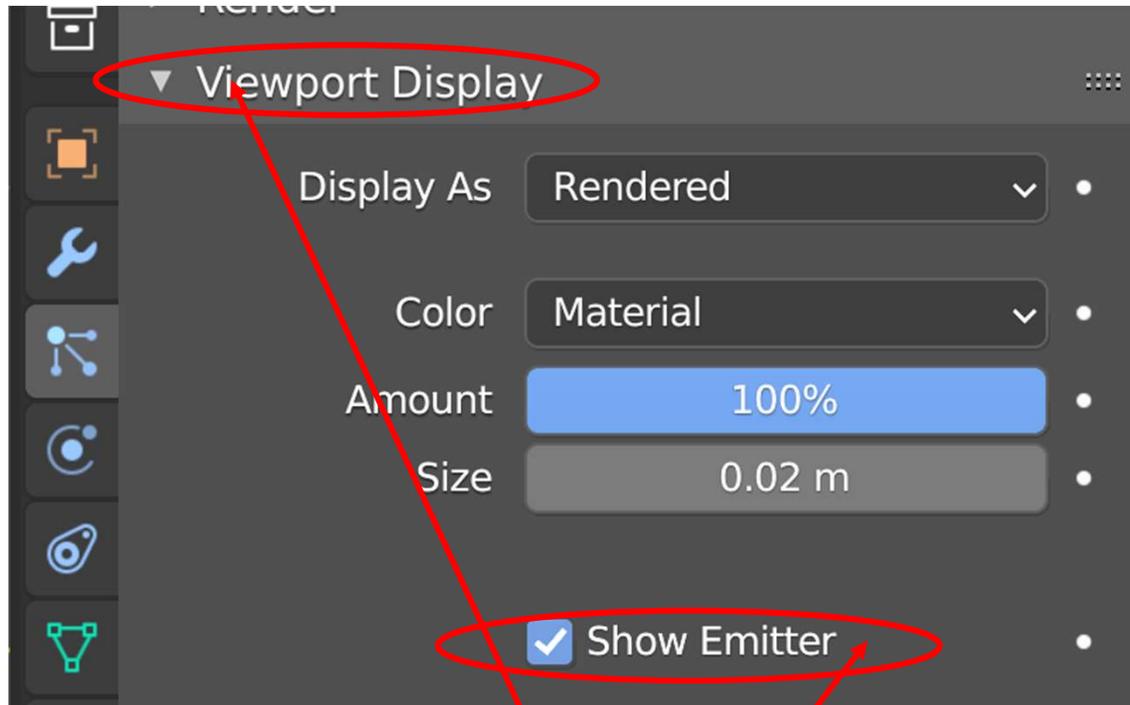


If you just want to see the boids and not the emitter object, go to the **Viewport Display** tab and click the **Show Emitter** checkbox off

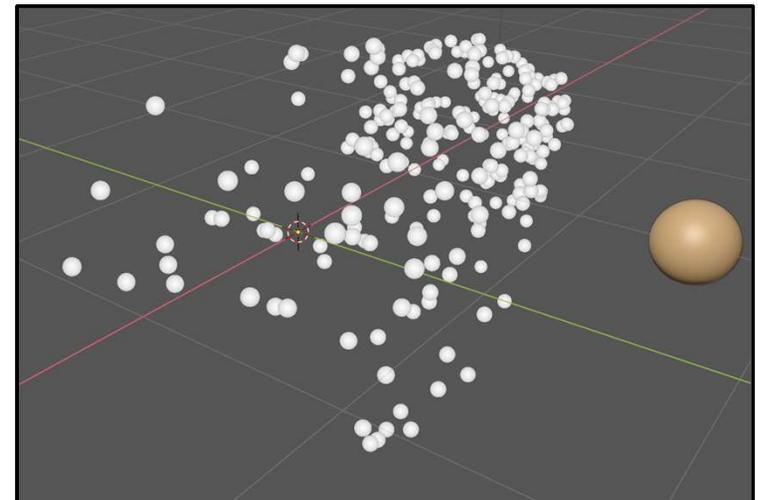


9. Physics Animation

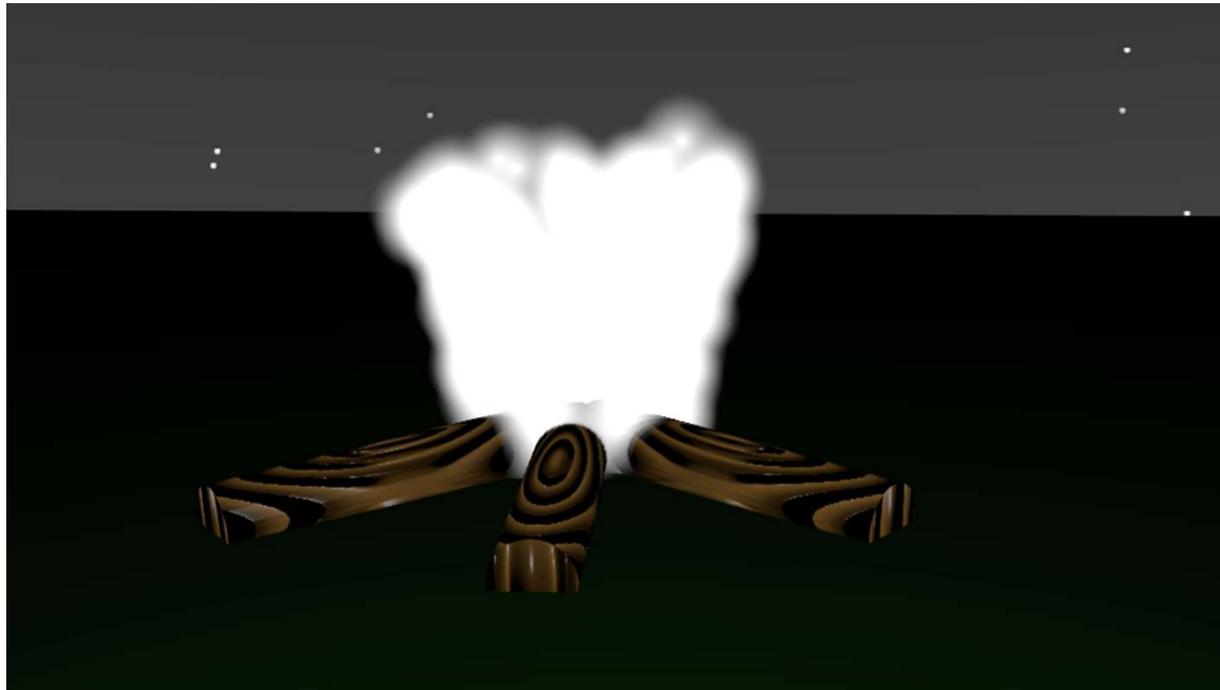

Quick Physics Cheats

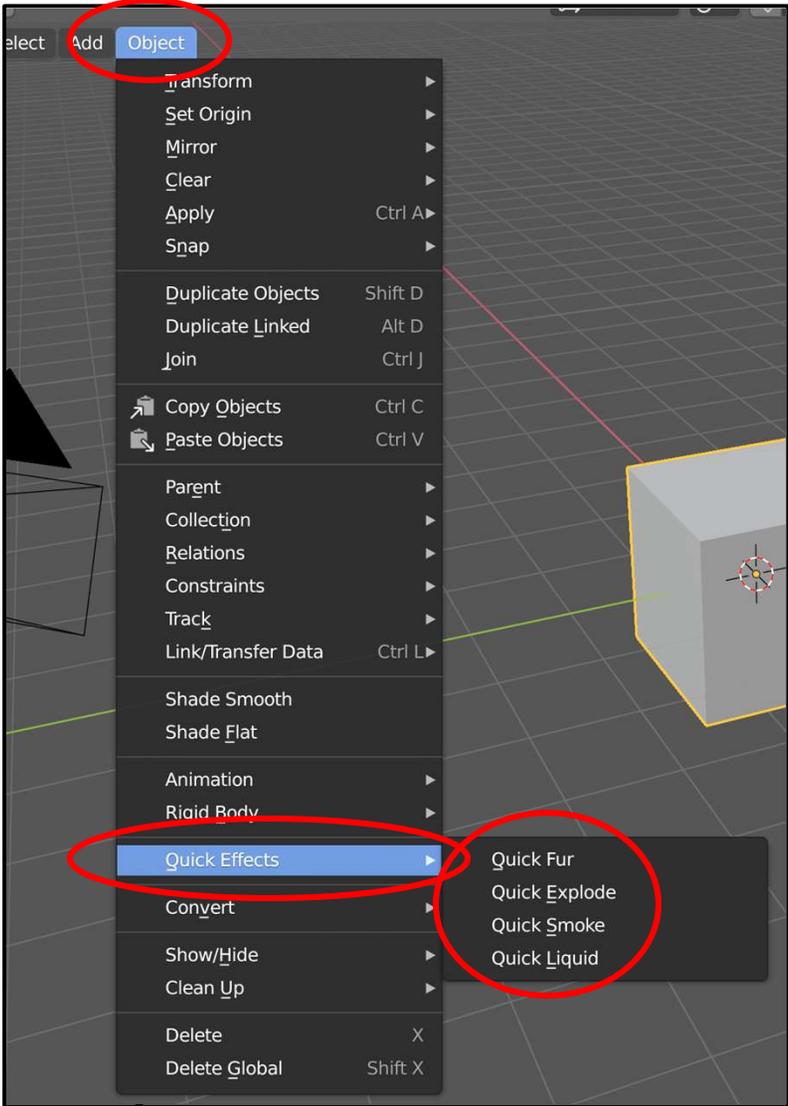


Original Scene

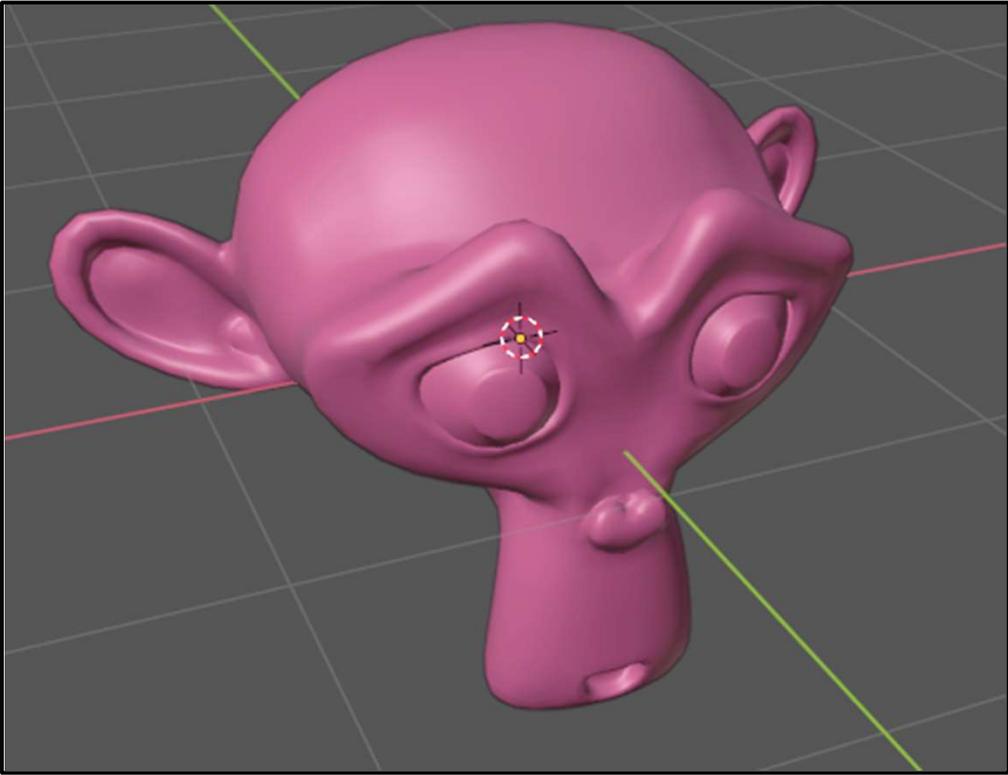


Quick Physics Cheats


- Quick Fur
- Quick Explode
- Quick Smoke
- Quick Liquid

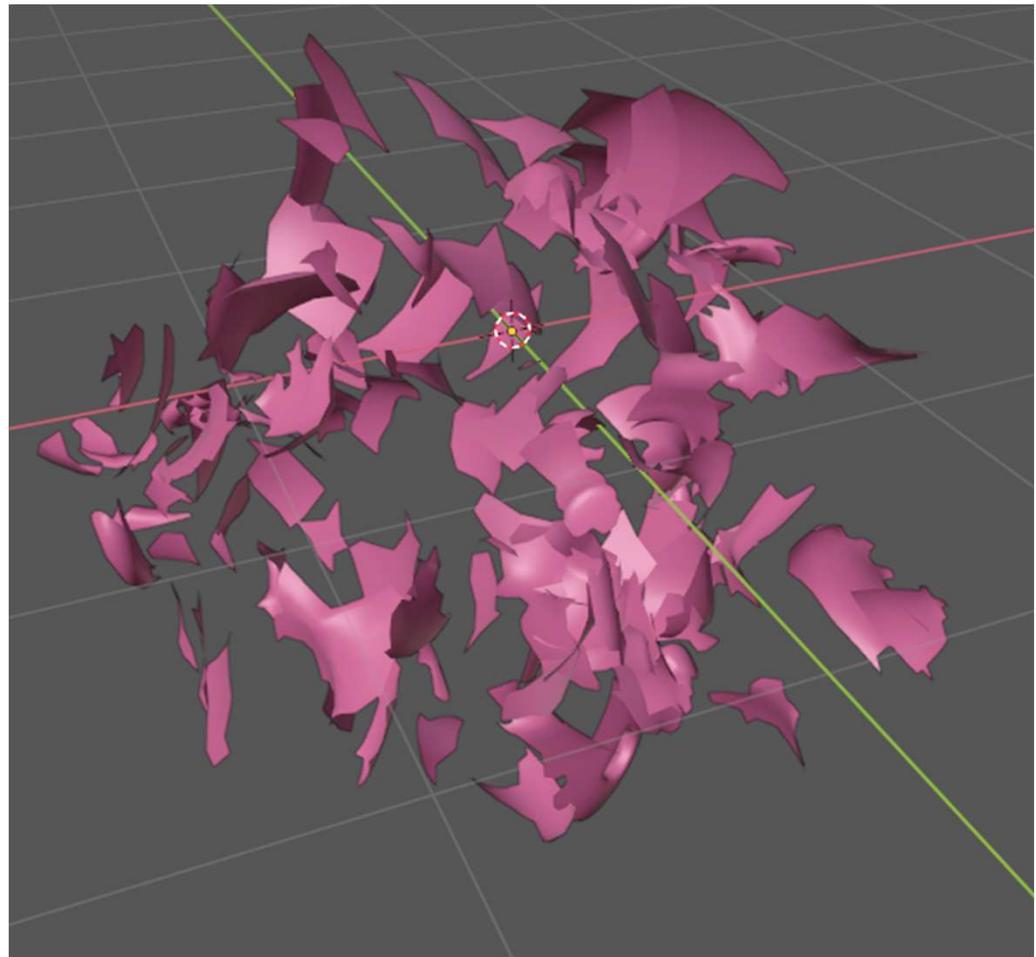


There are Eight Types of Physics Simulations

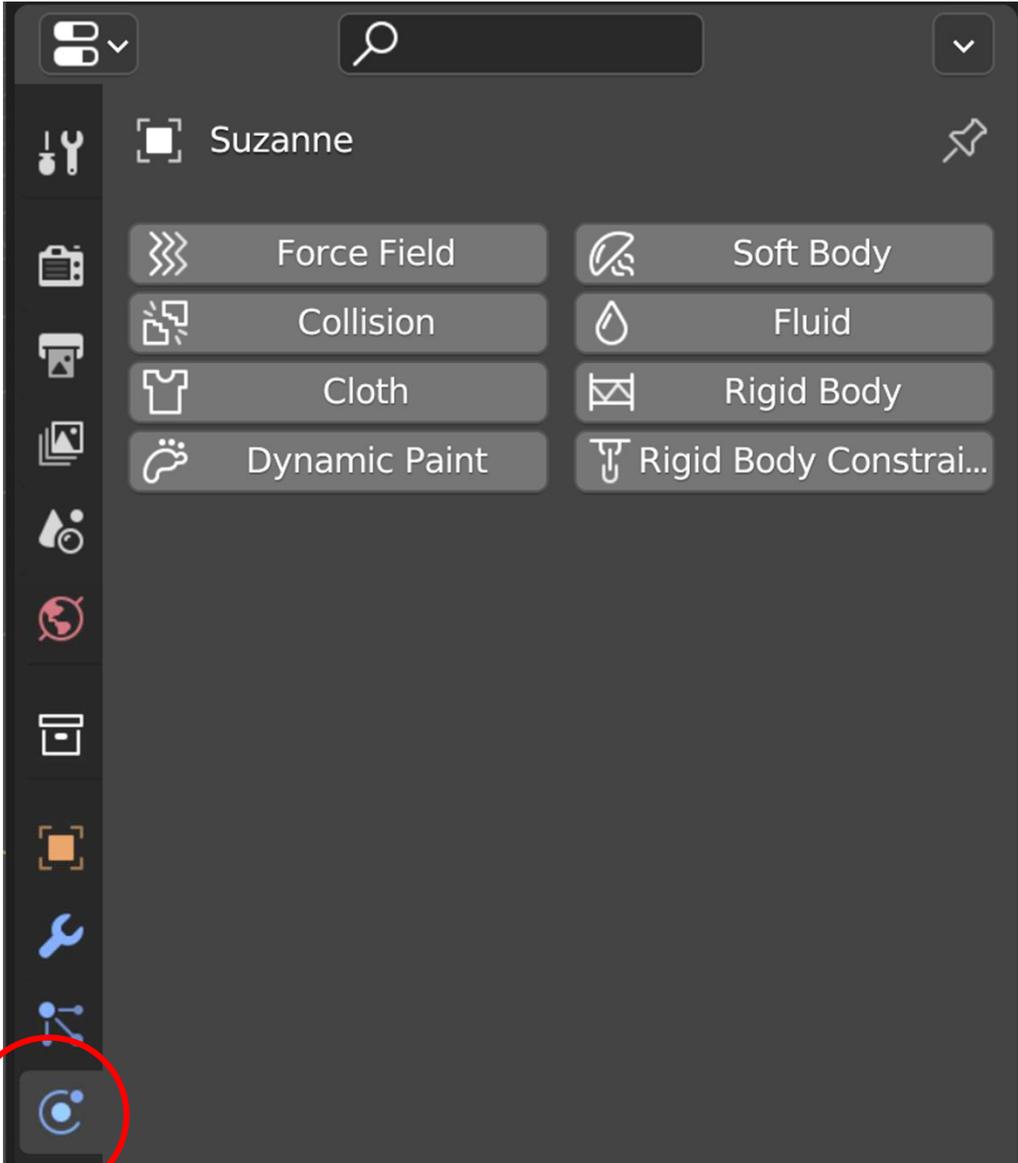


Rigid Body Collision Example

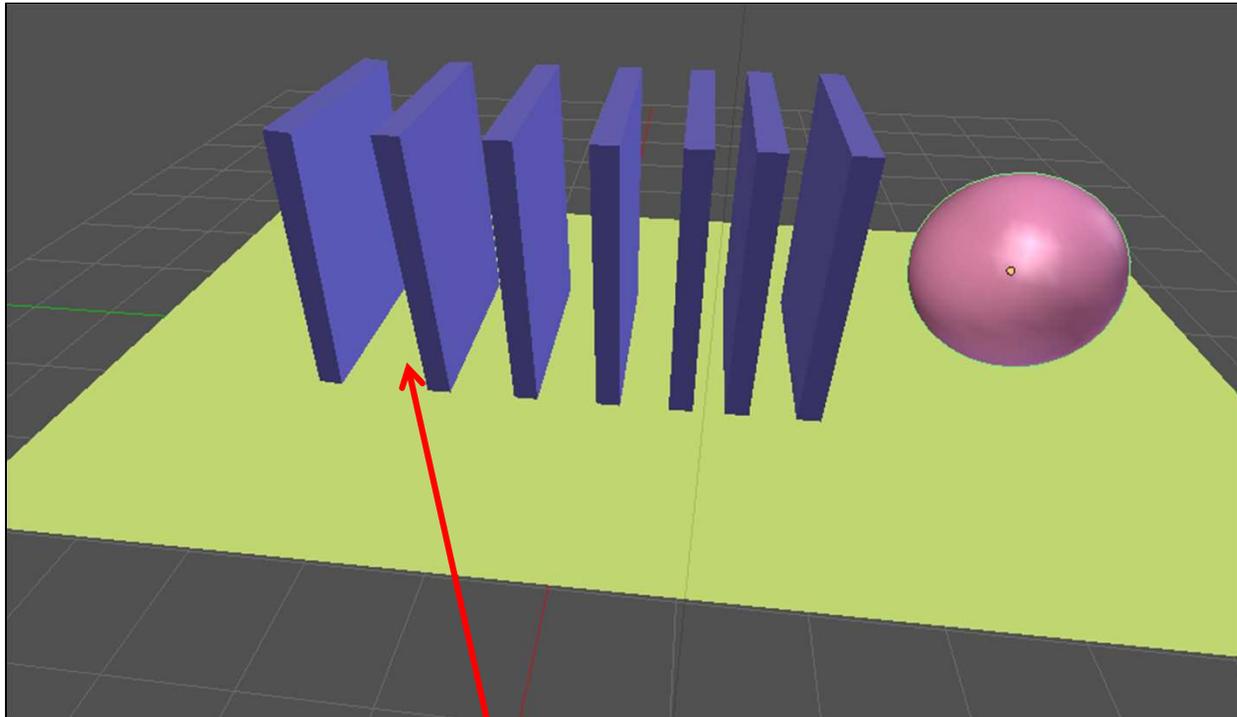

dominos.blend



dominos.mp4


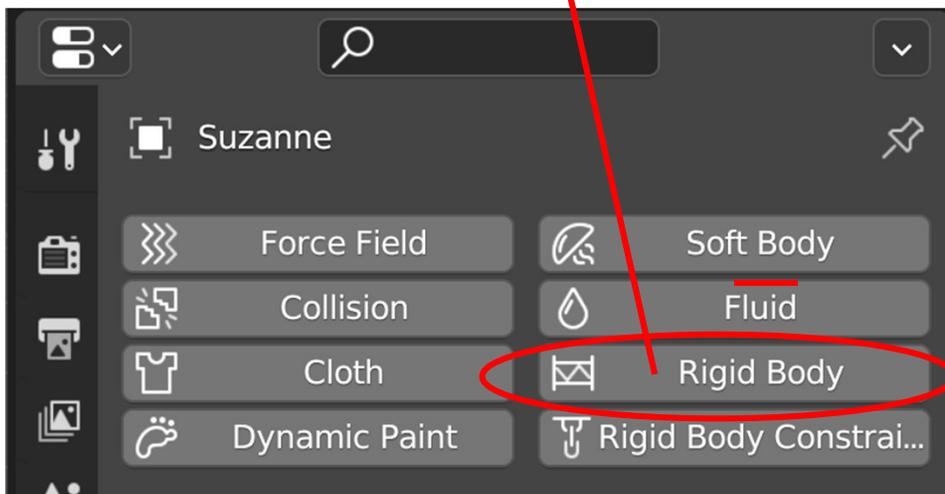


Set this up using what you know about modeling.

Slightly rotate the left-most domino to the right so that it will tip and start the sequence.

Let Blender Know You Want to do Rigid Body Physics

Click on the **Scene Properties** Button

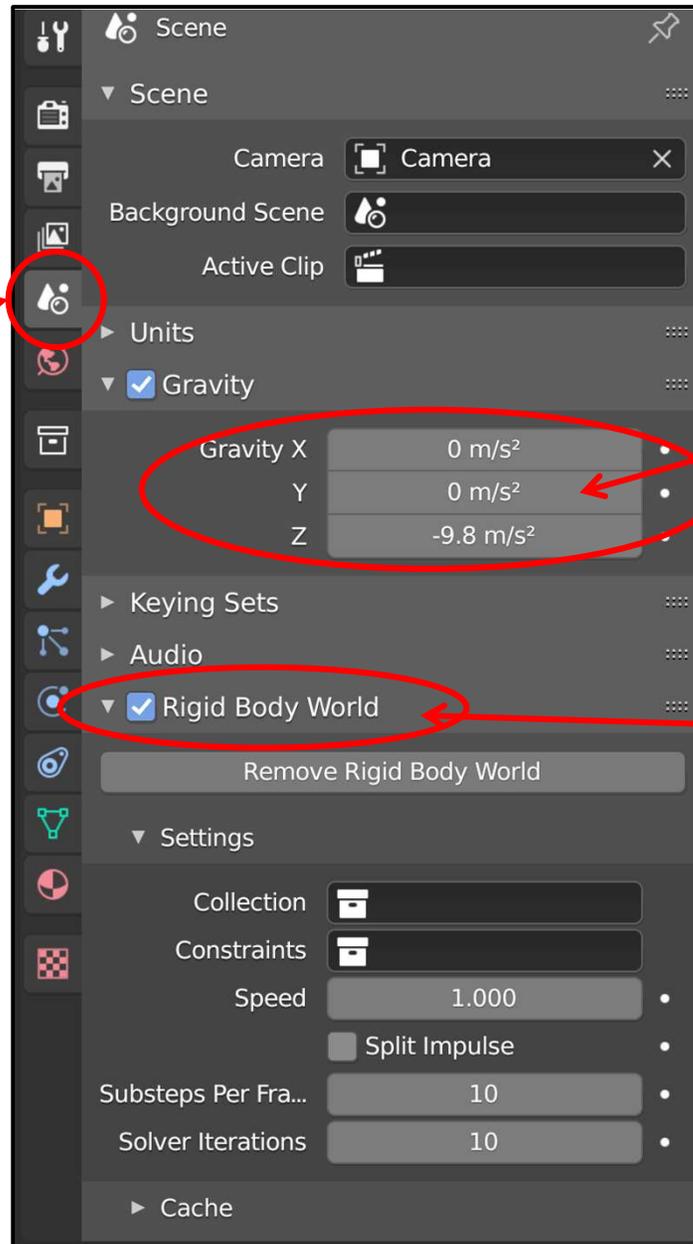



Set Gravity
(this value indicates gravity points downward and has a value of **-9.8 meters/second²**)

Be sure this is turned on

Tell the Physics which Objects will be Involved




For each object that will be pulled by gravity (the dominos and the ball), select the object, click on the **Physics Property Button**, click on on **Rigid Body**, and set the Type to **Active**

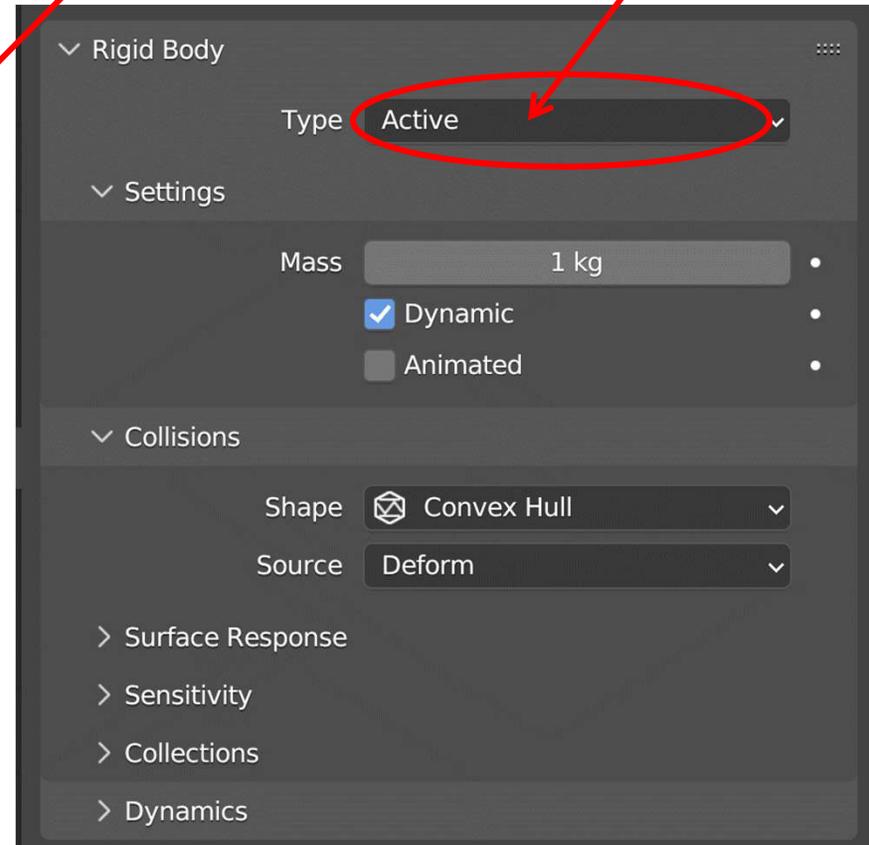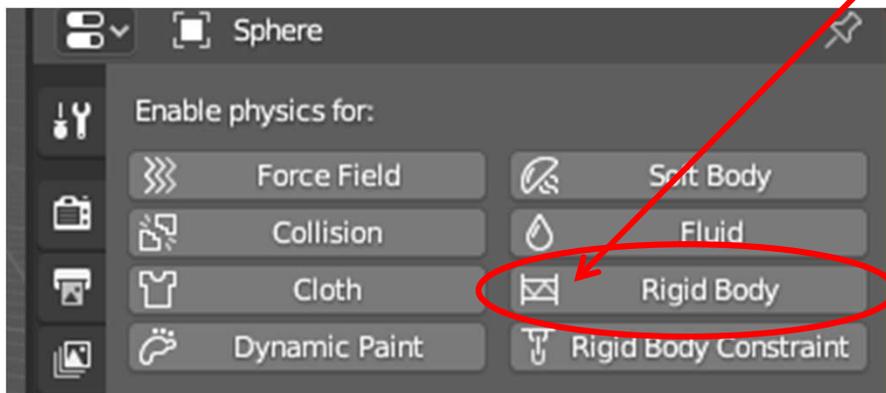


Tell the Physics which Objects will be Involved




For each object that will *not* be pulled by gravity but will still be involved in the collisions (the floor), select it and set the Type to **Passive**

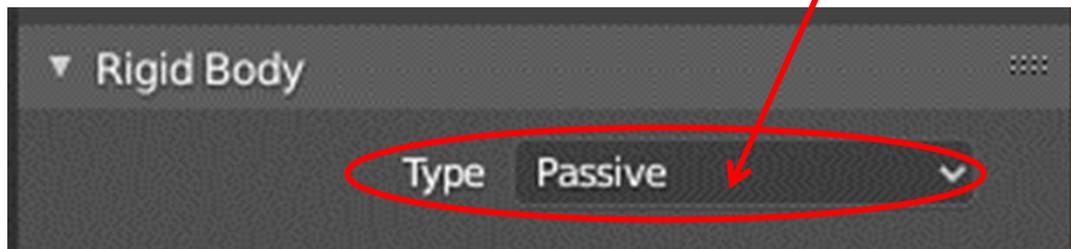


Turn the Animation On



Hit the **Escape** key to stop the animation

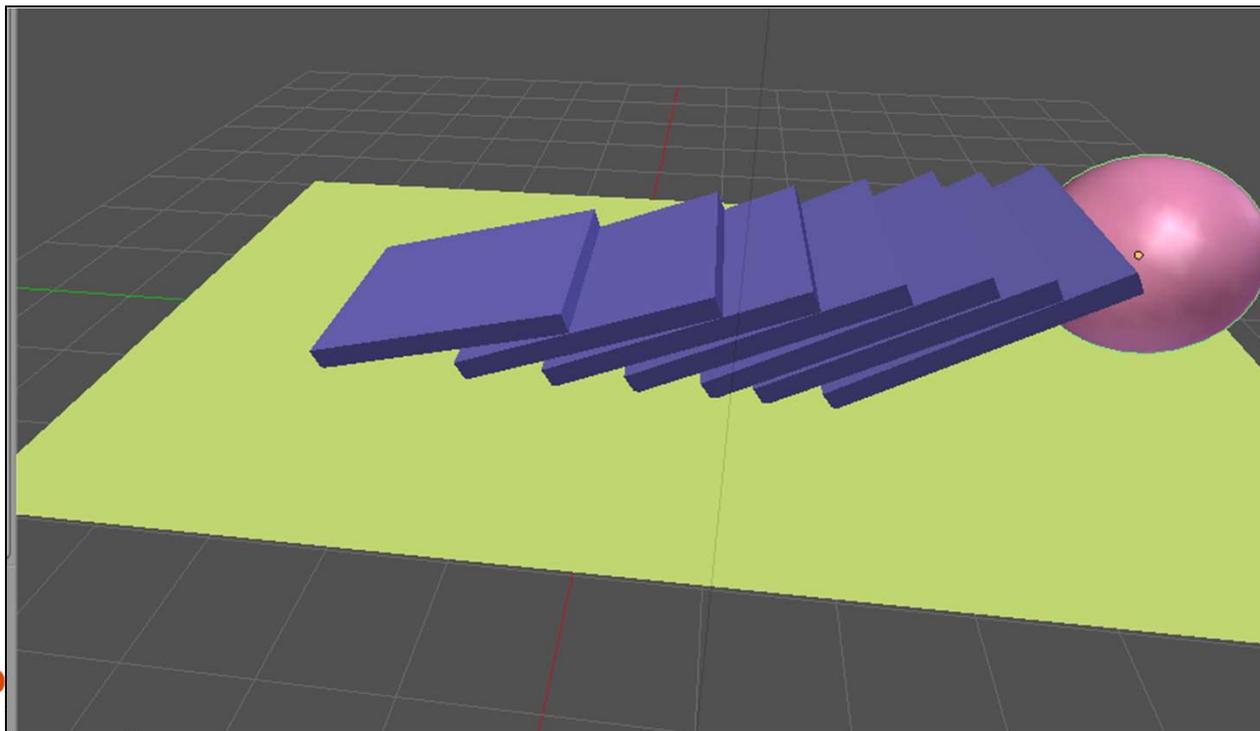

dominos.blend




dominos.mp4

Setting Gravity

In order to do physics animations, Blender needs to have an idea of what Gravity is. The acceleration due to gravity near the surface of the earth is 9.81 meters/sec² (pointing down), which also equals 32.2 feet/sec².

You can set this by clicking on the **Scene Properties Button** and then scrolling down to the **Gravity** dialog area.

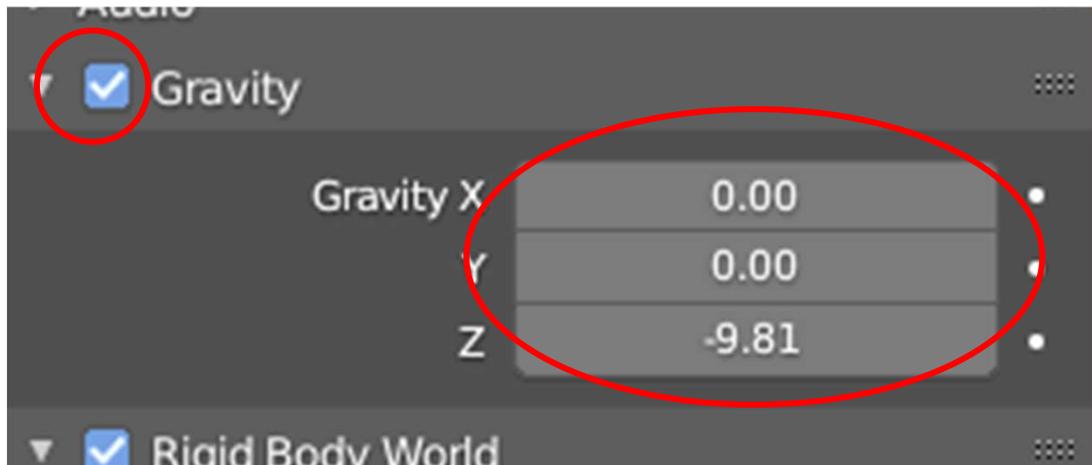


This is the default, but you can set Gravity to anything you want, including turning it off completely, or making it point upwards, or making it point sideways.

Gravity on Other Worlds

The acceleration due to gravity is not the same on all worlds. It depends on the mass of the body and its radius.

For fun, try setting the gravity to the Gravity Acceleration that other bodies have in our solar system:

Body	Gravity Acceleration (m/sec ²)	g's
Mercury	3.70	0.38
Venus	8.87	0.90
Earth	9.81	1.00
Moon	1.62	0.17
Mars	3.71	0.38
Jupiter	24.79	2.53
Saturn	10.44	1.06
Uranus	8.69	0.89
Neptune	11.15	1.14

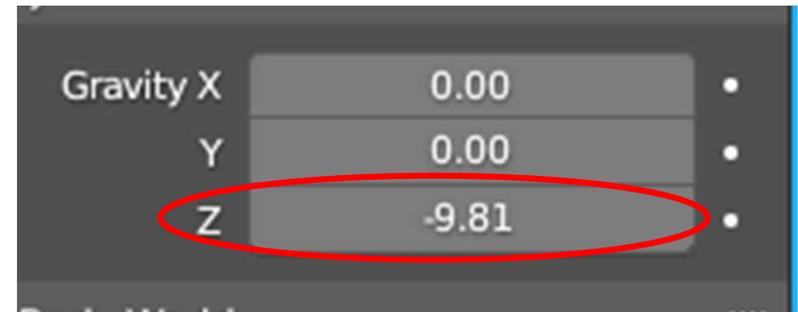

<https://www.universetoday.com/35565/gravity-on-other-planets/>

Gravity on Other Bodies

Or, invent your own planet! Pick a different “m/sec²”.



21st Century Fox



Another Cool Thing: Modeling Cloth




Pixar: *Geris's Game*




Modeling Cloth – Start with a Cube and a Grid

There is a difference in what different Mesh types will do. This needs to be a **Grid** – not a Plane!

Scale the **Grid** by 3 (**s3**) and move it in z (**gz**)

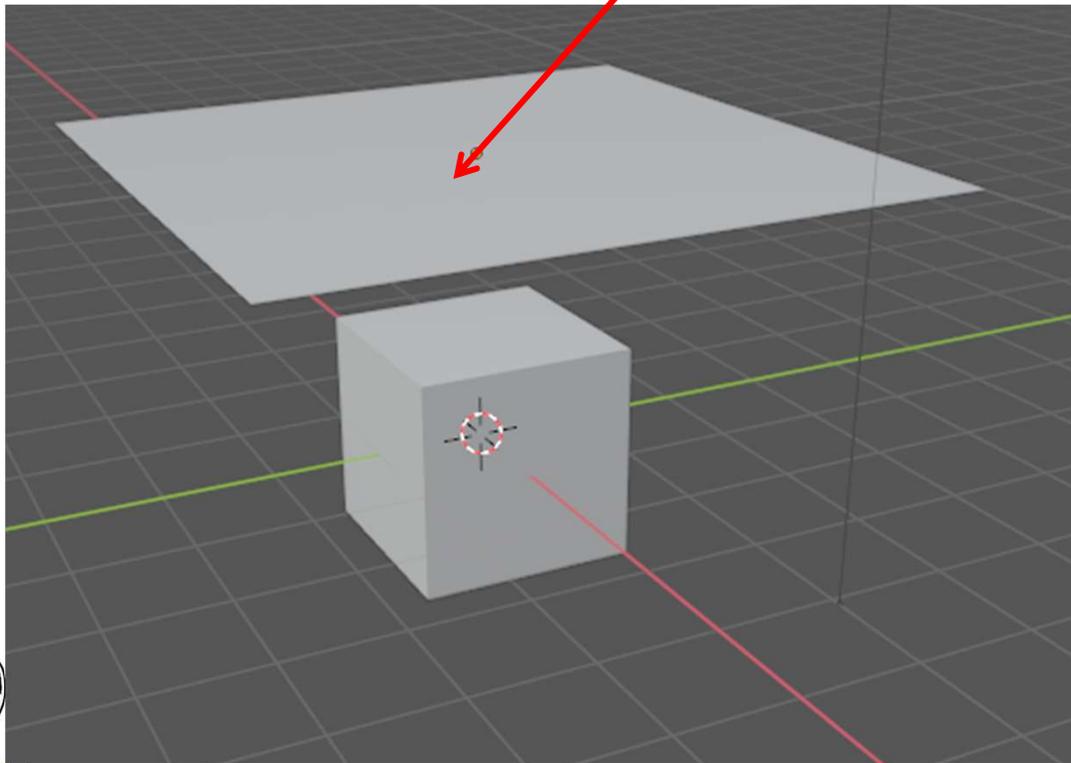

cloth.blend






cloth.mp4



Modeling Cloth -- Enable Collision with the Cube

1. Select the cube.
2. Then go to the **Physics Property Button**.
3. Then click on **Collision**

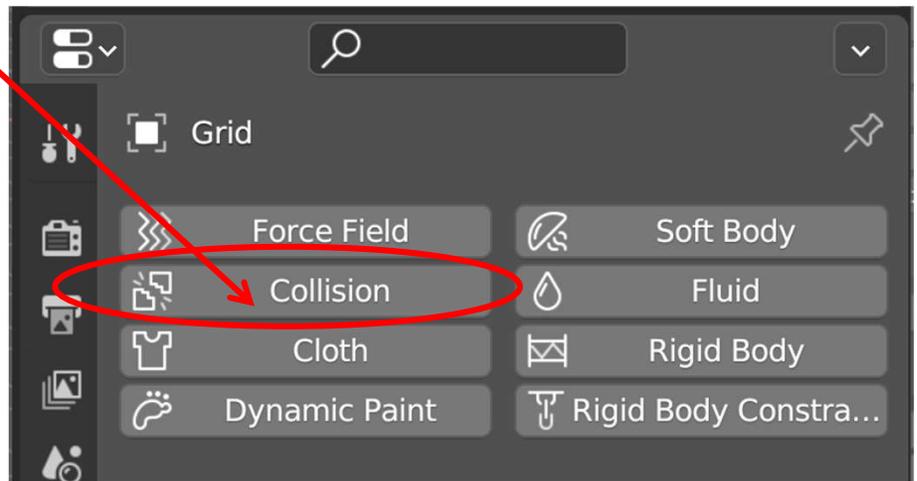
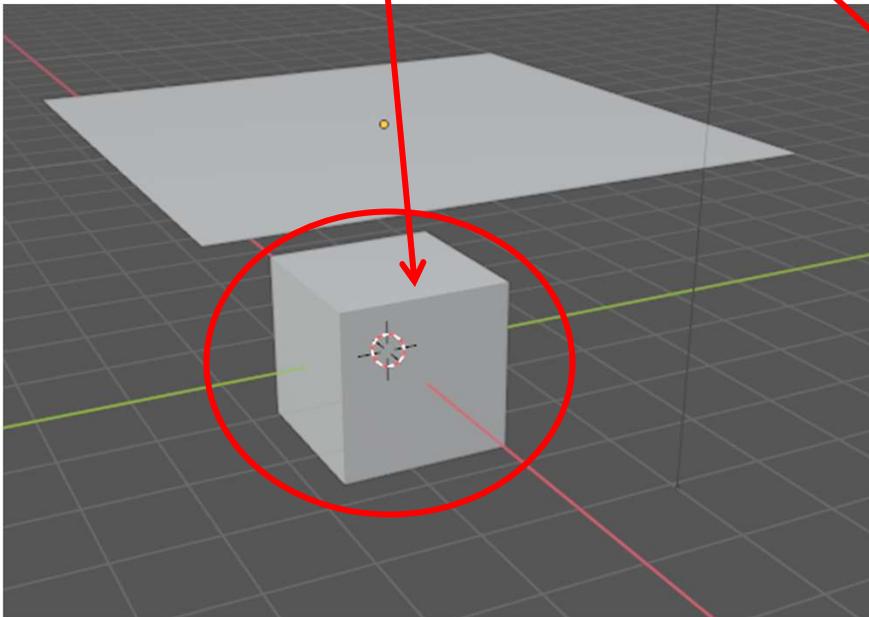



You don't need to set any other parameters (unless you want to)

Modeling Cloth – Subdivide the Grid into More Pieces


If you select the grid and tab over to **Edit Mode**, you will see that it is already subdivided somewhat. To act as a cloth, we'd like it subdivided some more.

- 4. Back in Object Mode, select the grid, then select **Modifiers**.
- 5. Then click **Add Modifier** and select **Subdivision Surface**.
- 6. Change the **Viewport** parameter from 1 to 2
- 7. Click the **Apply** button.

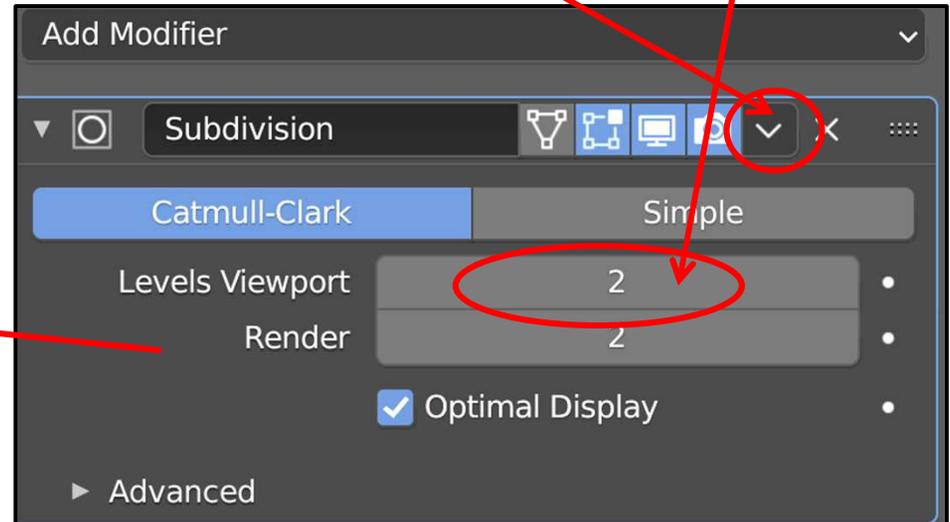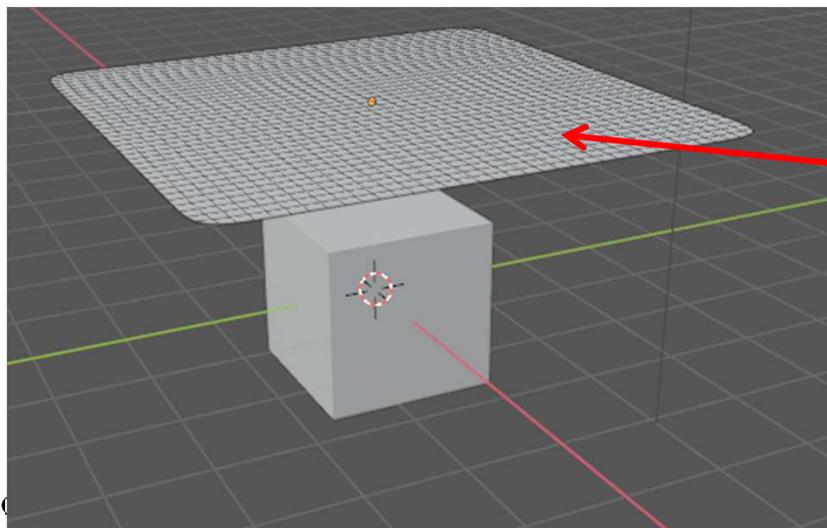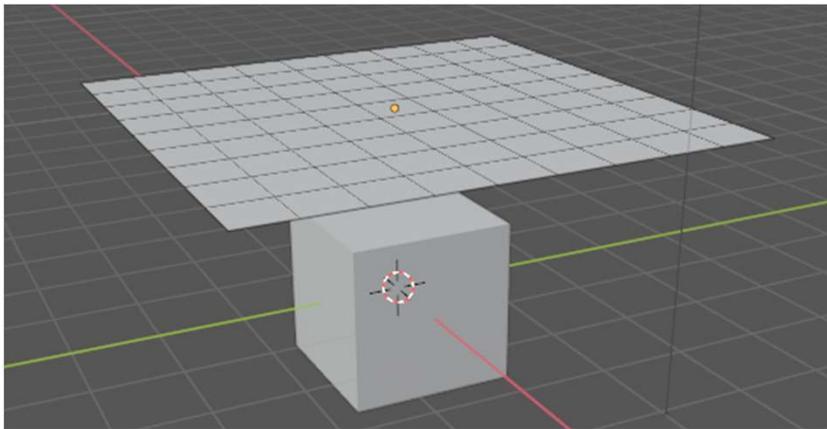


Modeling Cloth – Tell the Grid that it is Really a Piece of Cloth ²⁸⁵

8. Select the grid.
Then go to the **Physics Property Button**.
Then click on **Cloth**.





You can get away without changing any of these parameters, but, at some point, you will want to experiment with different values of **Stiffness** and **Damping**.

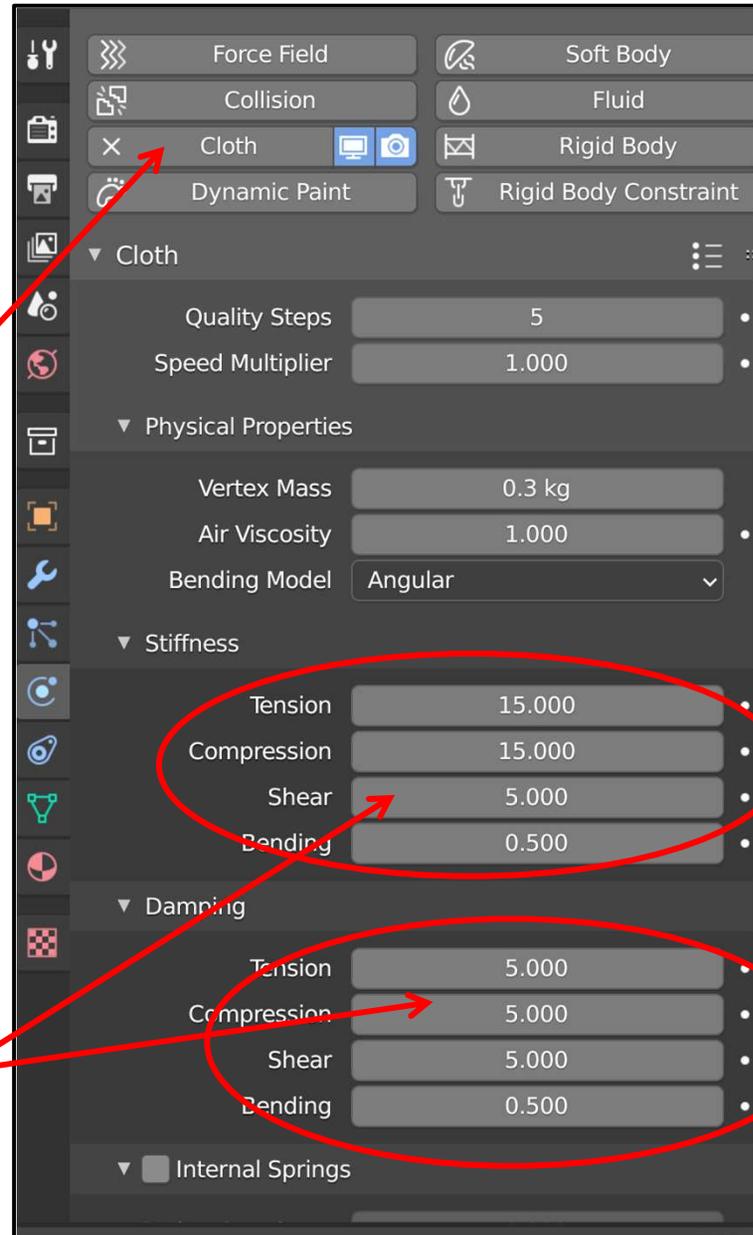


Modeling Cloth – Run the Animation

9. Select the grid, RMB, then select Shade Smooth.

10. Start the animation.

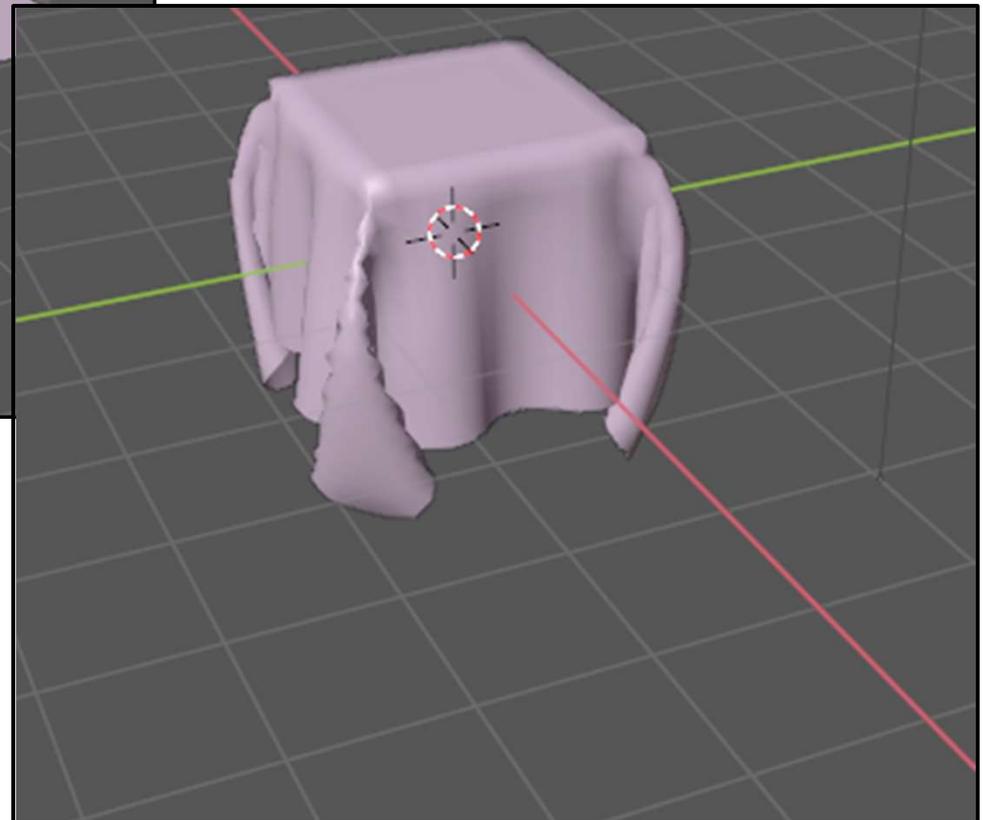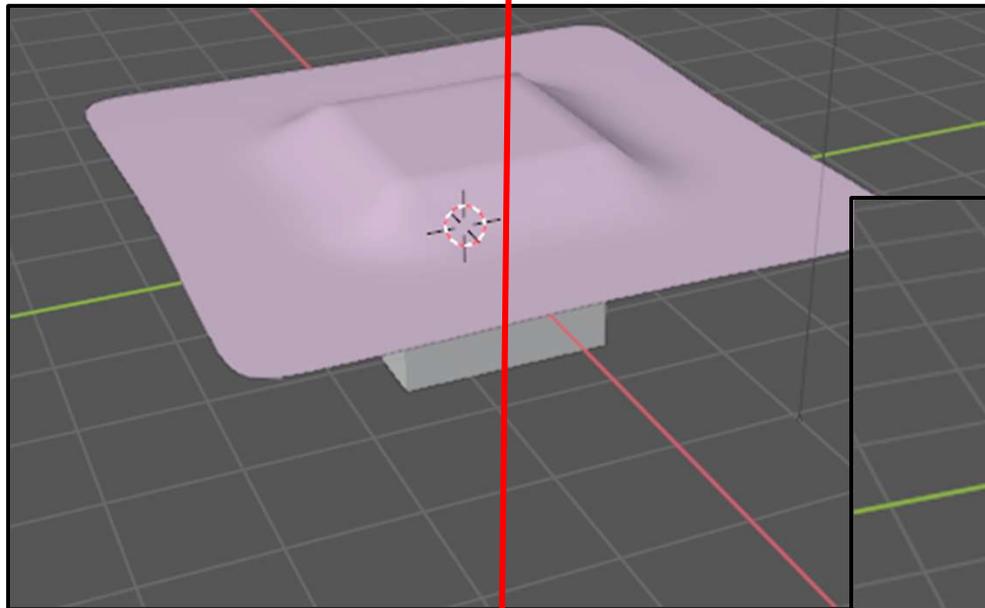

Baking the Cloth Animation


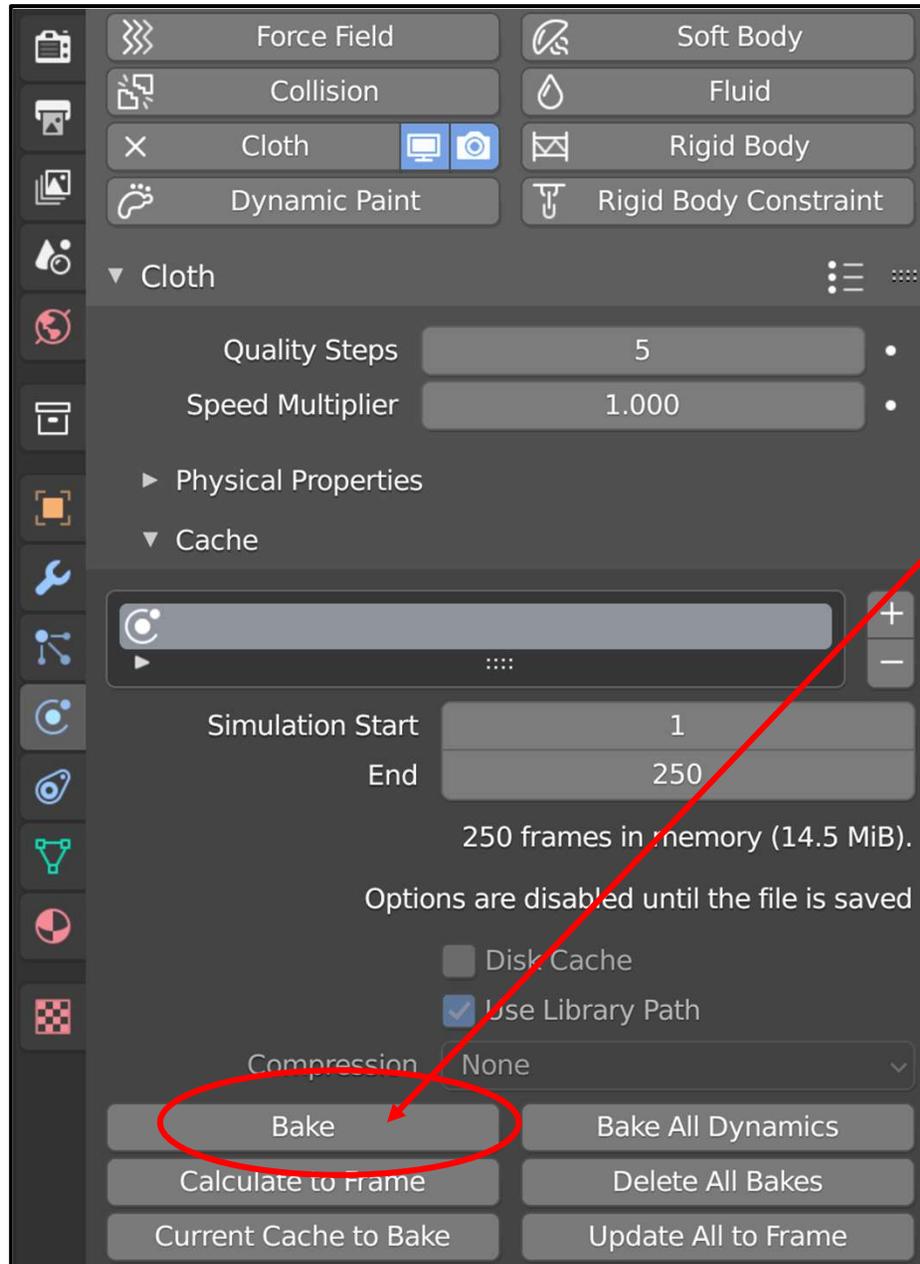


Why does the animation run so slowly?
That is because it is computing the simulation while it is animating.


Instead, tell it to precompute the animation. You do this by selecting the **Bake** button (and waiting and waiting).

Now try animating.

Cloth Animation with Color, Texture, and Lighting

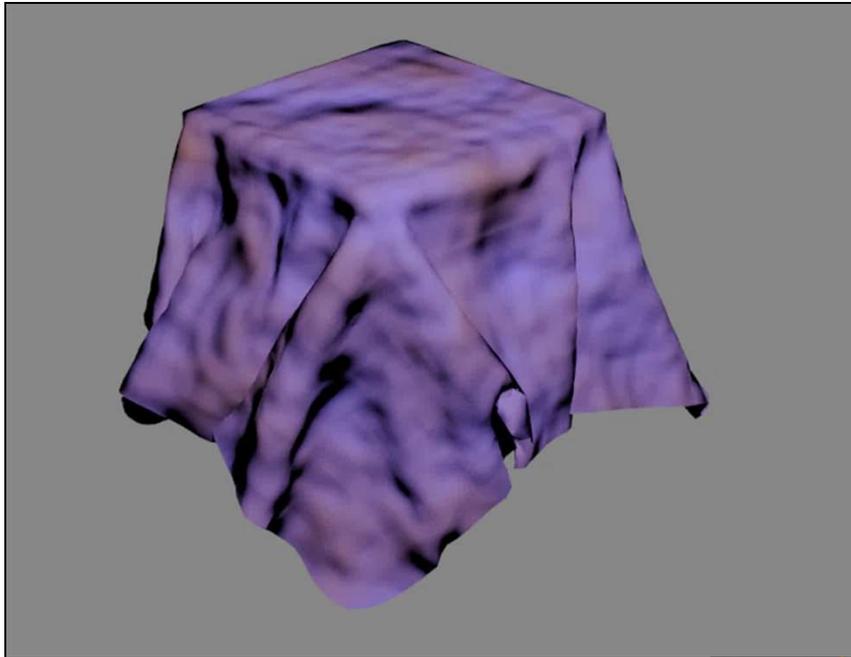


cloth.mp4

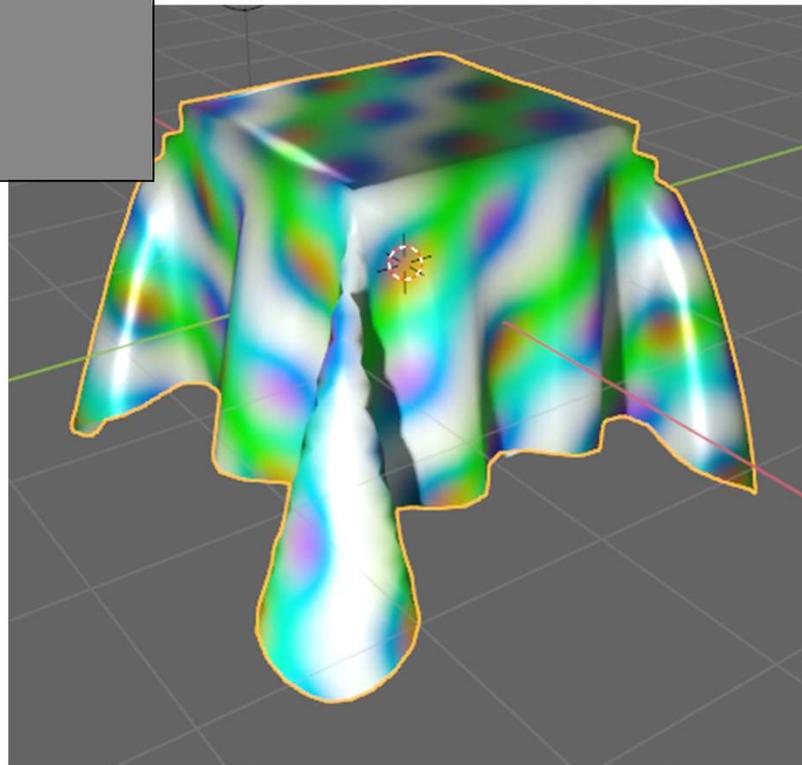

What if You Want the Cloth to Retain its Animated Shape Forever ?



That is, supposing you have used a cloth animation to drape a tablecloth over a table and now want to leave it that way.

You start with this:

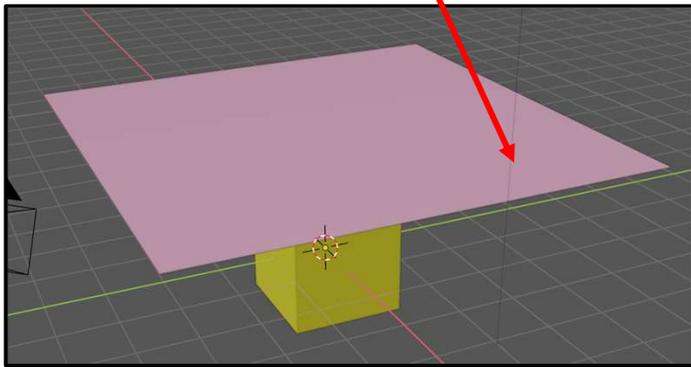

Then, with the cloth selected, go to the **Modifier** menu. You will see the **Cloth** modifier already magically there. Select the down arrow and click on **Apply**.



Animate to get this:

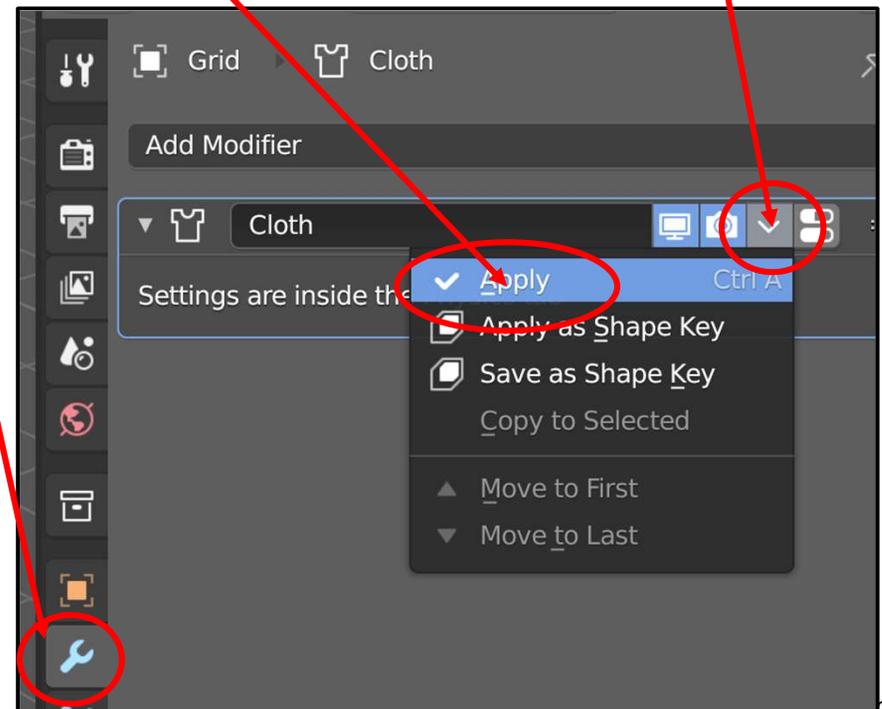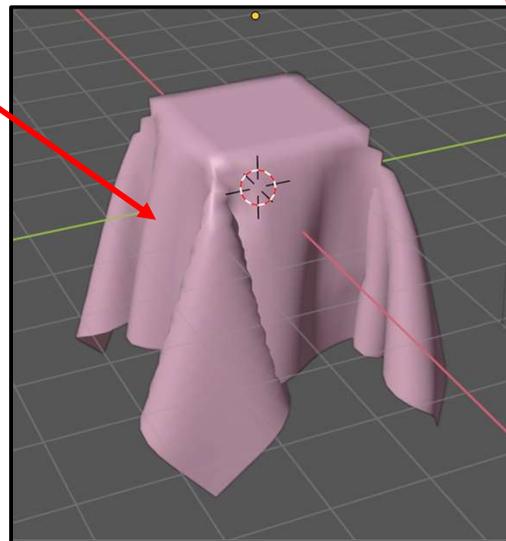

Cloth Animation: Pinning Vertices

One of the many fun parts of cloth animation is pinning some of the vertices. There are lots of reasons to do this, such as to pin the edge of a flag to its flagpole, or to pin a cloth to a clothesline.



To do this, Tab into **Edit Mode**, **Shift-LMB** the vertices to be pinned, and create a **Vertex Group** from them. (This was described in more detail in the Modeling section of these notes).

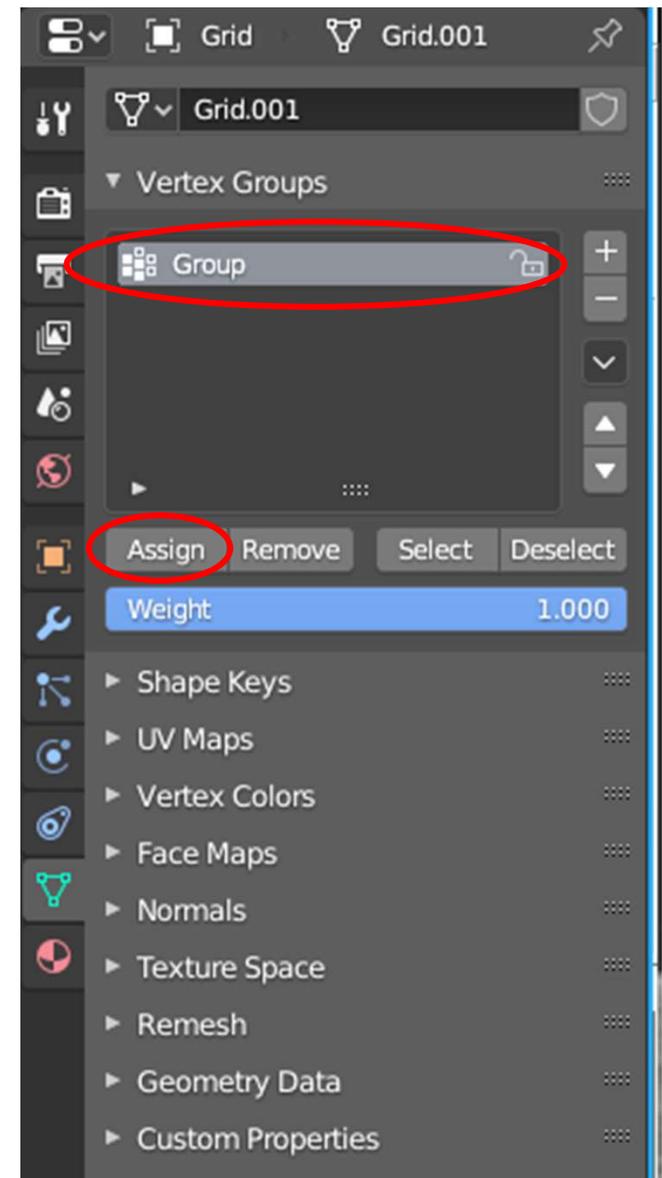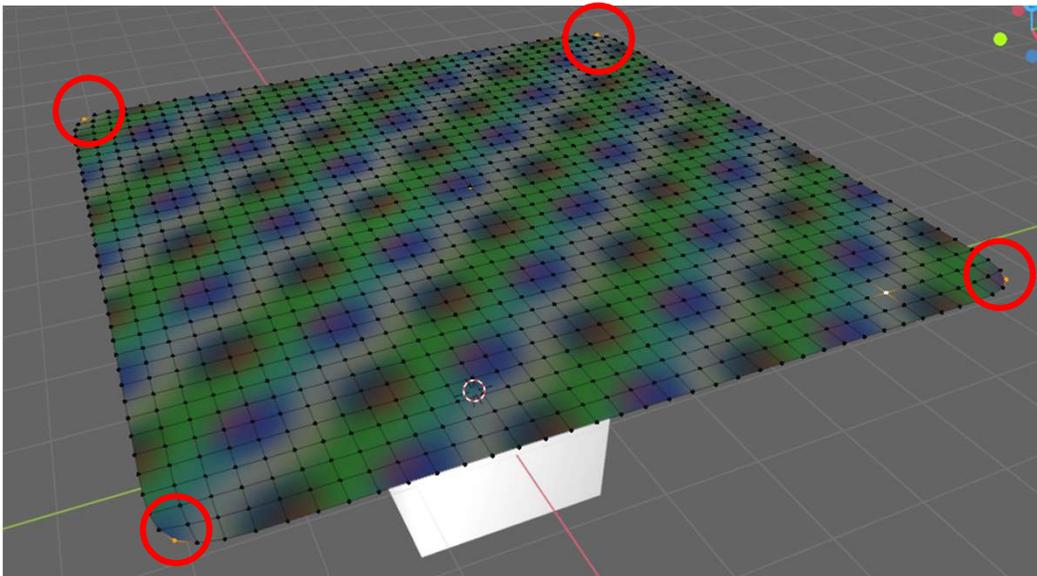


Cloth Animation: Pinning Vertices

In the Cloth section of the grid's **Physics** menu, select the name of the Vertex Group to be pinned.


When you re-animate, those vertices will be stationary.

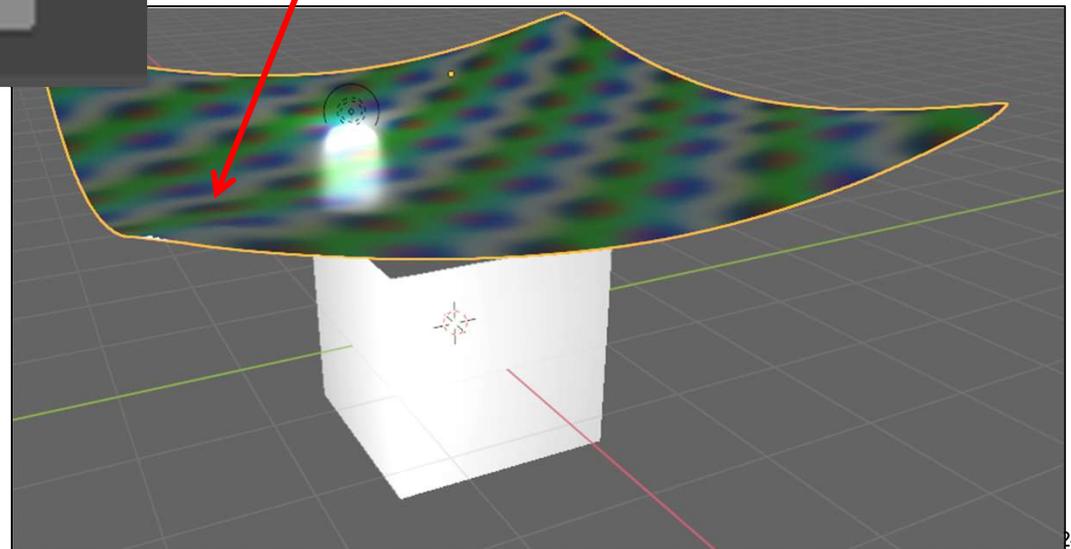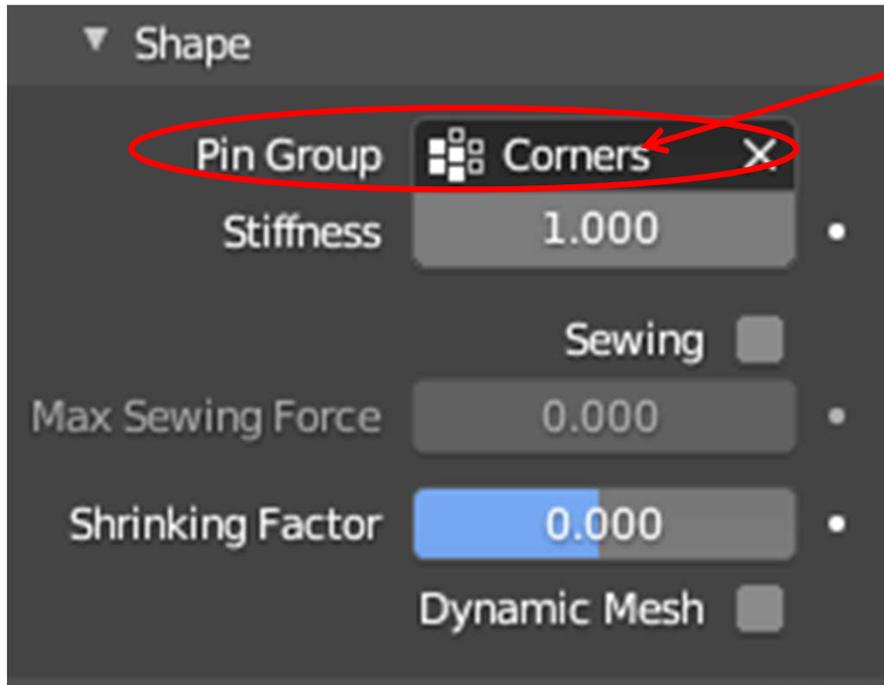

Rendering an Animation

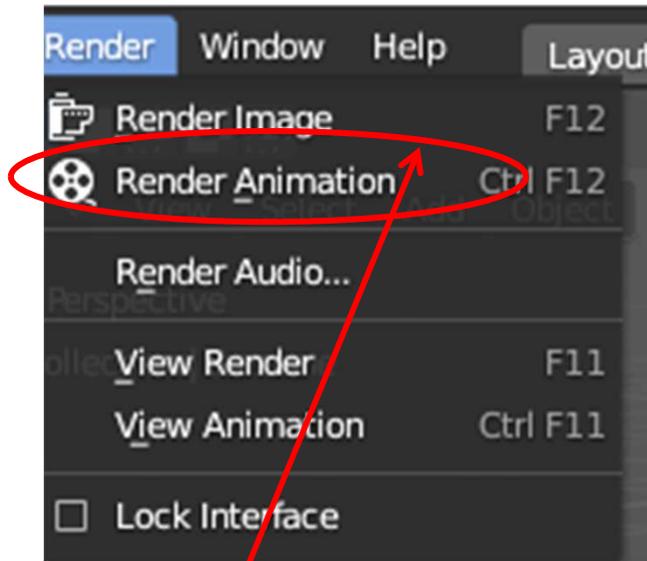


Render Animation kicks off the rendering of all your animation frames in order

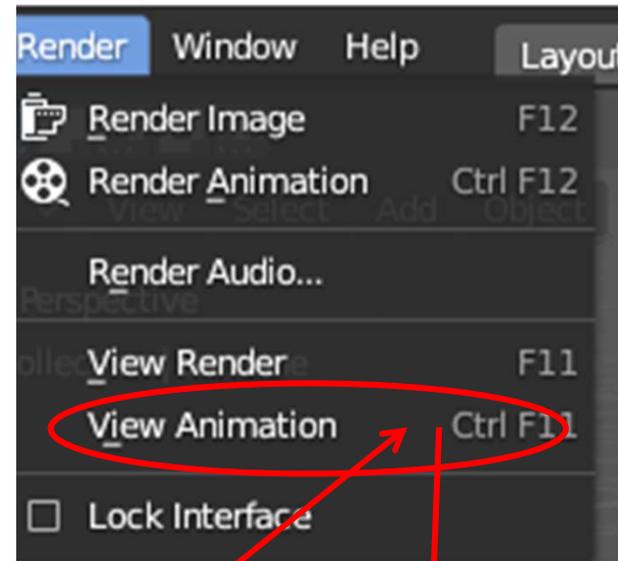

View Animation brings up a separate window and plays back your animation.

Hint: if this is just a test render, and you have lots of time-consuming visual effects going on, you might cut down the resolution and/or the number of rendered frames to speed things up.


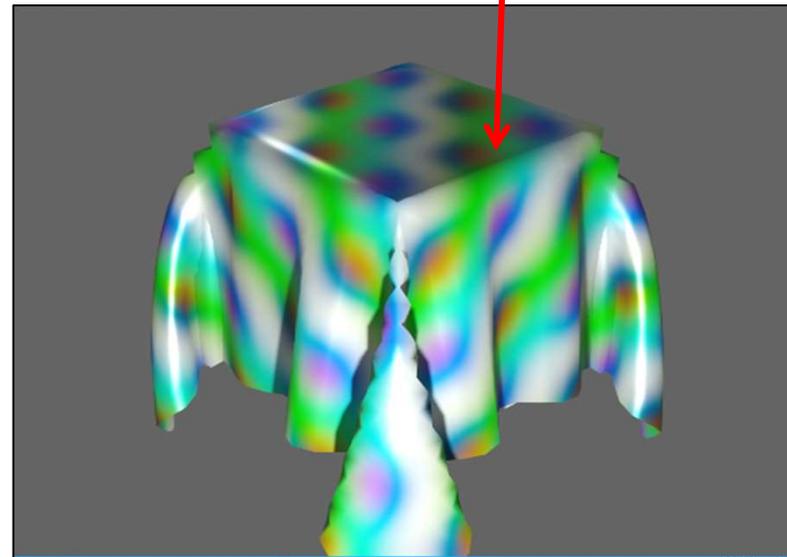


Cloth Flag Animation: Pinning Vertices




We previously had this note-slide in which we looked at creating a vertex group that would become pinned in place. ***This slide shows what we did before for pinning the cloth horizontally. Starting on the next slide, we will pin a column of vertices to create a flag waving.***

To do this, Tab into **Edit Mode**, **Shift-LMB** the vertices to be pinned, and create a **Vertex Group** from them. (This was described in more detail in the Modeling section of these notes).

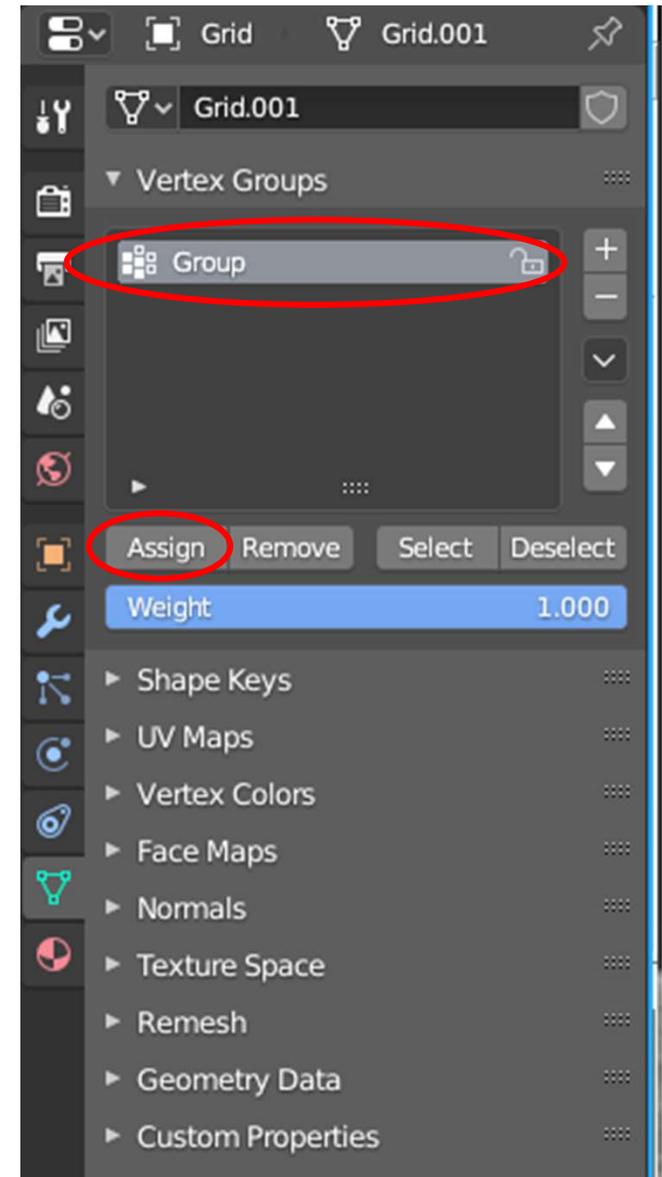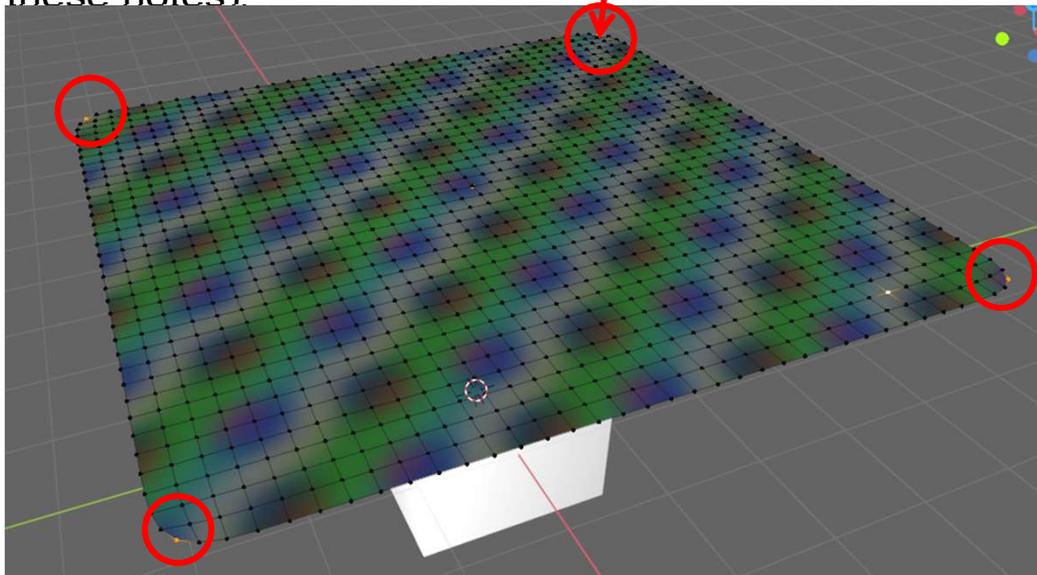


Cloth Flag Animation: Pinning Vertices

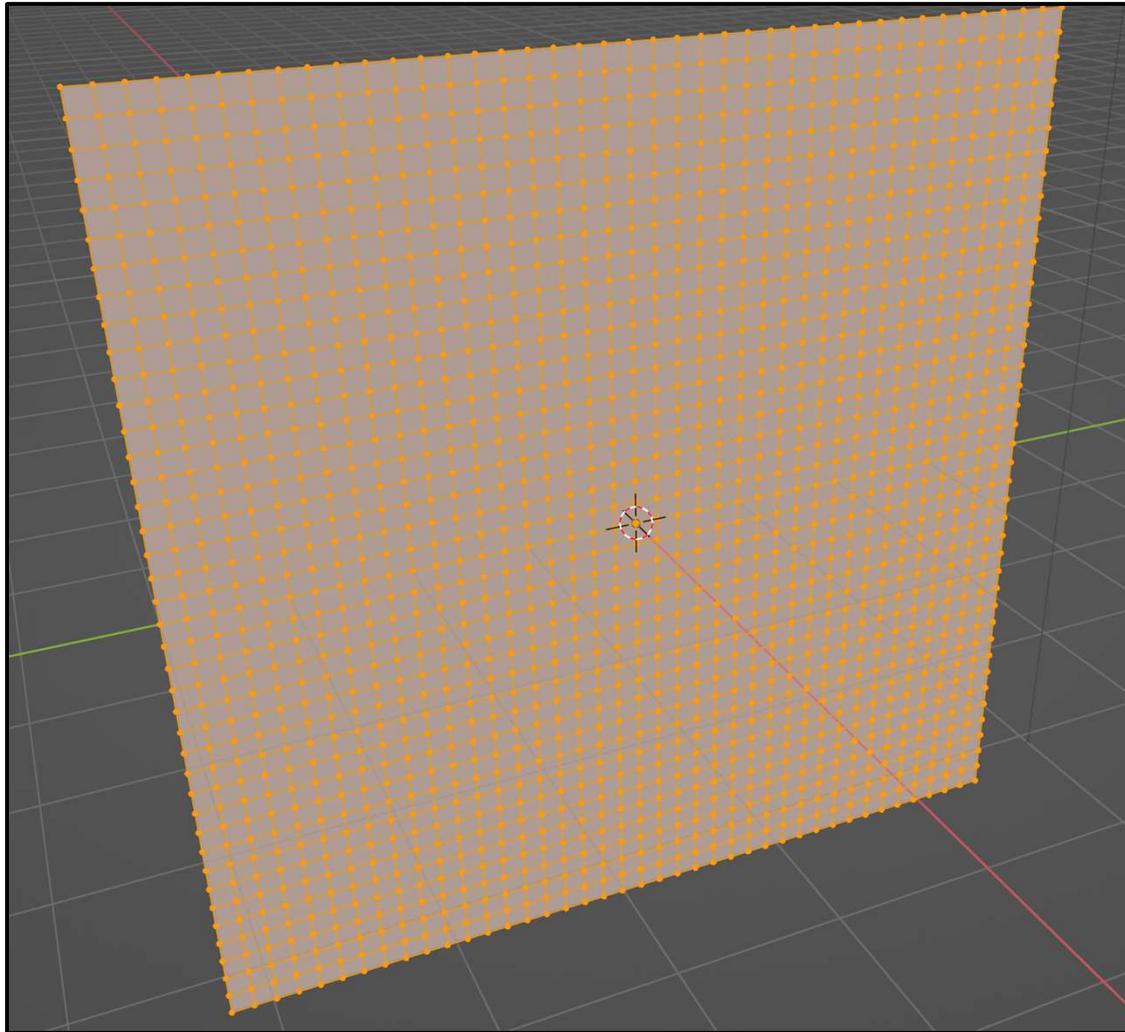

Create a grid, scale it up, rotate in to be vertical, and subdivide it in Edit mode.



Cloth Flag Animation: Pinning Vertices

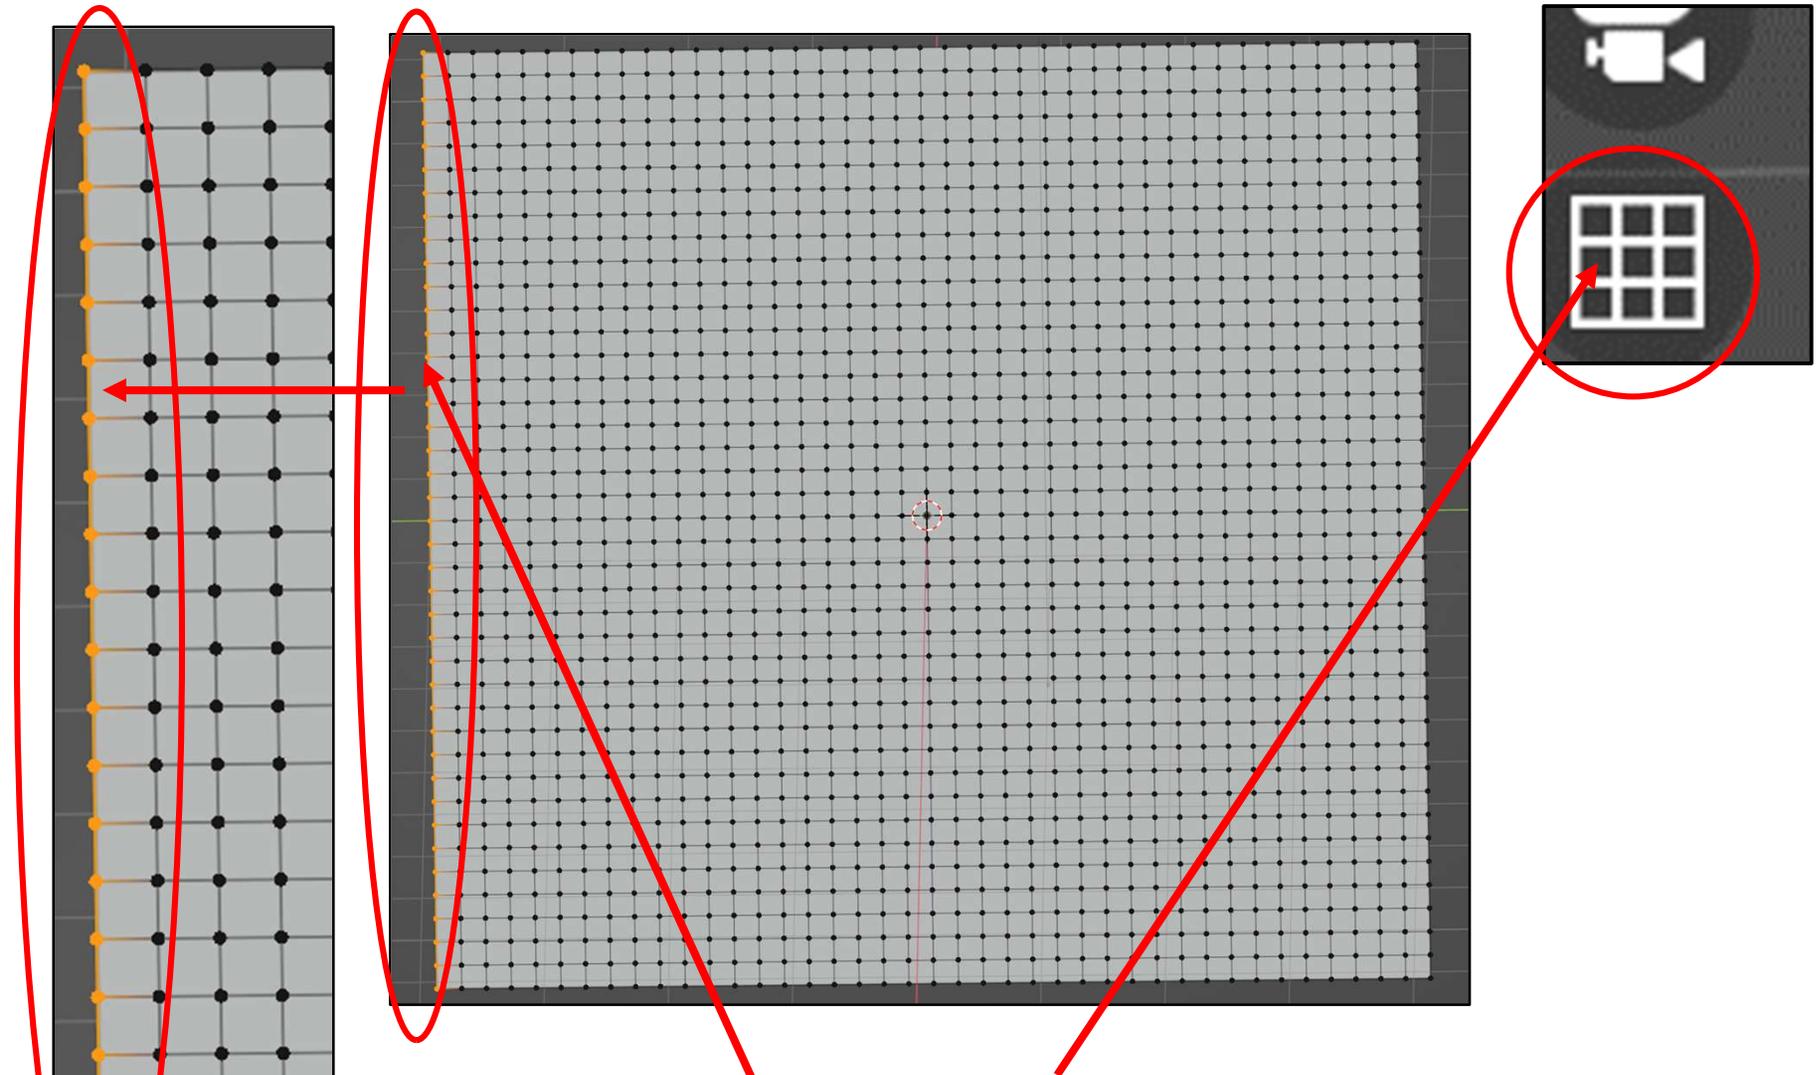


Still in Edit mode, switch to **Orthographic** mode and rotate so the cloth is perpendicularly facing you. Unselect everything (click in empty space) then box-select one column of vertices.

Cloth Flag Animation: Pinning Vertices



Click on this icon.

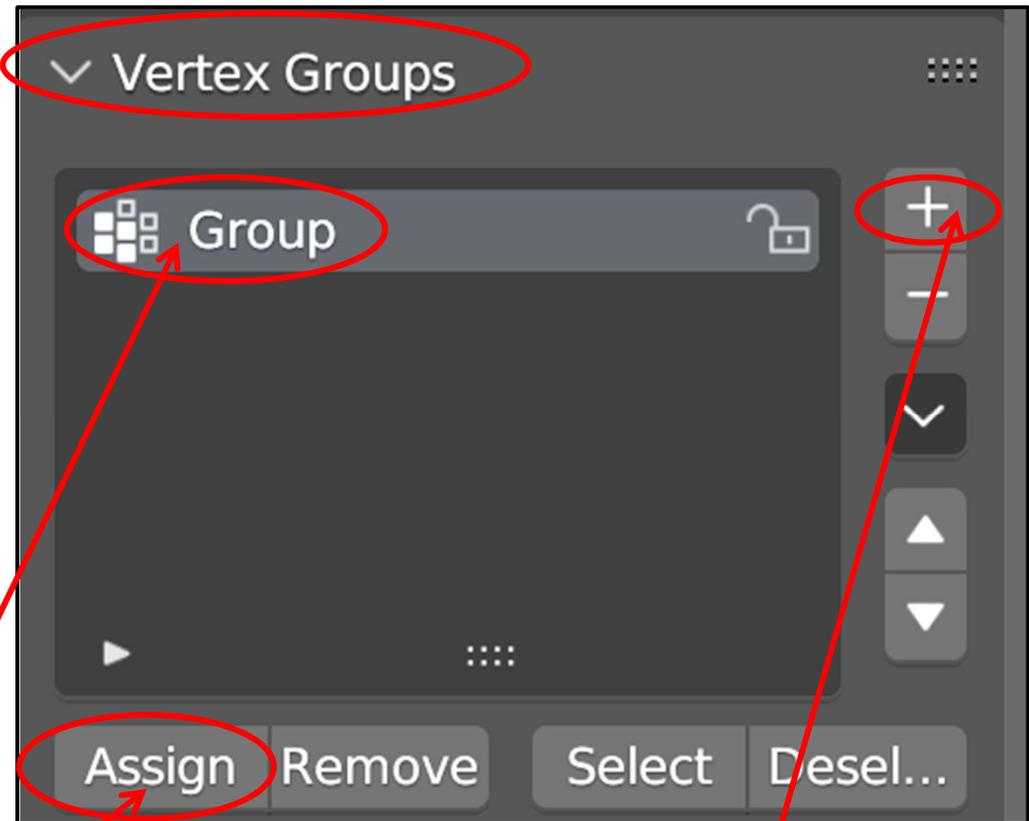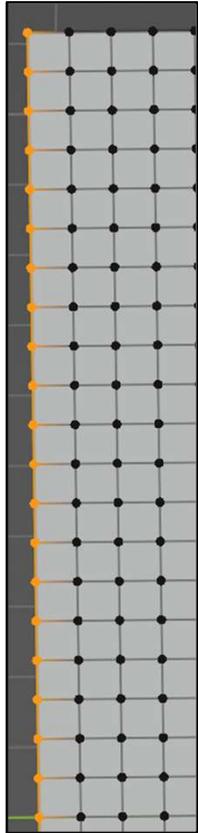

Find the **Vertex Groups** area. Click on the plus sign (+) then click on **Assign**. You can leave these vertices labeled as **Group**, or give them something more descriptive, like **Column**. Tab back to **Object Mode**. Go back to **Perspective Projection**.




Cloth Flag Animation: Pinning Vertices

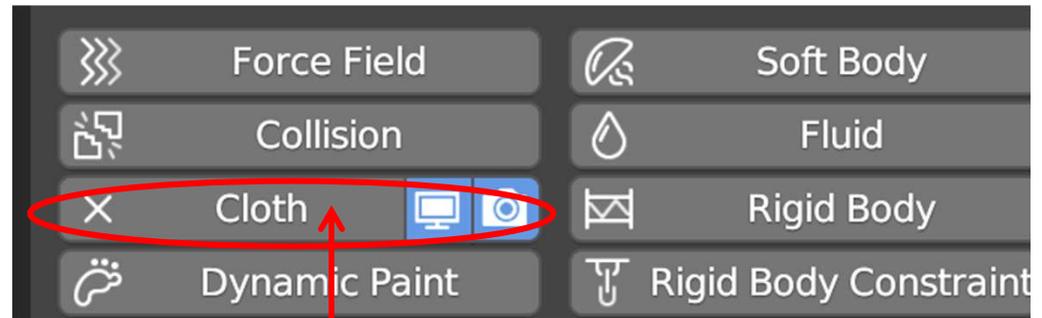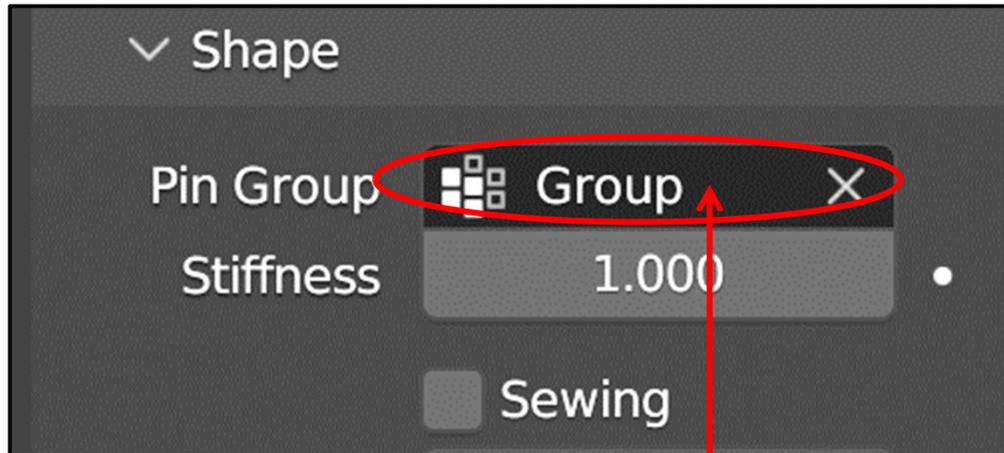


With the cloth selected, go to the **Physics icon** and select **Cloth**. Scroll down to the Shape tab and set the Pin Group to whatever name you gave your column of points (**Group**, here).




Cloth Flag Animation

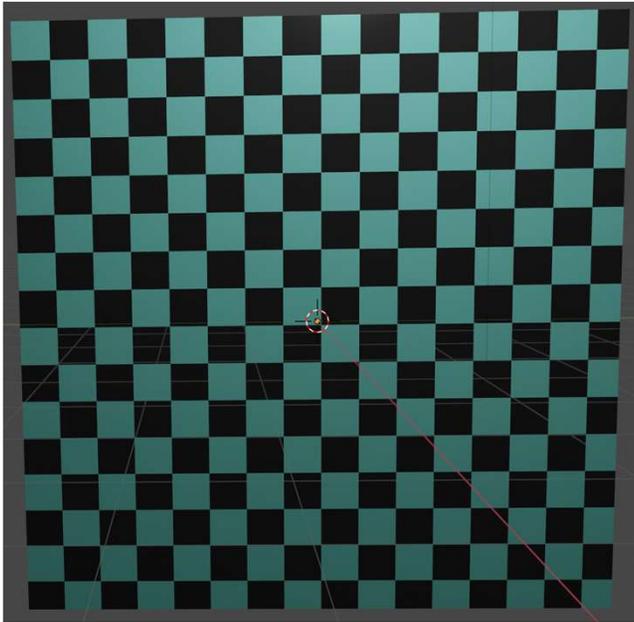

Color and texture the cloth any way you'd like, and turn on the **Animation**.

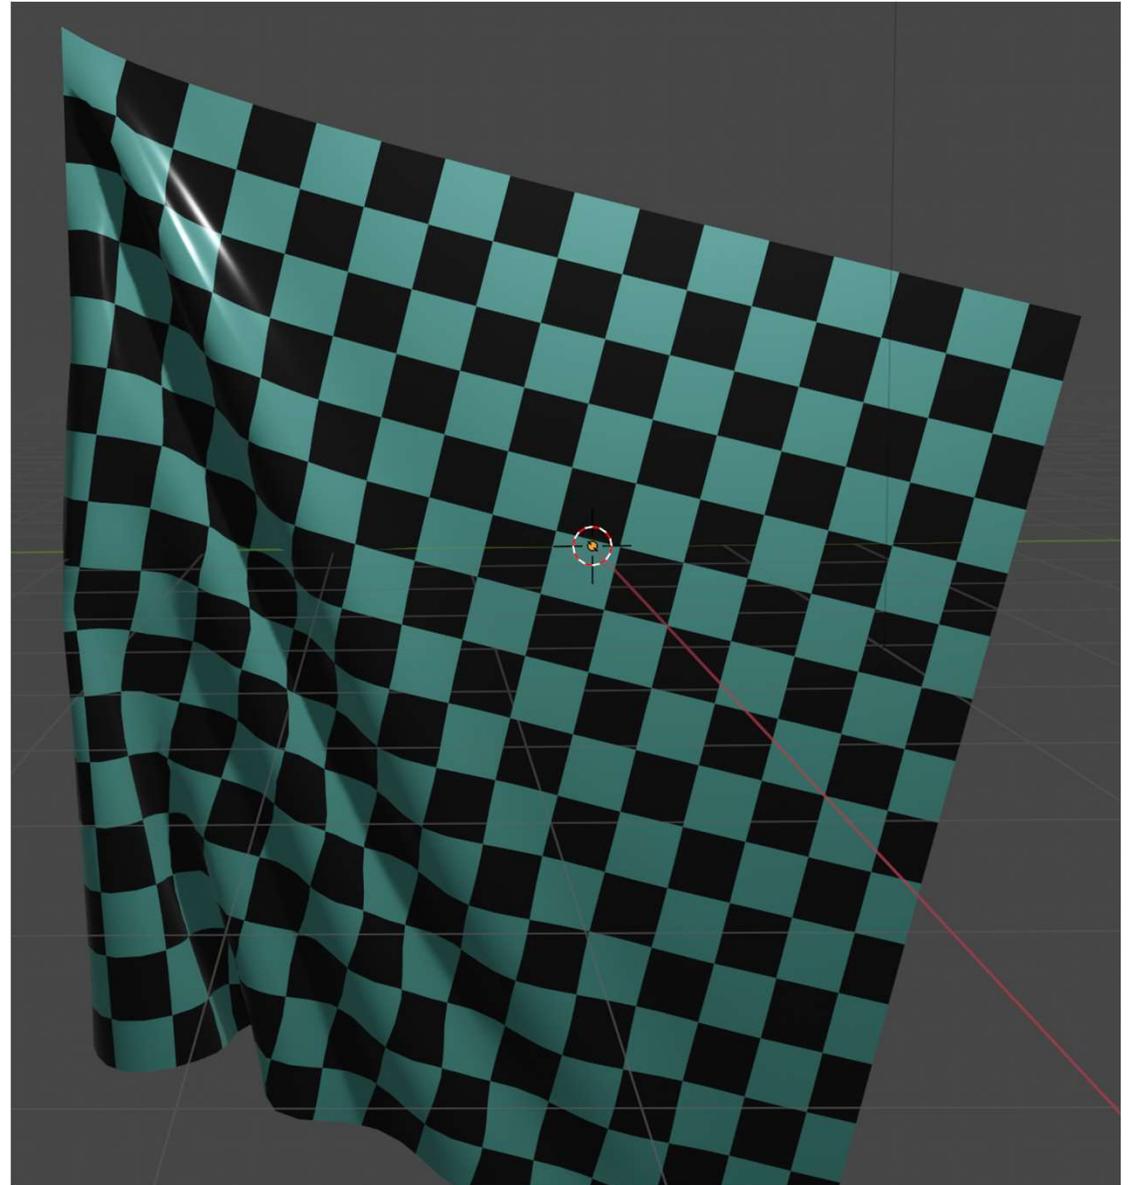

To Blow Cloth, We need a Force Field – Attach it to an Empty Object

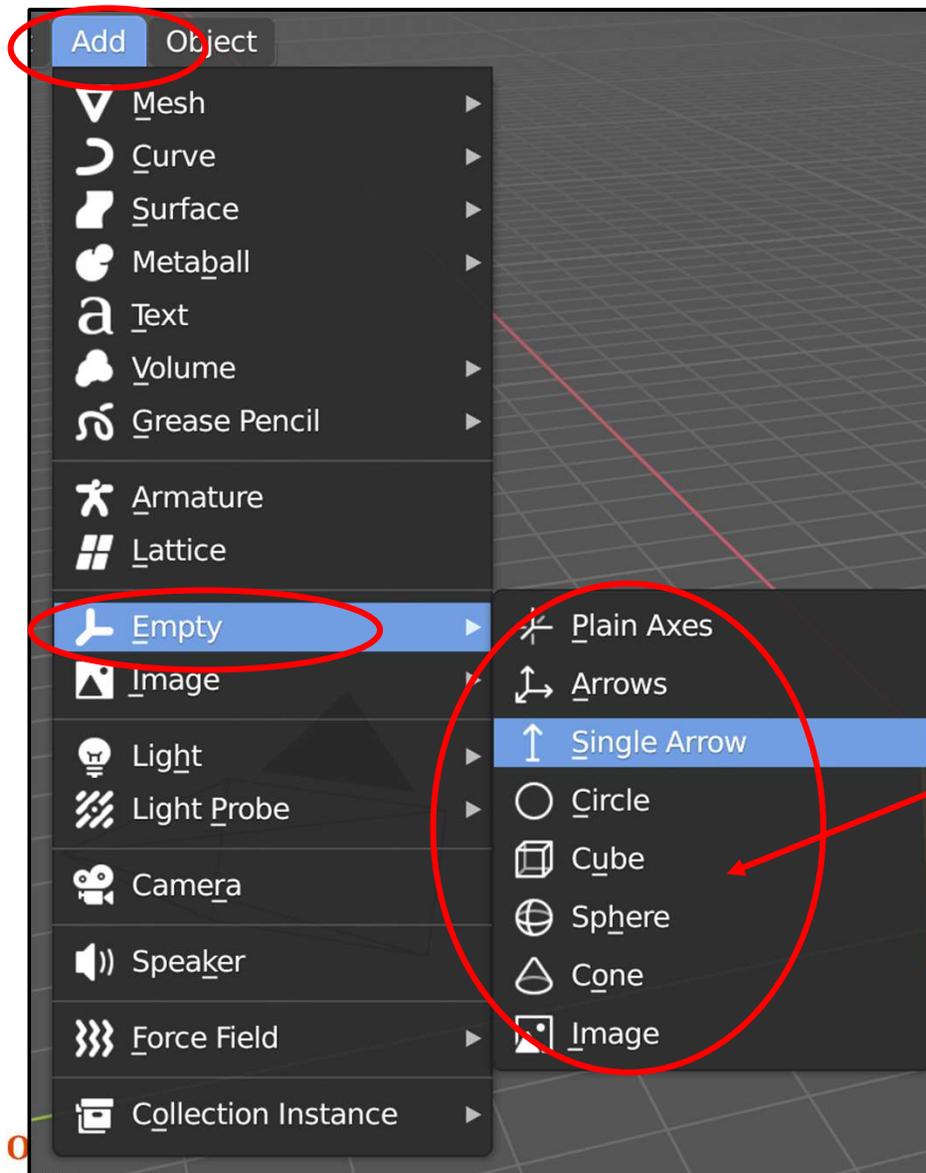


Ironically, one of the most useful objects is the one you can't see. Blender calls this an **Empty**.

It's invisible on the screen, but you can treat it like a real object, and can attach forces to it. These forces will influence the behavior of other objects.

Find the **Empty** under the **Add** tab at the top of the screen. When you click on it, this sub-menu pops up.


We need a Force Field – Attach it to an Empty Object

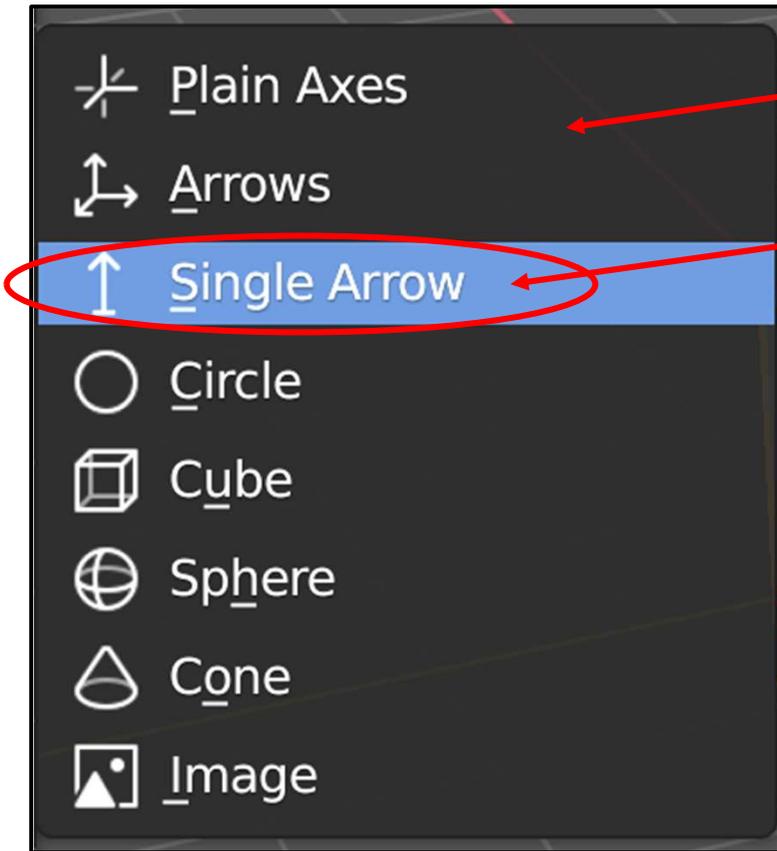


Surprise! Even though it is invisible, an **Empty** has a shape!

For this exercise, pick the **Single Arrow**

On the screen, it will look like this:.

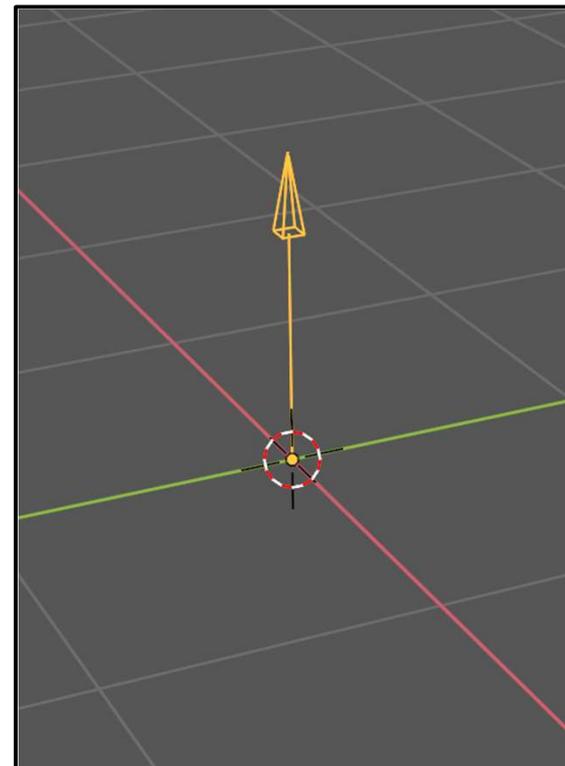

Blowing the Cloth -- Force Fields

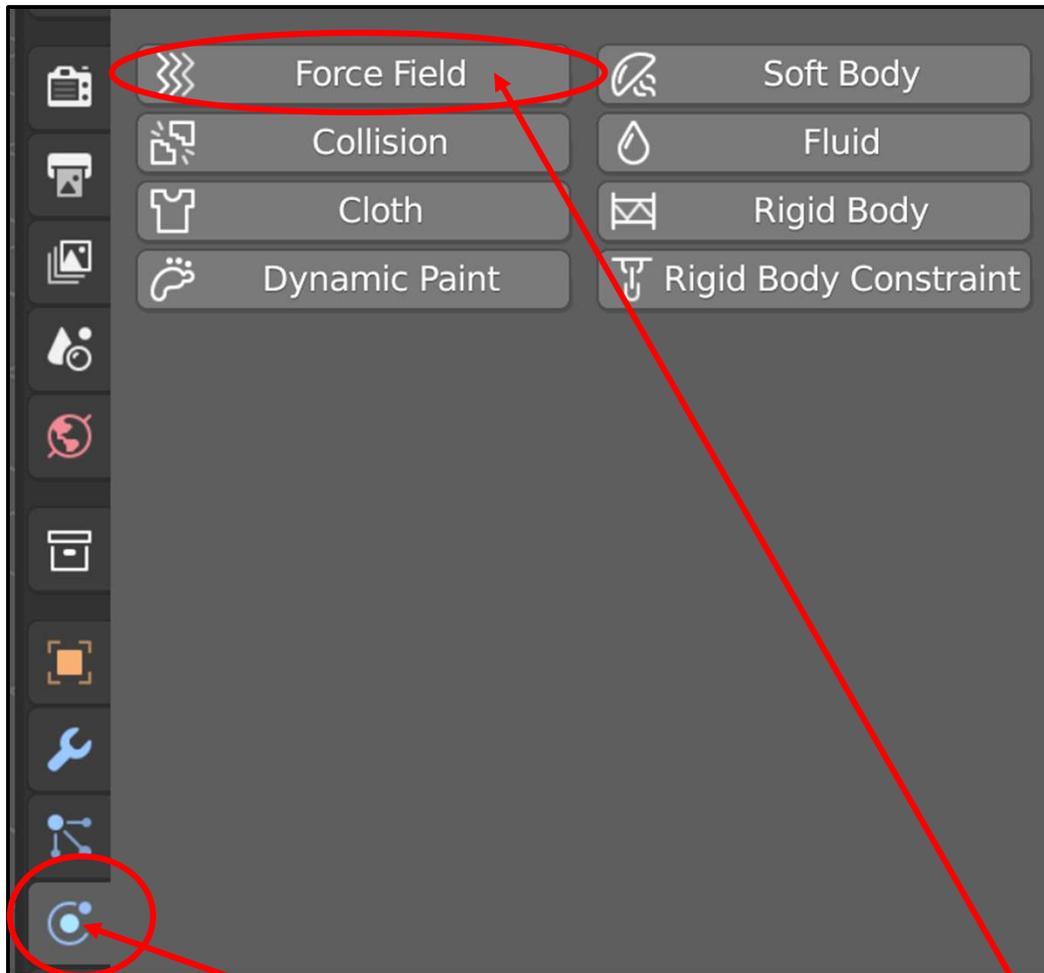


A really good use for **Force Fields** is to blow particles and cloth around

With the **Empty** Object selected, click on the Physics icon and then click on **Force Field**

Position and Orient the Empty

Using the usual object-rotate commands, orient the **Empty** so that it is pointing at the particles.


Hint: it is easiest to *position* it in Global Coordinates ($g \rightarrow x$) and easiest to *rotate* it in Local Coordinates ($r \rightarrow x \rightarrow x$).

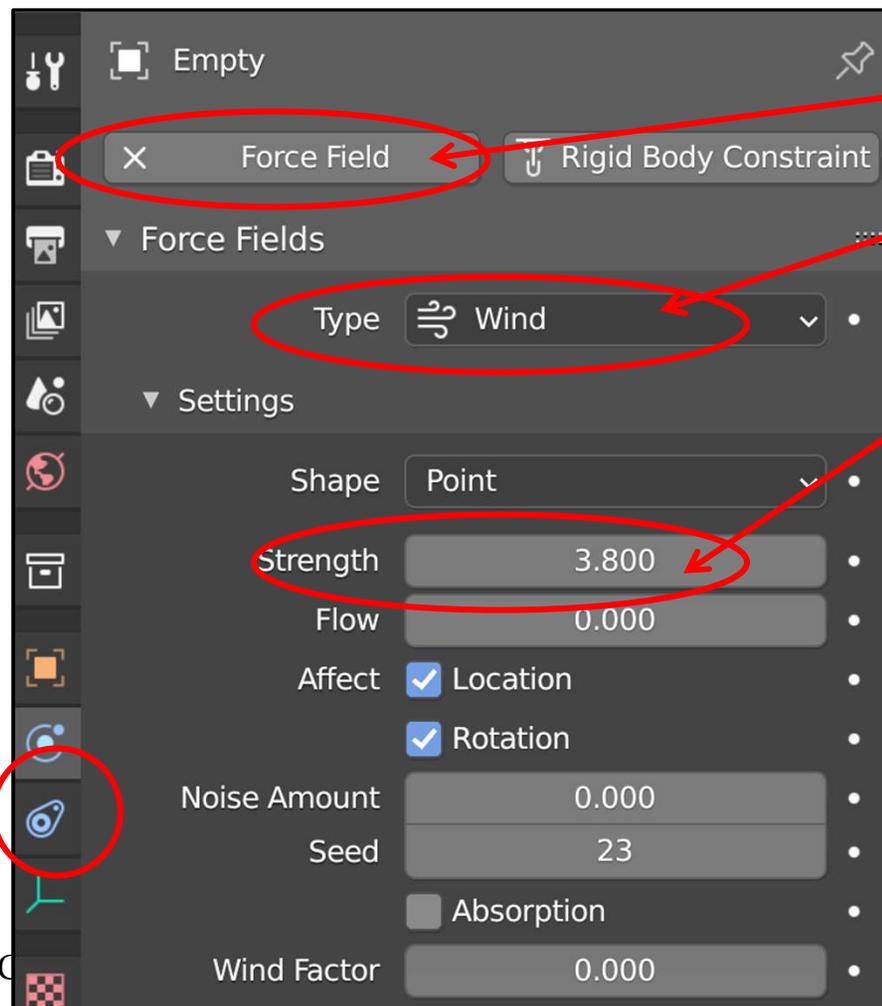


And, under **Force Field Type**, select **Wind**

You will use this to change the **Strength** of the wind


It will look like this on the screen:

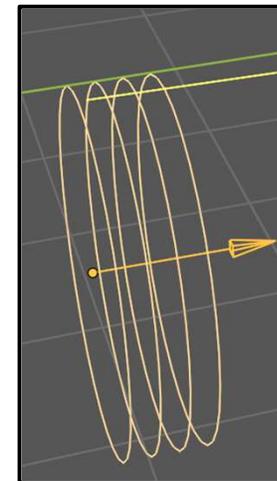

Cloth Flag Animation: Adjusting the Amount of Fluttering 303

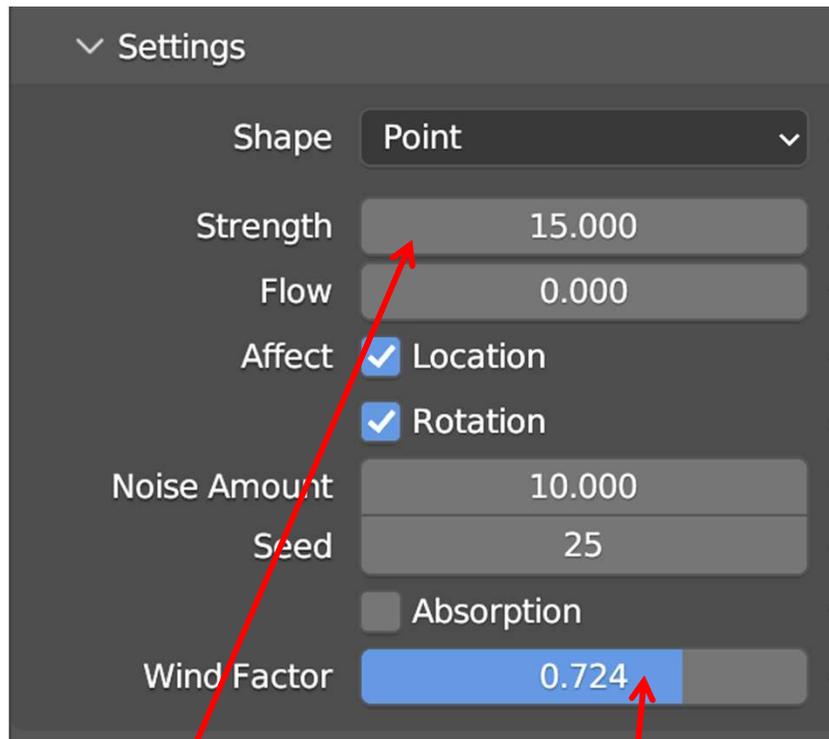


In the **Empty** object, increase the **Strength** and the **Wind Factor**.

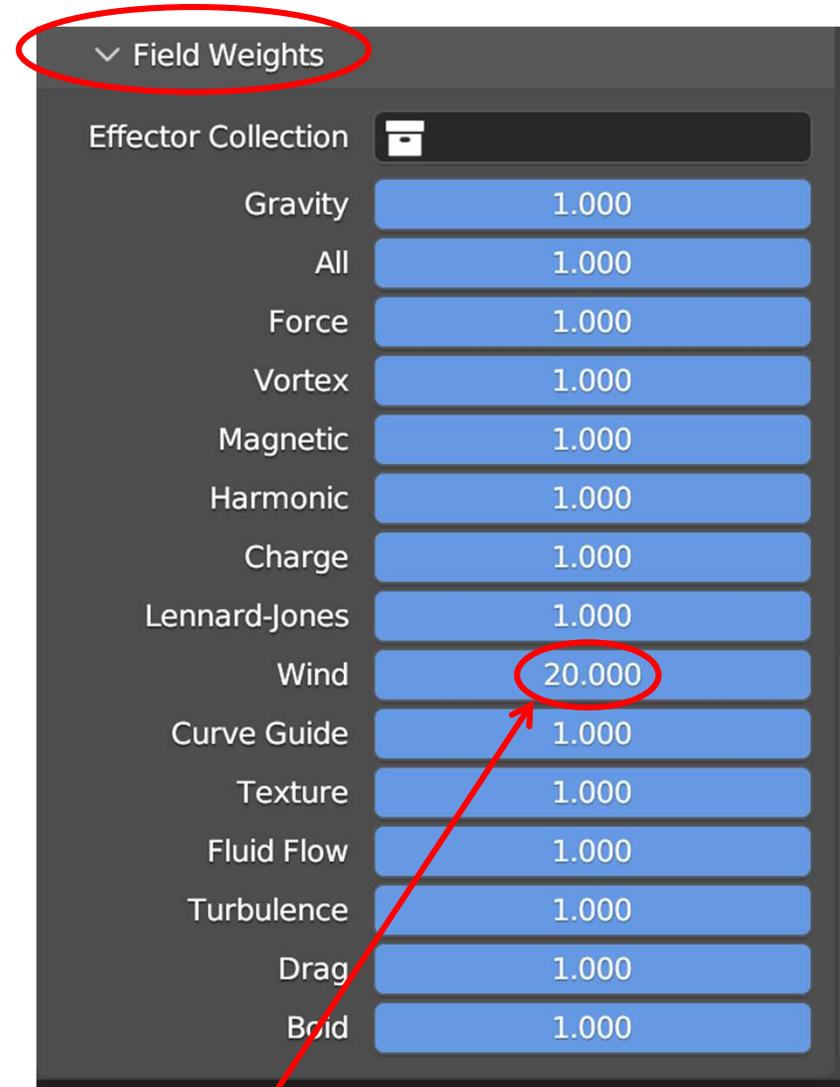


In the **Cloth** object, scroll down to the **Field Weights** and increase the **Wind**.

Cloth Fluttering Flag Animation

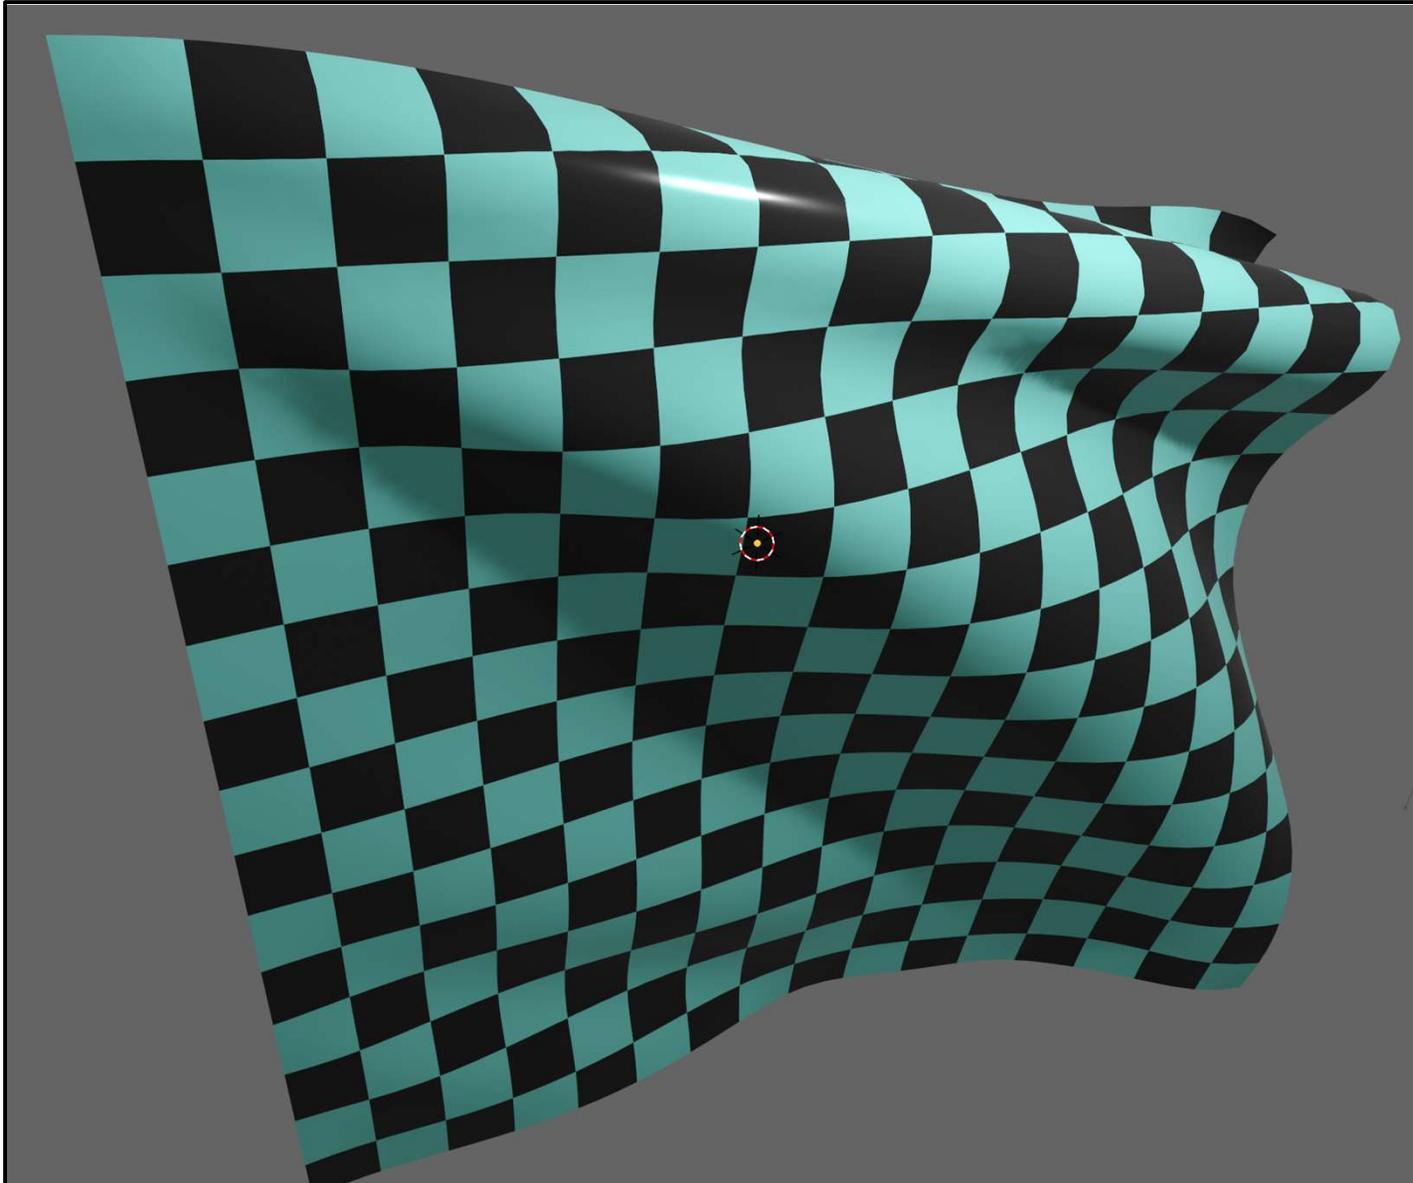

fluttering.blend



fluttering.mkv

Cloth Fluttering Flag Animation ☺


305




Dropping an Object on the Cloth

Setup this scenario:

1. Have an object hovering up in the air
2. Add a Grid object and scale it up
3. In Edit Mode, subdivide the Grid a few times
4. Select the 4 corner vertices of the grid and place them into a Vertex Group called **Corners** (see how to do this a few slides back)
5. Back in Object Mode, select the grid and hit **RMB**→**Shade Smooth**

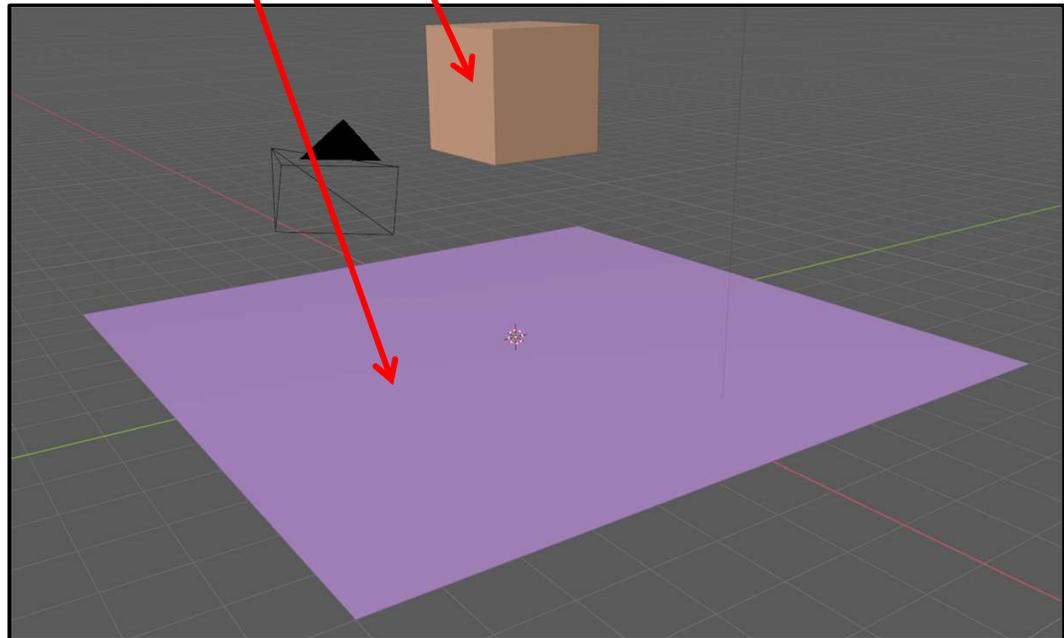


Dropping an Object on the Cloth


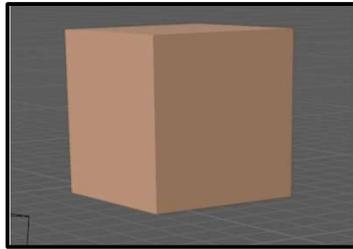


Select the object hovering up in the air:
Go to the **Physics** menu and select **Soft Body**
In the **Soft Body** sub-menu:

1. Uncheck **Goal**
2. In the **Edges** sub-menu:
 - Set the **Push** and **Pull** each to 0.999
 - Set **Bending** to **1.00**
3. In the **Self Collision** sub-menu
 - Check **Self Collision**

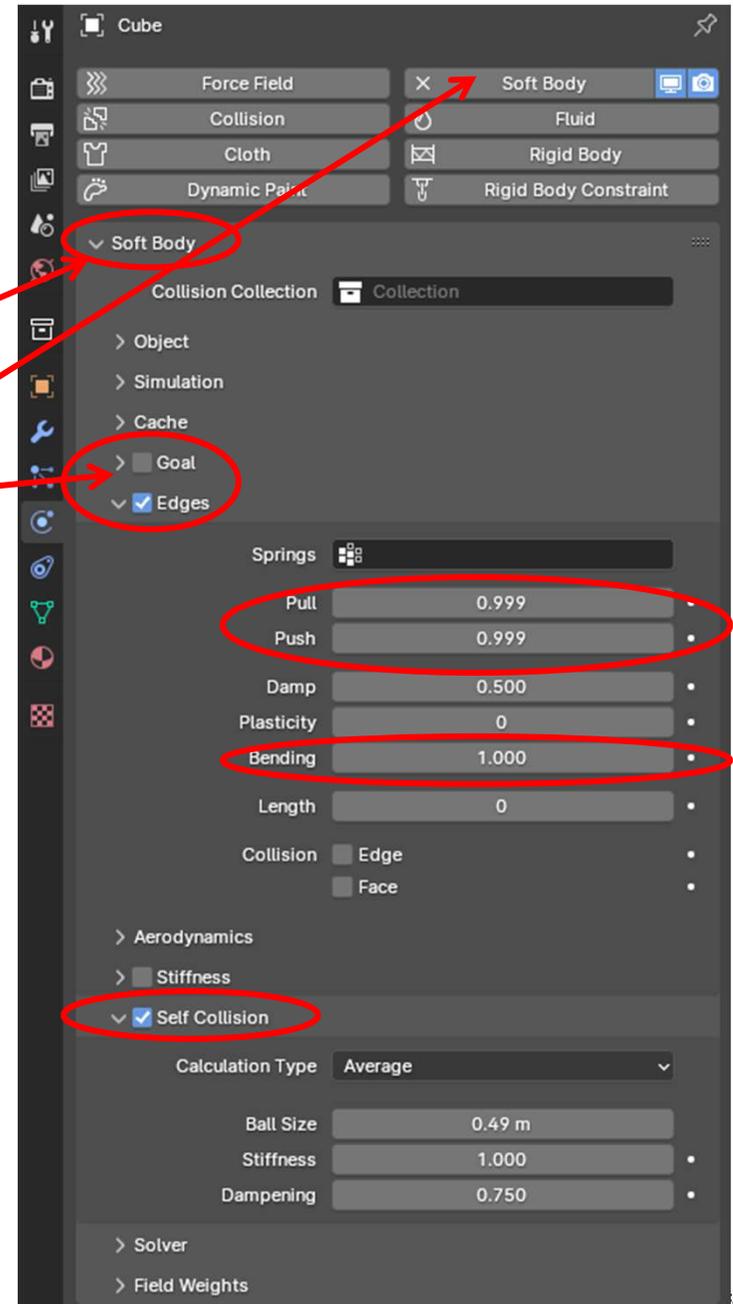


Dropping an Object on the Cloth

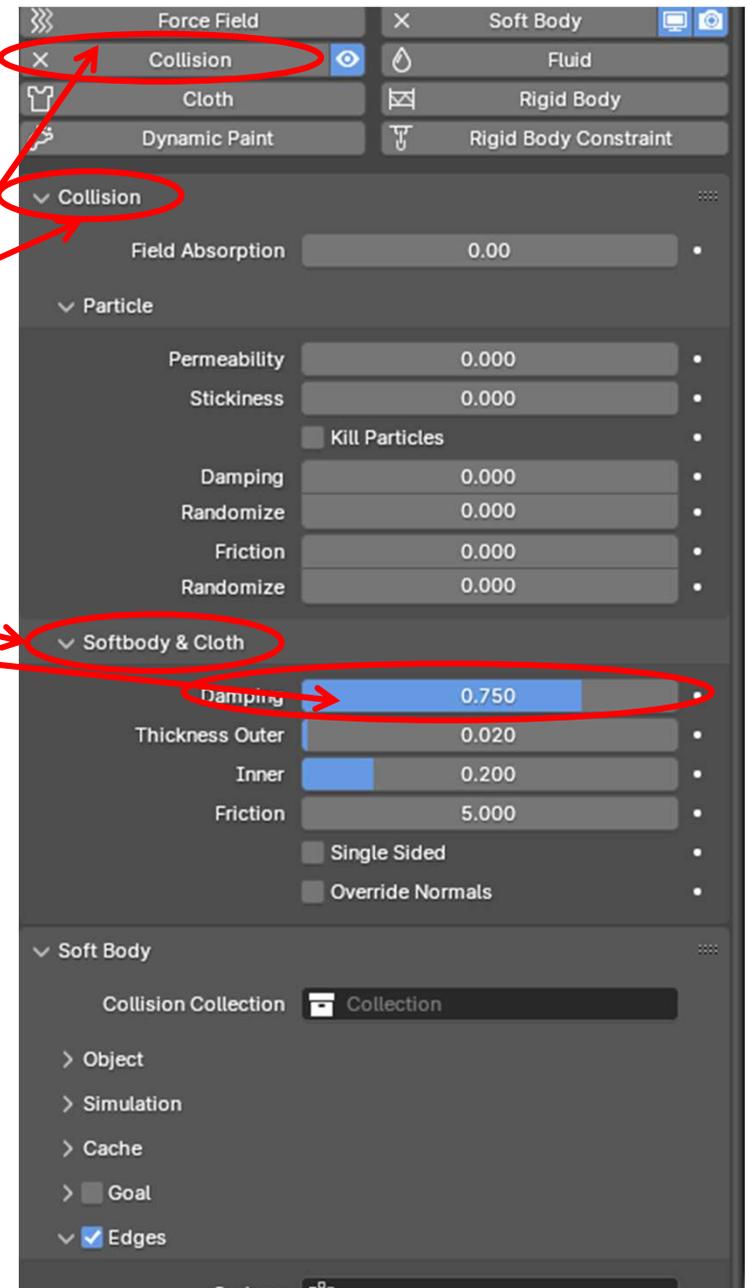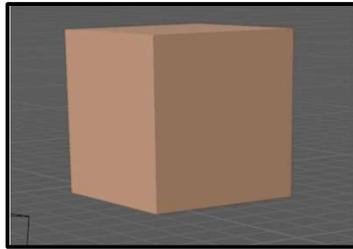

With the hovering object still selected:
Go to the **Physics** menu and select **Collision**
In the **Collision** menu:

1. In the **Softbody & Cloth** sub-menu
 - Set the **Damping to 0.75**

Dropping an Object on the Cloth

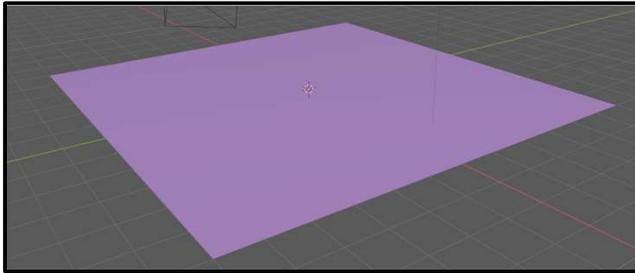


Select the cloth grid, then:


Go to the **Physics** menu and select **Cloth**

In the **Cloth** menu:

1. Open the **Shape** sub-menu and select the **Corners** Pin Group
2. Open the **Collisions** sub-menu and check **Self Collisions**

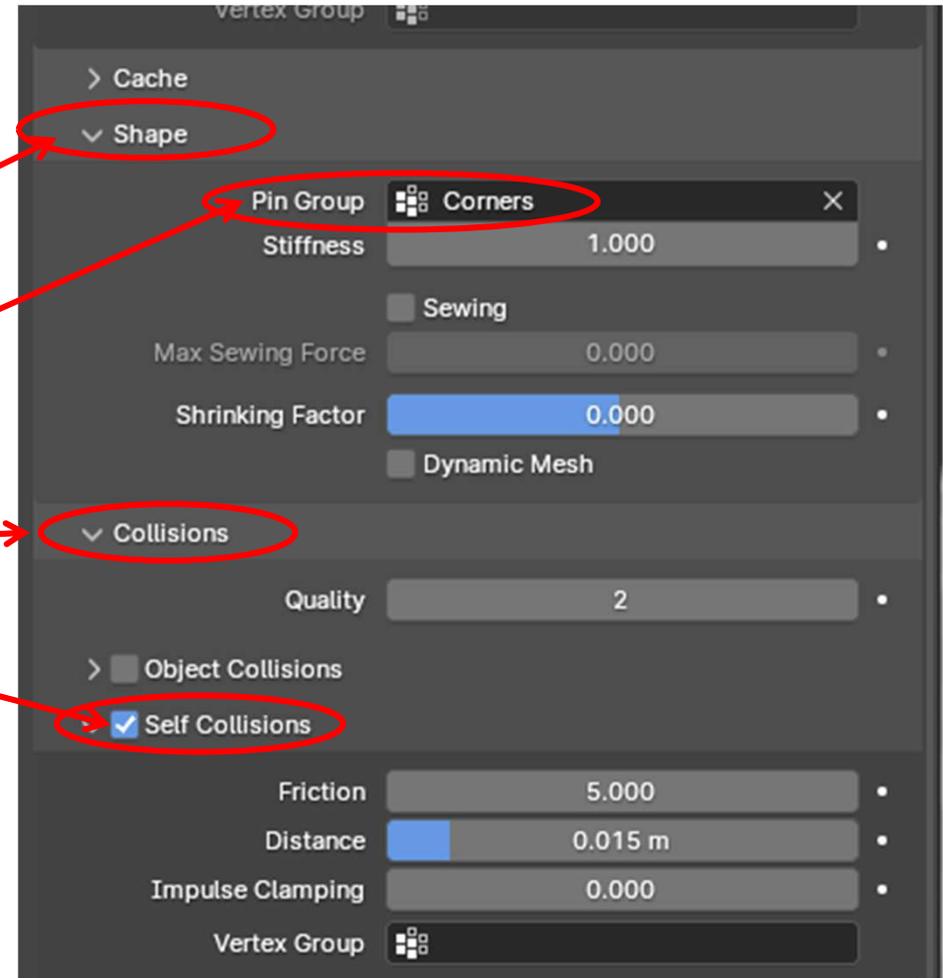


Dropping an Object on the Cloth

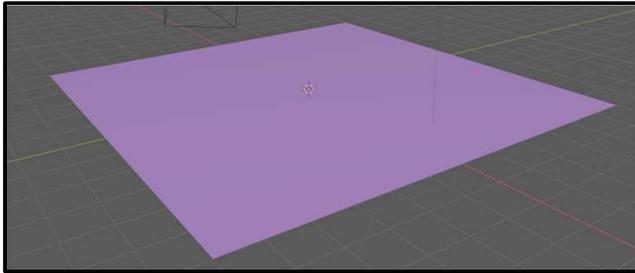

With the cloth still selected:
Go to the **Physics** menu and select **Collision**
Then, in the **Collision** sub-menu:
1. In the **Softbody & Cloth** sub-menu

- Set the **Damping** to **0.75**

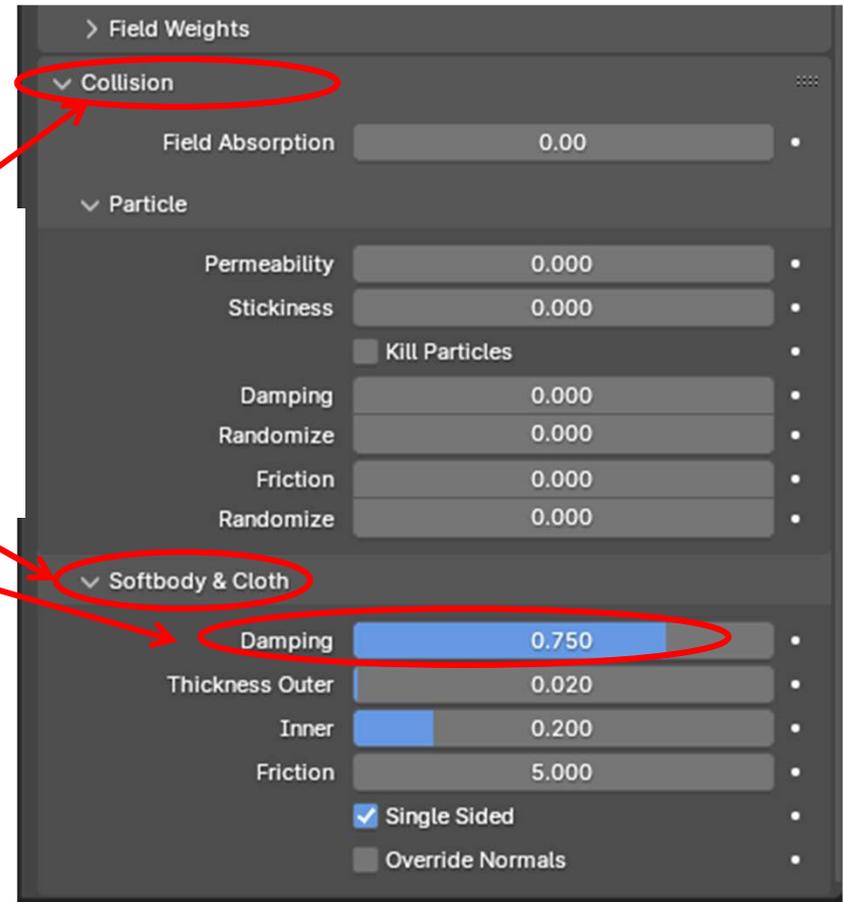


Dropping an Object on the Cloth

Click on the **Play** button in the animate controls





The cloth sags and the object plops into it

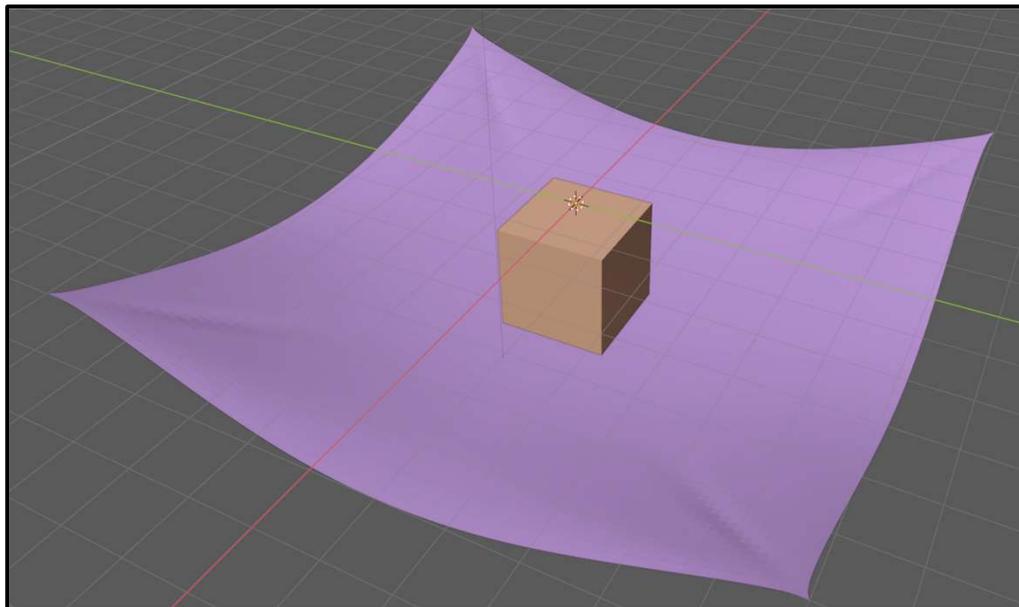

Setting up a Fluids Simulation – Create the Domain Object


Step #1: Create the **Domain**, the volume in which the fluid will be simulated. Here, I scaled the default cube by 3 in X, 3 in Y, and 5 in Z.

Step #2: With the cube selected, go to the **Physics** menu, click on **Fluid**, select **Domain**, and select **Liquid**

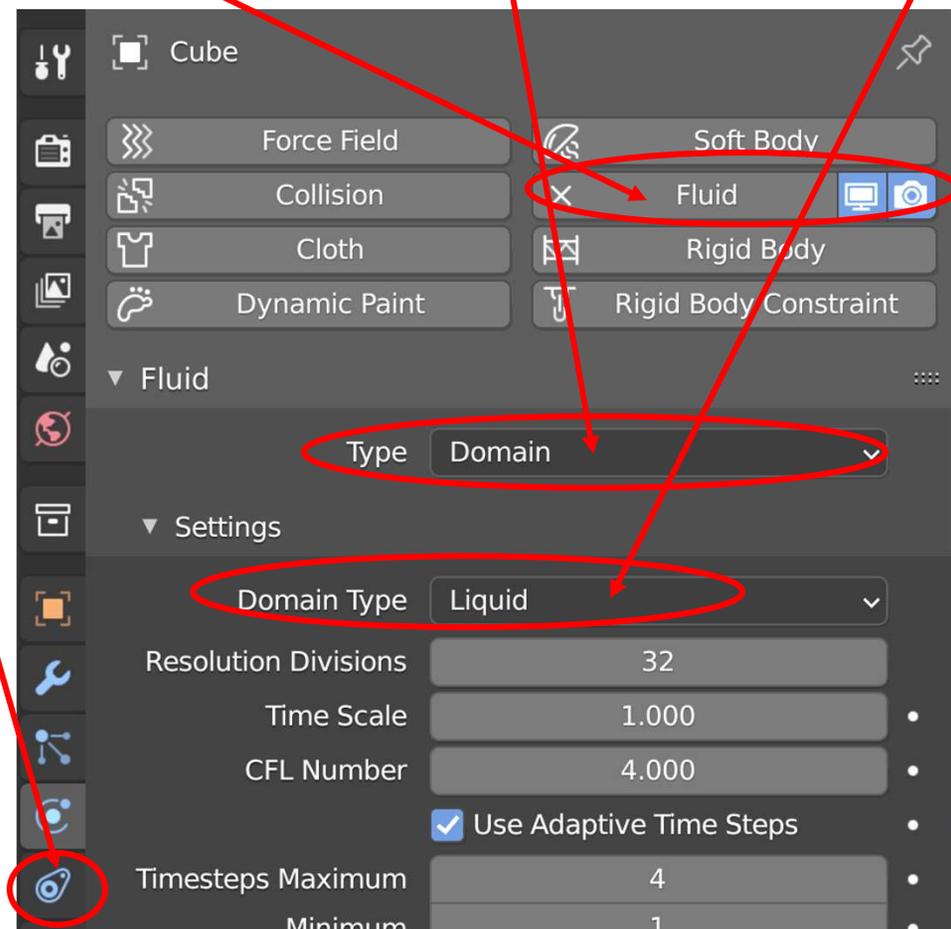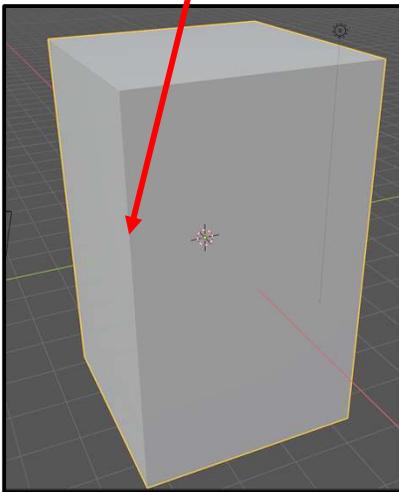

Setting up a Fluids Simulation – Create the Domain Object



Step #3: Scroll down in the **Physics-Fluid** menu until you find the **Mesh** tab.. Turn it on.

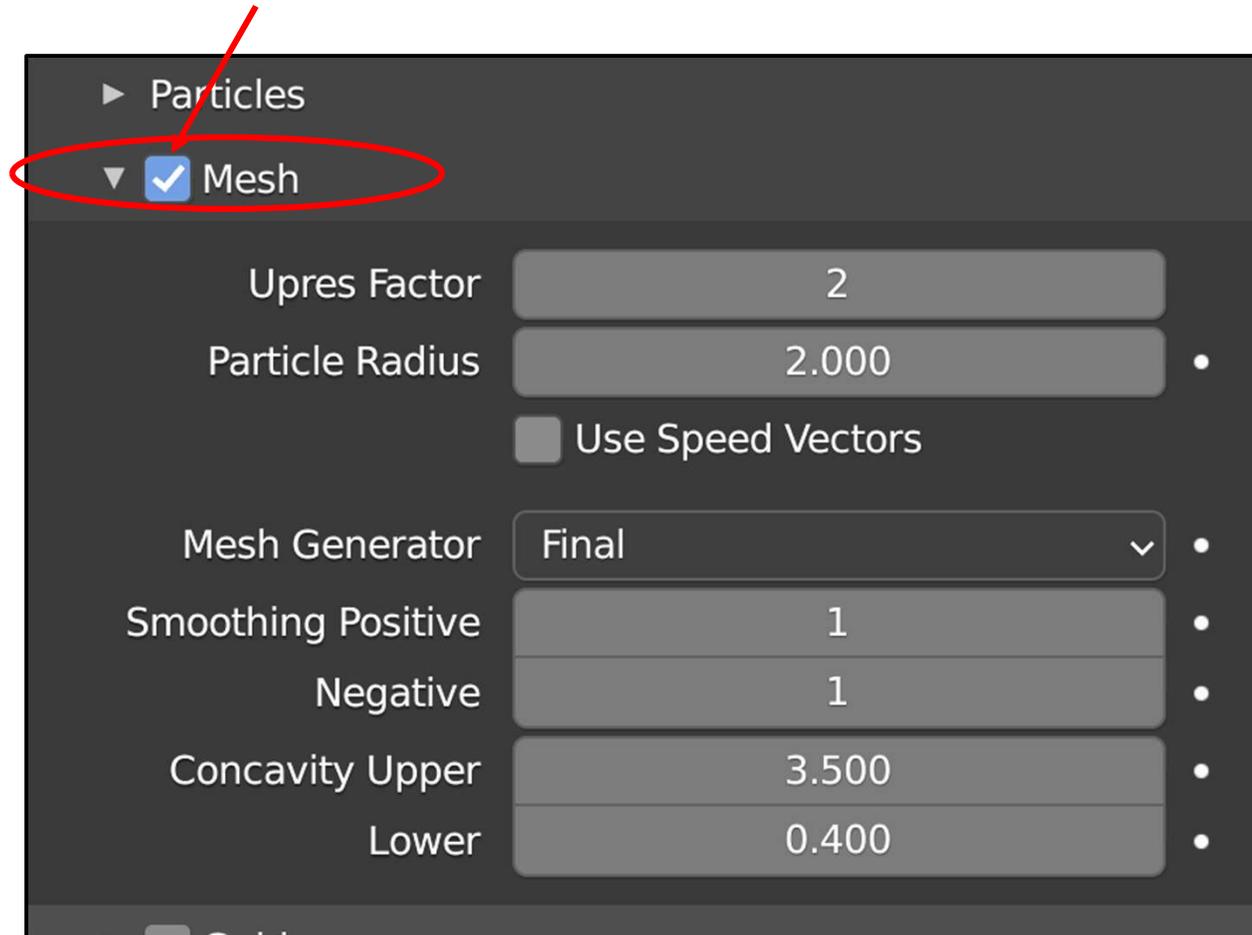

Setting up a Fluids Simulation – Create the Flow Object



Step #4: Create a mesh object that will be the original location and shape of the fluid. A UV-Sphere works well. A monkey works even better! 😊 This object must lie totally within the Domain. You should probably toggle into **wireframe** mode so you can see inside the Domain.

Position this object near the *top of the Domain*.

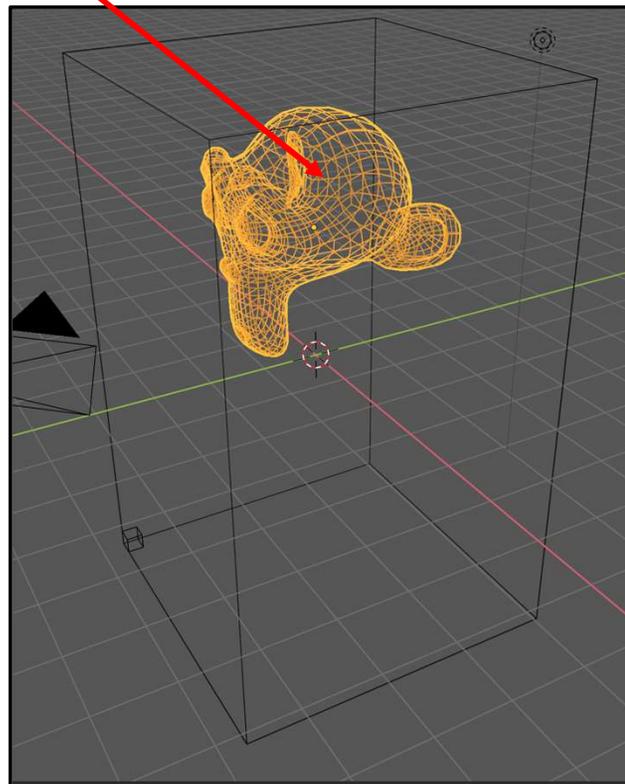

Setting up a Fluids Simulation – Create the Flow Object

Step #5: With this object selected, go to the **Physics** menu, click on **Fluid**, select **Flow**, and select **Liquid**

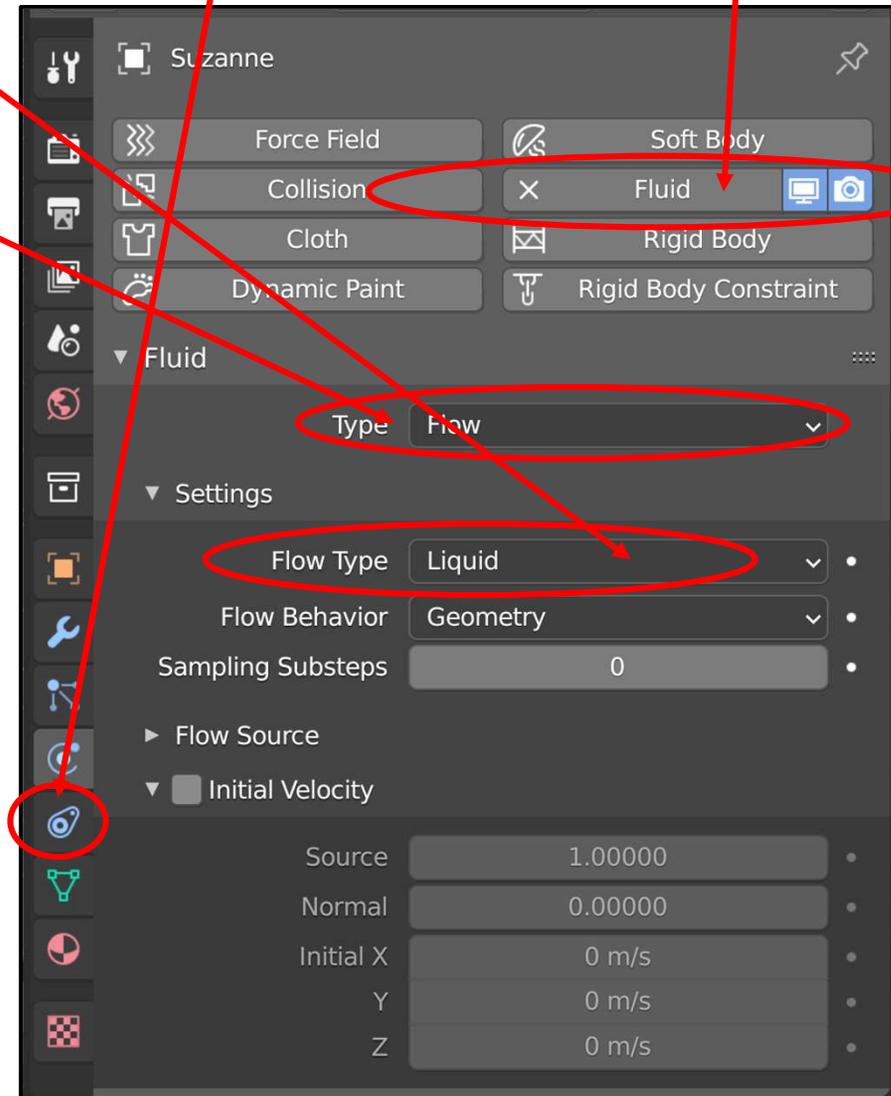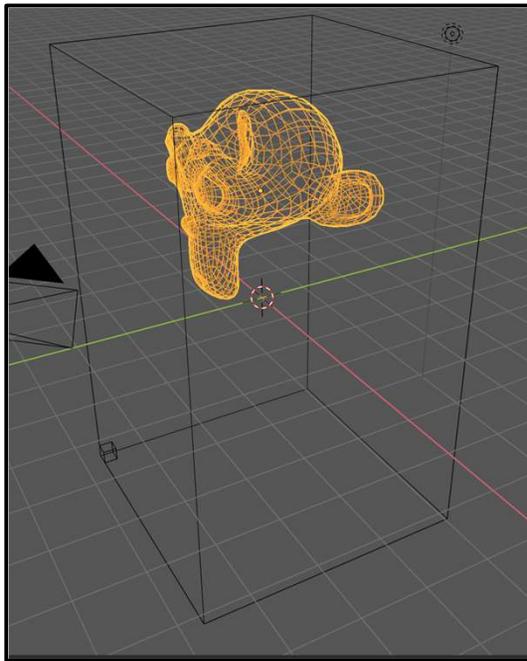


Setting up a Fluids Simulation – Miscellaneous

Step #6: Miscellaneous Things:

- Change the color of the Domain object (cube) to the color you want the fluid to be. Feel free to change the **Metallic** and **Roughness** parameters as well.
- Change the shading type of the Domain object to **Shade Smooth**
- Hide the Flow object (monkey?) by clicking off its eyeballs in the Outliner




- Select the Domain object, go to the **Physics** menu, scroll down until you see this: Be sure **Liquid** is turned on. Now, go here and select the *other option*. It doesn't make a huge difference which one you pick, but changing the option resets the fluid simulation.

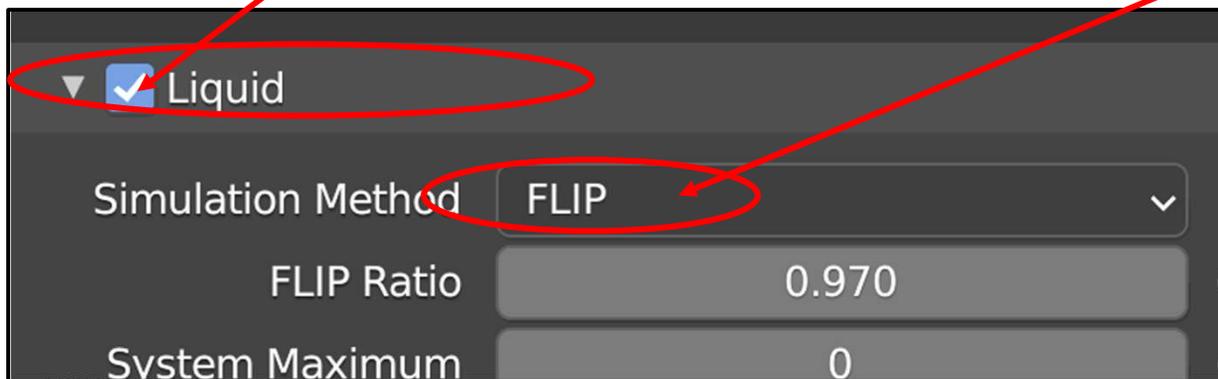



Running the Fluids Simulation

Step #7: Run the animation! Go to **Viewport Shading mode** and hit **Play**. The first time through will seem slow because it is computing the frames and storing them. After that, the animation will be much smoother because Blender is playing back your frames.

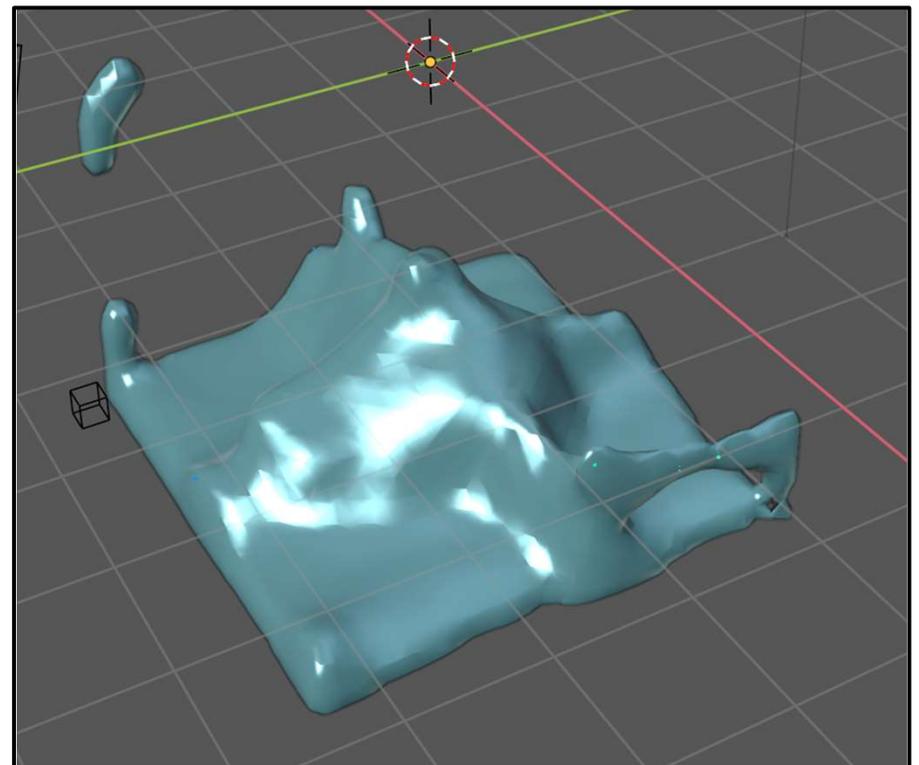


Adding a Barrier

Step #8: Add some shape (a cone perhaps) into the middle of the Domain. Give it a color and the proper shading type. Then, go to the **Physics** menu, click on **Fluid**, and select **Effector**.

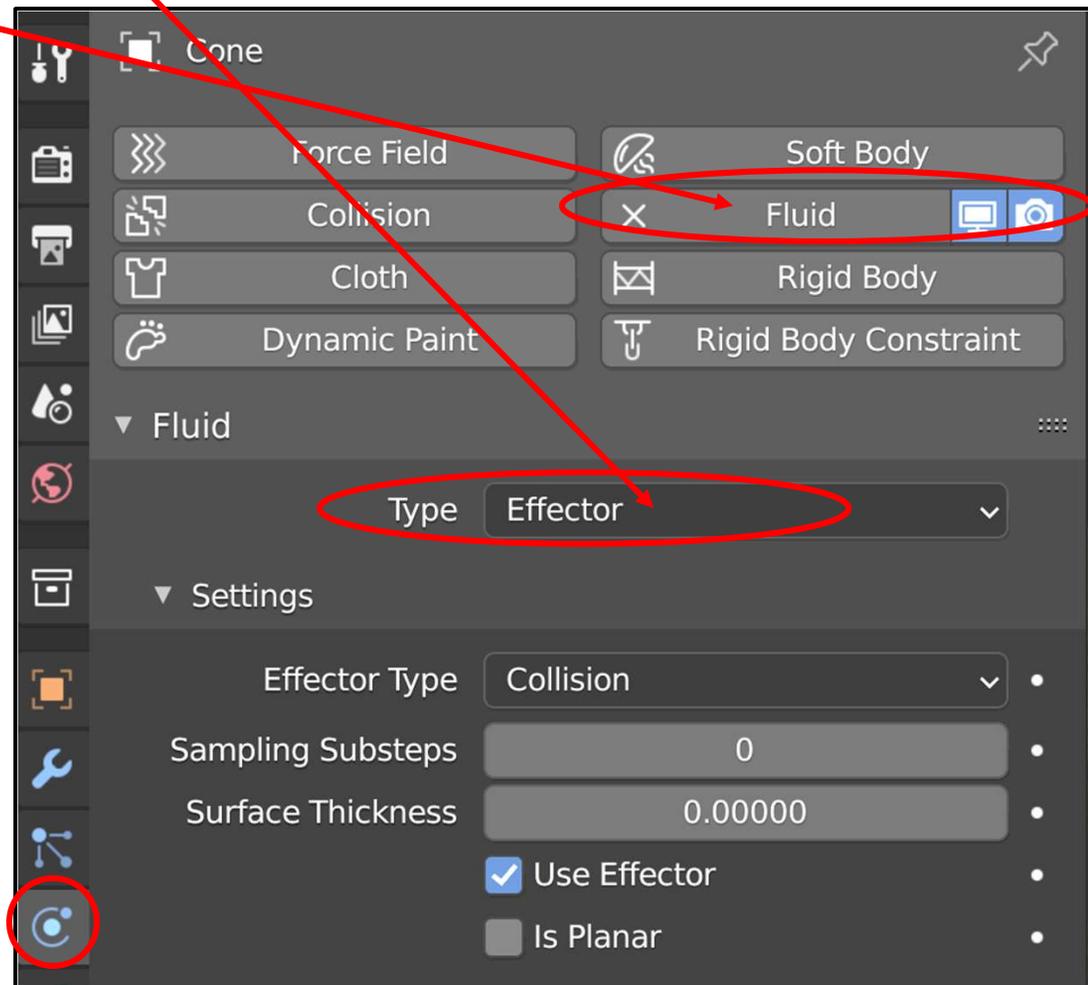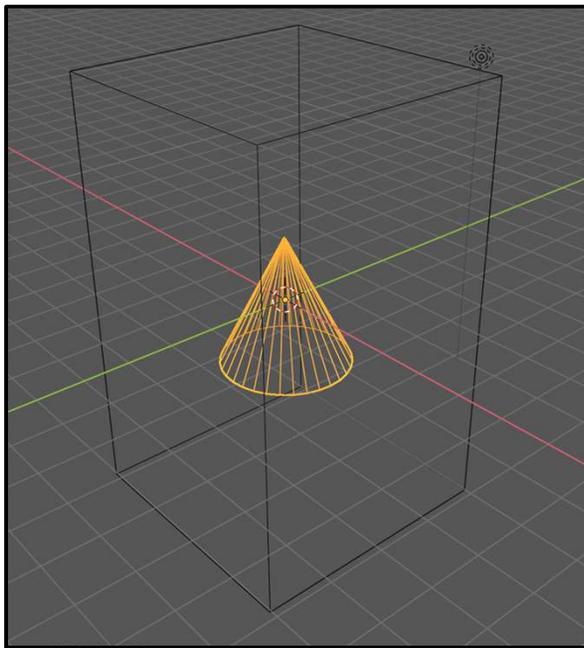


Adding a Barrier


Step 9: Select the Domain object, go to the **Physics** menu, scroll down until you see this again: Go here and select the *other option*. It doesn't make a huge difference which one you pick, but changing the option resets the fluid simulation.

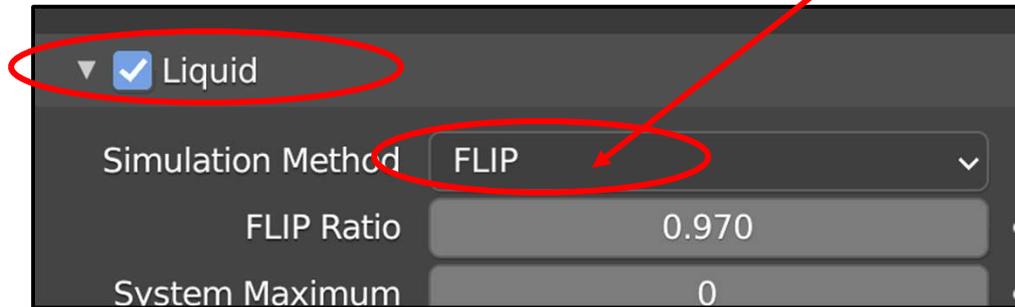



Step 10: Hit Play!

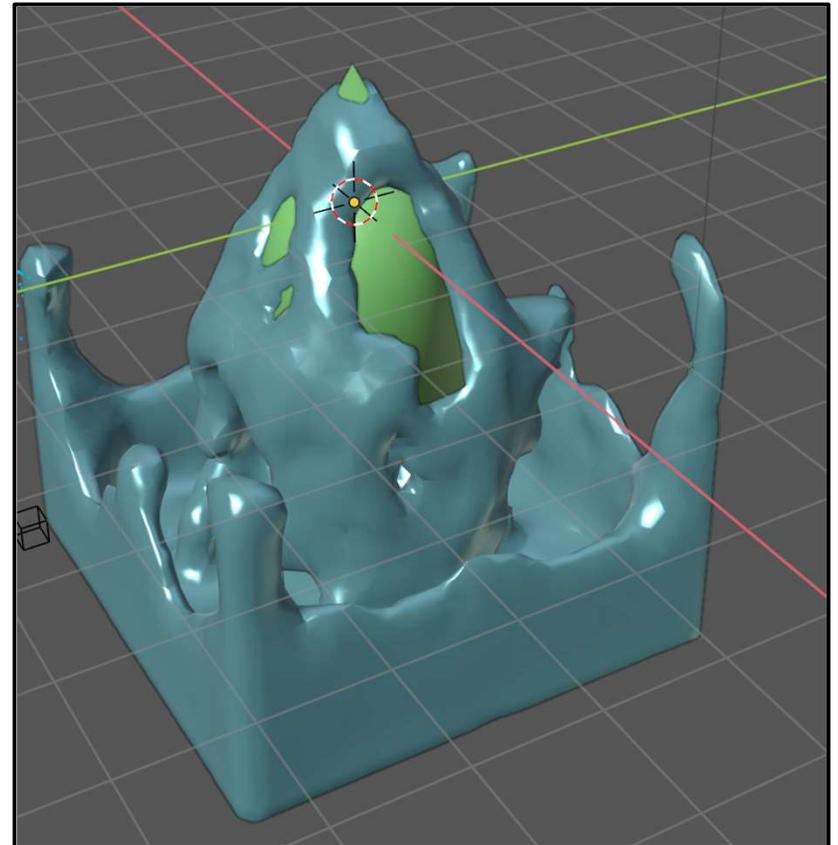

10. Appearance, II

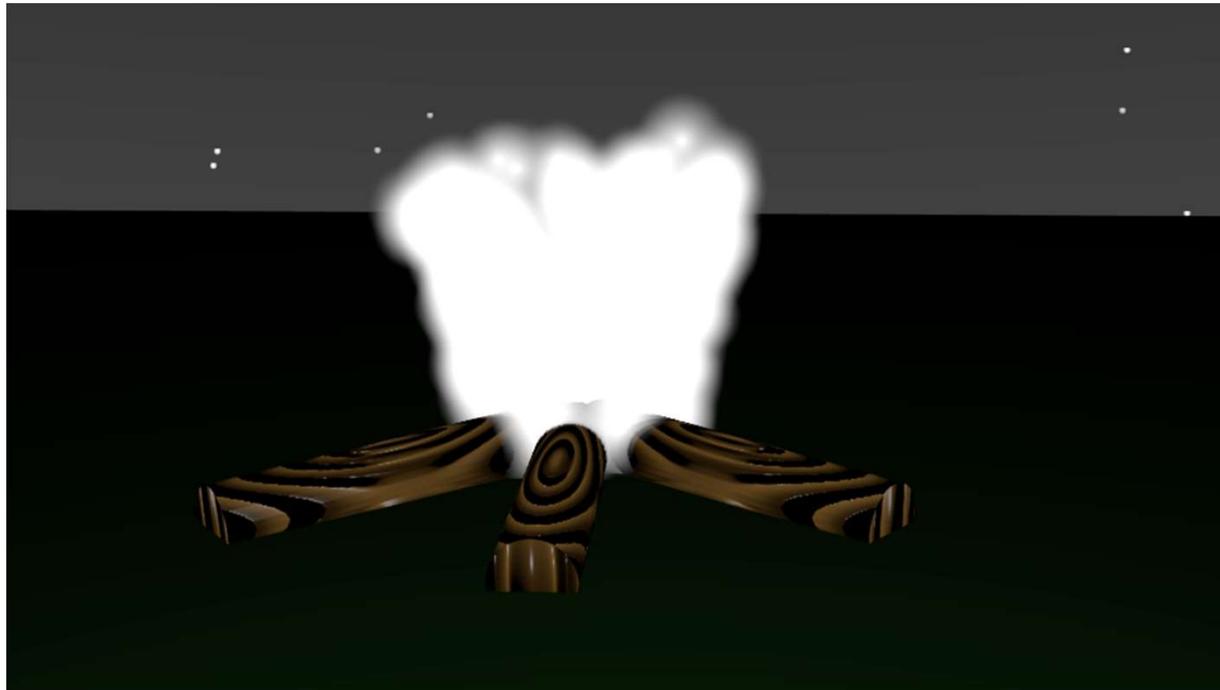

Procedural Texturing

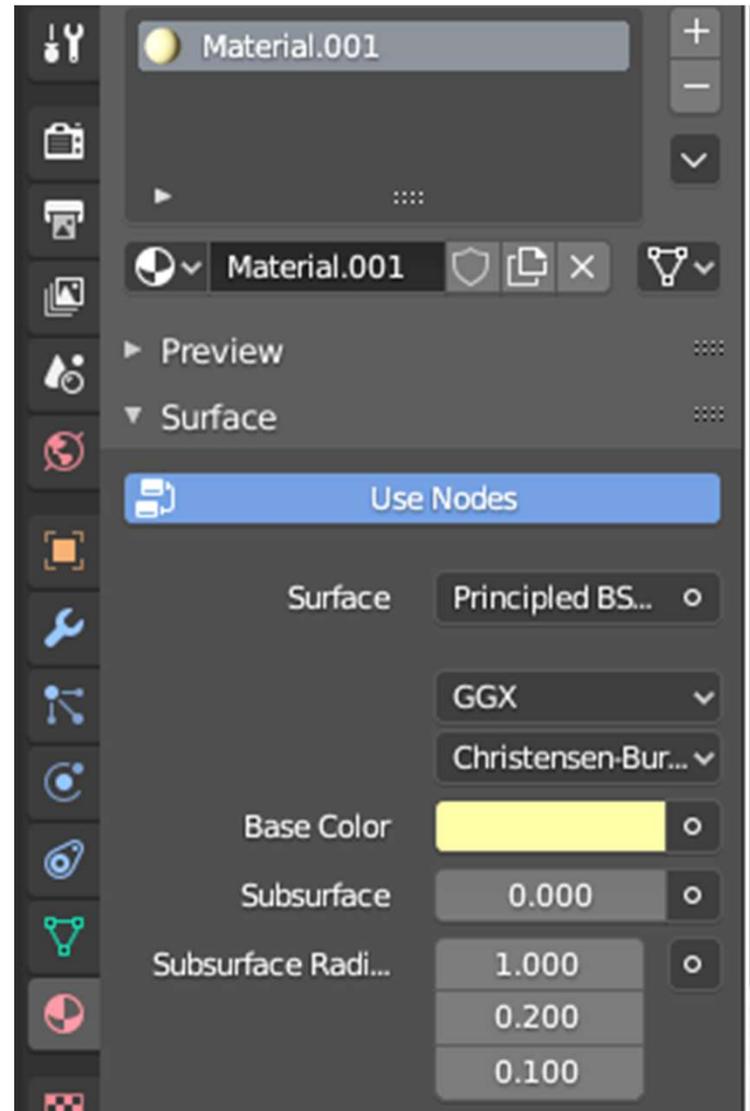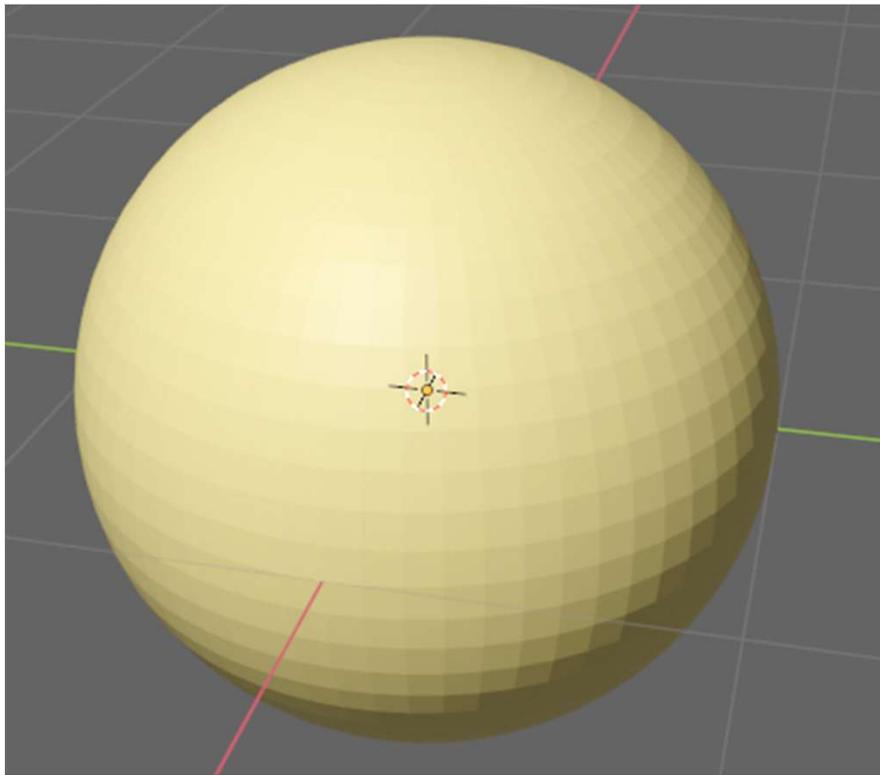



Procedural Texturing

1. Leave **Use Nodes** turned on.

2. Select **Principled BSDF** (probably already selected)

3. Here, where you would normally select a color, click on this little circle

4. From that pop-up menu, select **Voronoi Texture** (or one of the others)


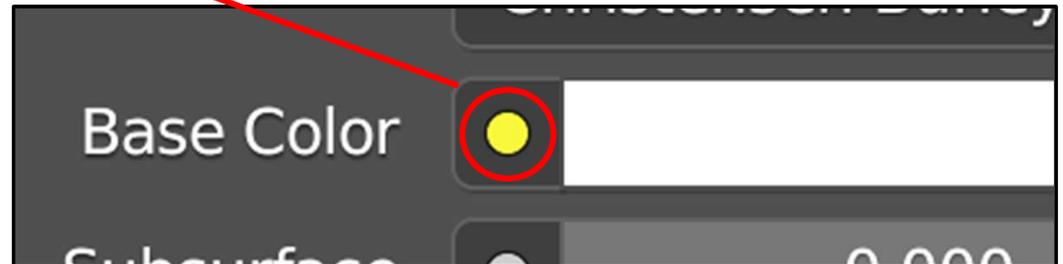
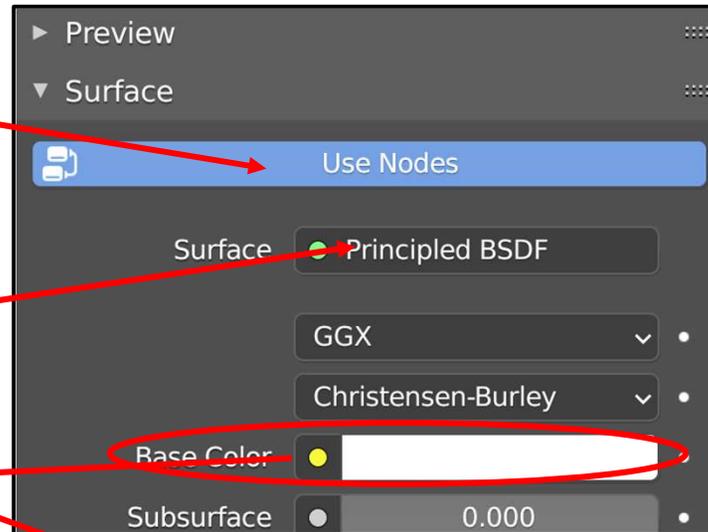


4. From that pop-up menu, select **Voronoi Texture** (or one of the others)

5. Change the **Scale** to change the size of the Voronoi cells

6. Try changing the **Randomness** as well!

7. As before, changing **Metallic** and **Roughness** affects the shininess.

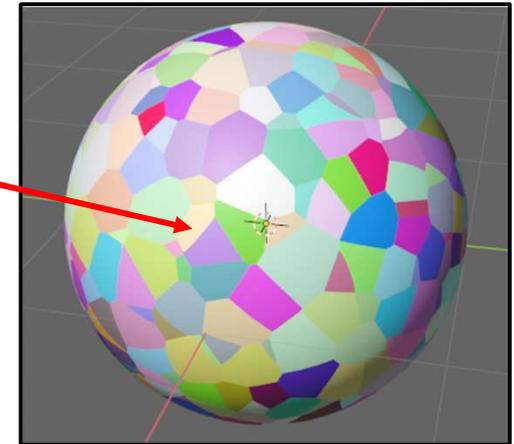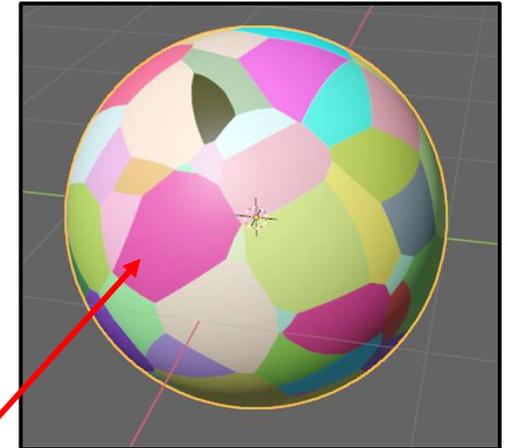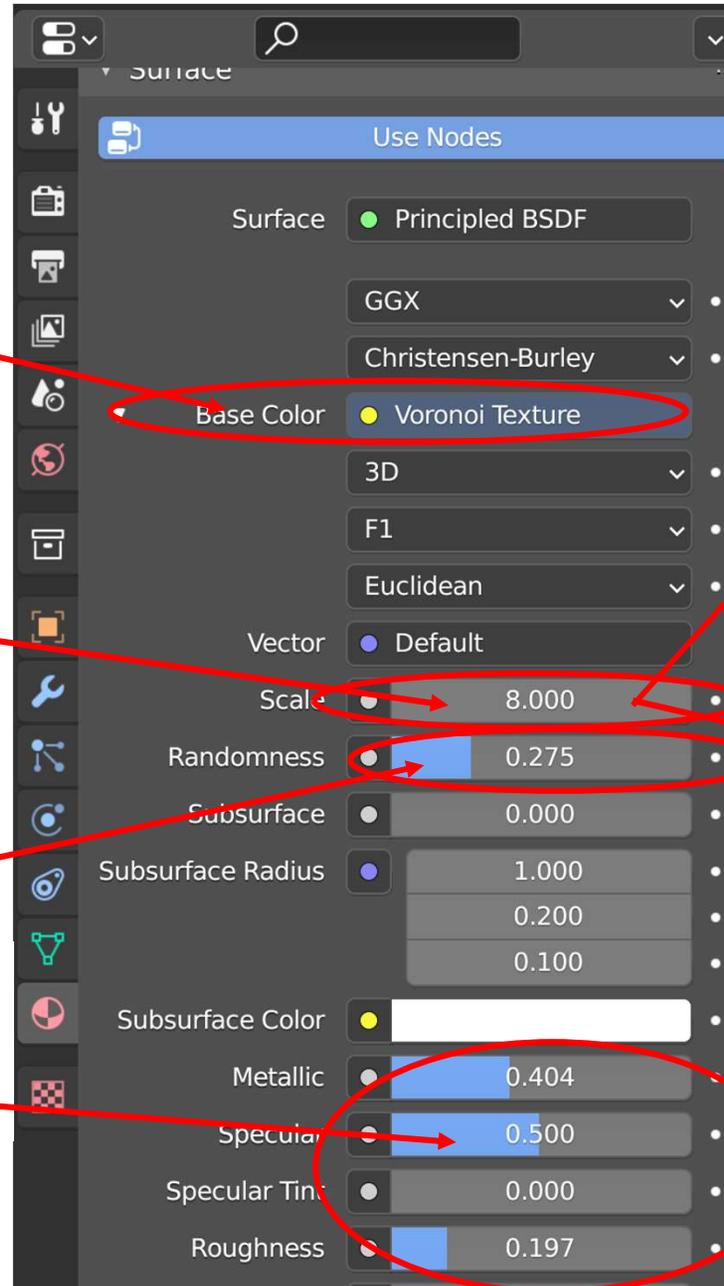

Blender has these Built-in Procedural Textures


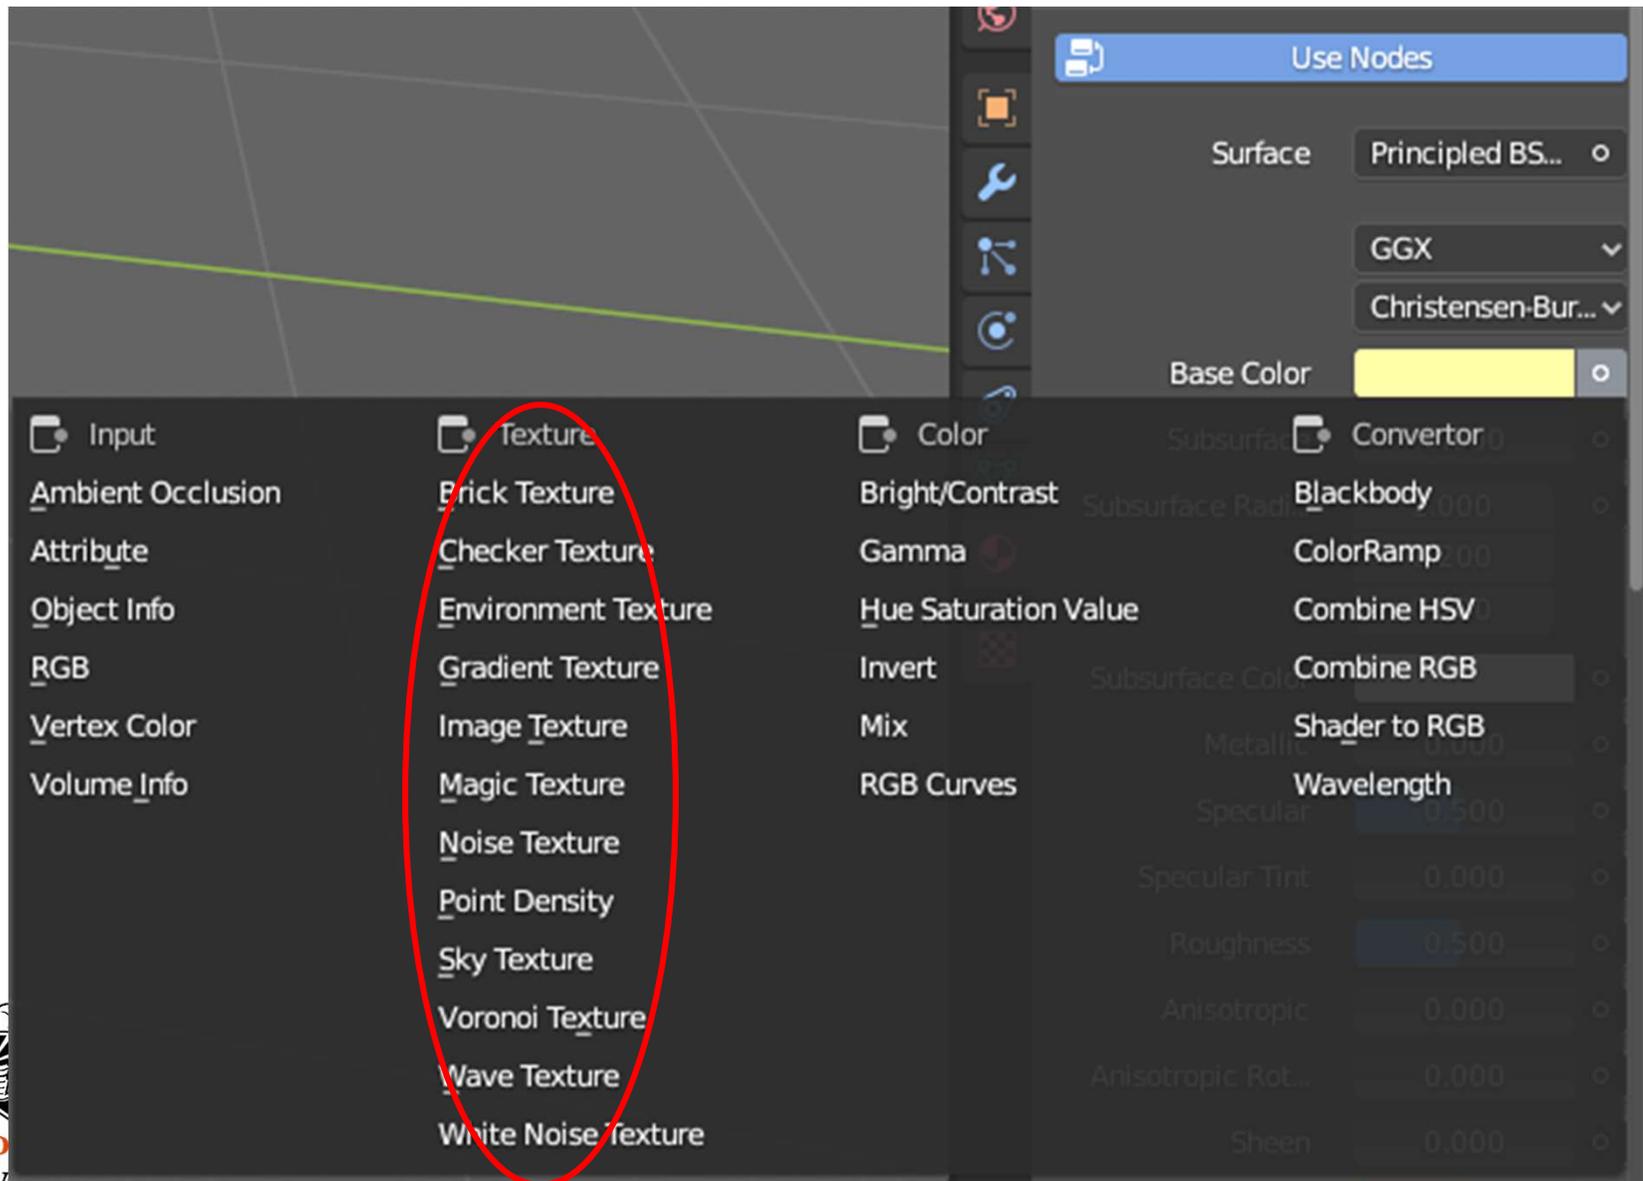


Image Texturing



Start with a **UV Sphere** being shown in **Render Preview** mode


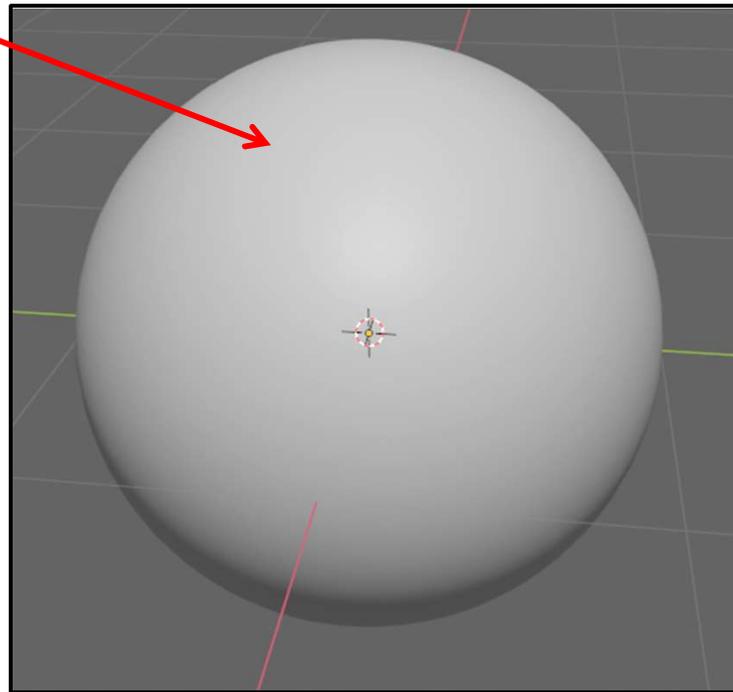



Image Texturing

Says that you want to read a texture image from a file

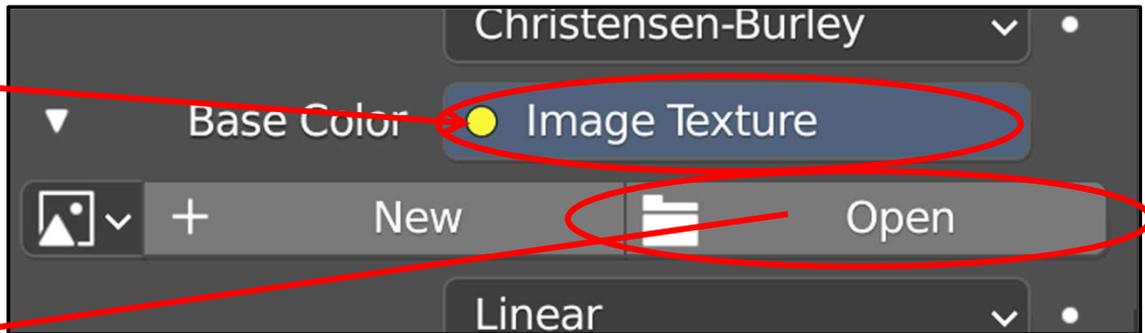


Click here to open an image file

Image Texturing

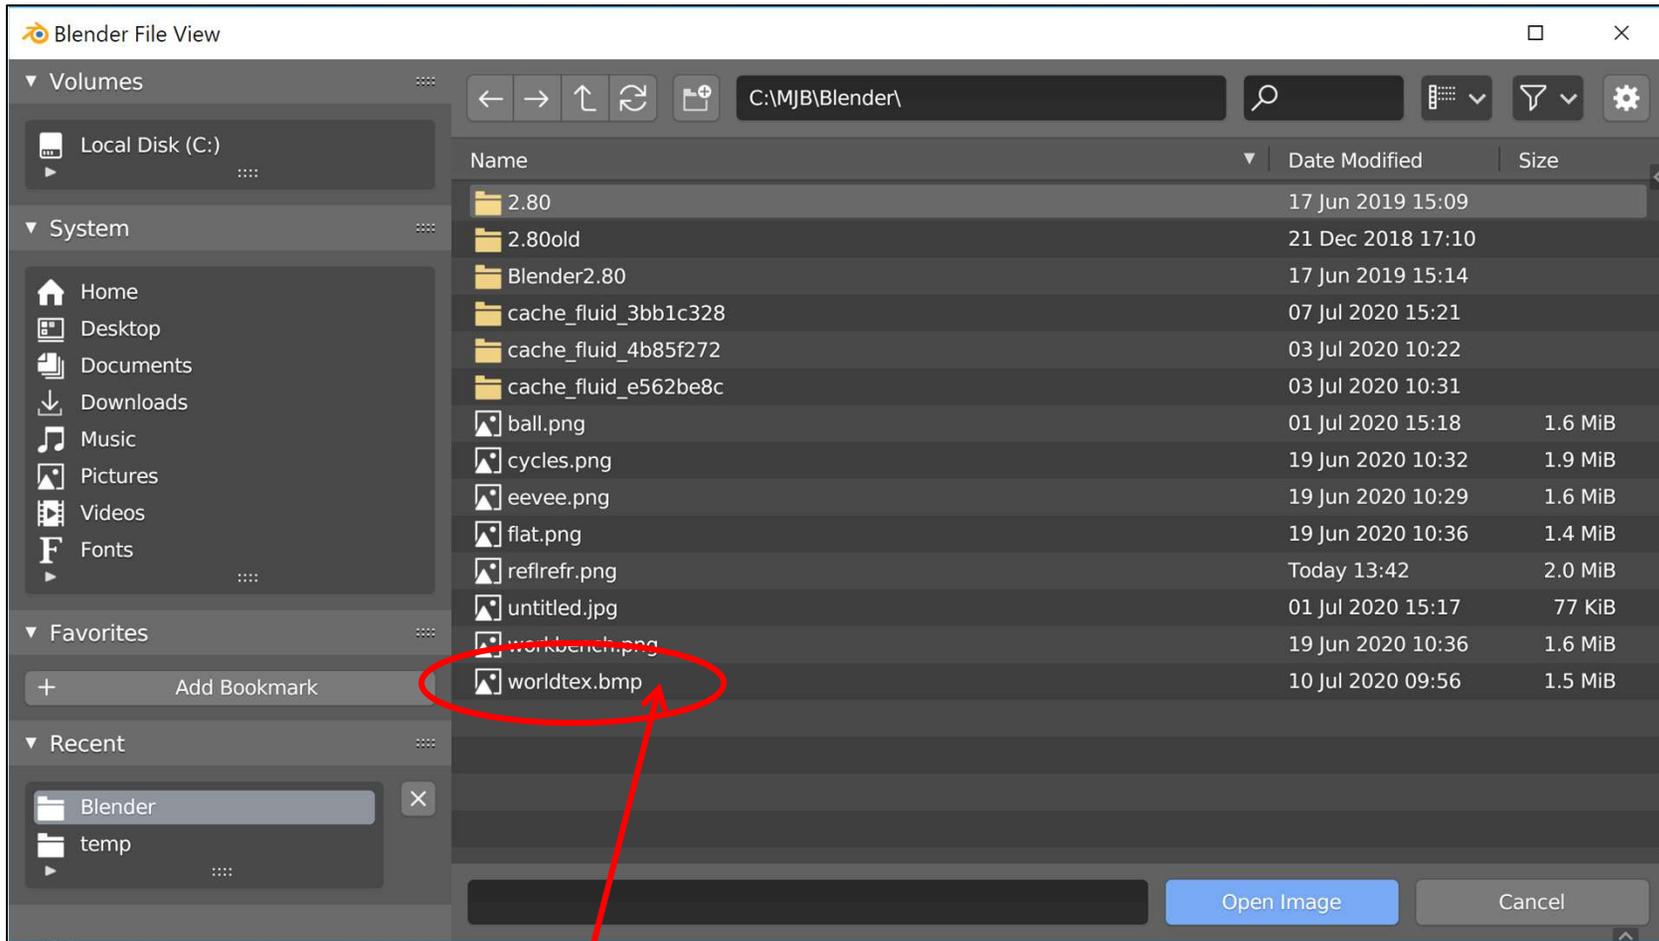

worldtex.bmp is a good texture to try!


Image Texturing

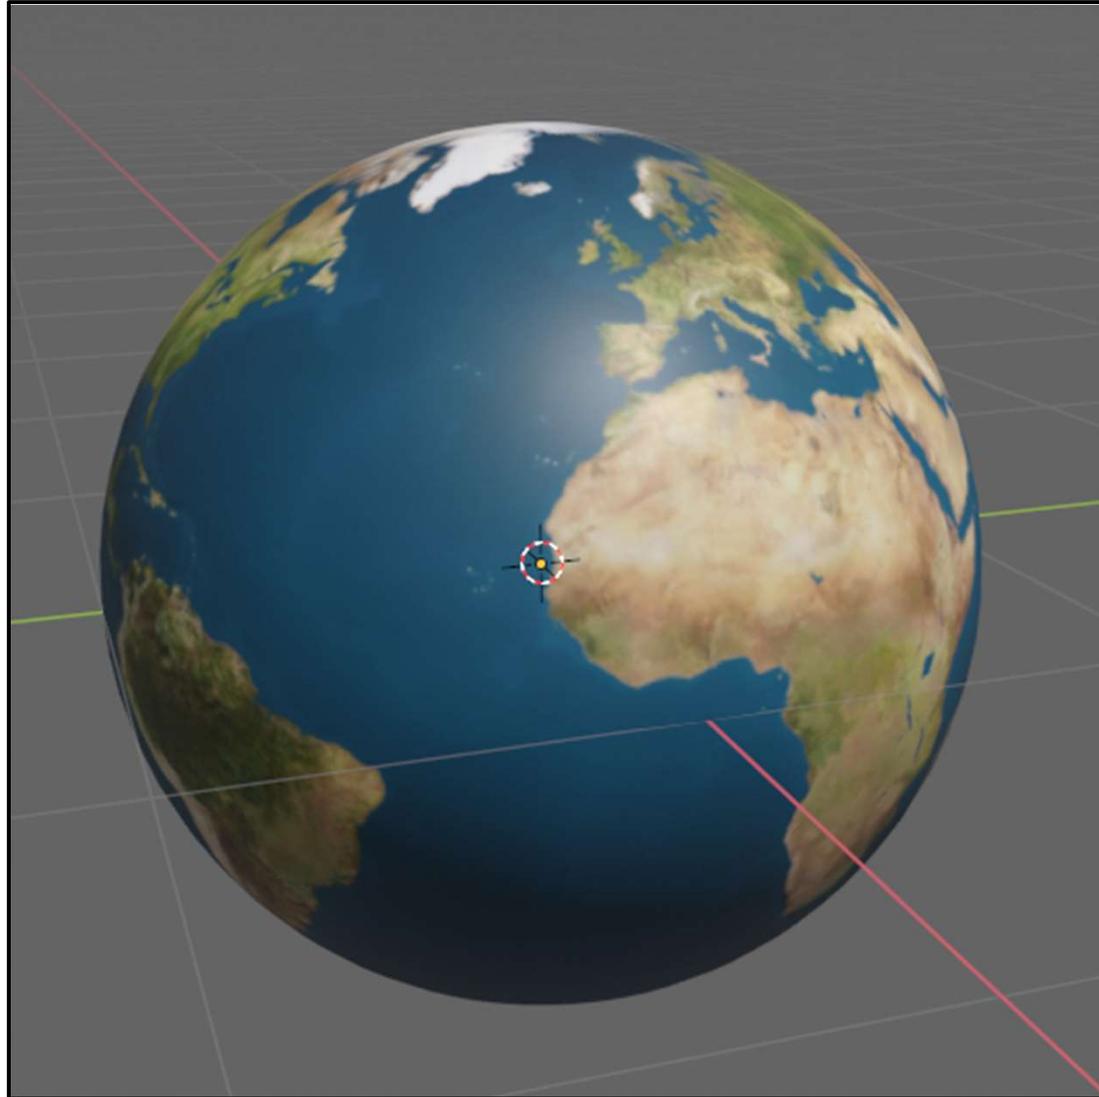


worldtex.bmp is a good texture to try!

Image Texturing


Sphere

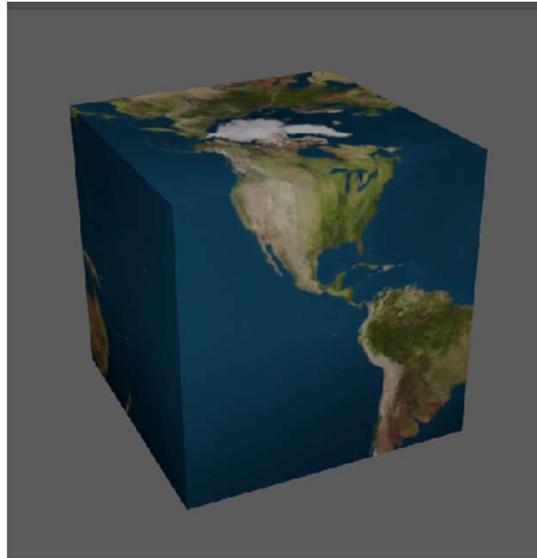

Tube

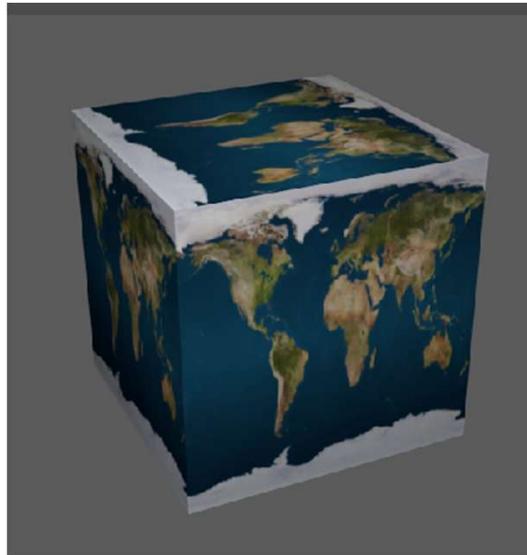

Cube

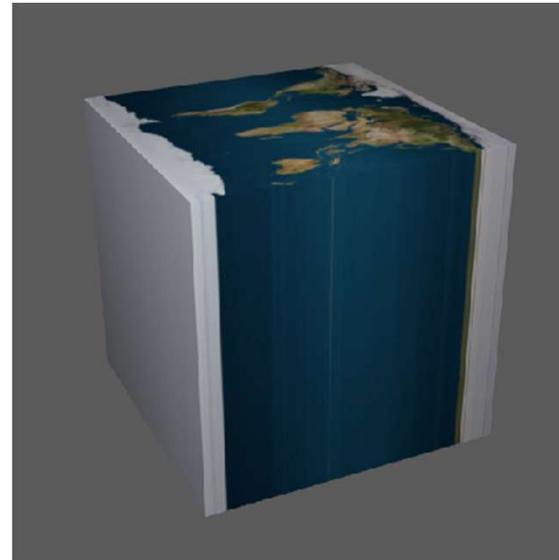

Flat

Places to Find Good Texture Images

330

<https://www.shutterstock.com/search/texture>

<https://ambientcg.com/list?sort=Popular>

<https://www.freepik.com/photos/texture>


Links checked: June 19, 2024




Turning on the Cycles Renderer

We have been using the Eevee renderer and have gotten some very nice results. But, we can do even better with the Cycles renderer.

In the **Rendering Properties** menu, select **Cycles** instead of **Eevee**.

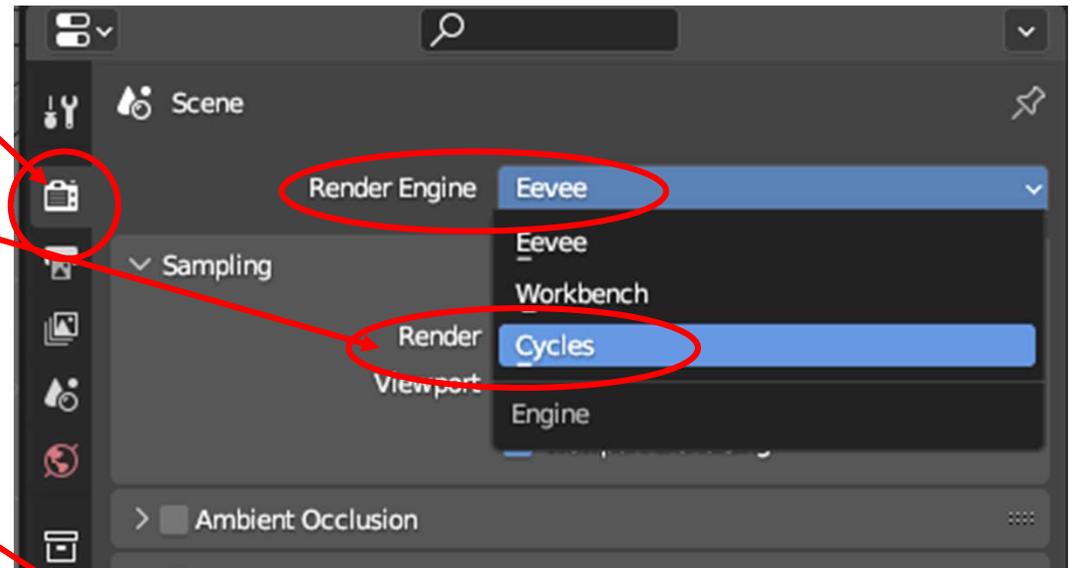


And then select **GPU Compute** instead of **CPU** (it's faster!).

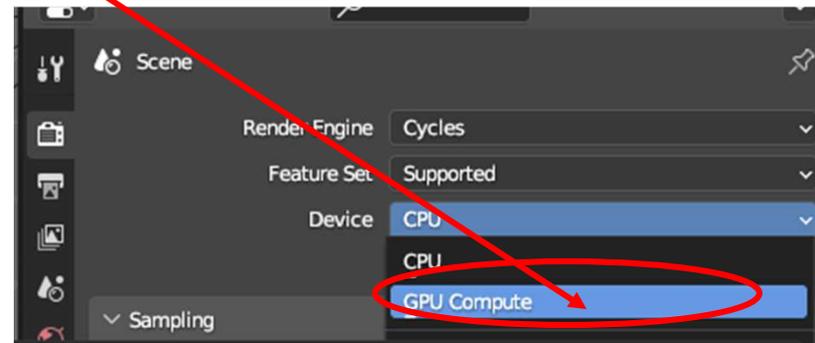


Turning on the Cycles Renderer

Then, right below that, turn on **Denoise**

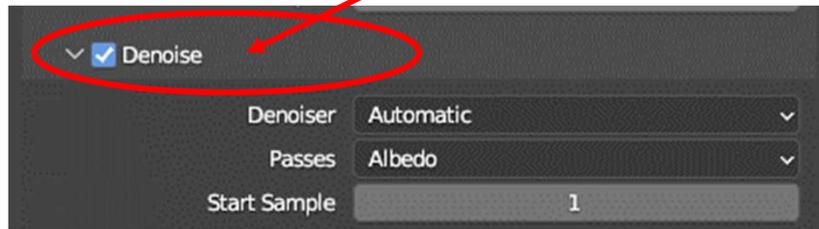


Selecting the GPU Options

Select **Edit**→**Preferences**

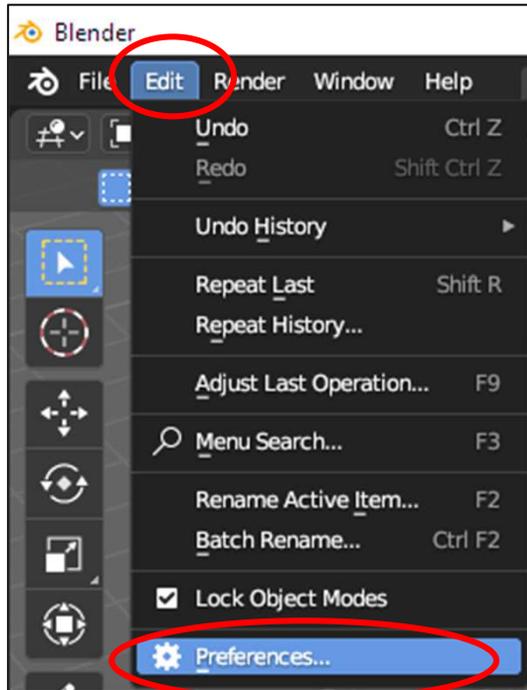

In the **Preferences** menu, select **System**. These are your GPU options. All might work on your system, or none might work on your system. Depends on what graphics hardware you have.

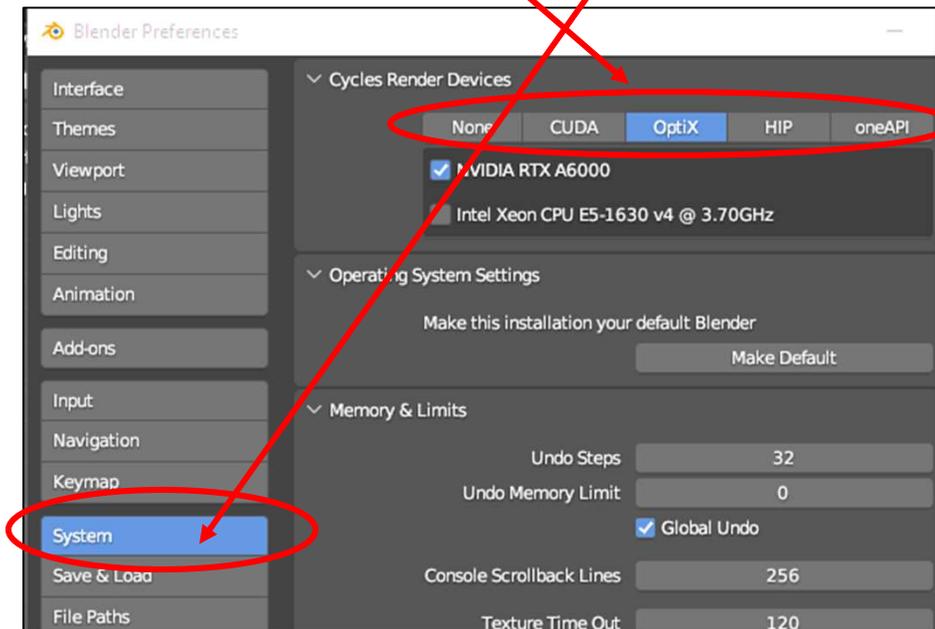

Try them all to see which you have and which give the fastest Cycles render. On my system, **OptiX** is fastest, followed by CUDA, and HIP and oneAPI aren't available.


Back to Cycles: Let's Say That We Want to Render This Scene

Cube and Monkey are opaque


Sphere is both reflective and refractive

Plane has a checkerboard texture on it

Scene has lighting and shadows

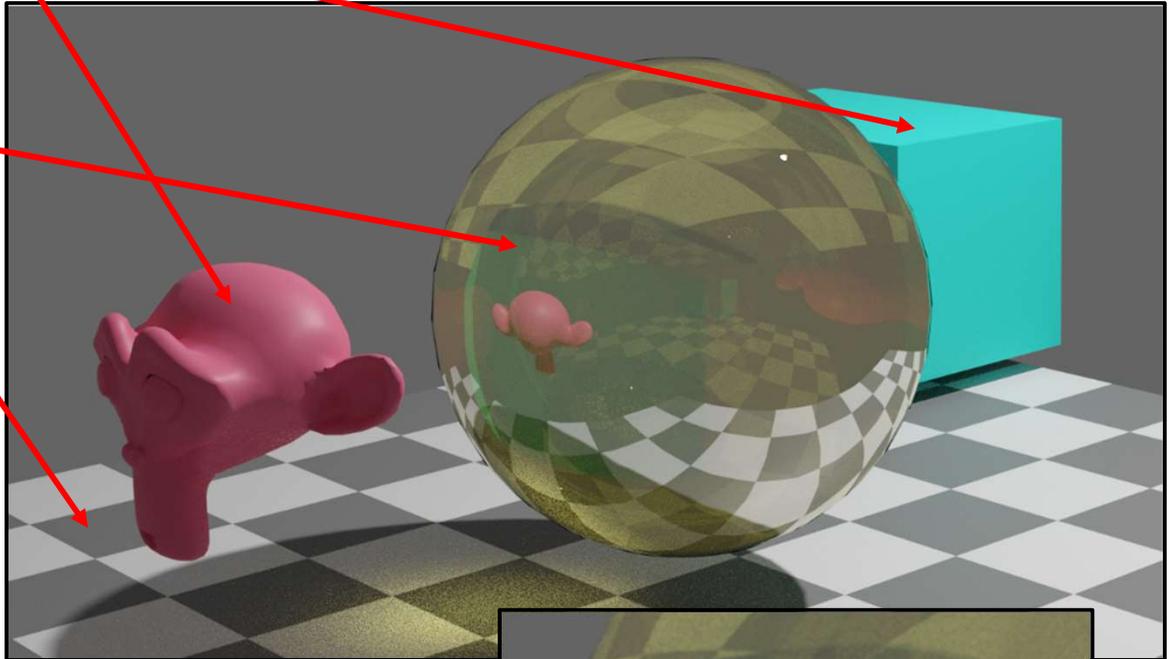

Sphere is both reflective and refractive

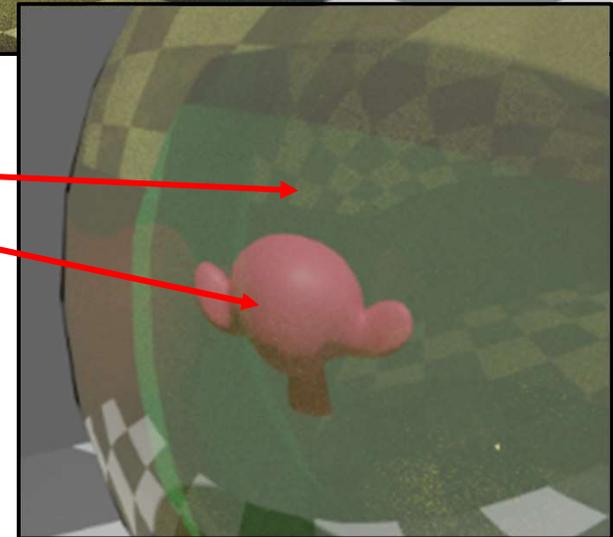

Making the Sphere Reflective and Refractive

Combine refraction and reflection effects together with the Mix Shader

How much to mix each shader


First shader is **Glass** to get the refraction

Transmission color

Index of Refraction

Second shader is **Glossy** to get the reflection

No inherent color in the reflection

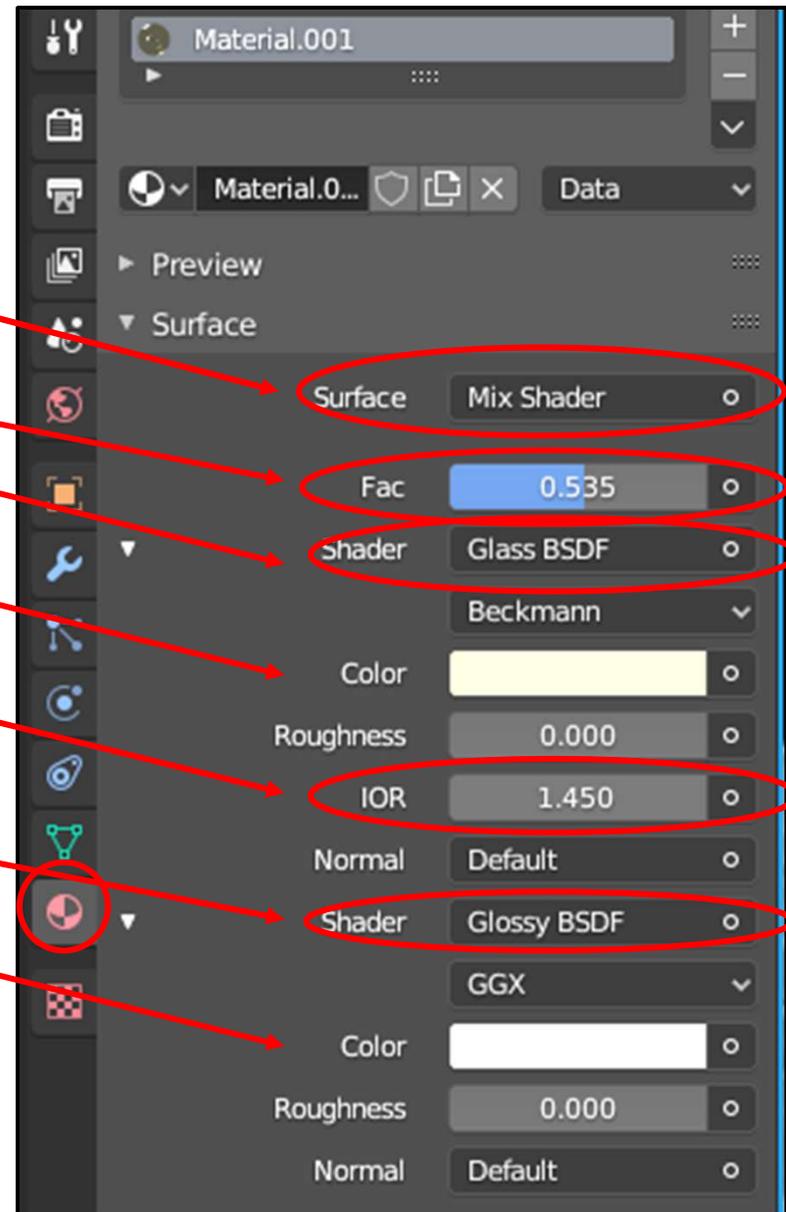

Putting a Checkerboard Pattern on the Plane

1. Leave **Use Nodes** turned on.


2. Select **Principled BSDF**
(probably already selected)

3. Here, where you would normally select a color, click on this little circle


4. From that pop-up menu, select **Checker Texture** (or one of the others)

5. Here you can select the two colors making up the checkerboard

6. Change the scale to change the size of the checkerboard squares

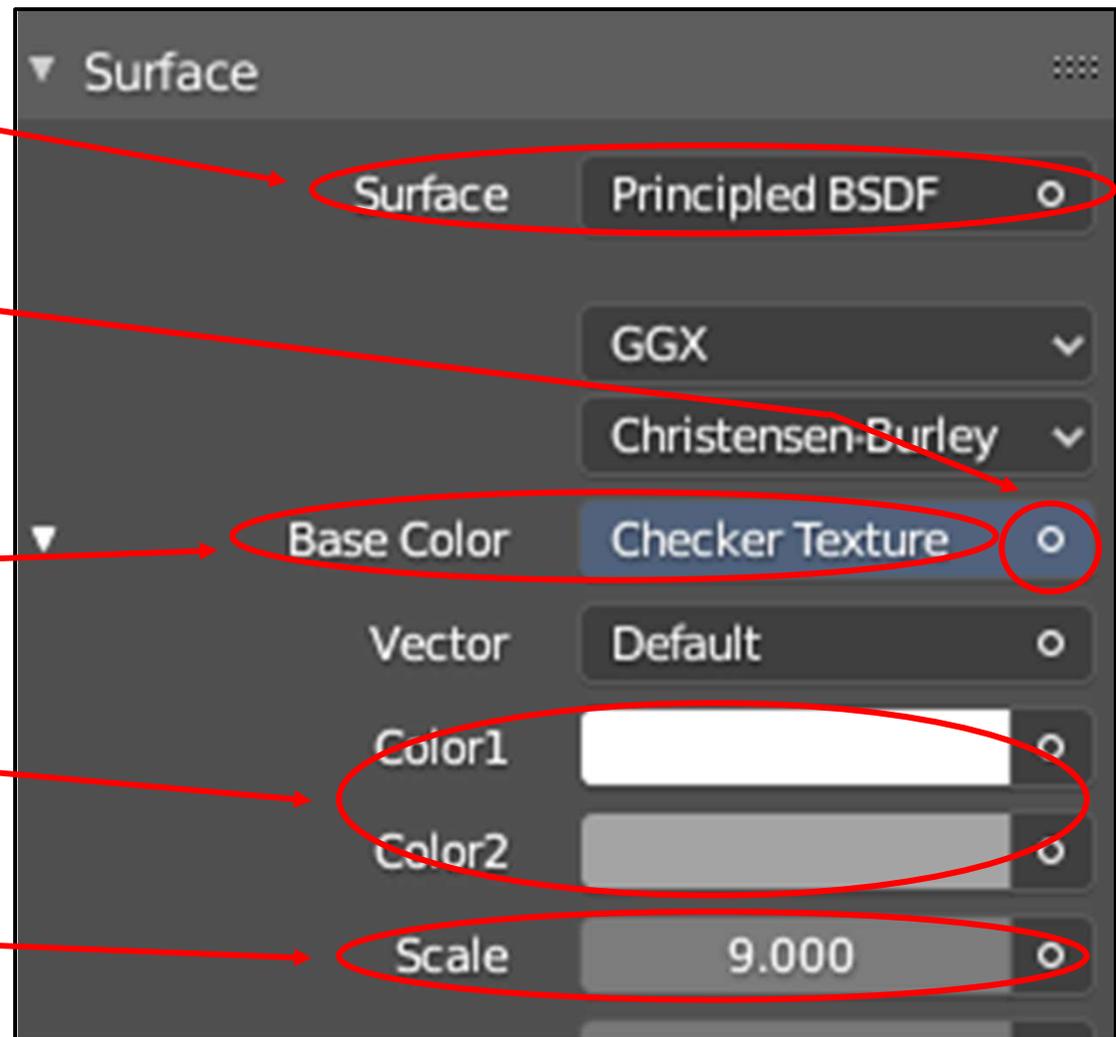


Onscreen and Rendered Results with Eevee

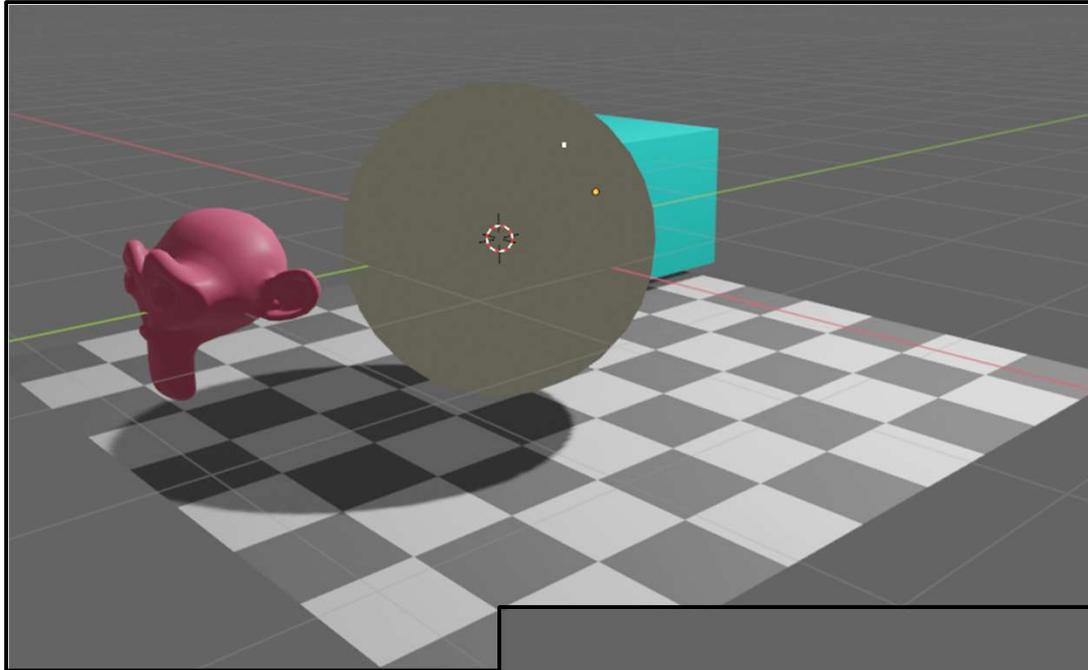


On-screen

Rendered

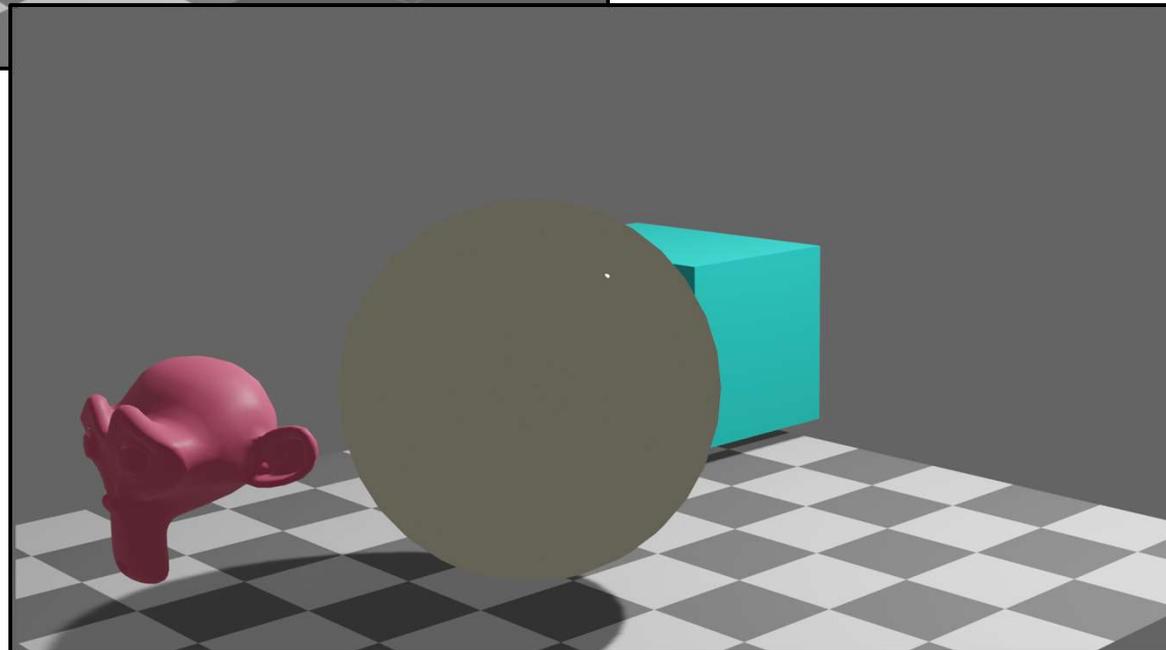


Onscreen and Rendered Results with Cycles

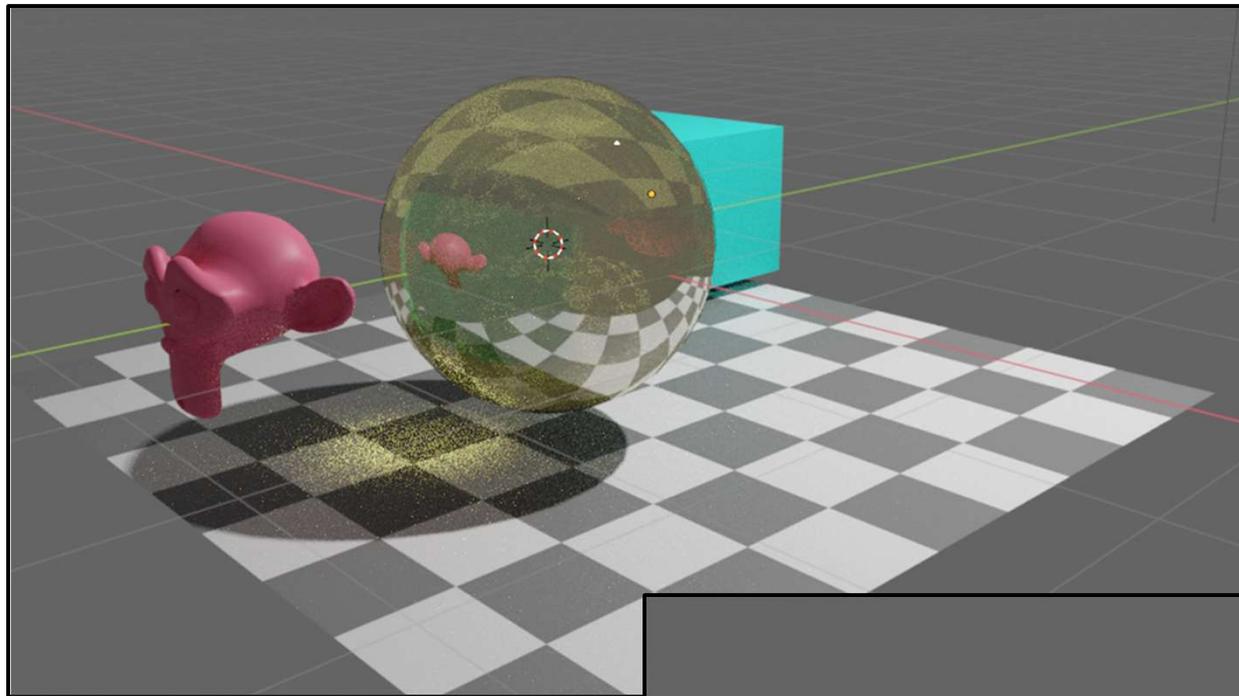


On-screen

Rendered


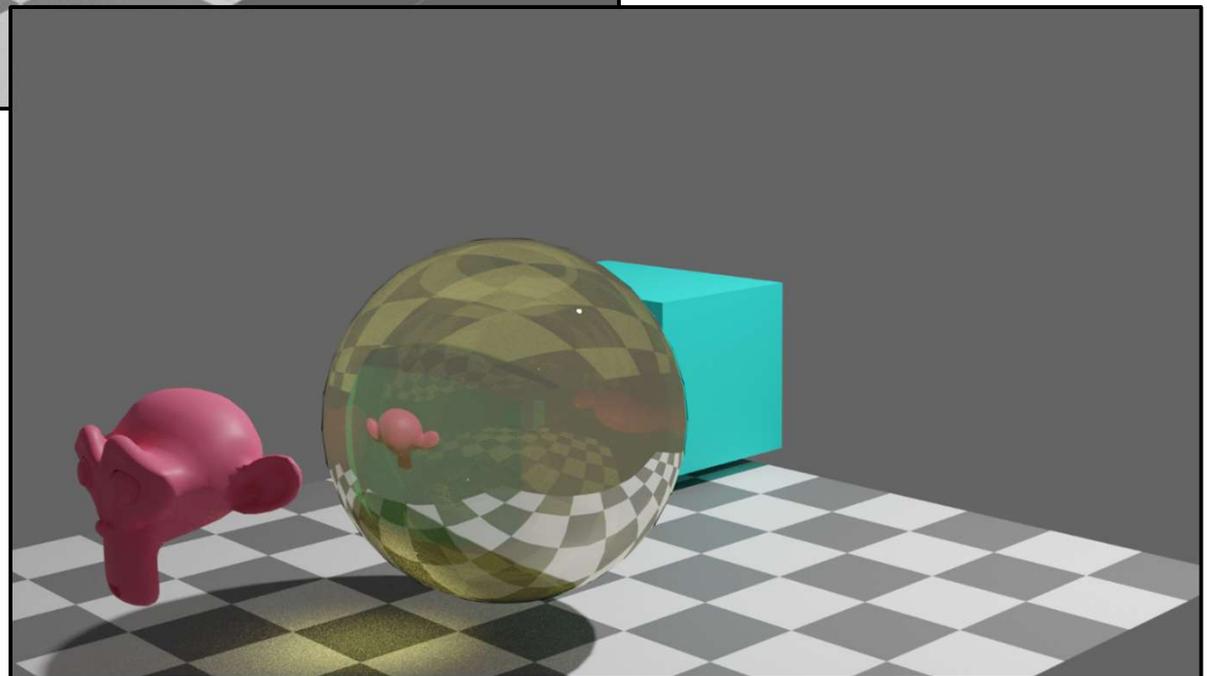


Rendered Results with Cycles

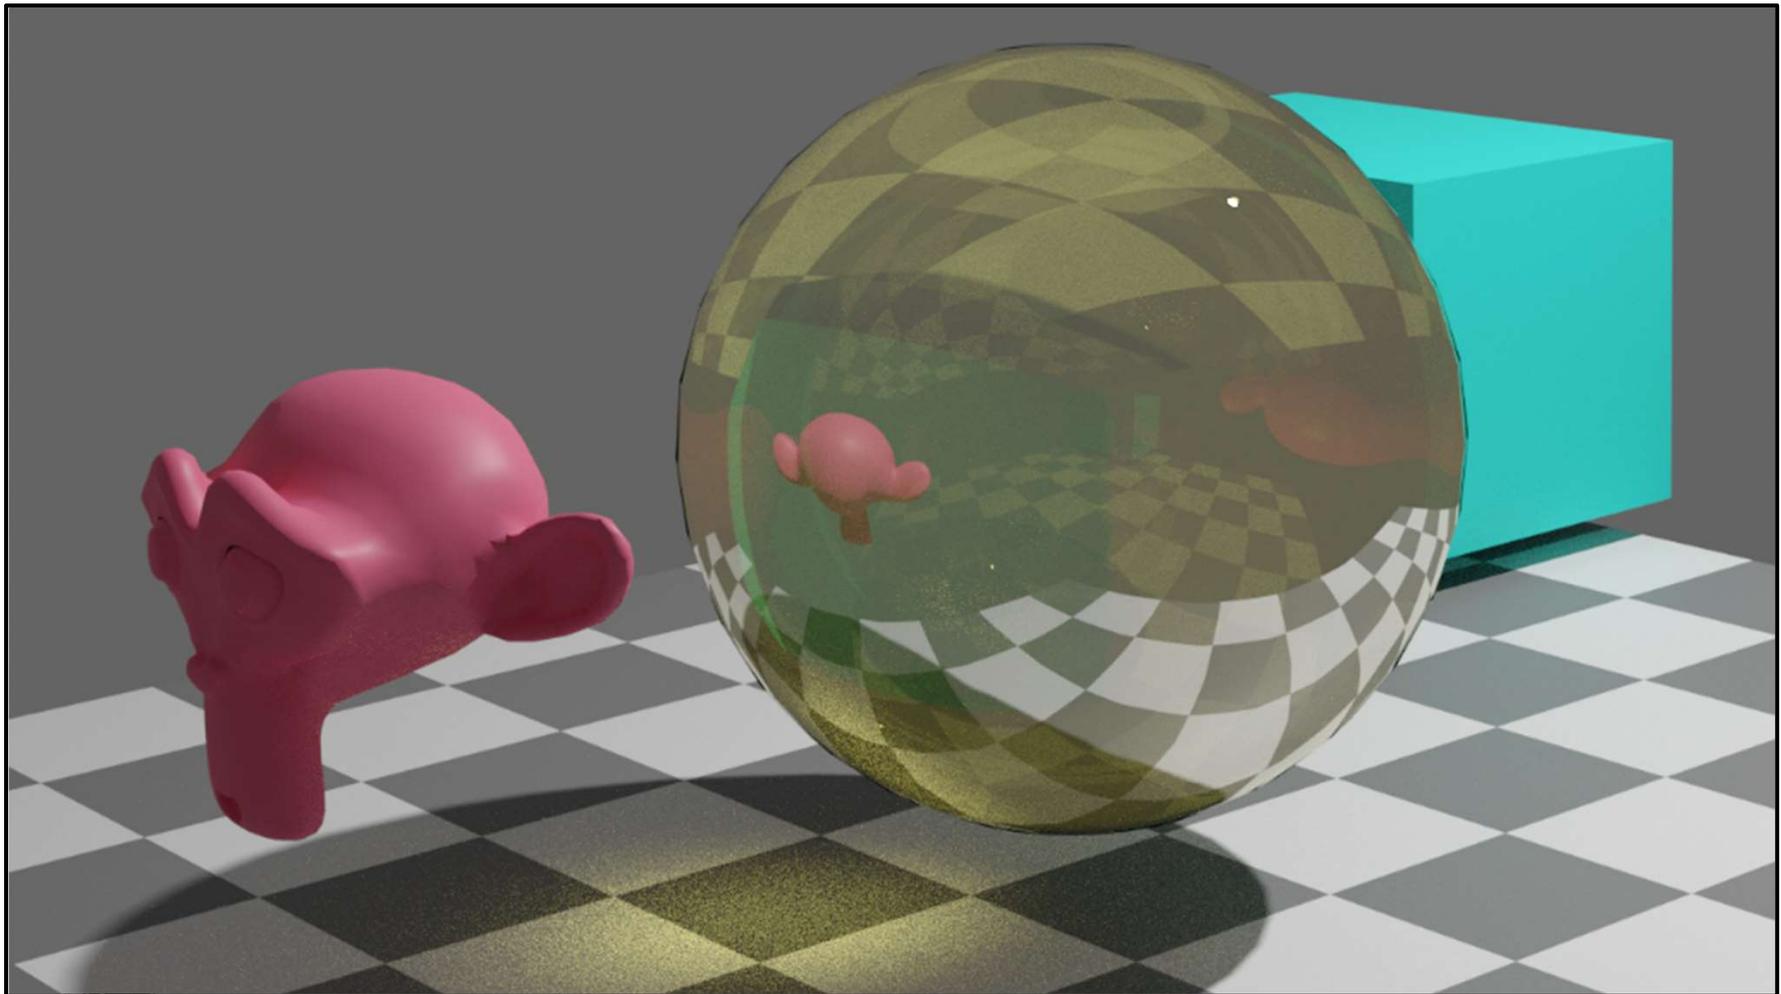


Rendered Results with Cycles

You may have noticed some “sparkling” in the rendered image on the previous slide. That is a natural artifact of the path-tracing algorithm that Cycles uses. In computer graphics, this is called “render noise”. Blender has a denoising feature. All you have to do is turn it on in the **Denoising** tab of the **Render Properties** menu.

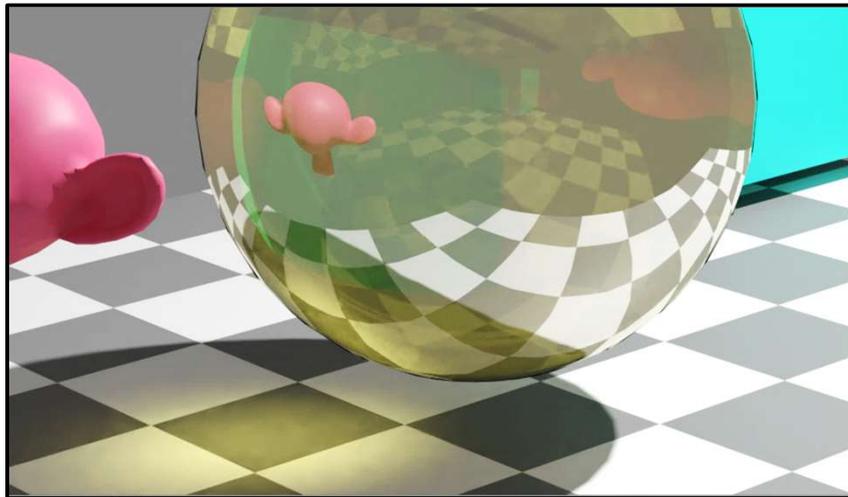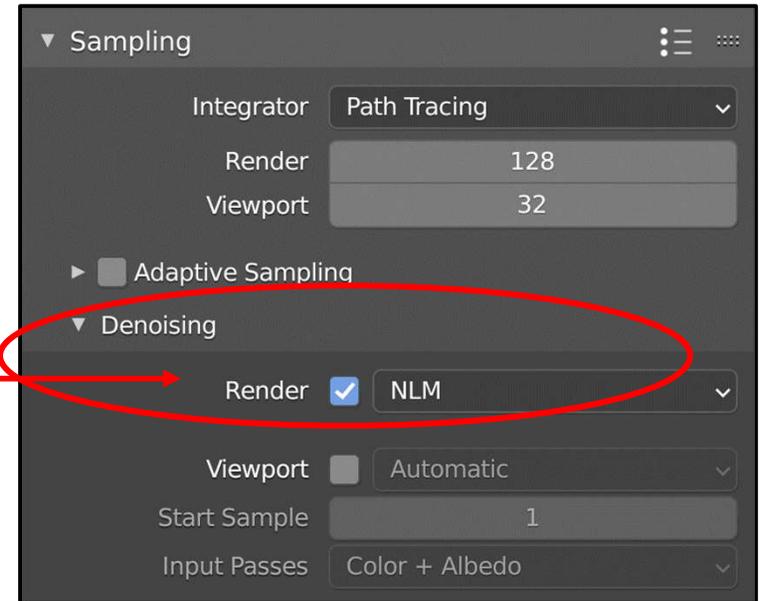


No Denoising
1 minute, 39 seconds

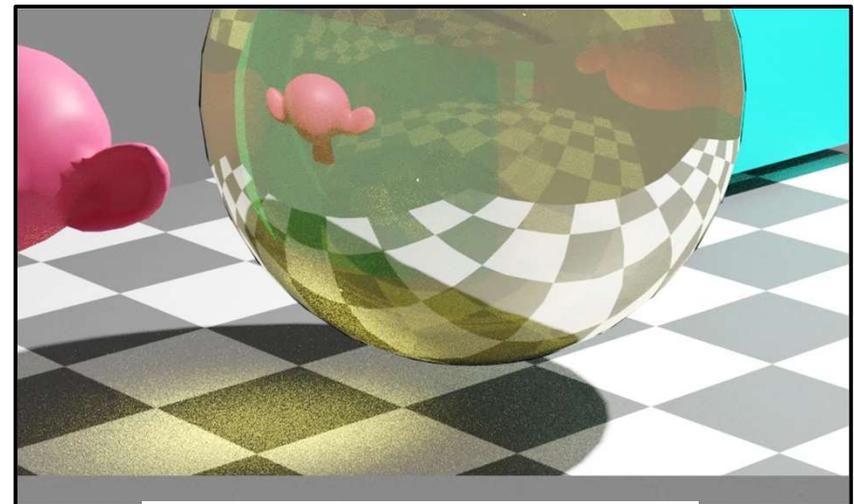


Denoising
2 minutes, 14 seconds

Rendered Results with Cycles

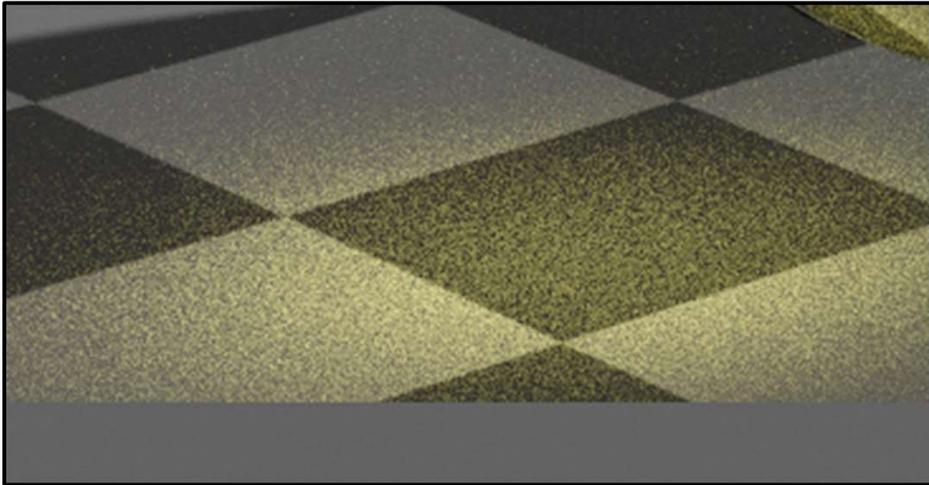


No Denoising
1 minute, 39 seconds

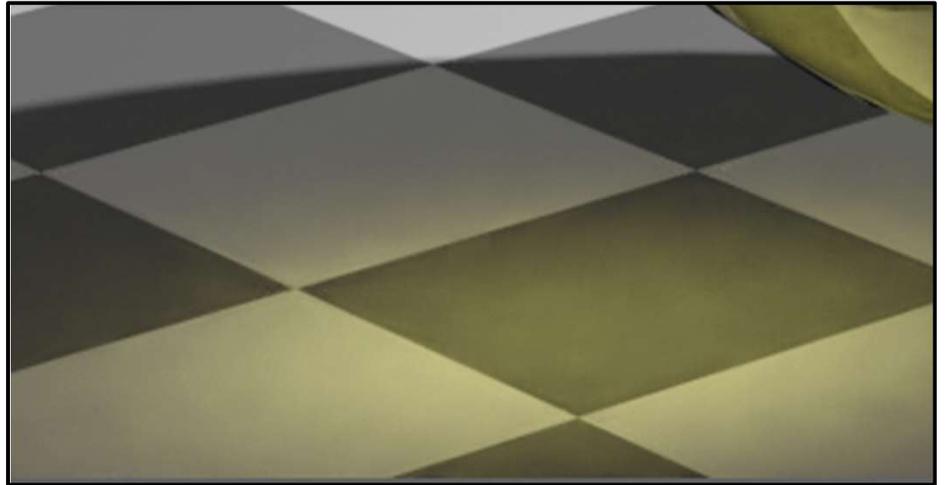


Denoising
2 minute, 14 seconds

BTW, I **don't** recommend you turn Denoising on for the Viewport display. It really slows down your interaction when using Cycles.

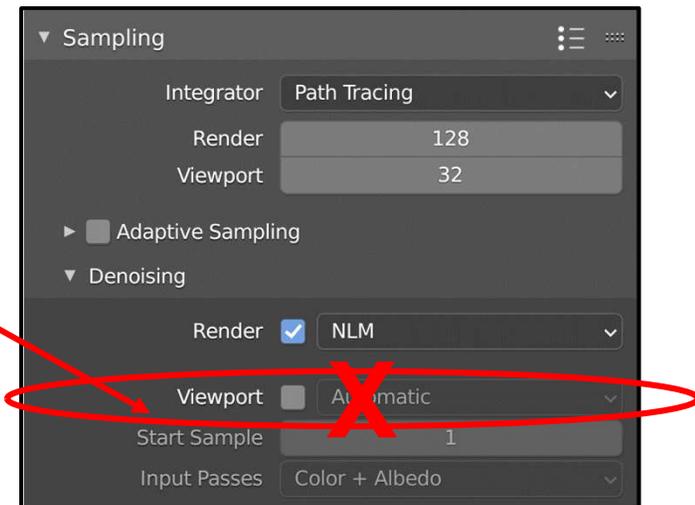

What is Ray-Tracing?


It starts at the eye:

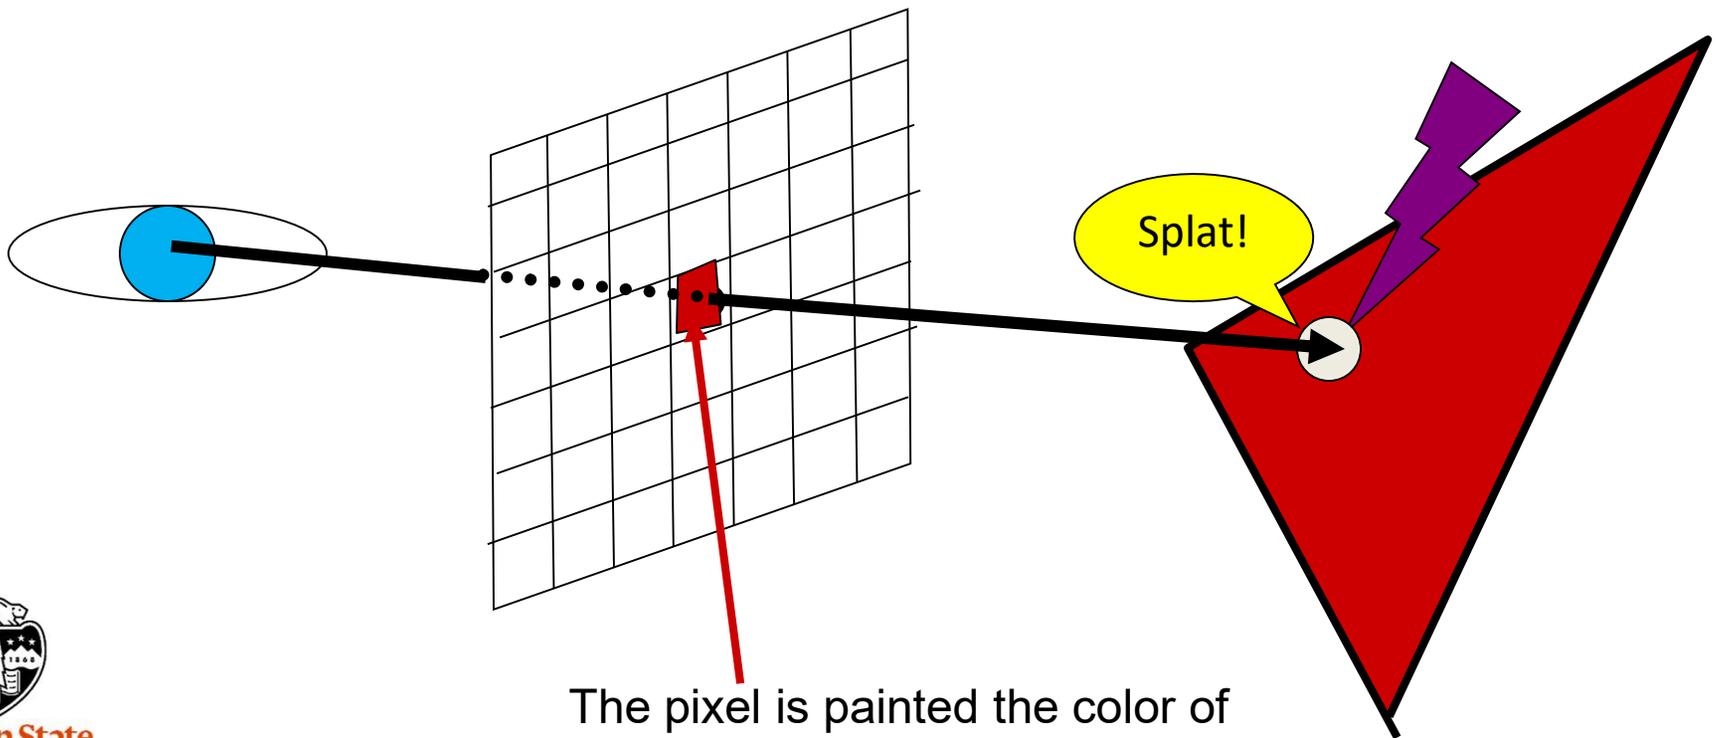

The pixel is painted the color of the nearest object that is hit.

What is Ray-Tracing?


It's also straightforward to see if this point lies in a shadow:

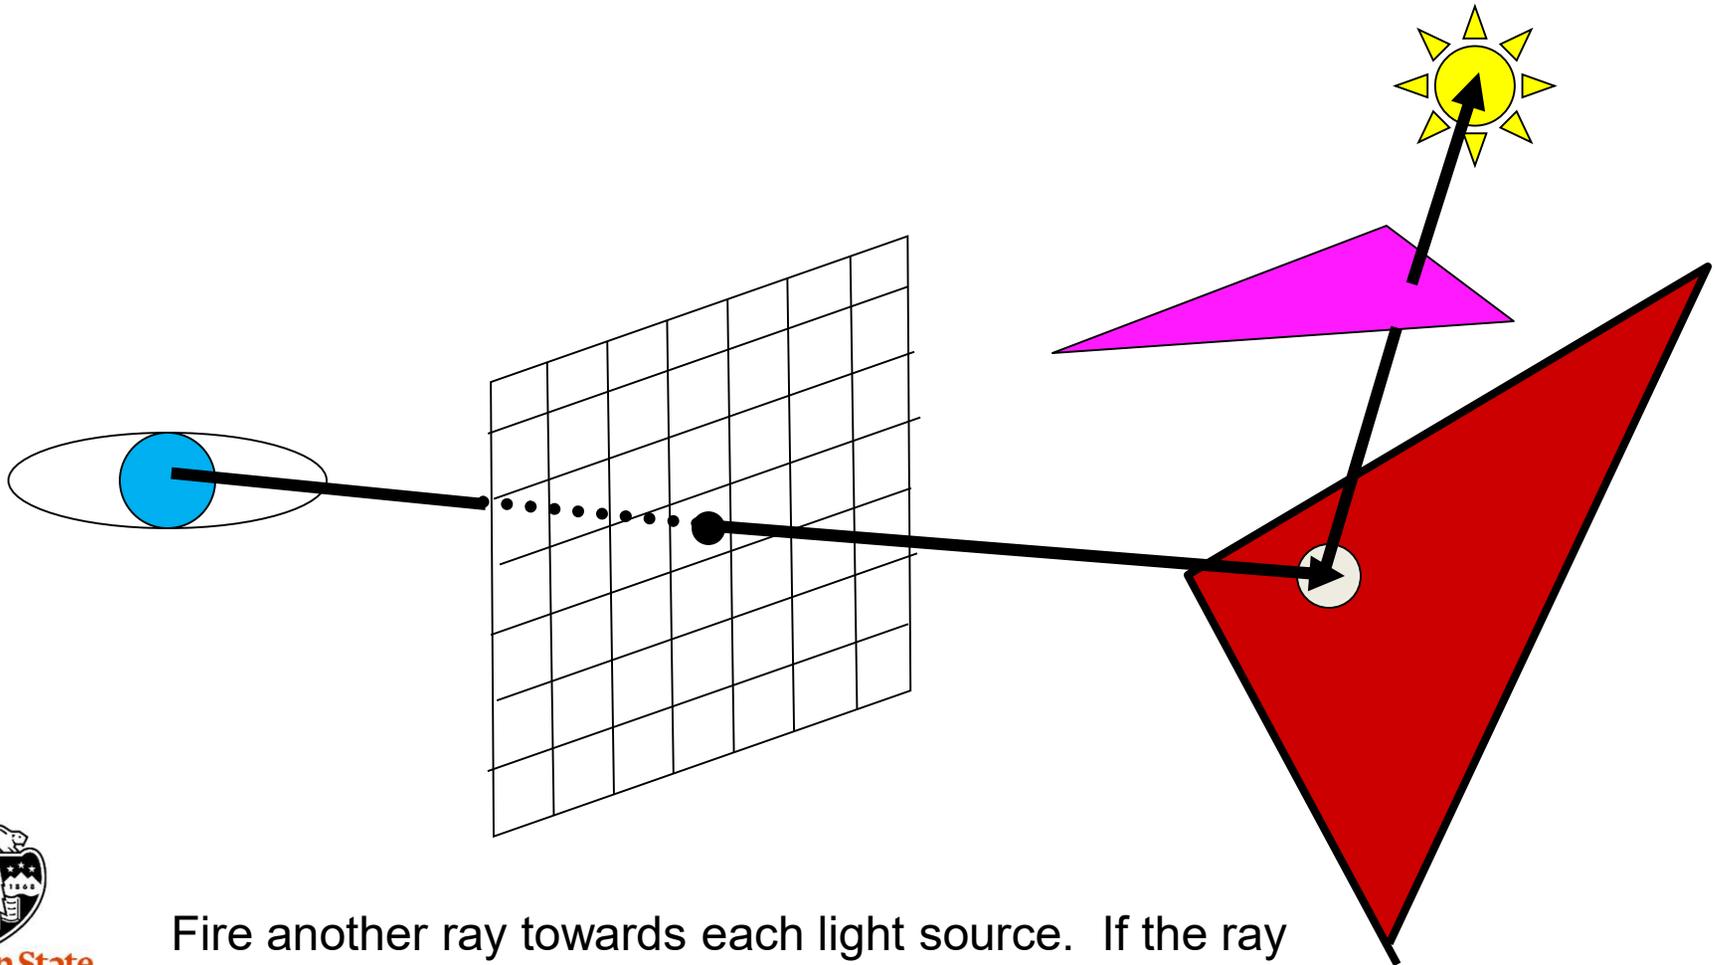

Fire another ray towards each light source. If the ray hits *anything*, then the point does not receive that light.


What is Ray-Tracing?

It's also straightforward to handle reflection

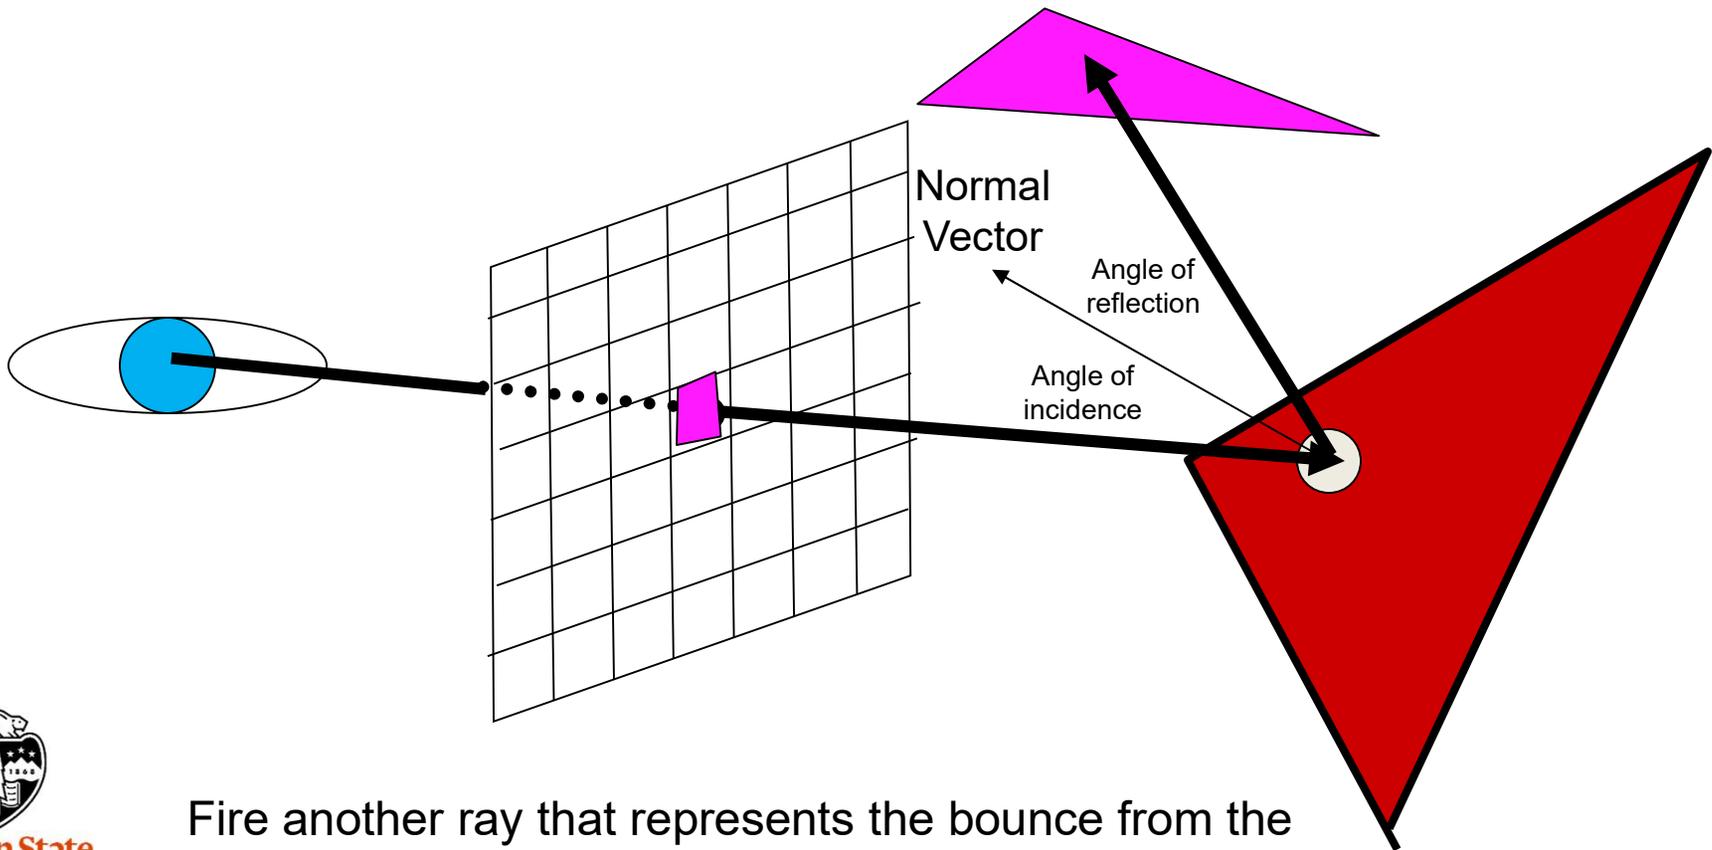

Fire another ray that represents the bounce from the reflection. Paint the pixel the color that this ray sees.

The Physics of Reflection

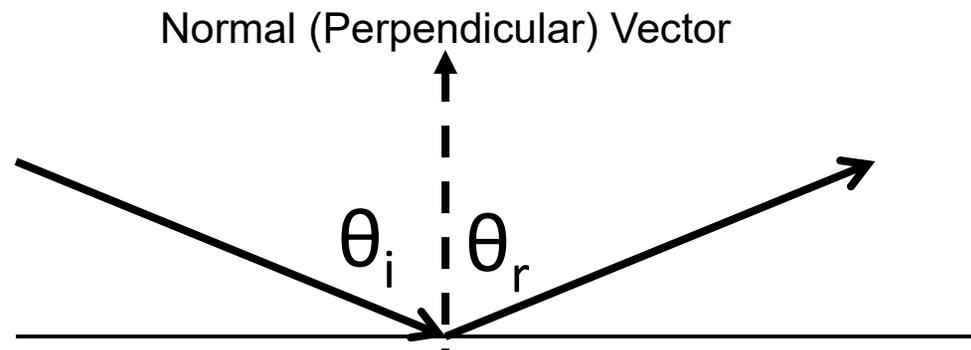


Law of Reflection:

$$\theta_r = \theta_i$$

Angle of reflection = Angle of incidence


What is Ray-Tracing?

It's also straightforward to handle refraction

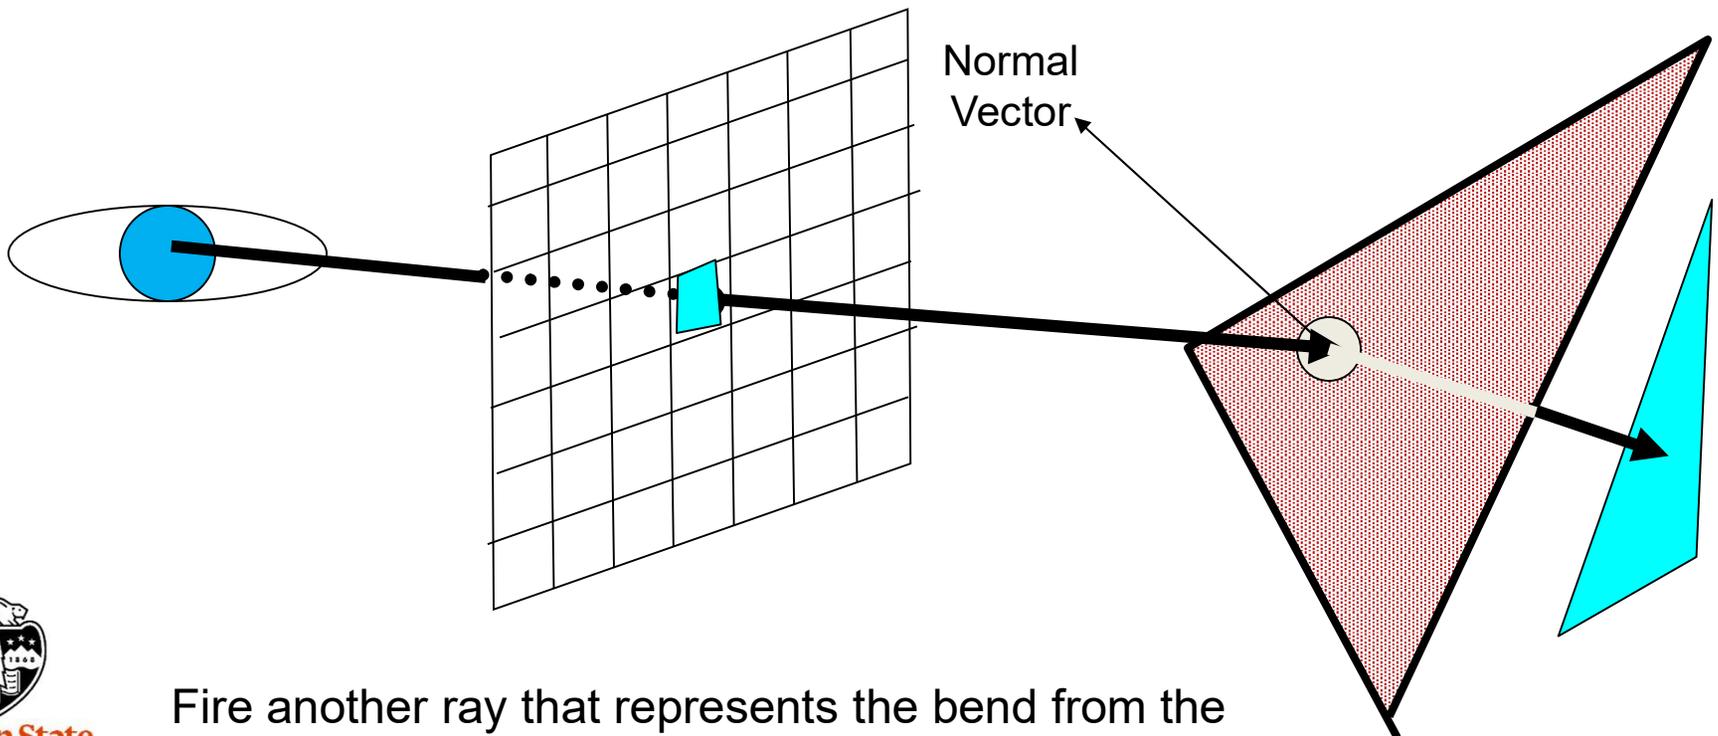

Fire another ray that represents the bend from the refraction. Paint the pixel the color that this ray sees.

The Index of Refraction, η

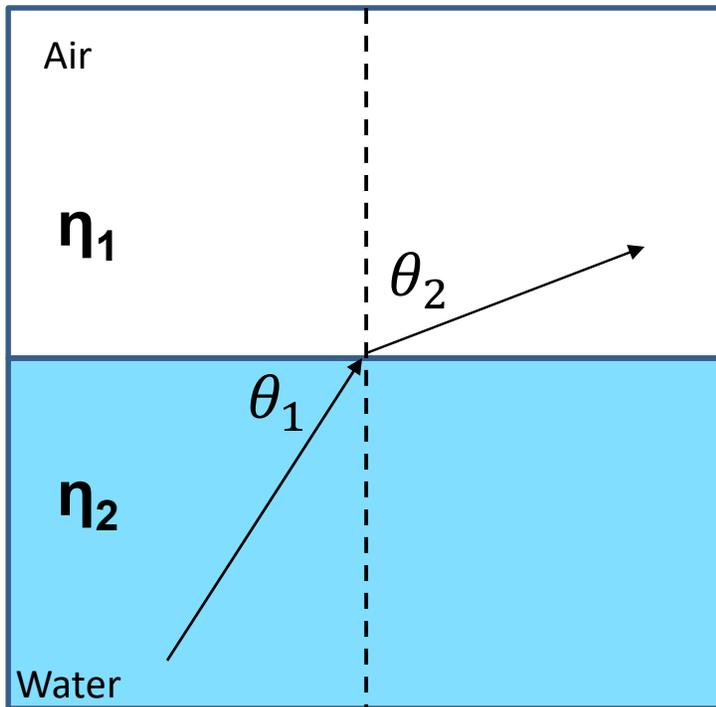

The Index of Refraction (IOR) is a measure of how much light slows down as it passes through a particular material.

The larger the IOR, the slower the speed of light in that material.

The larger the change in IOR, the more the light will bend as it passes from one material to another.

Snell's Law of Refraction says that:

$$\frac{\sin\theta_2}{\sin\theta_1} = \frac{\eta_1}{\eta_2}$$

Or:

$$\sin\theta_2 = \sin\theta_1 \frac{\eta_1}{\eta_2}$$




Oregon State
University

Computer Graphics

Notice that there are certain combinations of the η 's that require $\sin\theta_2$ to be outside the range $-1. \rightarrow +1.$, which is not possible. This indicates that the refraction has actually become a reflection.

https://en.wikipedia.org/wiki/Snell's_law

The Physics of Refraction

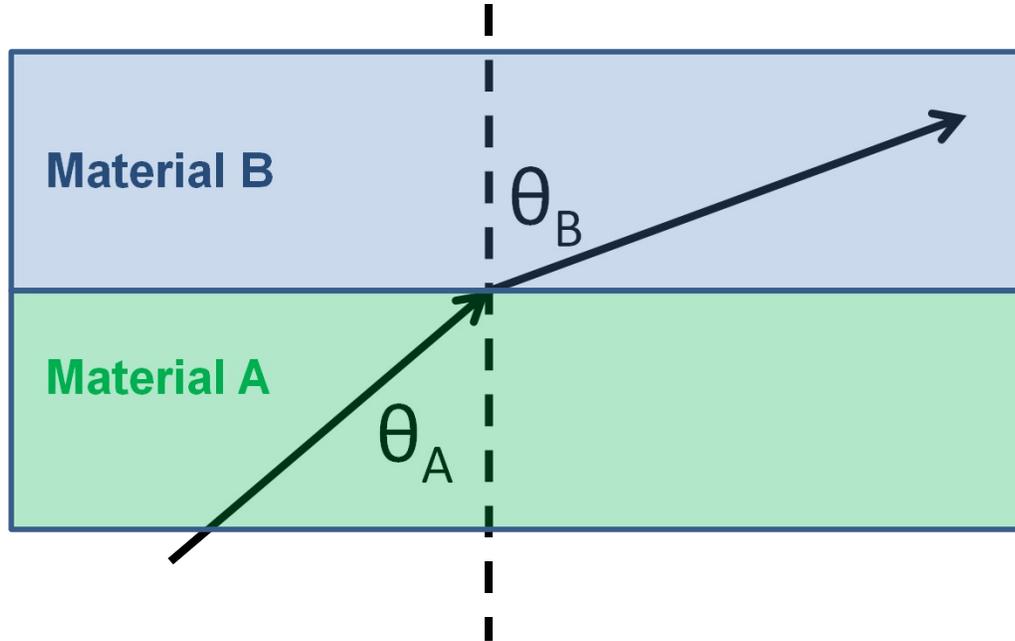

η
↓

Snell's Law of Refraction:

$$\frac{\sin \Theta_B}{\sin \Theta_A} = \frac{\eta_A}{\eta_B}$$


Material	Index of Refraction
Vacuum	1.00000
Air	1.00029
Ice	1.309
Water	1.333
Plexiglass	1.49
Glass	1.60
Diamond	2.42

http://en.wikipedia.org/wiki/Refractive_index

Common Indices of Refraction

Material	Index of Refraction
Vacuum	1.00000
Air	1.00029
Ice	1.309
Water	1.333
Plexiglass	1.49
Glass	1.60
Diamond	2.42



Something New: Moissanite

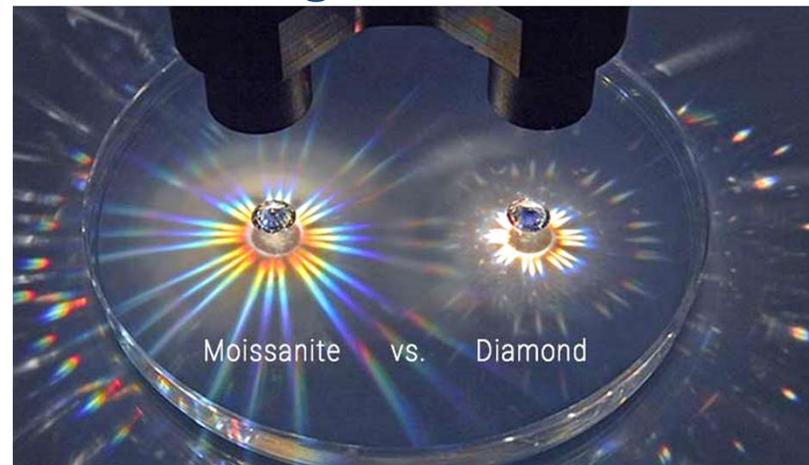


$$\eta = 2.62$$



You Can Also use a Mix Shader to Blend Glass and a Texture

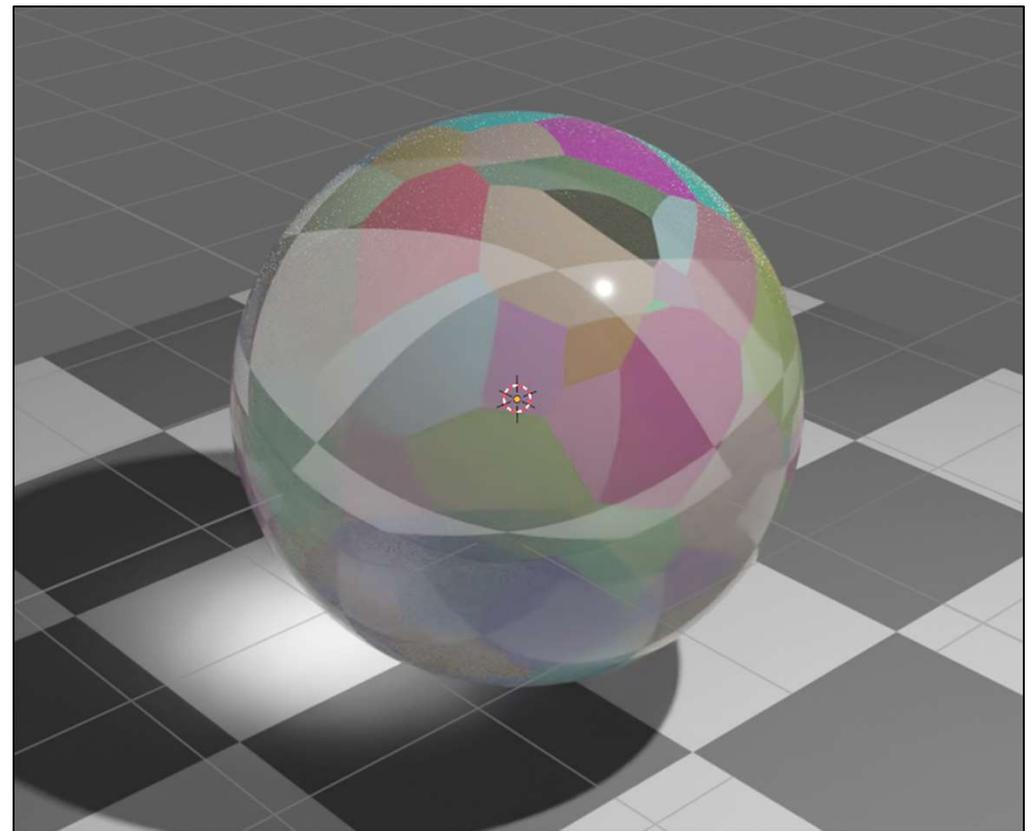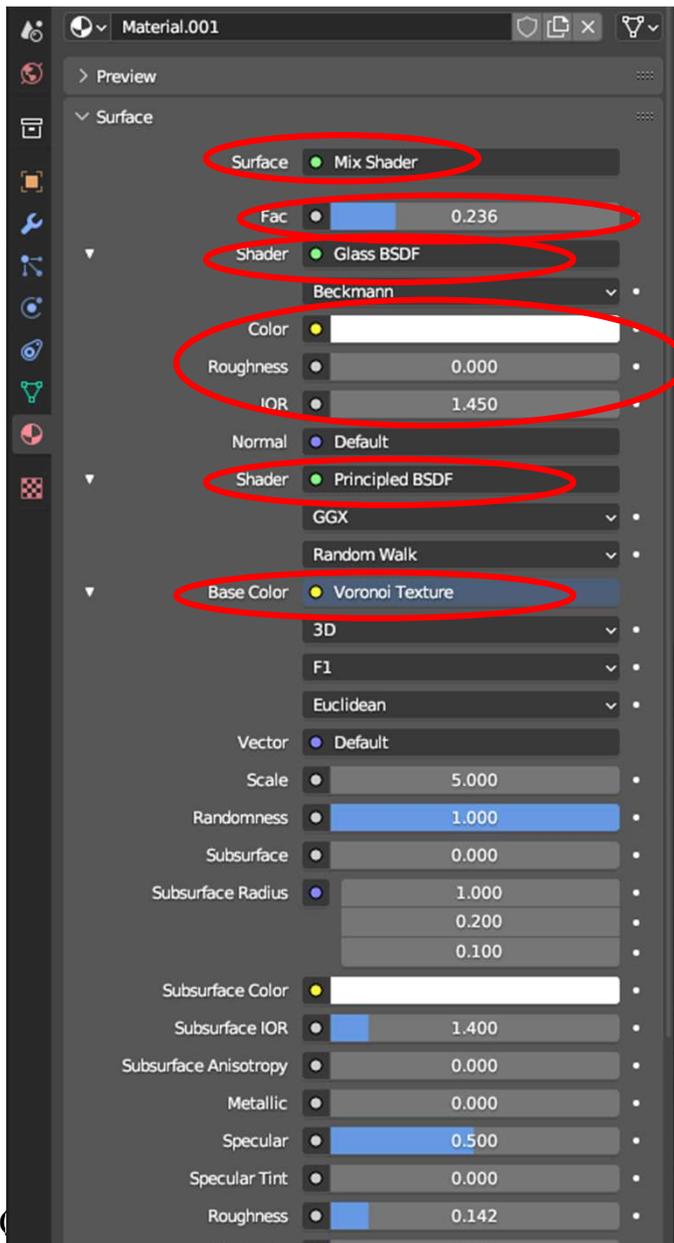


11. Vertex Sculpting

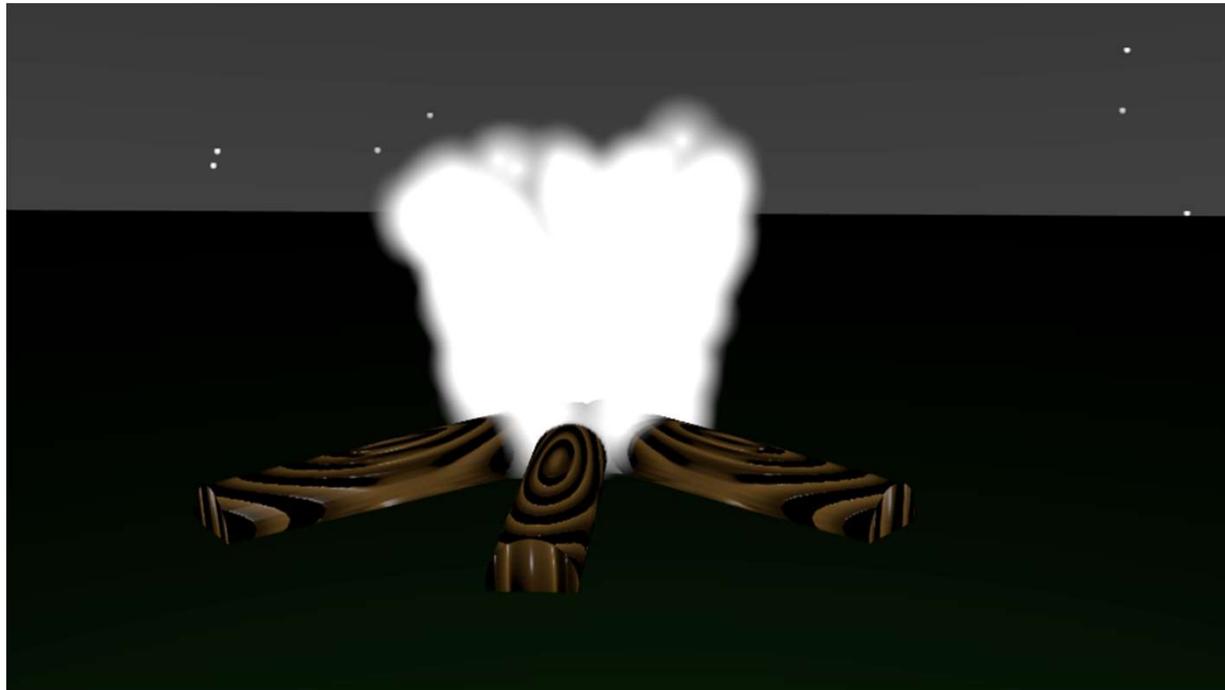

Vertex Sculpting

Vertex Sculpting is, well, sculpting vertices. But, in order to do this well, we need a lot of vertices.




Start with a UV sphere mesh object.



Tab over to **Edit Mode**.
RMB → **Subdivide** → **Subdivide**

When you get back to Object Mode, the sphere won't look any different than before because you just subdivided the polygons, not smoothed them. If you had wanted smoothing, you could have used the **Subdivision Surface Modifier**.

Now go to **Sculpt Mode**.

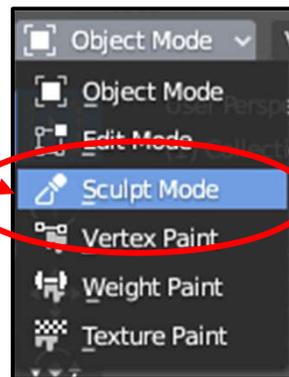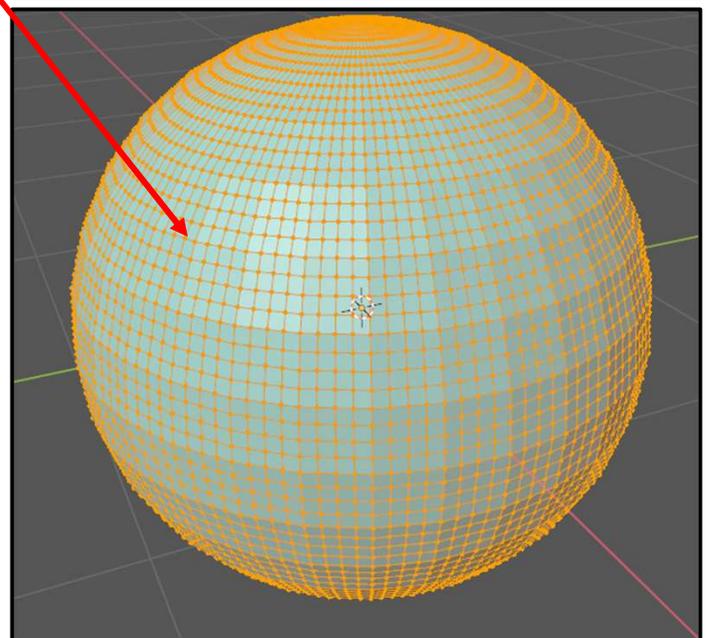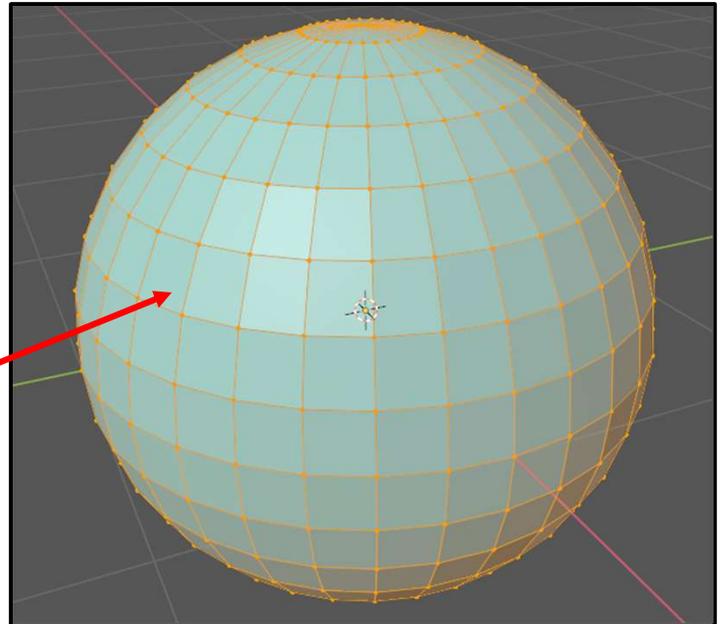

Vertex Sculpting

Lots of new options will appear at the top:




Brush Radius
(I like **25-100**, depending on the size of the object)

Brush Strength
(height)

Add Material (+) or Subtract Material (-)

Brush Characteristics



Stroking Characteristics

Surface Falloff from the Center of the Brush
(I like **Smoother**)


Symmetry Control
(I recommend you click all of these off for now.)

Vertex Sculpting

Go back and forth over the object with the brush to increase the sculpting effect


Add material

Subtract material

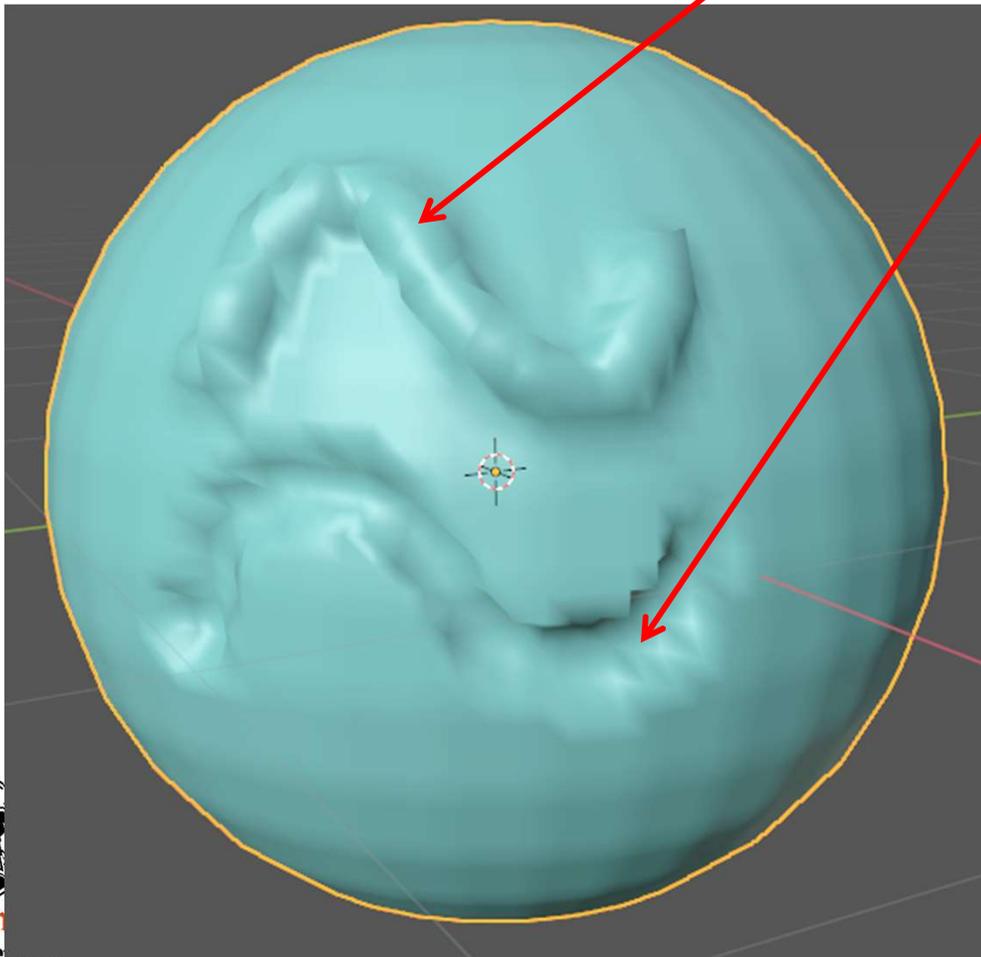


Sculpting usually looks better if you quick get over into **Object Mode**, **RMB** → **Shade Smooth**

Vertex Sculpting Options

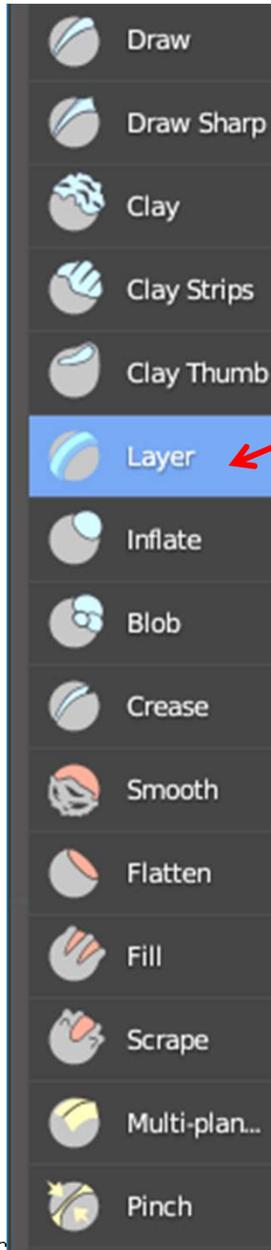

I like this one

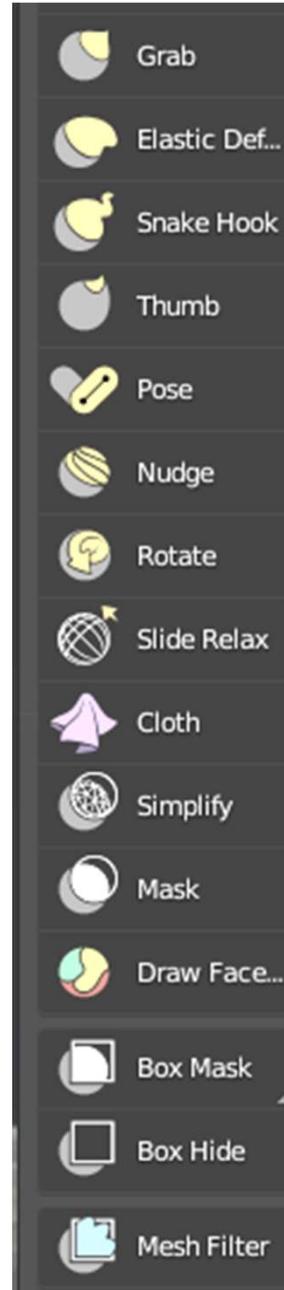

Vertex Sculpting Options

Brush	Meaning
Blob	Change the local mesh into a spherical shape
Brush	Moves vertices in or out
Clay	Like Brush, but lets you set a plane of action
Clay Strips	Like Clay, but uses a cube to limit the action
Crease	Creates ridges by pulling/pushing vertices and pinching them
Fill/Deepen	
Flatten/Cont	Push/pull vertices towards a plane
Grab	Grab and move a single vertex
Inflate/Deflate	Like Brush, but vertices are moved in the direction of their normal
Layer	Like Brush, but the height is capped
Mask	??
Nudge	Slightly push vertices in a certain direction
Pinch/Magnify	Pinches vertices towards the brush's center
Polish	??
Scrape/Peak	Like Flatten?
Sculpt Draw	Moves vertices in or out
Smooth	Smooth a region by averaging out vertex coords
Snake Hook	Pulls vertices along the brush's path
Thumb	Like Nudge, but over a larger area
Twist	Rotate a single vertex



Vertex Sculpting with Dynamic Topology (“Dyntopo”)

This cool – you are really going to like this!




Set the Sculpt Mode to **Draw**

Set Radius to **20**

Set Brush Strength to **1.0**

Add Material (+)

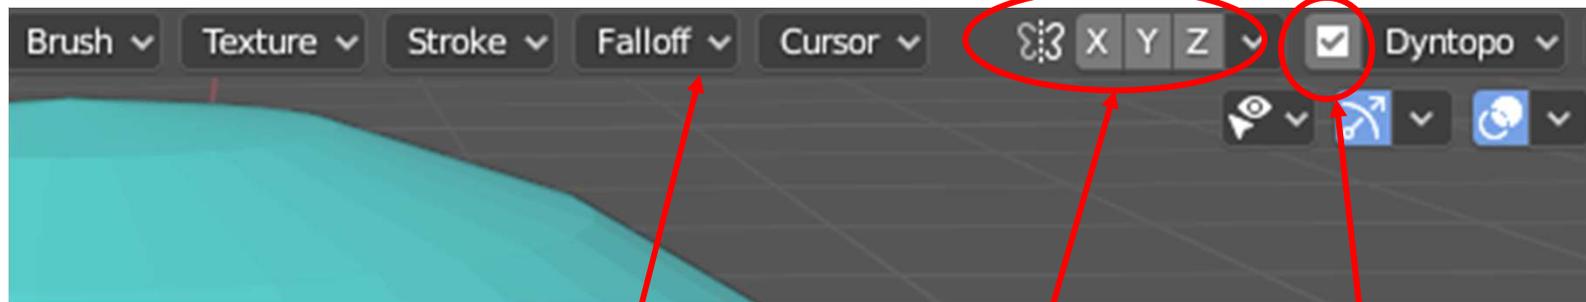


Surface Falloff from the Center of the Brush to **Smoother**

No Symmetry


Click **Dyntopo** on (if you get a message, just click **OK**)

Vertex Sculpting with Dynamic Topology (“Dyntopo”)

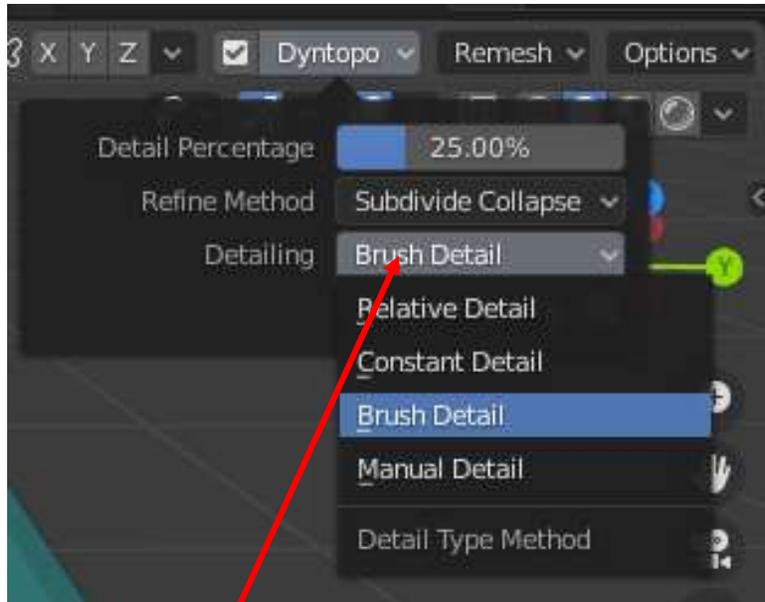




Set Dyntopo Detailing to **Brush Detail**

And, have at it!

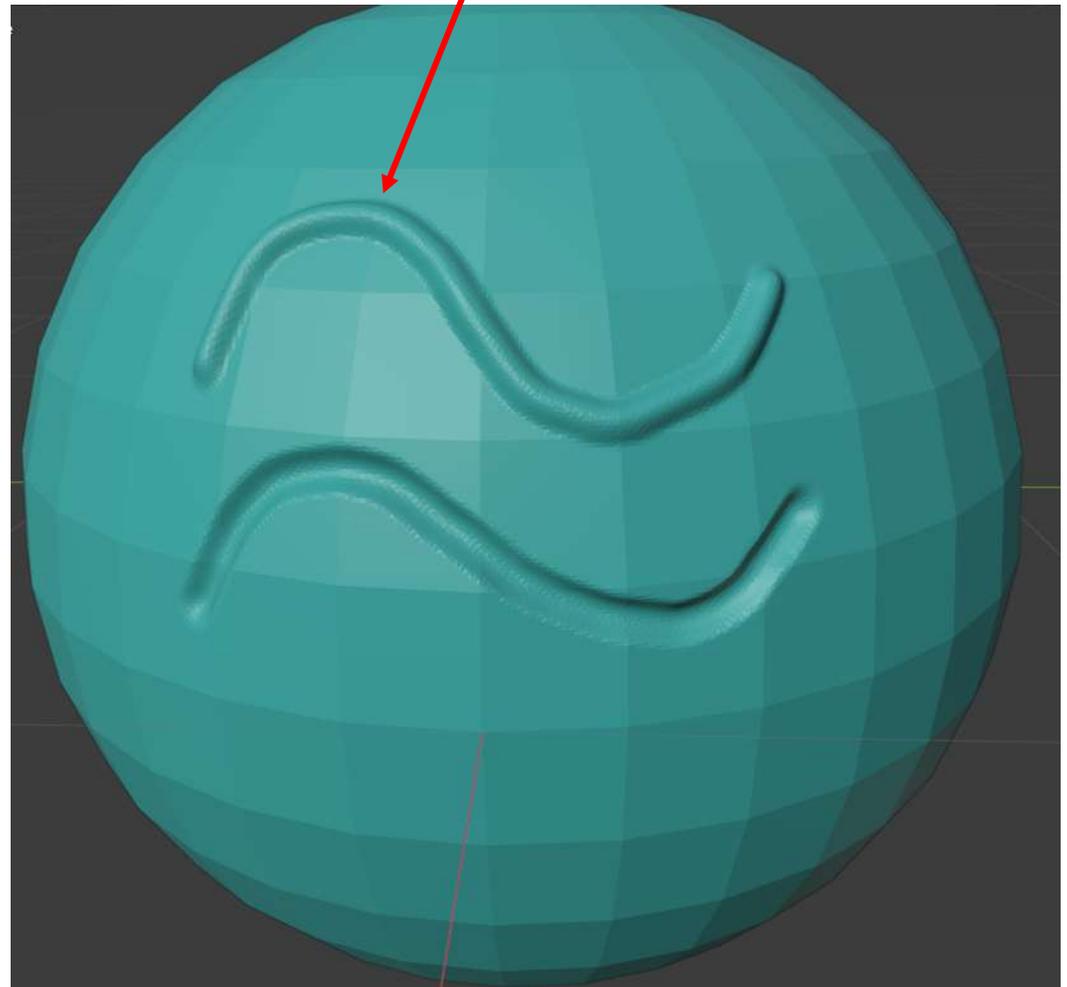


Vertex Sculpting with Dynamic Topology (“Dyntopo”)

How does Dyntopo Mode make such a smooth sculpt?
Let’s look at this in **Sculpt Mode** and then in **Edit Mode**:

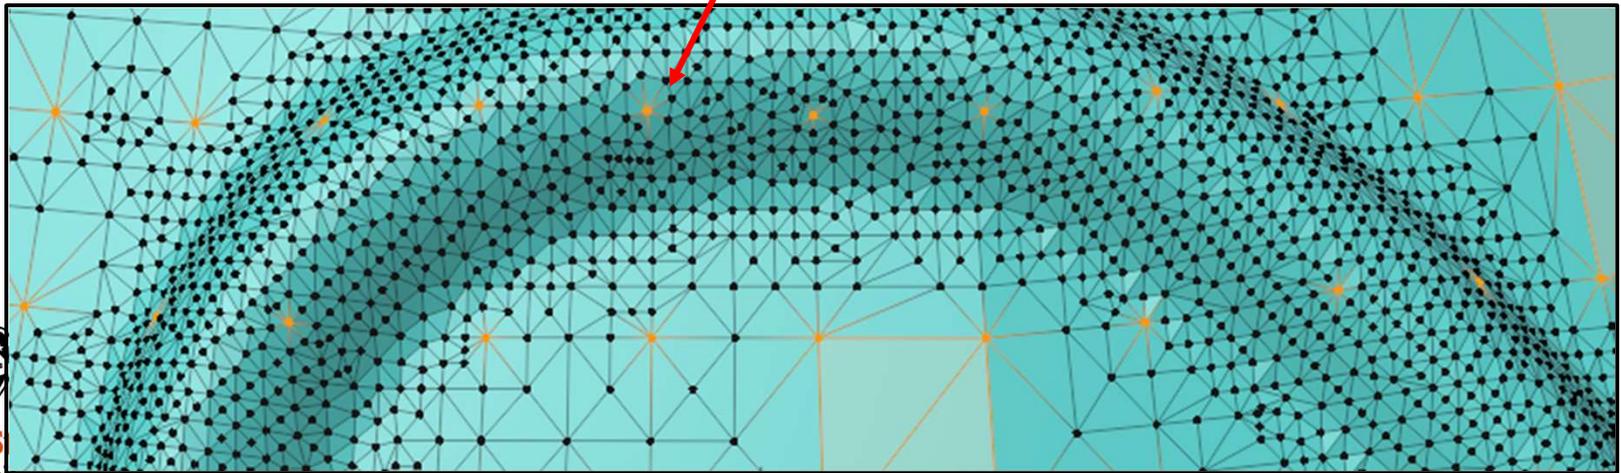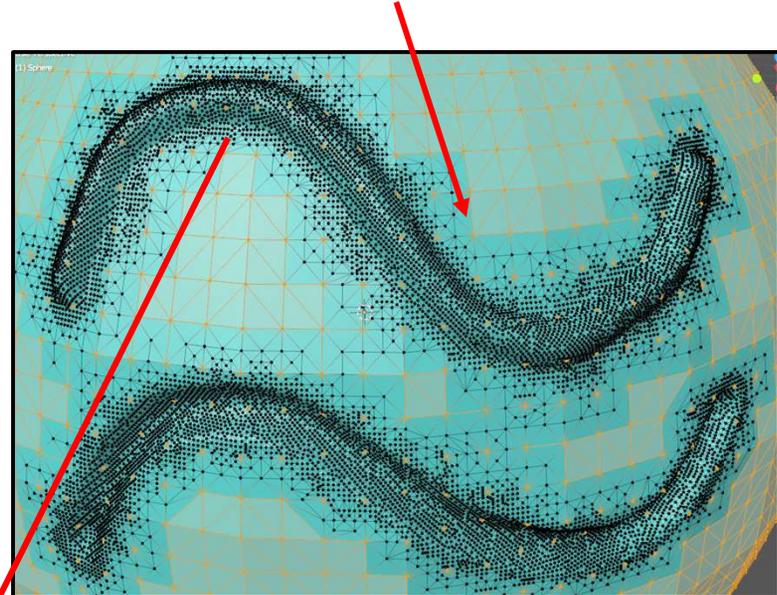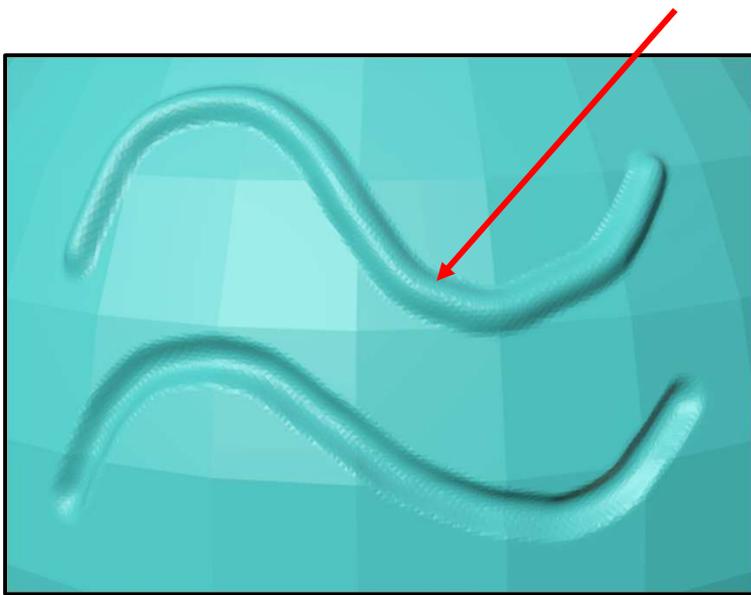

That’s why it is called *Dynamic Topology*!


12. Vertex Painting

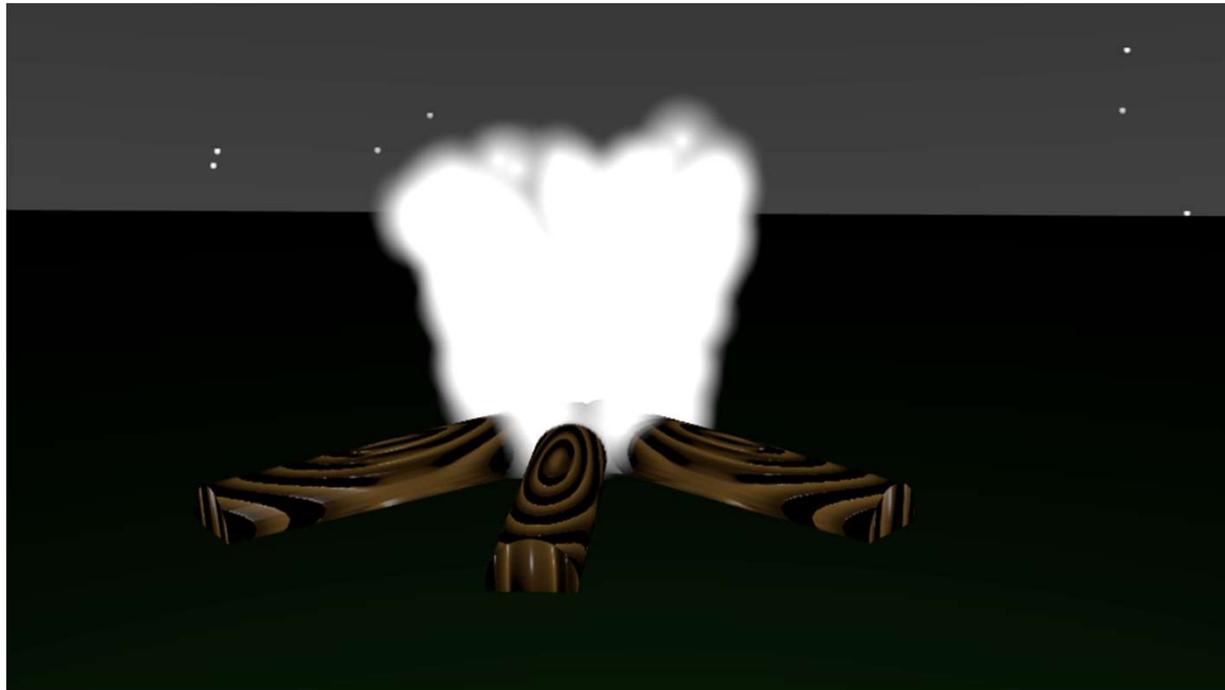

Vertex Painting

Vertex Sculpting is, well, sculpting vertices. But, in order to do this well, we need a lot of vertices.




Start with a UV sphere mesh object.



Tab over to **Edit Mode**.
RMB → **Subdivide** → **Subdivide**

When you get back to Object Mode, the sphere won't look any different than before because you just subdivided the polygons, not smoothed them. If you had wanted smoothing, you could have used the **Subdivision Surface Modifier**.

Now go to **Vertex Paint Mode**.

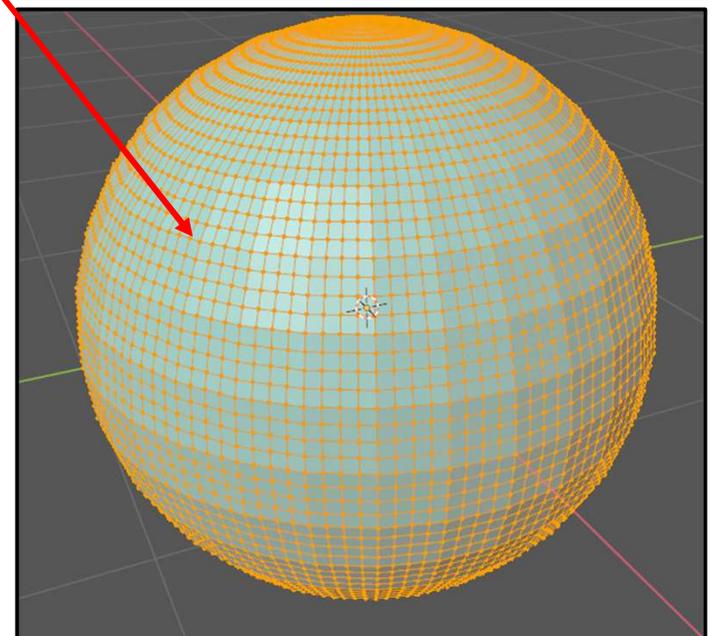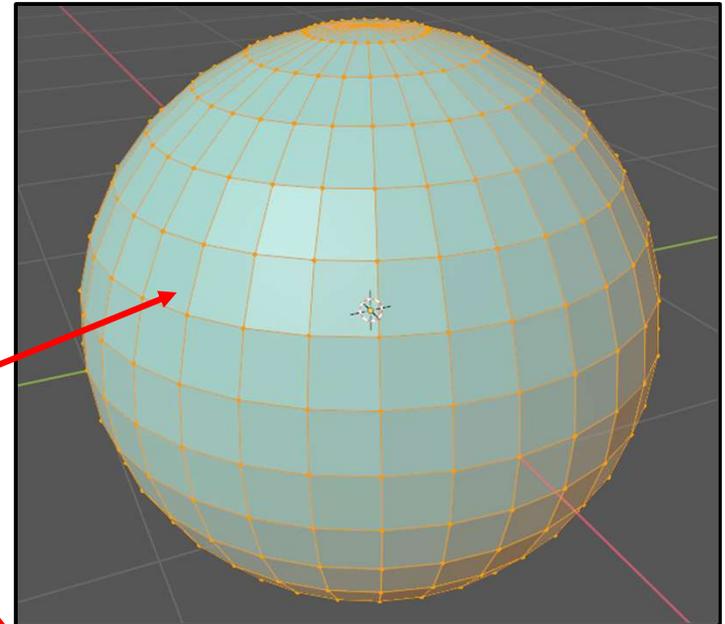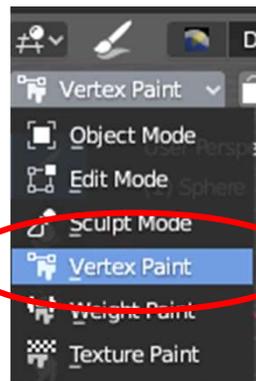

Setting up for Vertex Painting




Be in **Solid Shading** mode



Brush Color

Brush Radius
(I like **25-100**)






Brush Intensity

Brush
Characteristics

Stroking
Characteristics


Surface Falloff
from the Center
of the Brush
(I like **Smoother**)

A Word on Brush Size

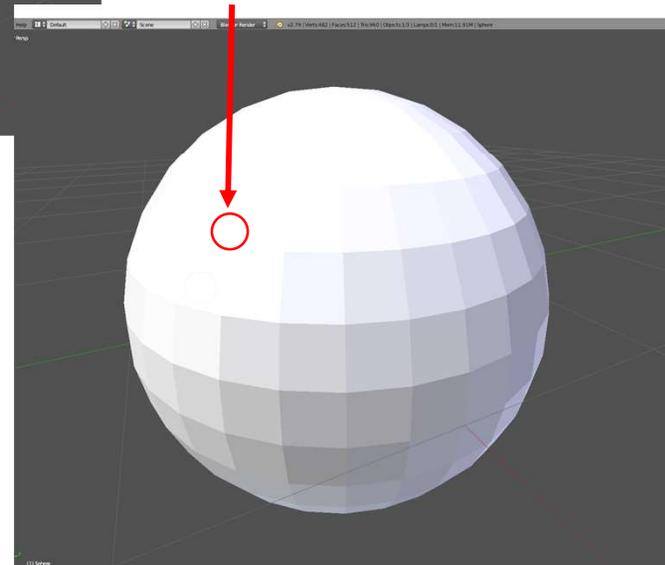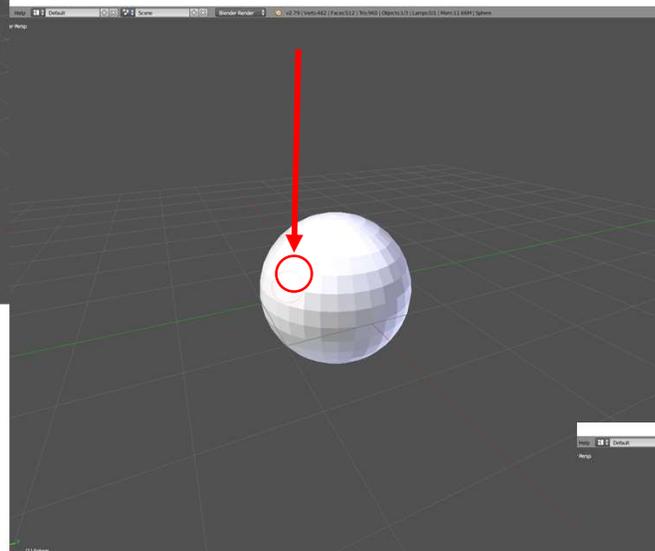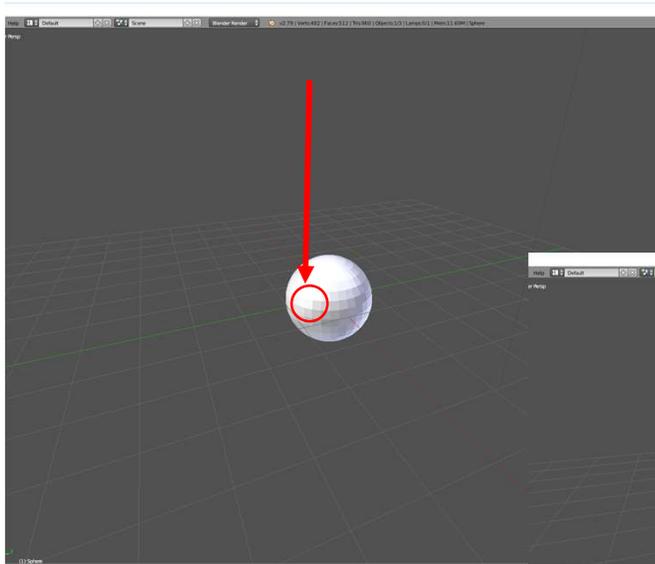




Note: the brush size does not scale with zooming in or out. It stays the same size.

How Does Vertex Painting Work?

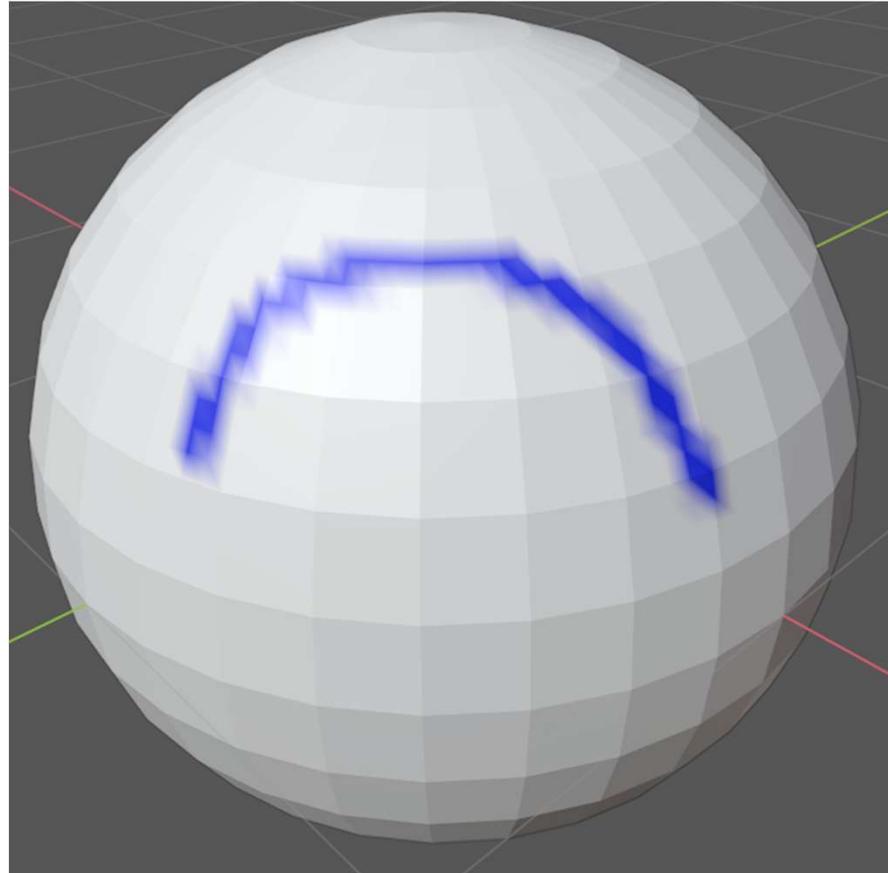

The “paintbrush” only drops “paint” when a vertex is inside the circle brush. This means that the paint does not smear along a nice line but looks splotchy like this.


How Do We Make it Less Splotchy?

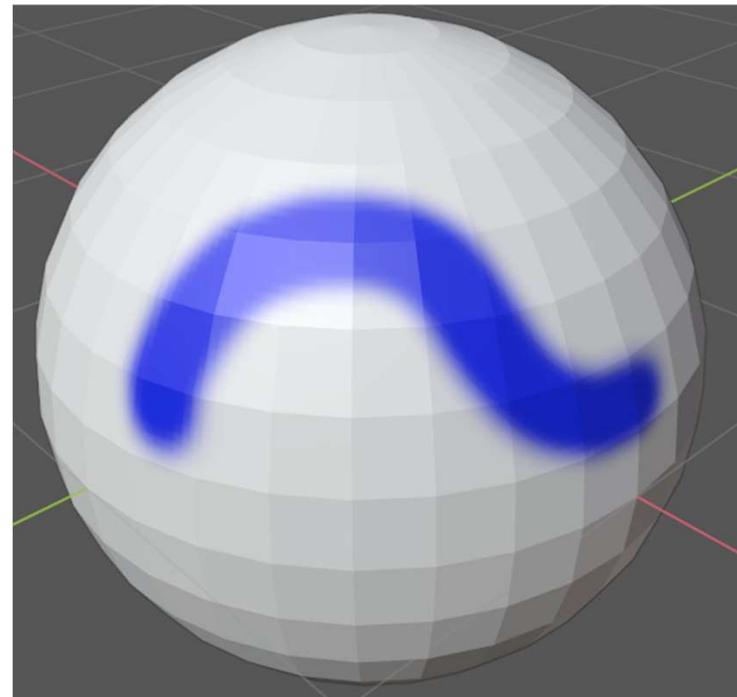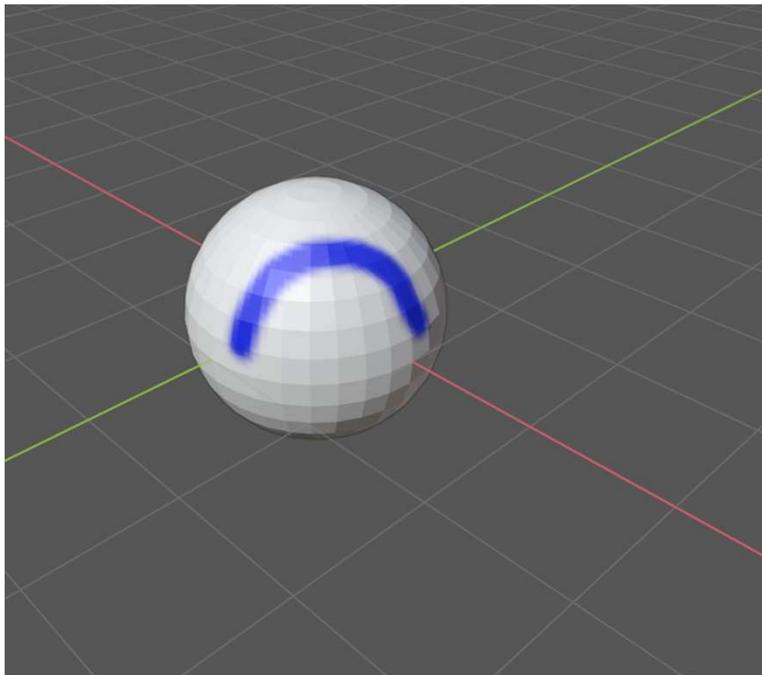

Two approaches:


1. Make the object look smaller. That way more vertices will end up inside the brush circle.
2. Use **Subdivide** or **Subdivision Surfaces** to add more vertices

Making Your Vertex Painting Show Up


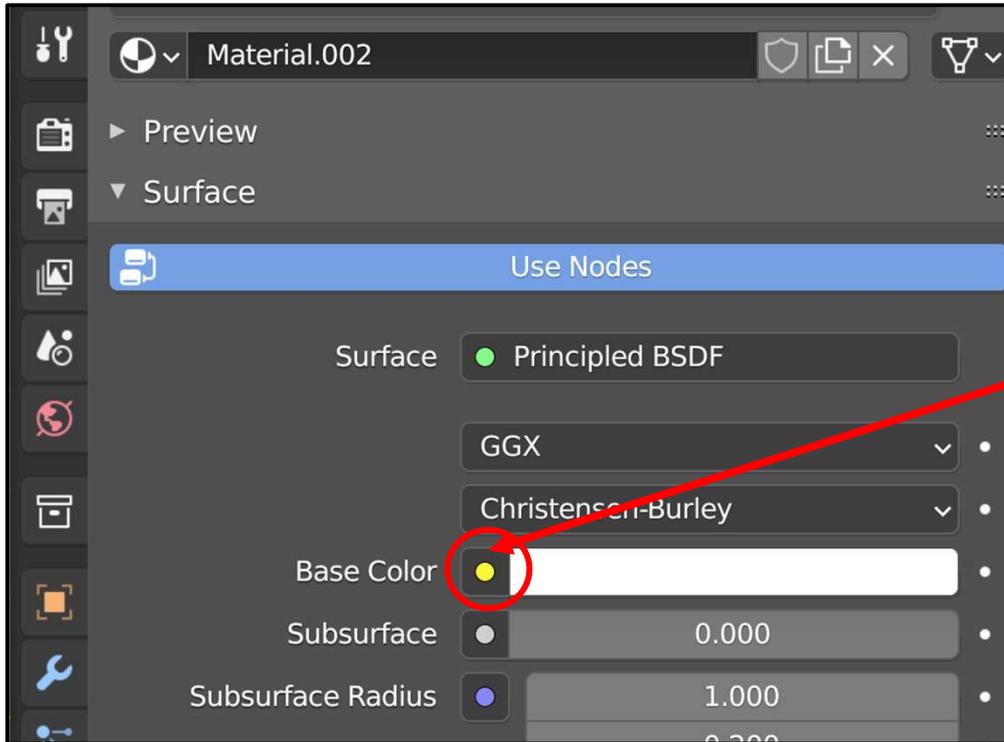


Be in **Rendered Shading** mode

Click on the small circle and select **Mix (Legacy)** from the pop-up menu

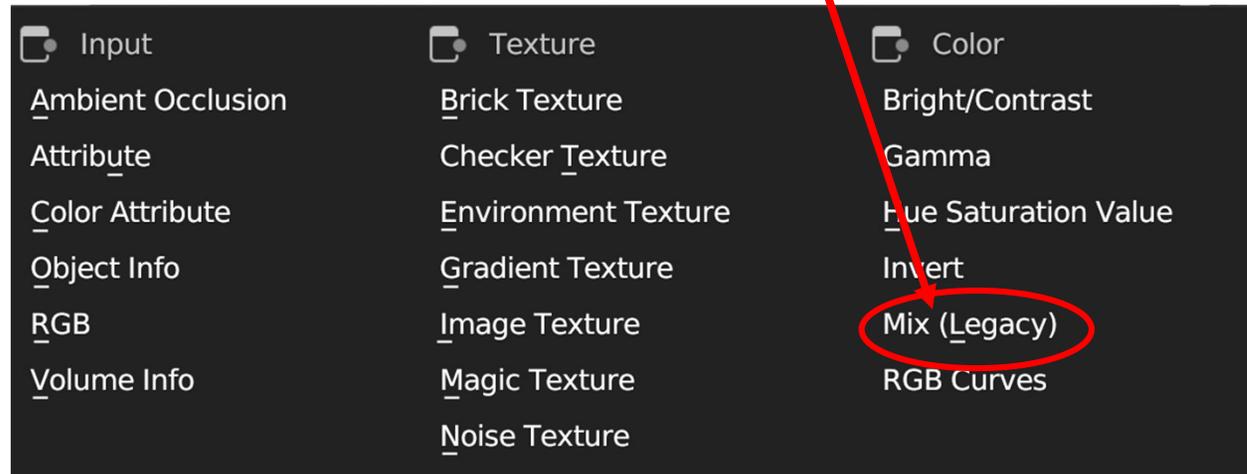


Making Your Vertex Painting Show Up

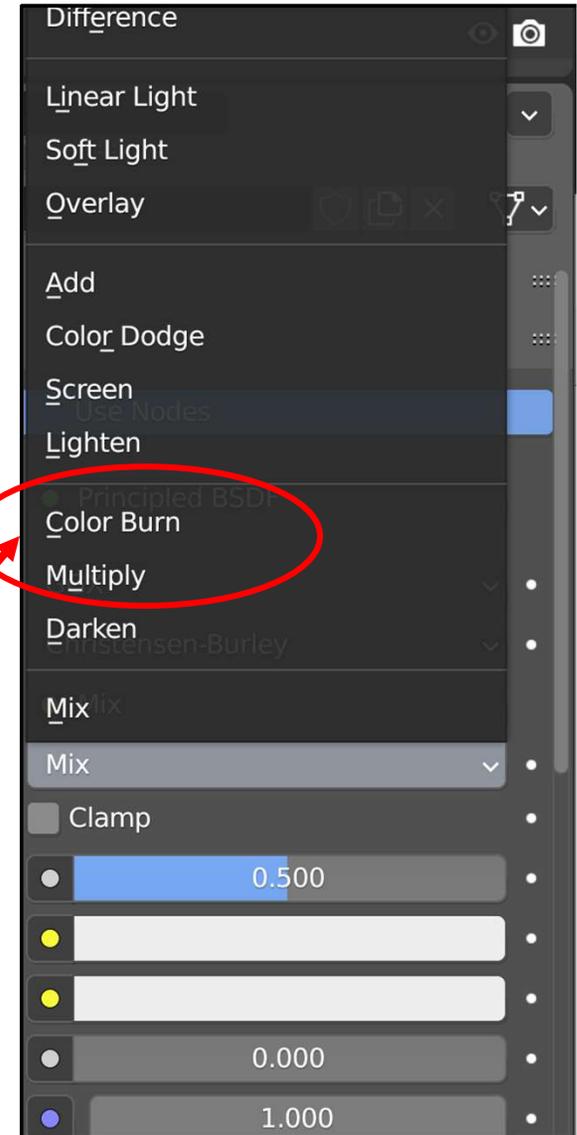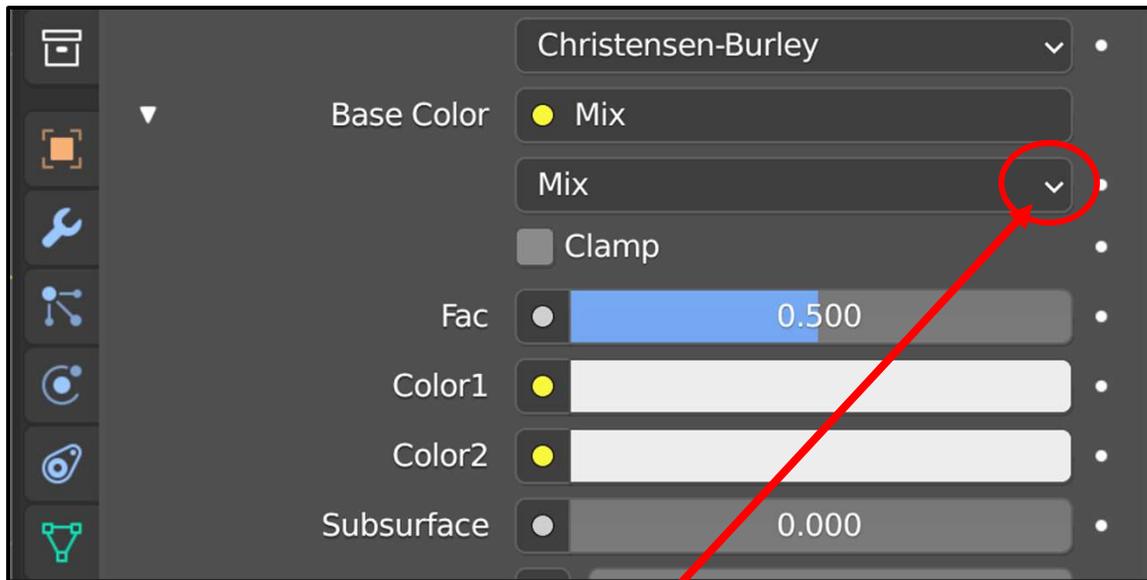

Then click **here** and select **Color Burn** or **Multiply** from the pull-down menu ("Mix" will change to whichever you picked)

Making Your Vertex Painting Show Up

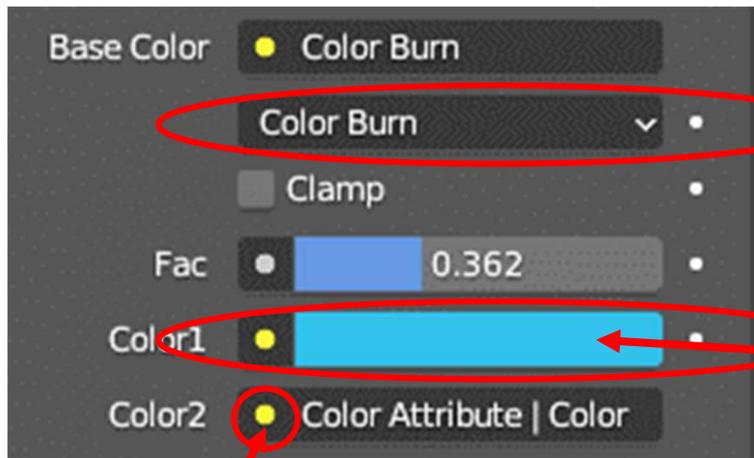


Click here and select a color for the sphere




Click and adjust the value of **Fac** (the interpolation Factor)

Click on the small circle and select **Color Attribute** from the left column of the pop-up menu

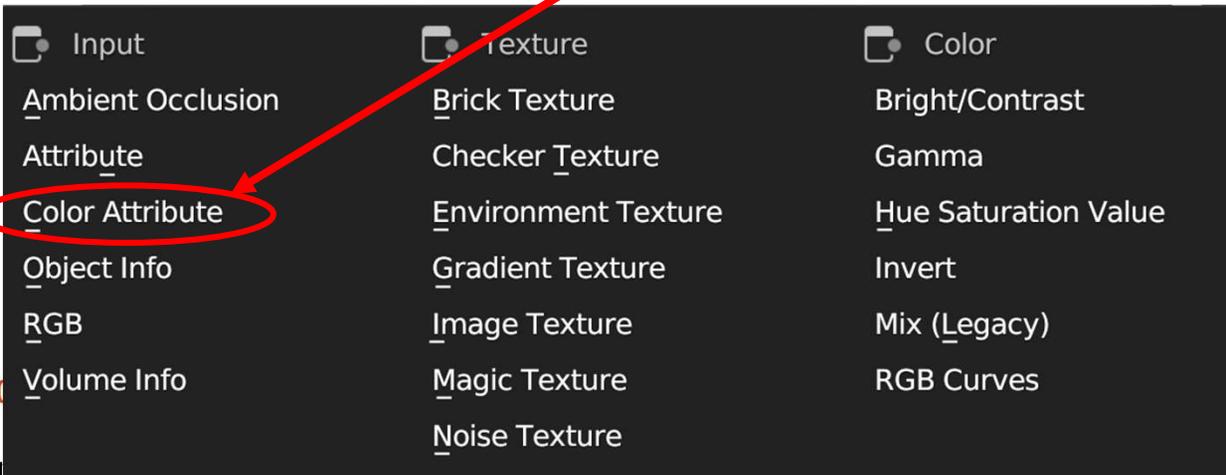


Col

The *Fac* Parameter Tells Blender What to do on the Parts of Your Object that have both an Object Color and a Paint Color

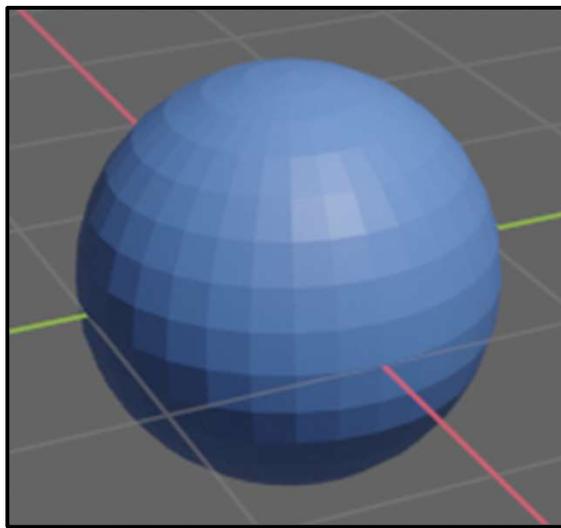


Multiply
Fac = 0.00

All Object Color

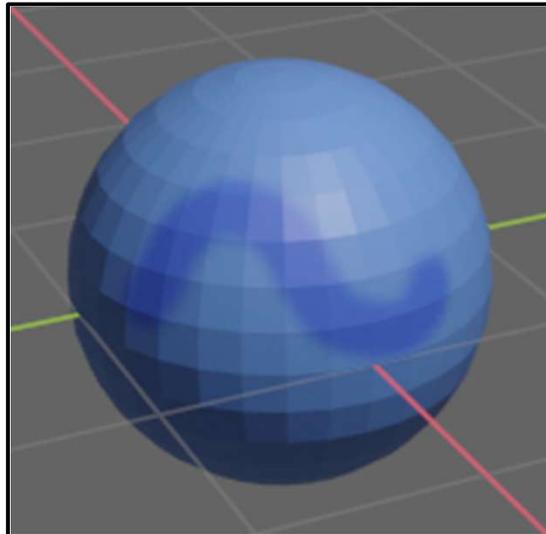

Multiply
Fac = 0.50

Half of Each

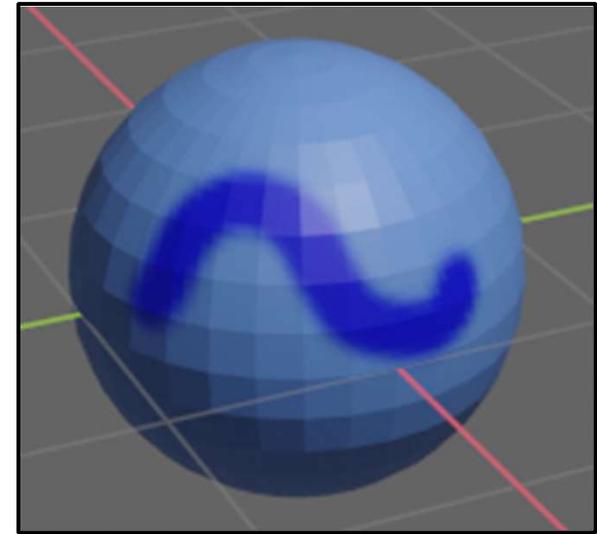

Multiply
Fac = 1.00

All Paint Color




Have a Nice Day!

370



13. Keyframe Animation

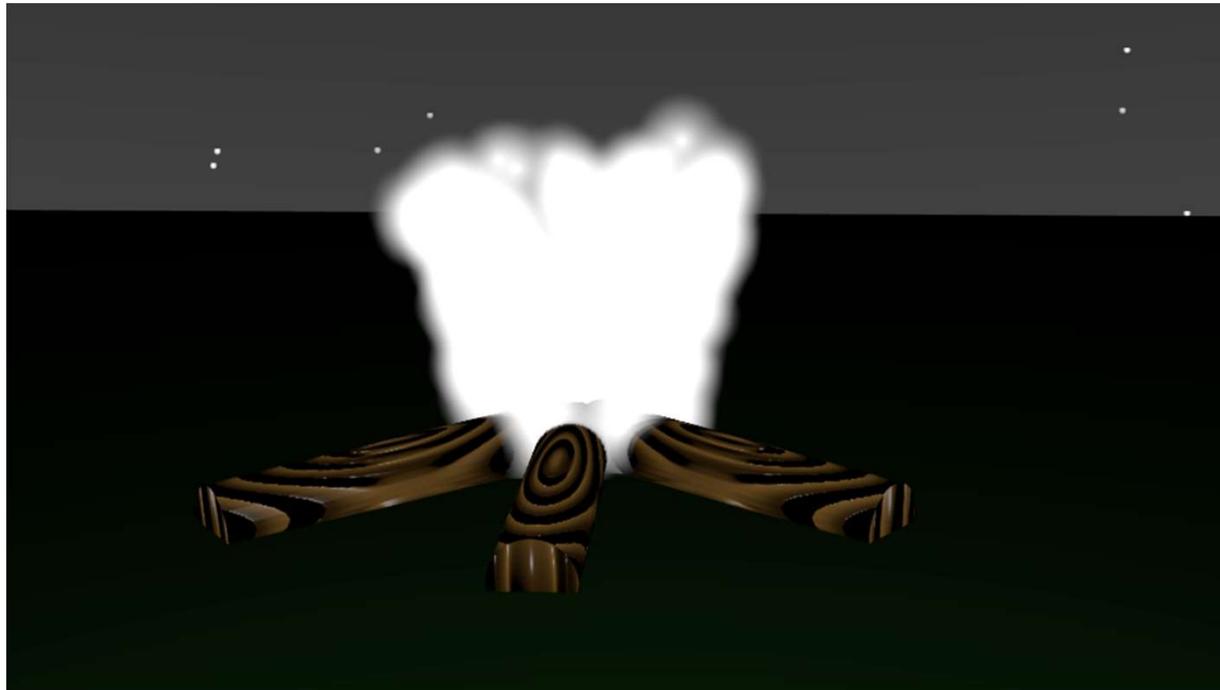

Keyframe Example




http://ieeexplore.ieee.org/ieee_pilot/articles/05/ttg2009050853/figures.html

Keyframe Animation


Keyframe animation is a technique that goes all the way back to the beginning of hand drawn animation (e.g., Walt Disney). Senior animators would specify key positions for the animated characters and then more junior animators would fill in the frames in between. This became known as **keyframing** and **in-betweening**.

Blender allows you to create the keyframes and gets the computer to do the in-betweening. Here, we will keyframe-animate the monkey as she slaloms around a group of colored cubes:

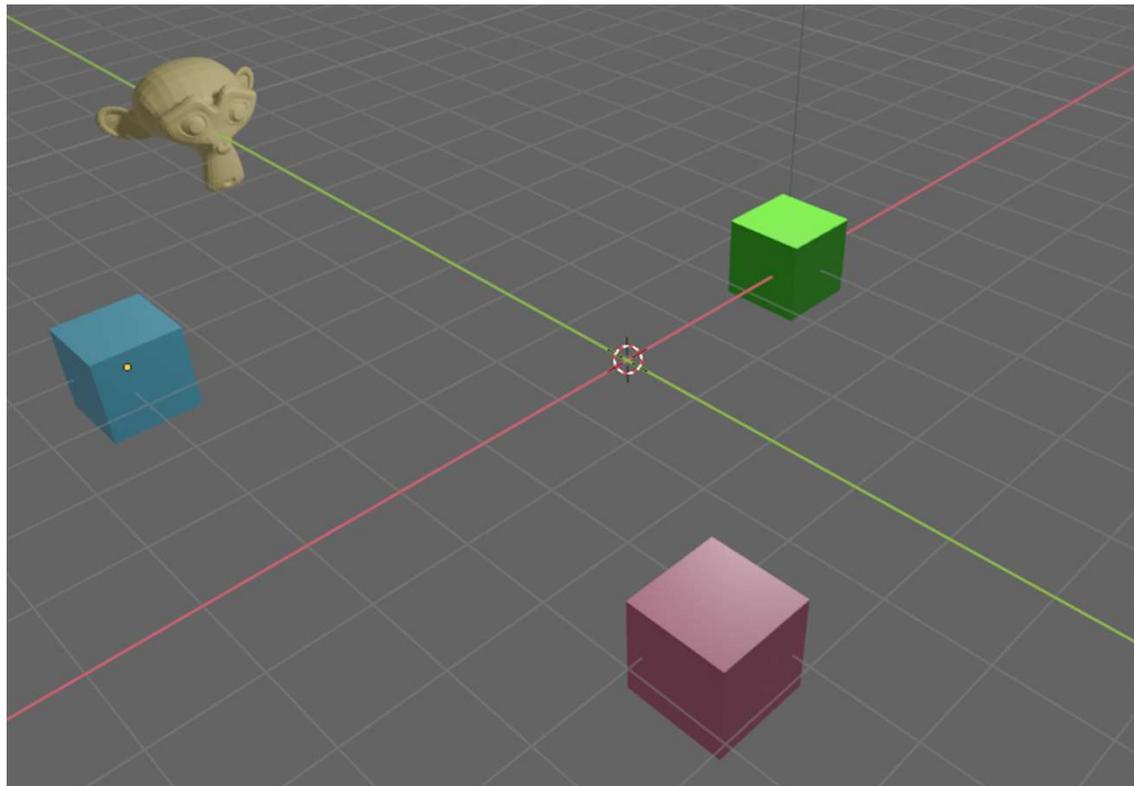


Keyframe Animation

Select the **Animation** workspace from the list at the top. This creates a screen layout that looks like this:



This makes your screen look like this. These new sections are:

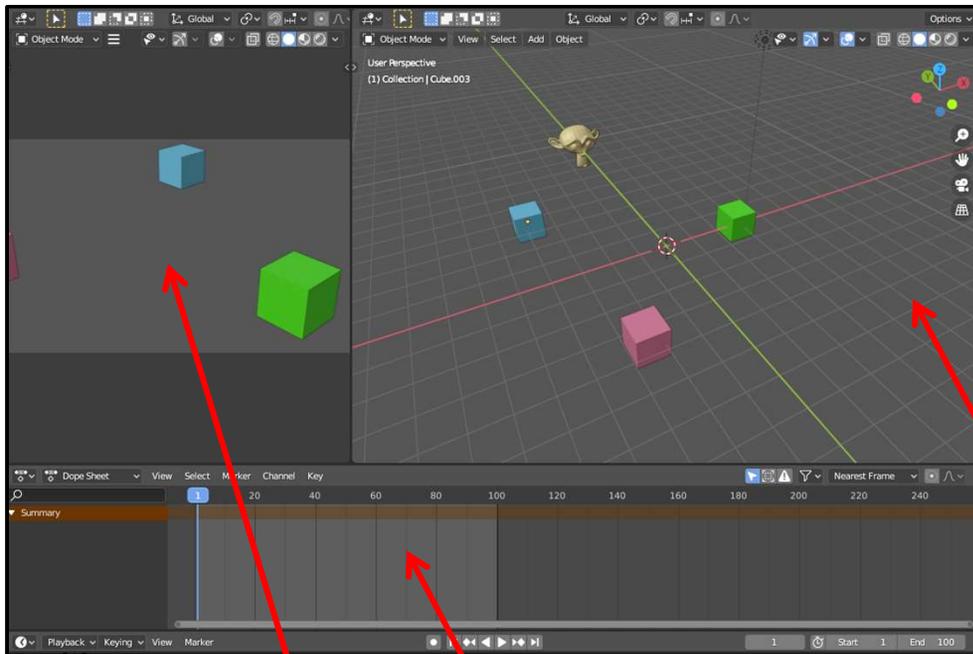


3D Viewport Window – what you are used to

Camera View Window – what you will see if you Render




Timeline Window – keeps track of what frame number we are on.

Keyframe Animation

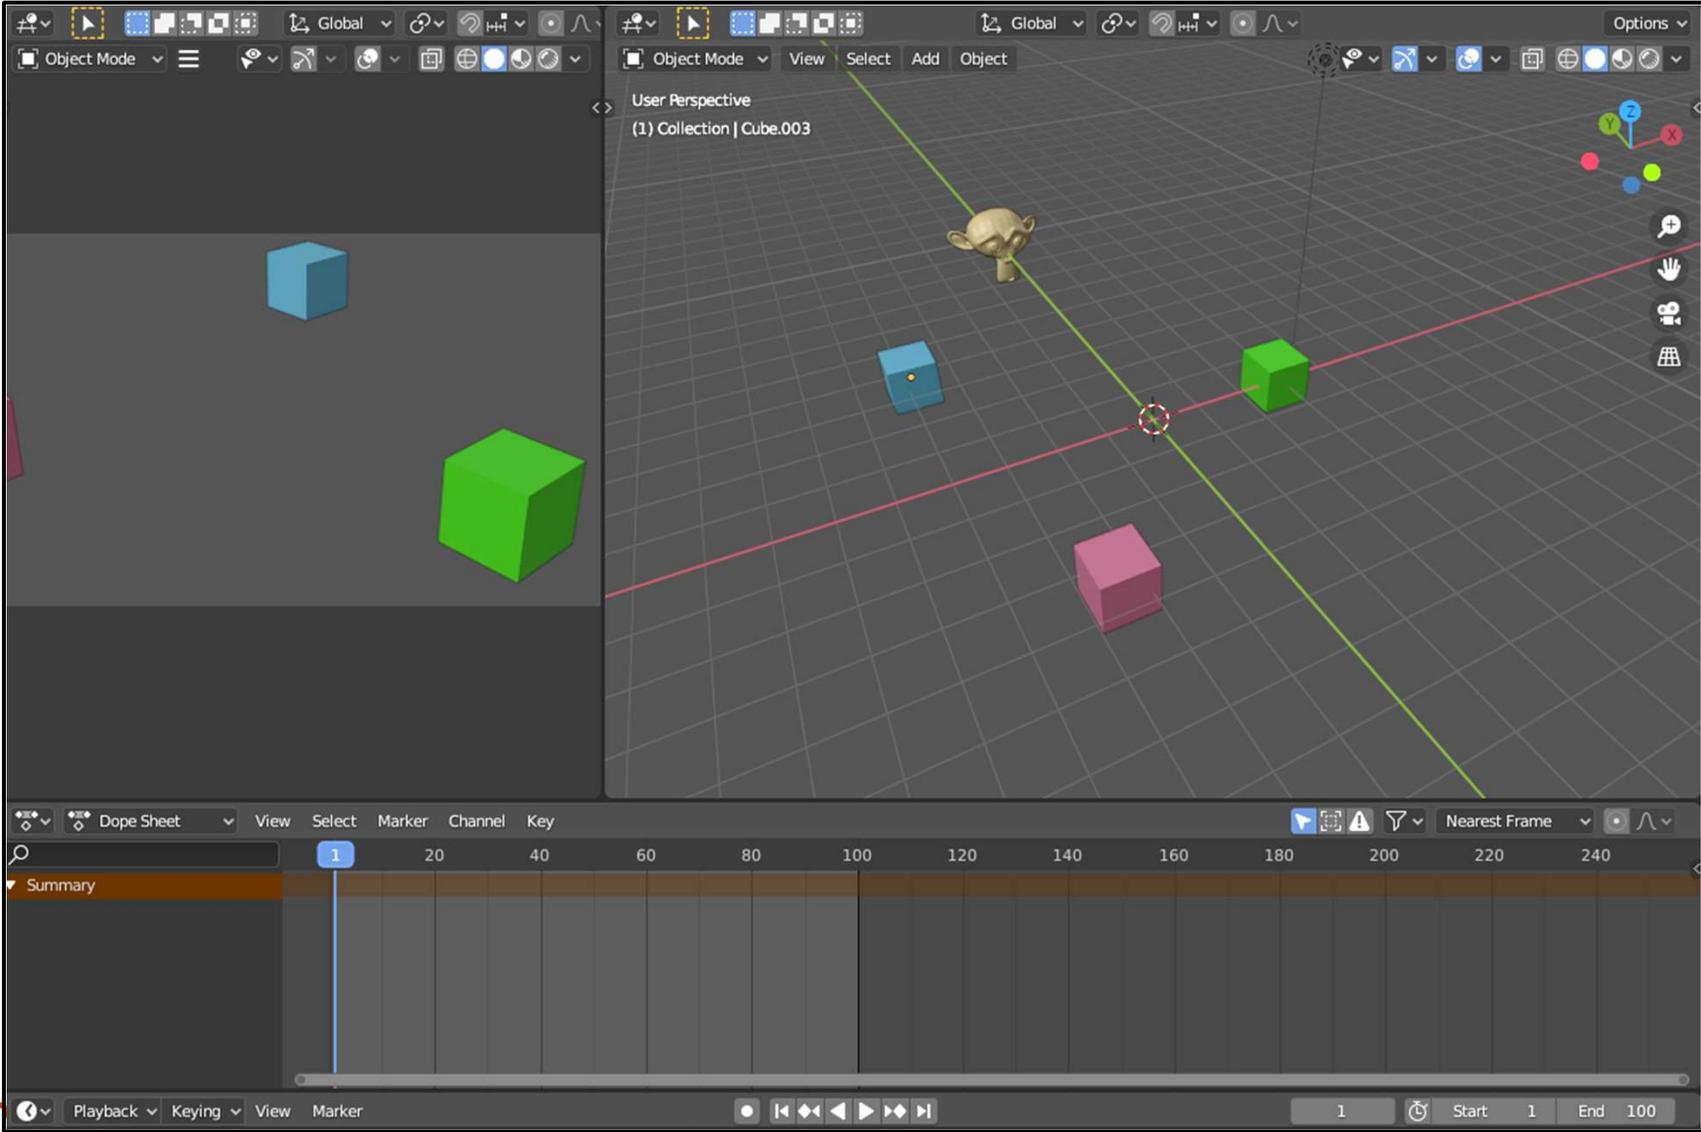


Keyframe Animation

Slide the **timeline indicator** to what frame number you want to set, position the object (grab, scale, rotate) how you want it to be (grab, scale, rotate), and **RMB** → **Insert Keyframe** (or hit the 'i' key). From the pop-up menu, select **Location, Rotation, and Scale**, indicating that you want to record location, rotation, and scale factor.

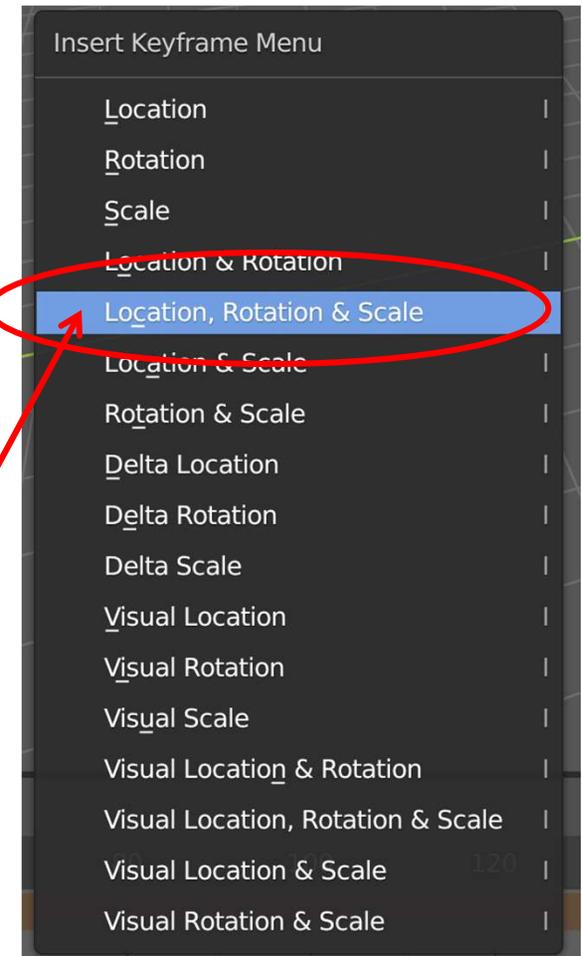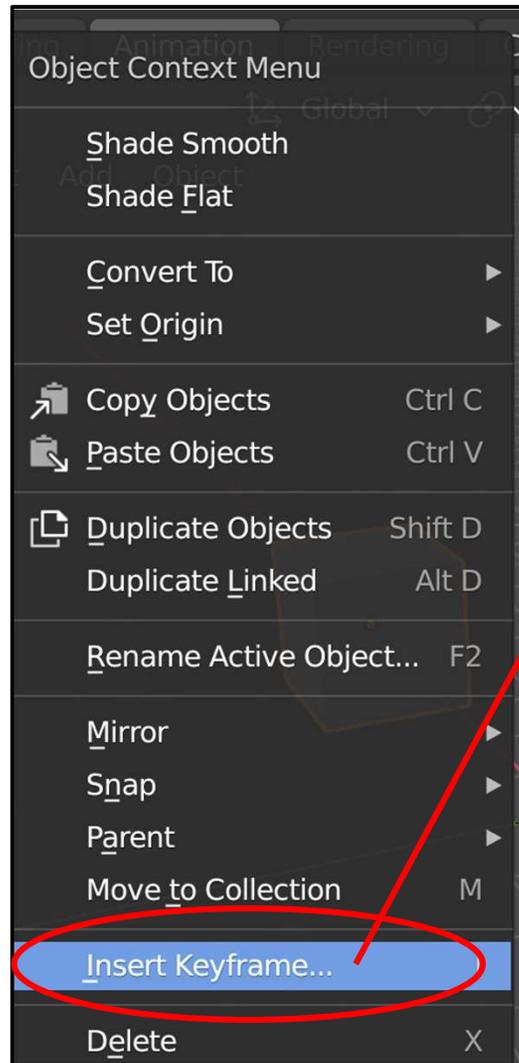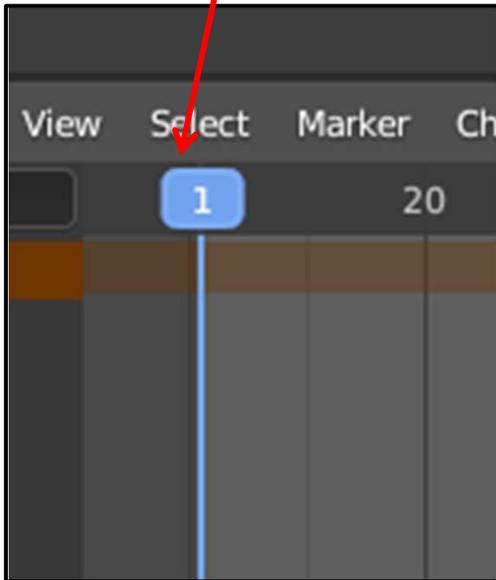


Keyframe Animation

Do it again: slide the timeline indicator to what frame number you want to set, position the object how you want it to look, and **RMB** → **Insert Keyframe** (or hit the 'i' key). From the pop-up menu, select **Location, Rotation, and Scale**, indicating that you want to record location, rotation, and scale factor.

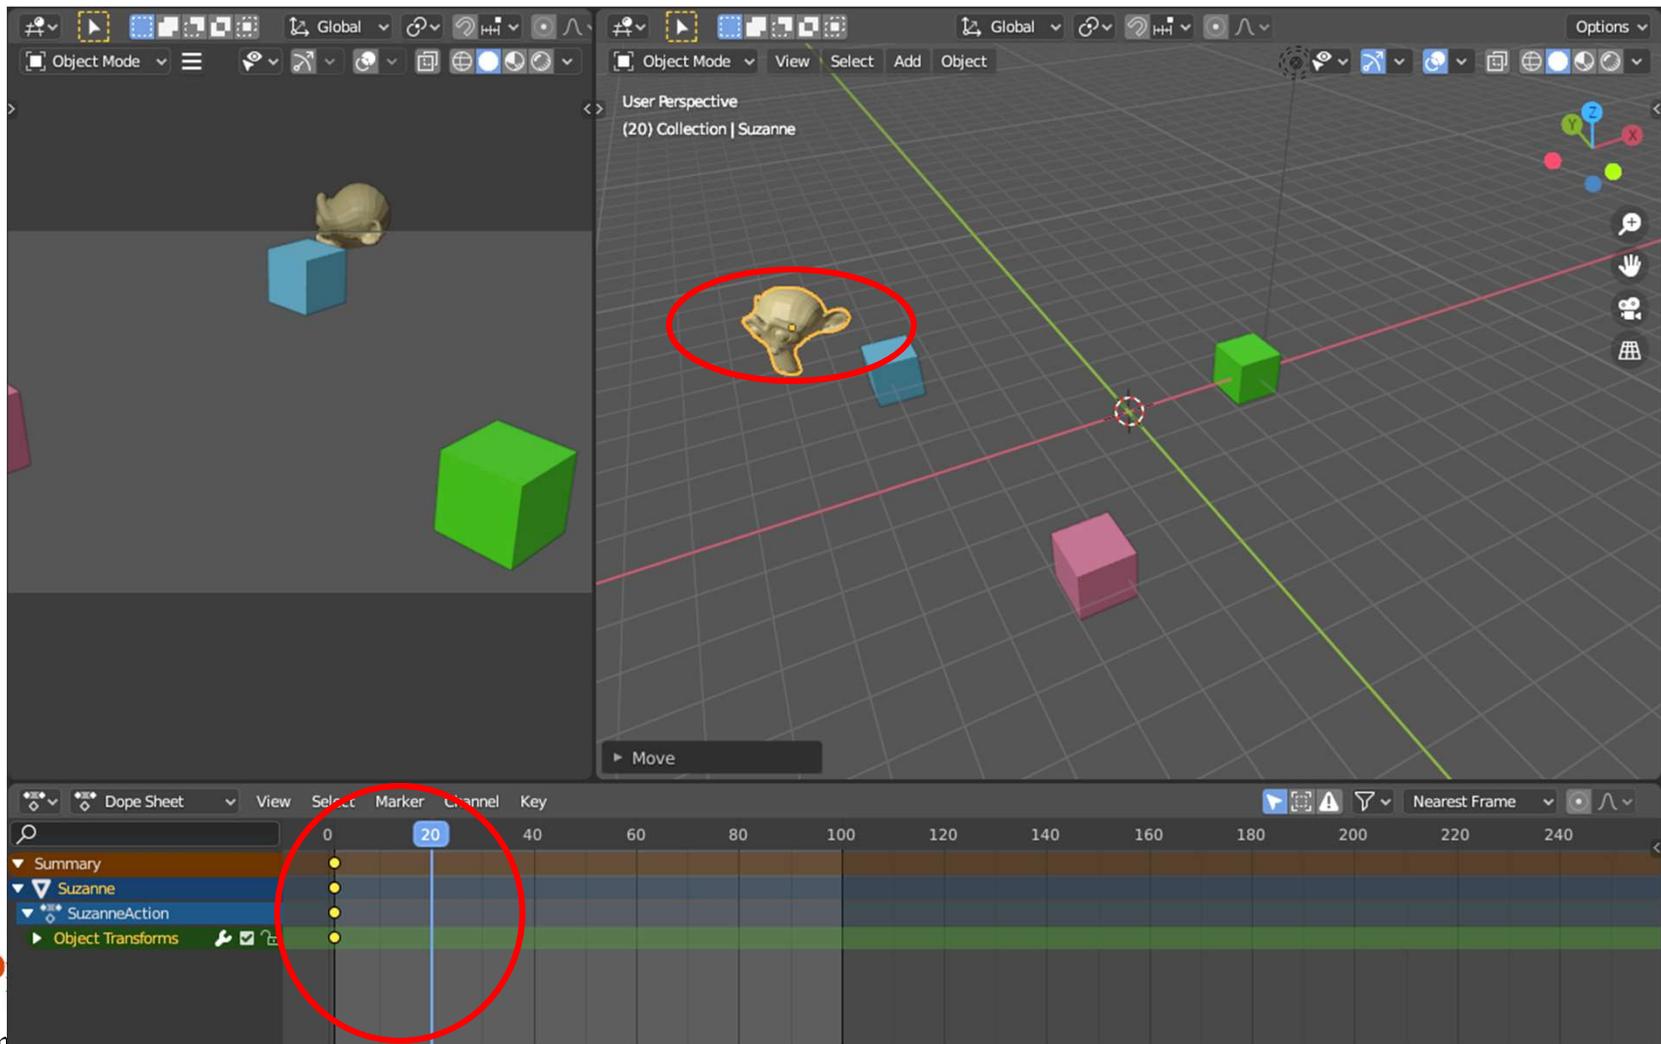


Keyframe Animation


After a while, your timeline will look like this:

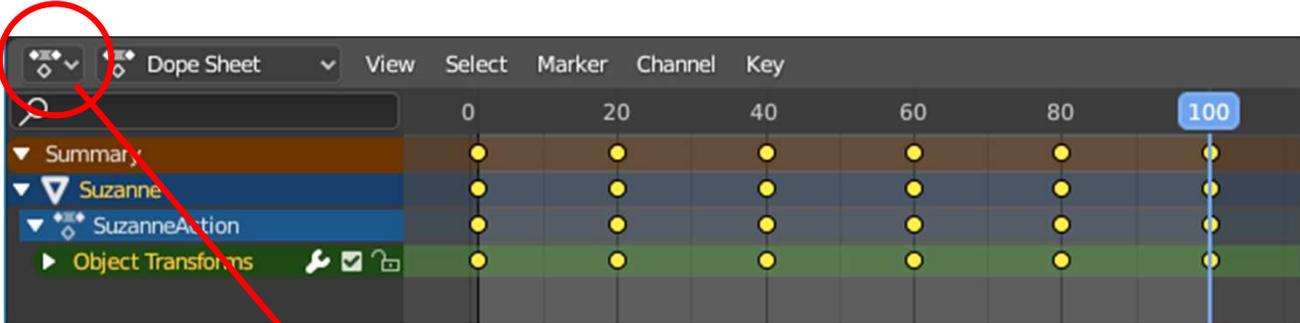

Then, click here and change the type of display to the **Graph Editor**:

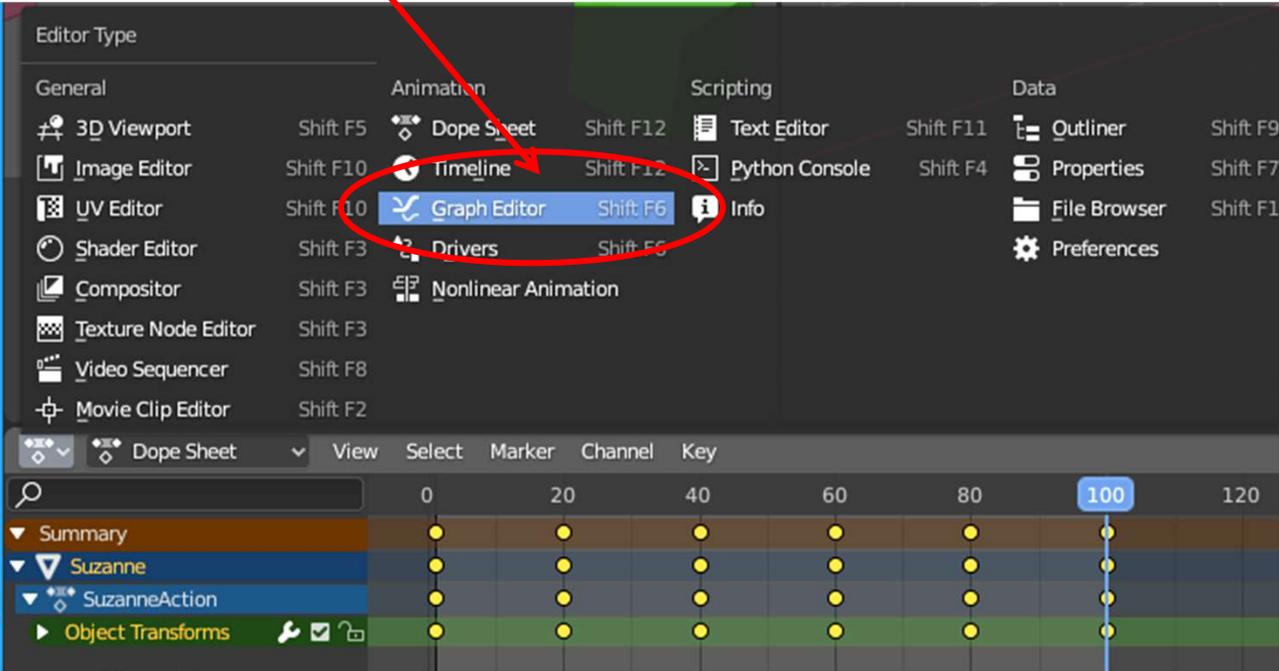

Graph Editor

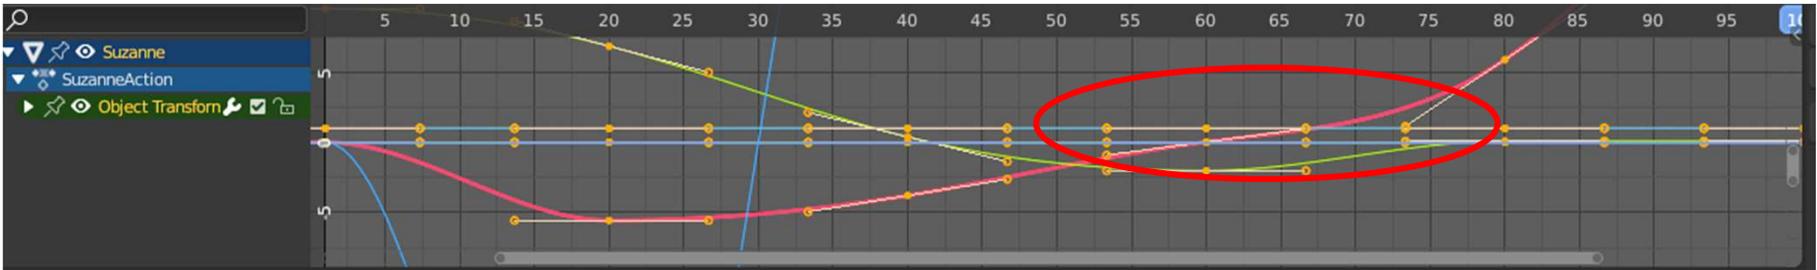


Property	Visibility	Editability	Lock
X Location	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Y Location	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Z Location	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
X Euler Rotation	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Y Euler Rotation	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Z Euler Rotation	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Keyframe Animation

Your **Graph Editor** window should now look about like this.

Note that Blender has filled in the in-between values for you. (This is the “**In-Betweening**”.)

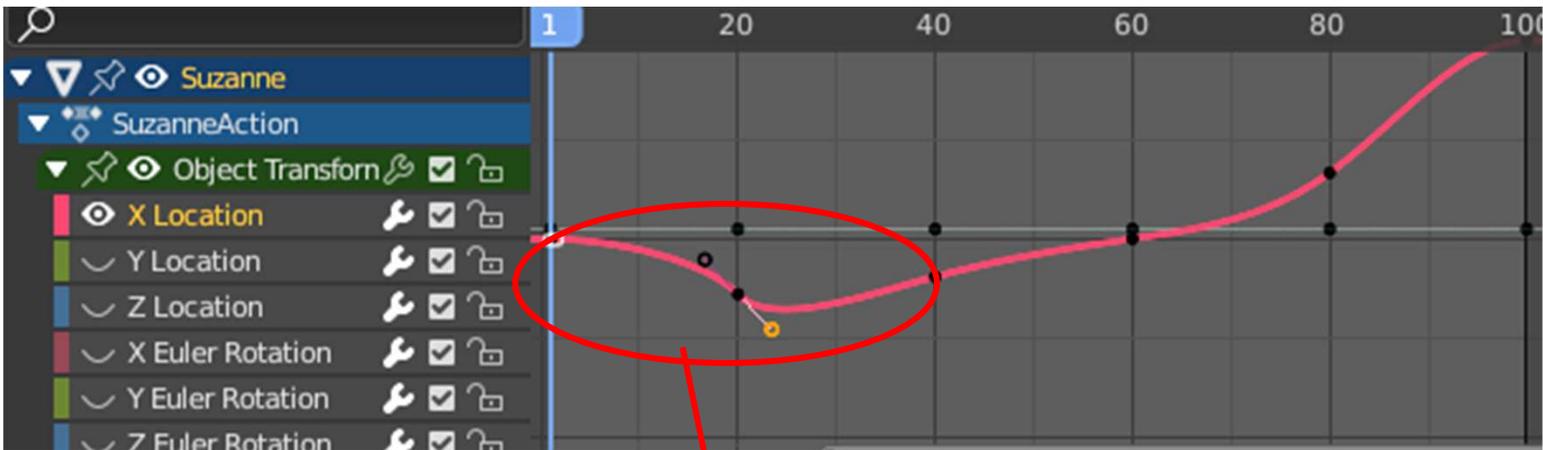


The Graph Editor Window

Click on the triangle. This gives you access to the curves.

Clicking on the eye toggles whether or not you can see a curve.

Clicking on the name of the curve makes that the current curve. You can then edit it.

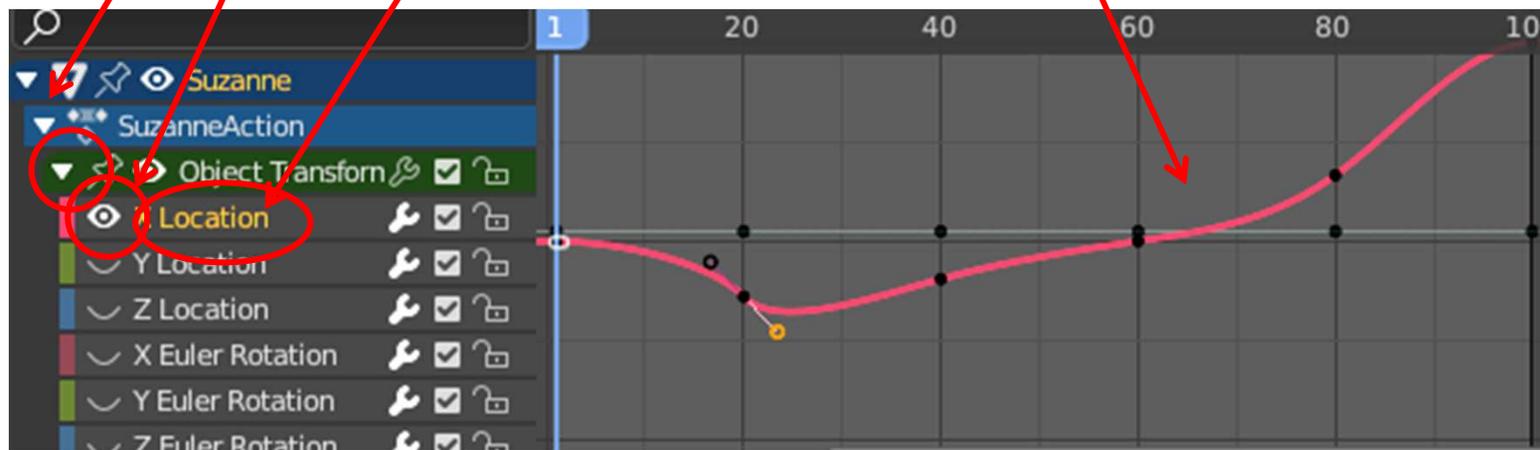

The Graph Editor Window

Shortcuts when the cursor is in the **Graph Window**:

Shortcut	What it does
LMB	Select a keyframe dot
Scroll wheel	Zoom in and out of the Graph
MMB	Pan the Graph
Shift-scroll wheel	Pan in Value (vertical)
Shift-MMB	Pan in Value (vertical) and Time (horizontal)
Control-MMB	Scale in Value (vertical) and Time (horizontal)




Animation Mischief 😊

Hit the 'n' key. Like in the 3D View, a Number Panel pops up.

Click on the **Modifier** tab.


Then click on **Add Modifier**.

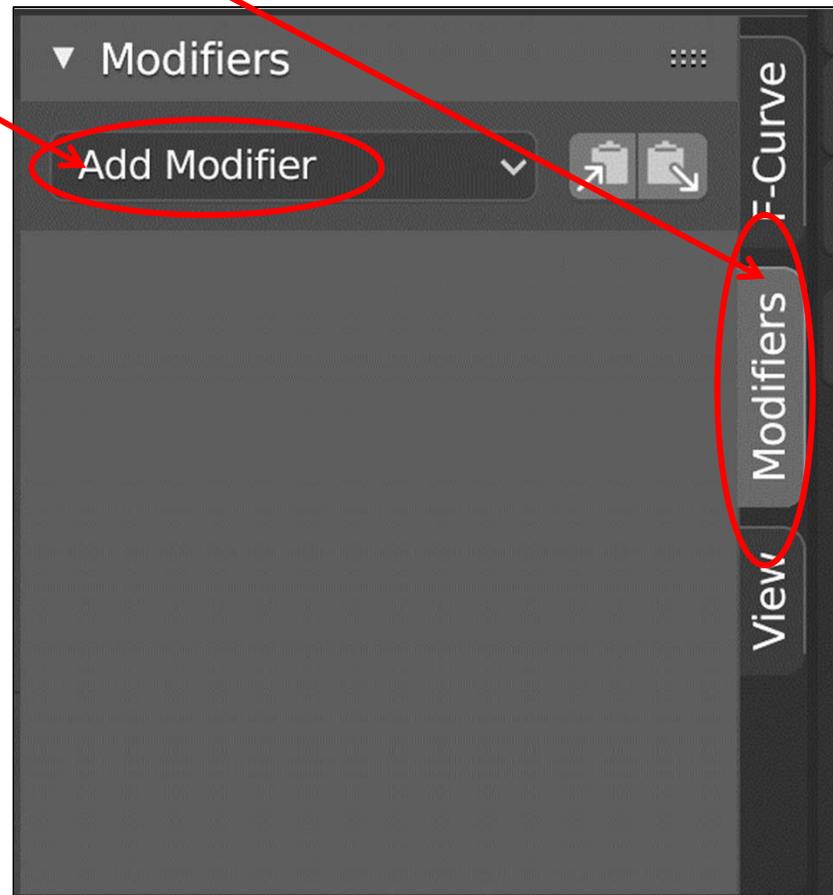

Animation Mischief 😊


Select **Add Modifier**.

From the list of Modifiers, select **Noise**.

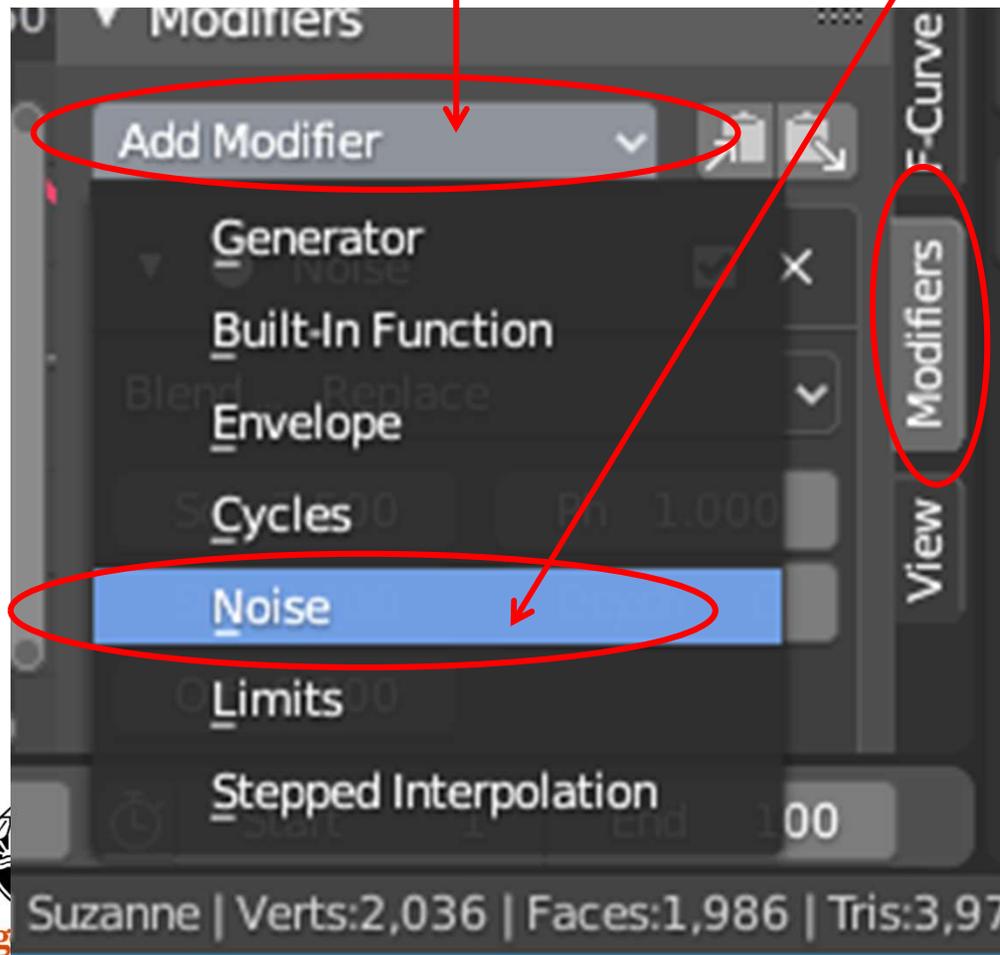

Animation Mischief 😊

Use this menu to change the noise parameters **scale** and **strength**. Notice what this does to the curve. Now play the animation.

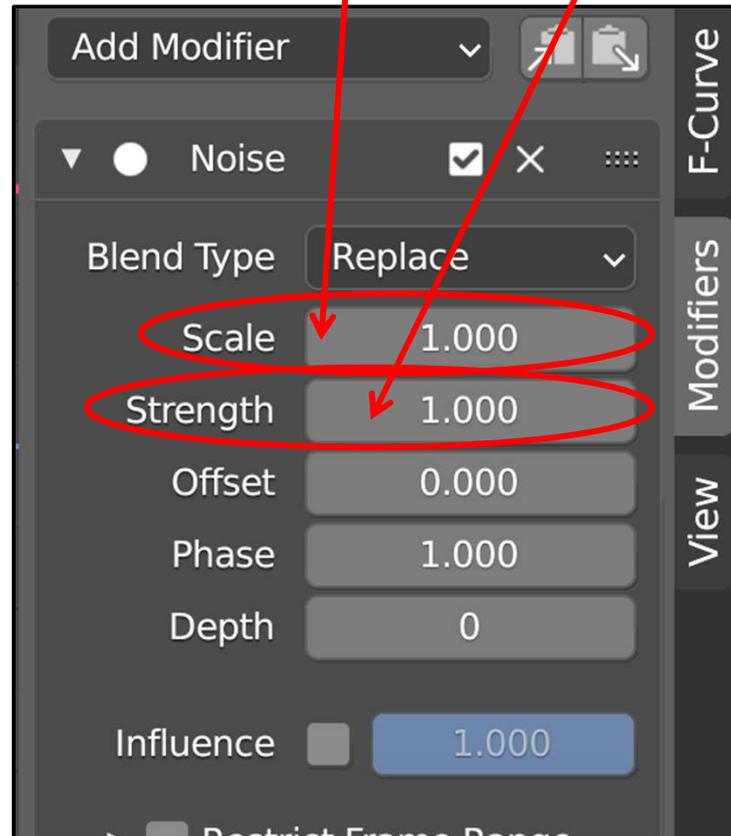

Two Characters Interacting

To avoid a collision, the monkey jumps up and the cube squishes




anim2.blend



anim2.mp4




Animating the Camera and the Lamps

Cameras and Lamps are just like any other object. As you have seen, they can be positioned. They can also be keyframe-animated. Like other objects, just select them and hit the 'i' key to insert a keyframe.

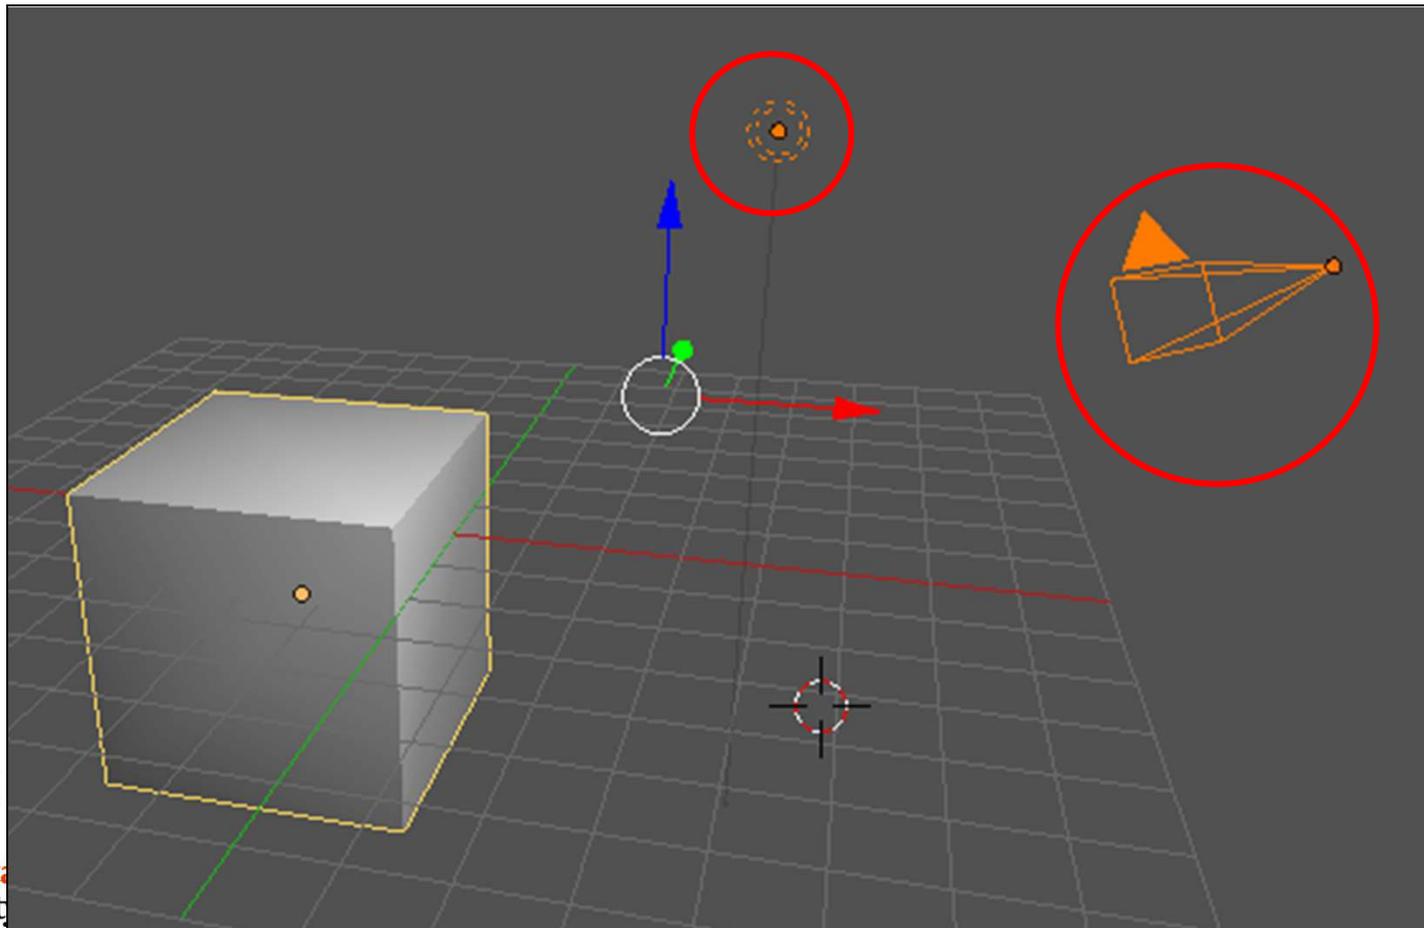


Animating (almost) Any Parameter

One of the many cool things about Blender is that you can do more than just keyframe-animate the objects, you can also keyframe-animate the parameters you are setting. For example, suppose you want to animate the Metallic-ness. To set a keyframe for this, **right click** on the Metallic box and select **Insert Keyframe** from the pop-up menu. Do this for two keyframes and then animate.

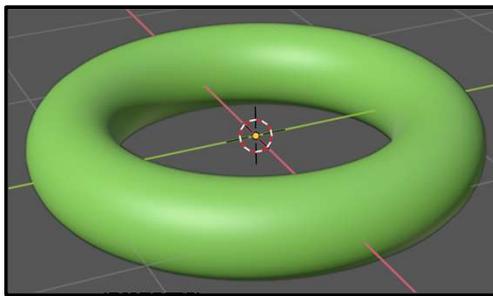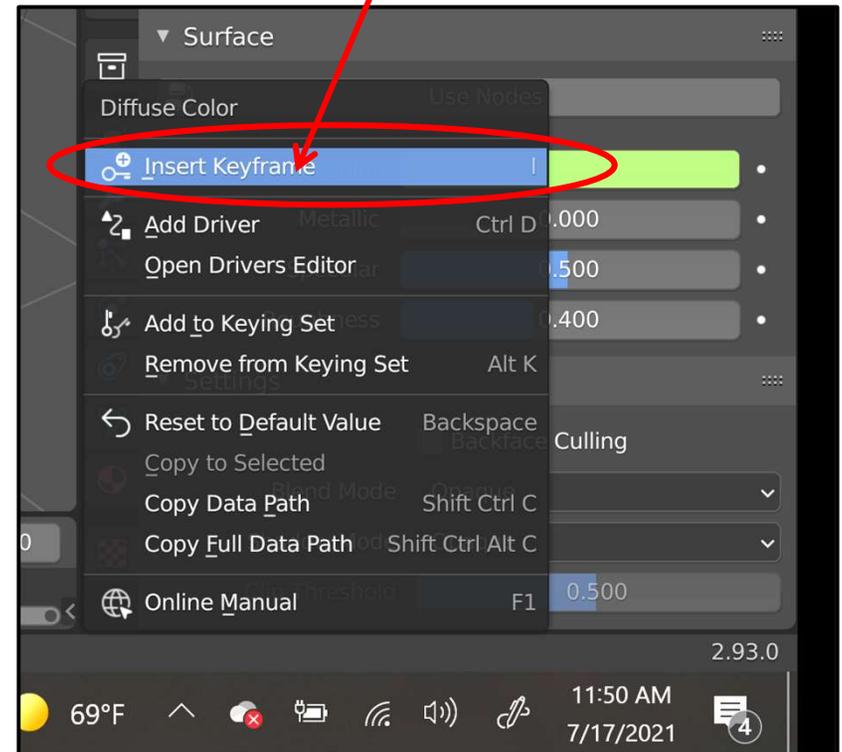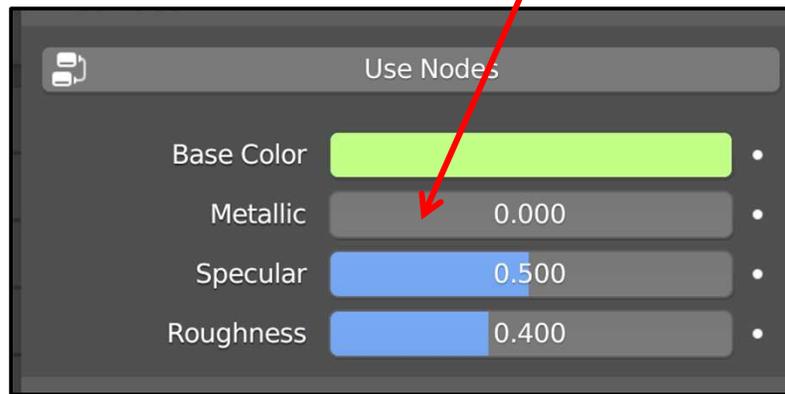

Frame 0

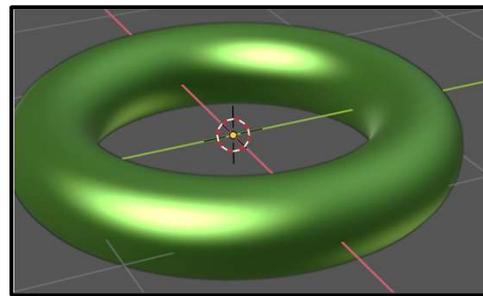

Frame 60

Animating a Human-ish Form

Start with this ...




... and turn it into a Blender model:



model.blend

modelmoved.blend

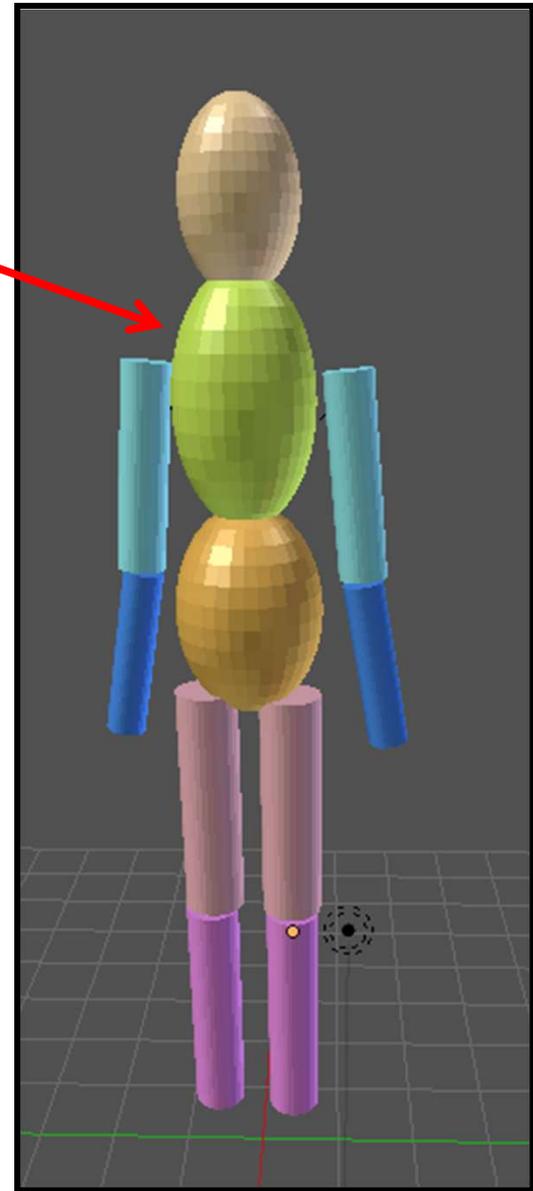


Animating a Human-ish Form

But, it's more than just a collection of parts!


Be sure that the origins of the different parts are where you want the part to pivot around.

Then establish the proper parent-child relationships.

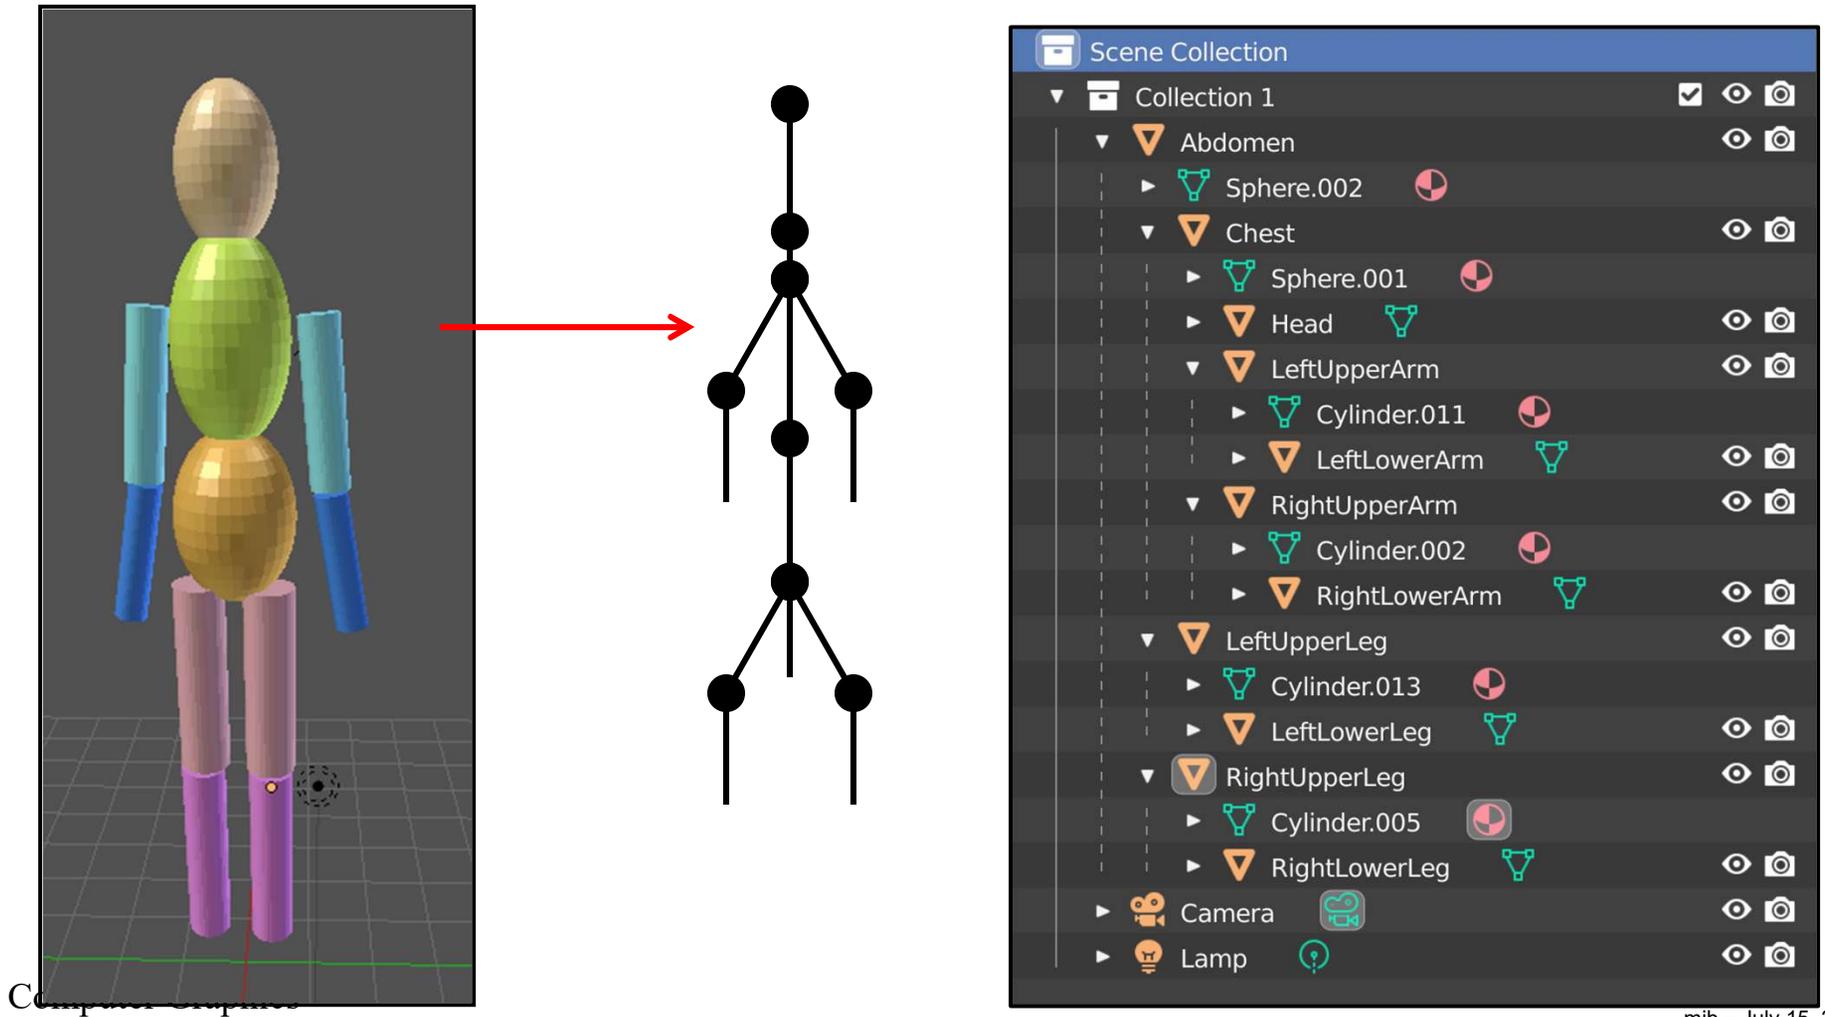


Animating a Human-ish Form

Now tell Blender to do all rotations around each part's origin

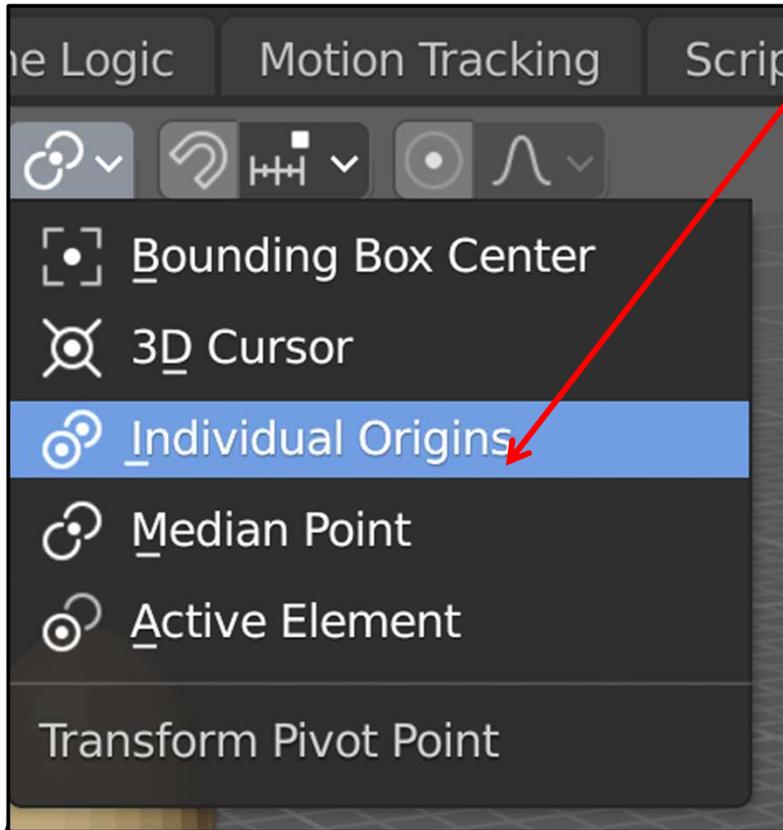

Selecting this ... causes object rotation to happen about the previously-set origin

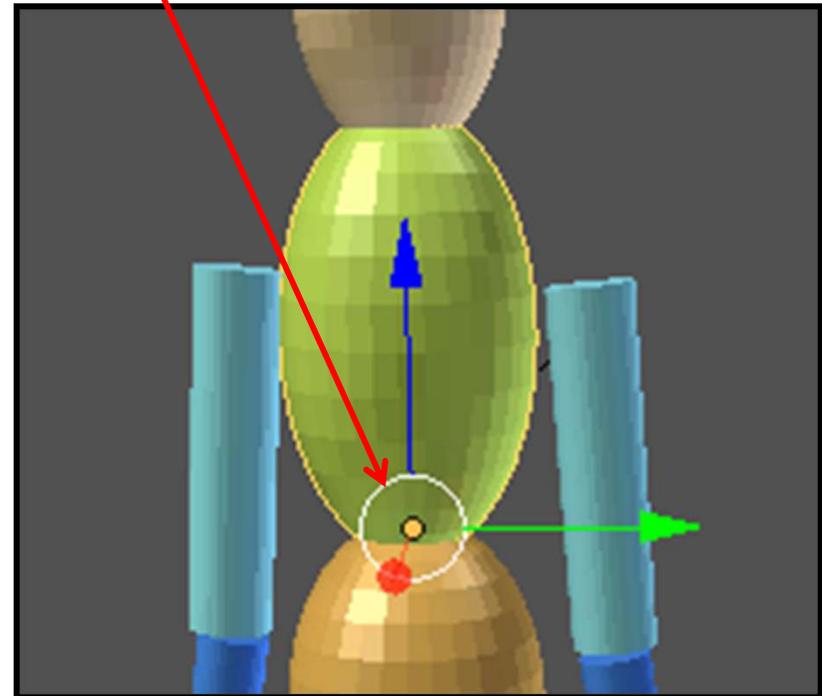

Animating a Human-ish Form

Now try rotating the individual parts.



**Be sure you are rotating in
local coordinates, e.g.,
 $r \rightarrow y \rightarrow y$**





There is a time-honored tradition in stop-motion animation to use an internal support, called an **armature**, to help position the object at each frame.

Digital animation has adopted the same technique, and has even retained the same terminology, armature.

The process of creating this digital armature is referred to as **Rigging**.



Laika

Rigging for Animation

Let's say we have a cheesy noodle character named **Mac**. We would like to rig him to bend.


The first step is to create Mac's geometry. In this case, one cylinder was Boolean-subtracted from another and then was **Edit** → **Subdivide**'d a couple of times.

The second step is to go to the **Add** tab on the Object Tools and click on **Armature**. This brings up the sub-menu here.

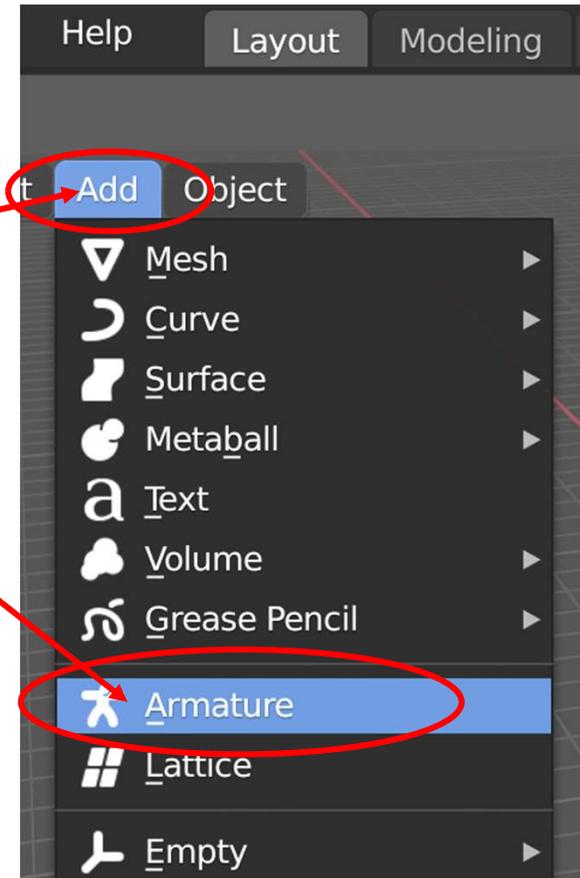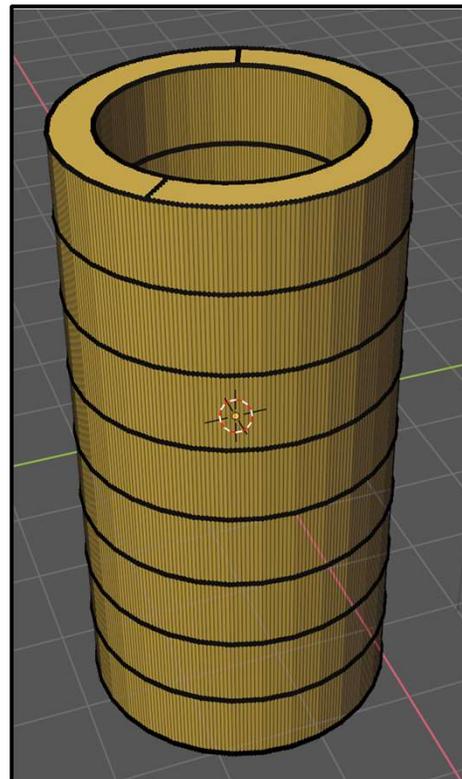


Rigging for Animation

Grab the armature just like you would any other object and position it next to Mac.
(I scaled it up a couple of times to make it more visible.)

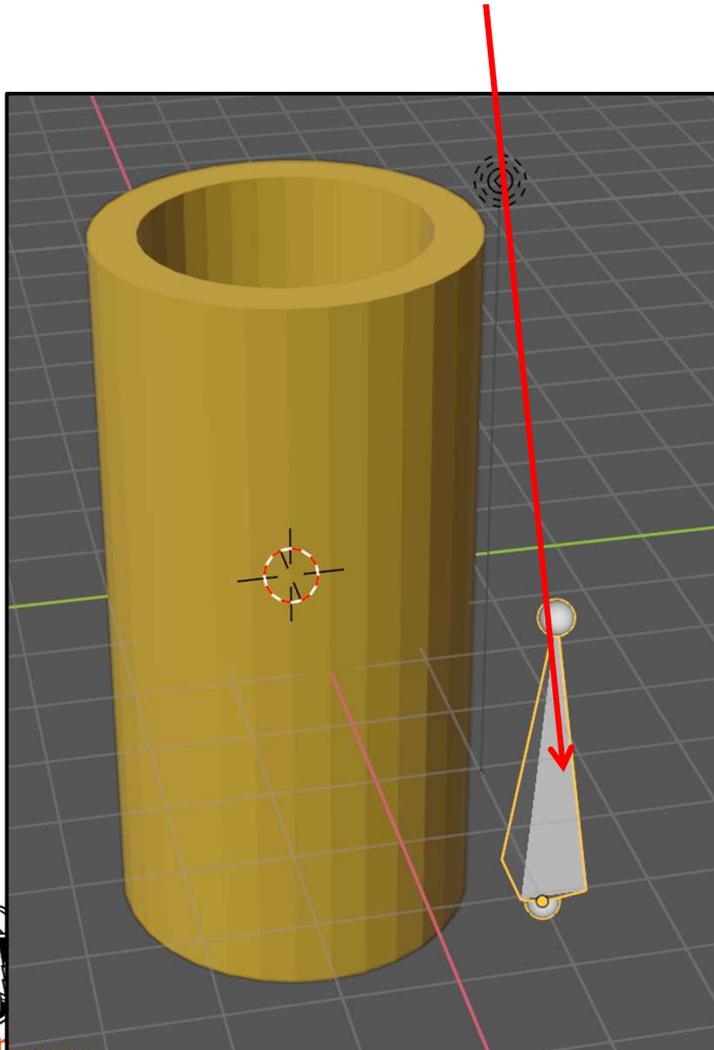




This is what the pieces of a Blender armature look like. The three sections of one of these bones are the root, the body, and the tip.

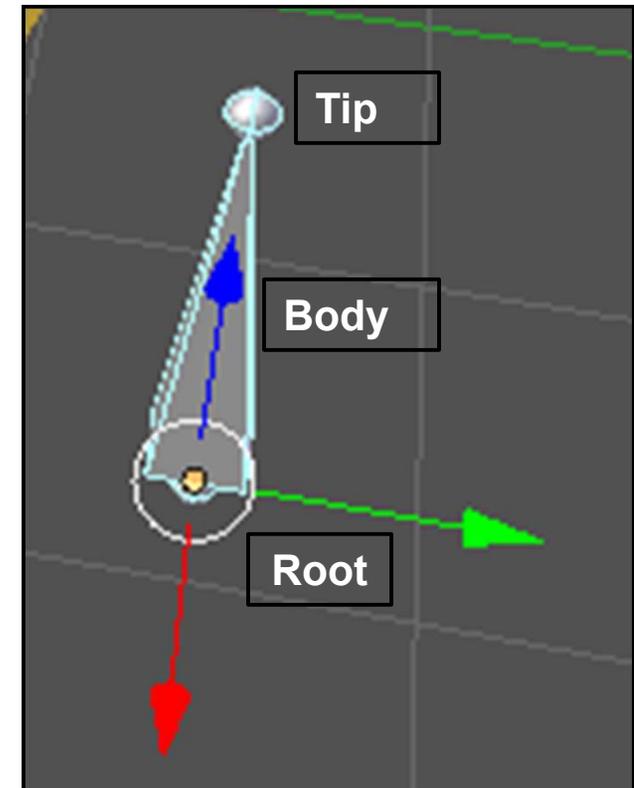

Rigging for Animation


We could put lots of bones in place to animate Mac, but, for simplicity we will just use two.

Tab into **Edit Mode**, select the **Armature**, then select **Extrude**. Lift up on the **plus sign**. This will add a second armature on top of the first and connect them tip-to-root. Click here to let go. Tab back to Object Mode.

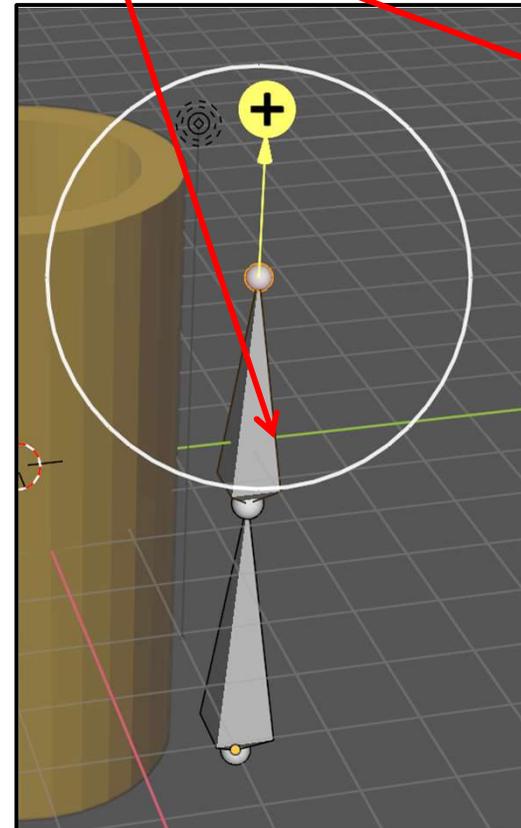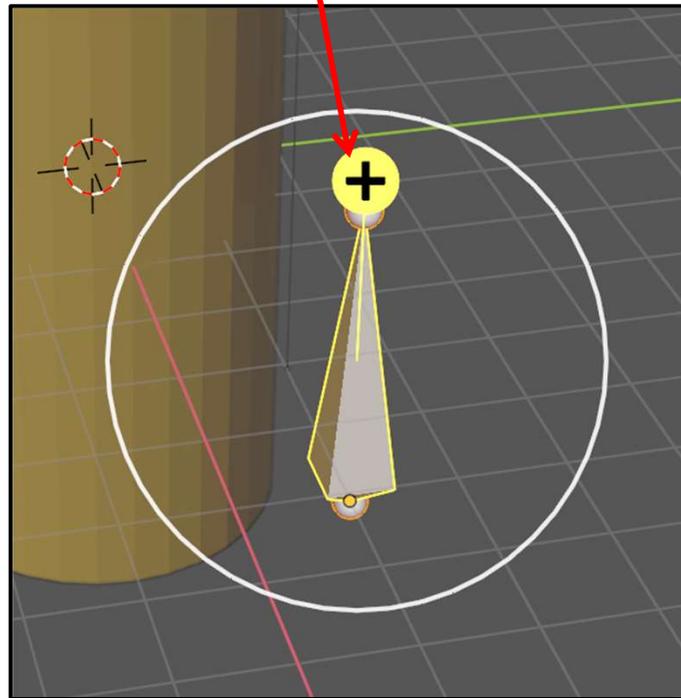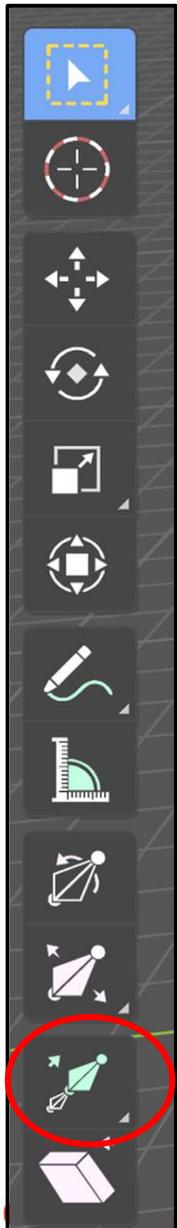

Rigging for Animation

In the **Outliner**, you can see the bones you have created.

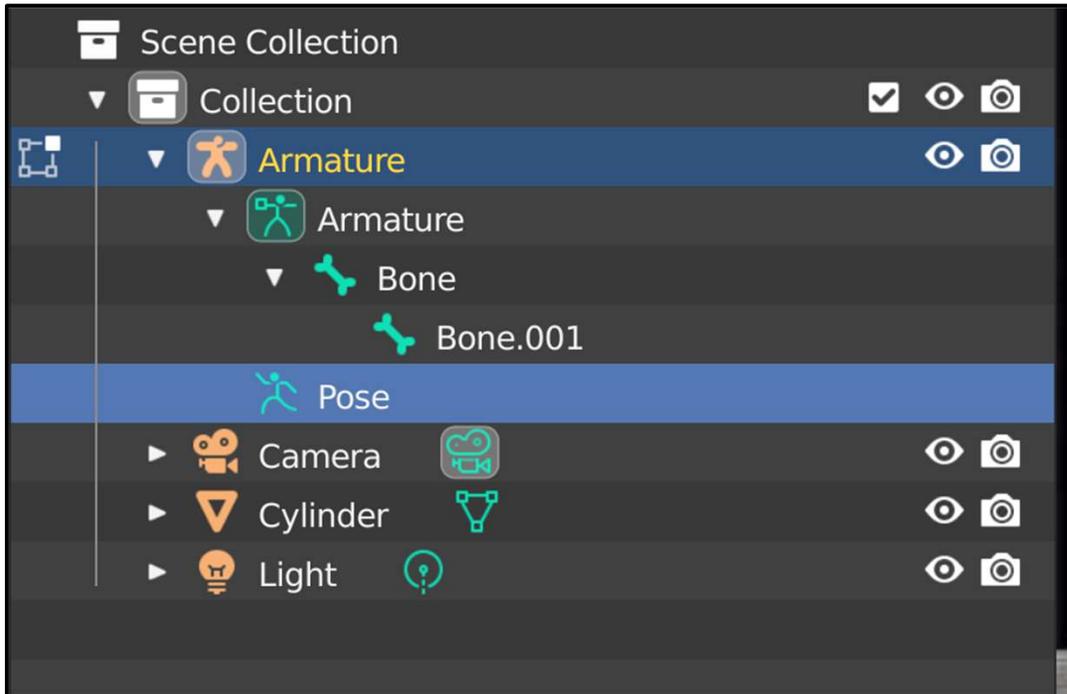


Also, in the Properties buttons, you will see that there are now **Armature** and **Bone** buttons.



Rigging for Animation




When you click the **Armature Properties** button, a bunch of new information comes up. The most important for right now is in the **Viewport Display** tab:

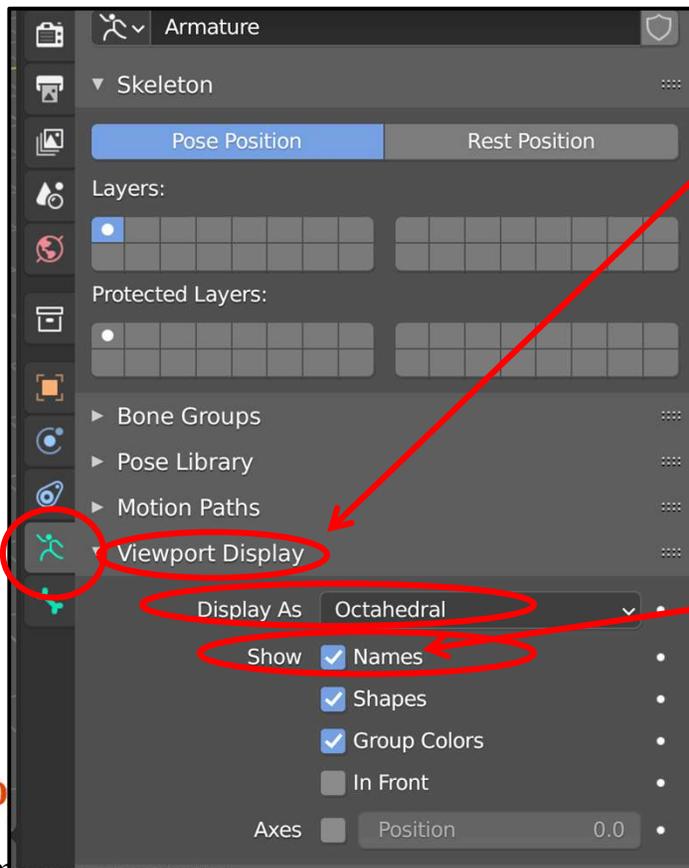



Try these. They change the appearance of the Bones.

Click on **Names**. It puts the name of the Bone next to it so you know which one is which.

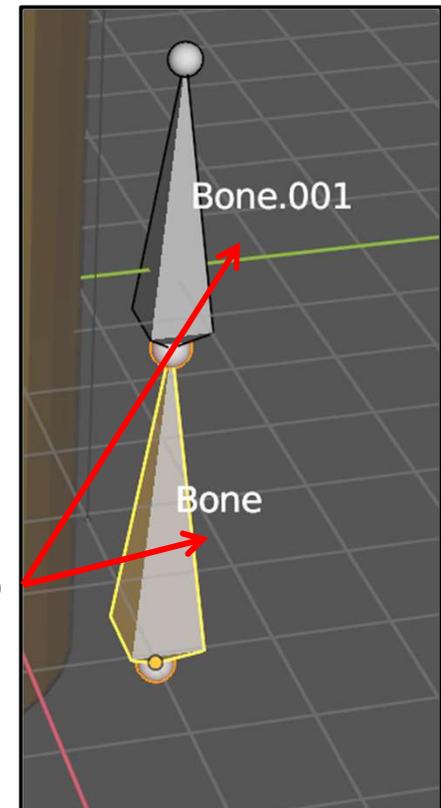

Rigging for Animation



It's always good to name your Bones. In the Outliner, double-left-click on **Bone.001** and rename it **Top**. Double-left-click on **Bone** and rename it **Bottom**. Your display now looks like this:

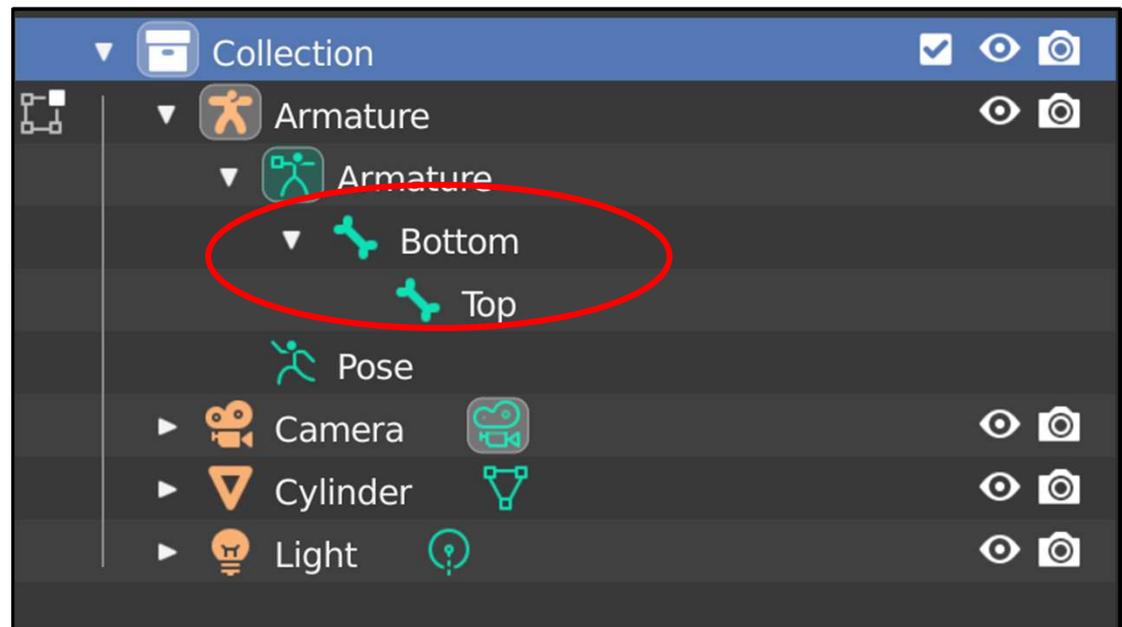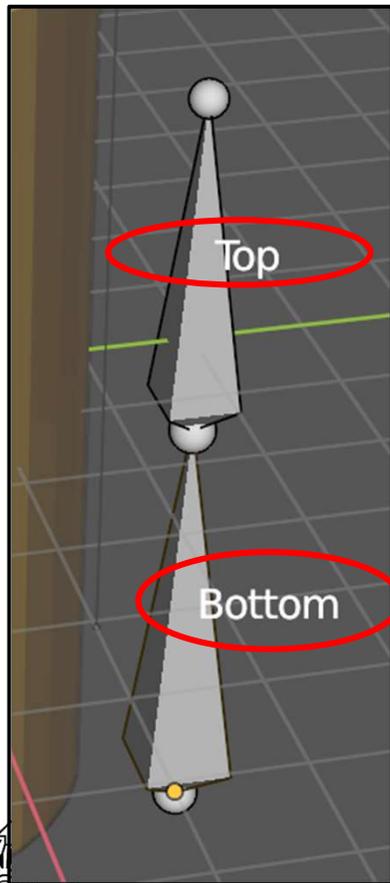


Rigging for Animation

We next need to make the armature a Parent and the object (i.e., Mac) its Child. Select Mac and then shift-select the armature. (The order is important!)

To create the Parent-Child relationship, hit **Control-P**. In the pop-up menu, select **Armature Deform With Automatic Weights**

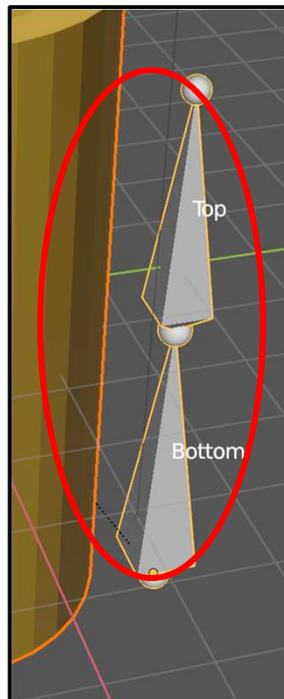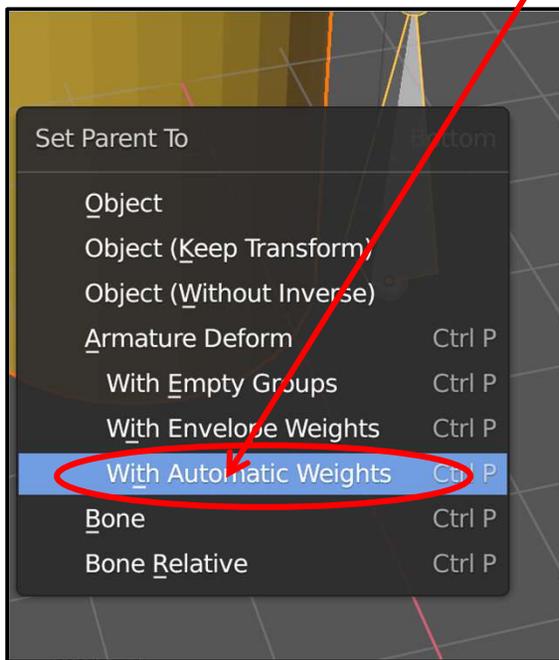

To verify that this worked, the **Outliner** will show that Mac is now part of the Armature.

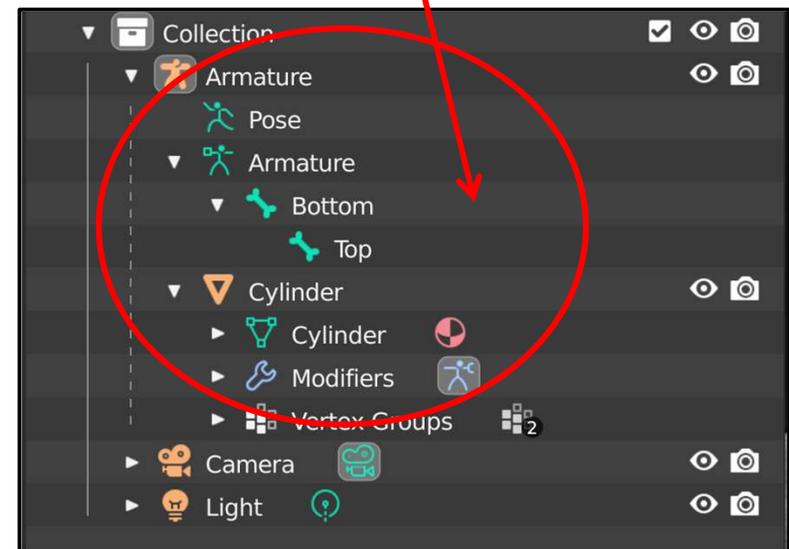

Rigging for Animation

Almost there – the last step is to assign which vertices on Mac will be deformed by the Bottom Bone and which will be deformed by the Top Bone. These groups do not need to be mutually exclusive – they can (and should) have vertices in common.


Earlier in these notes we talked about selecting multiple vertices and Vertex Groups. We are going to do that again. We are going to put some of Mac's vertices into a Vertex Group called **Bottom**, and some into a Vertex Group called **Top**. These must match the names of the respective Bones *exactly*,

1. Select Mac
2. In the properties area, select the **Object Data Properties**
3. Tab into **Edit Mode**
4. Select **View → Perspective/Orthographic** to place yourself in orthographic display mode
5. Turn on the **X-ray** button at the top
6. Hit 'a' to unselect everything




Rigging for Animation

7. Use the Border Select to select the *top 2/3* of Mac's vertices
8. Create a Vertex Group with them called Top by clicking on **Top** and then clicking on **Assign**
9. Hit 'a' to unselect everything

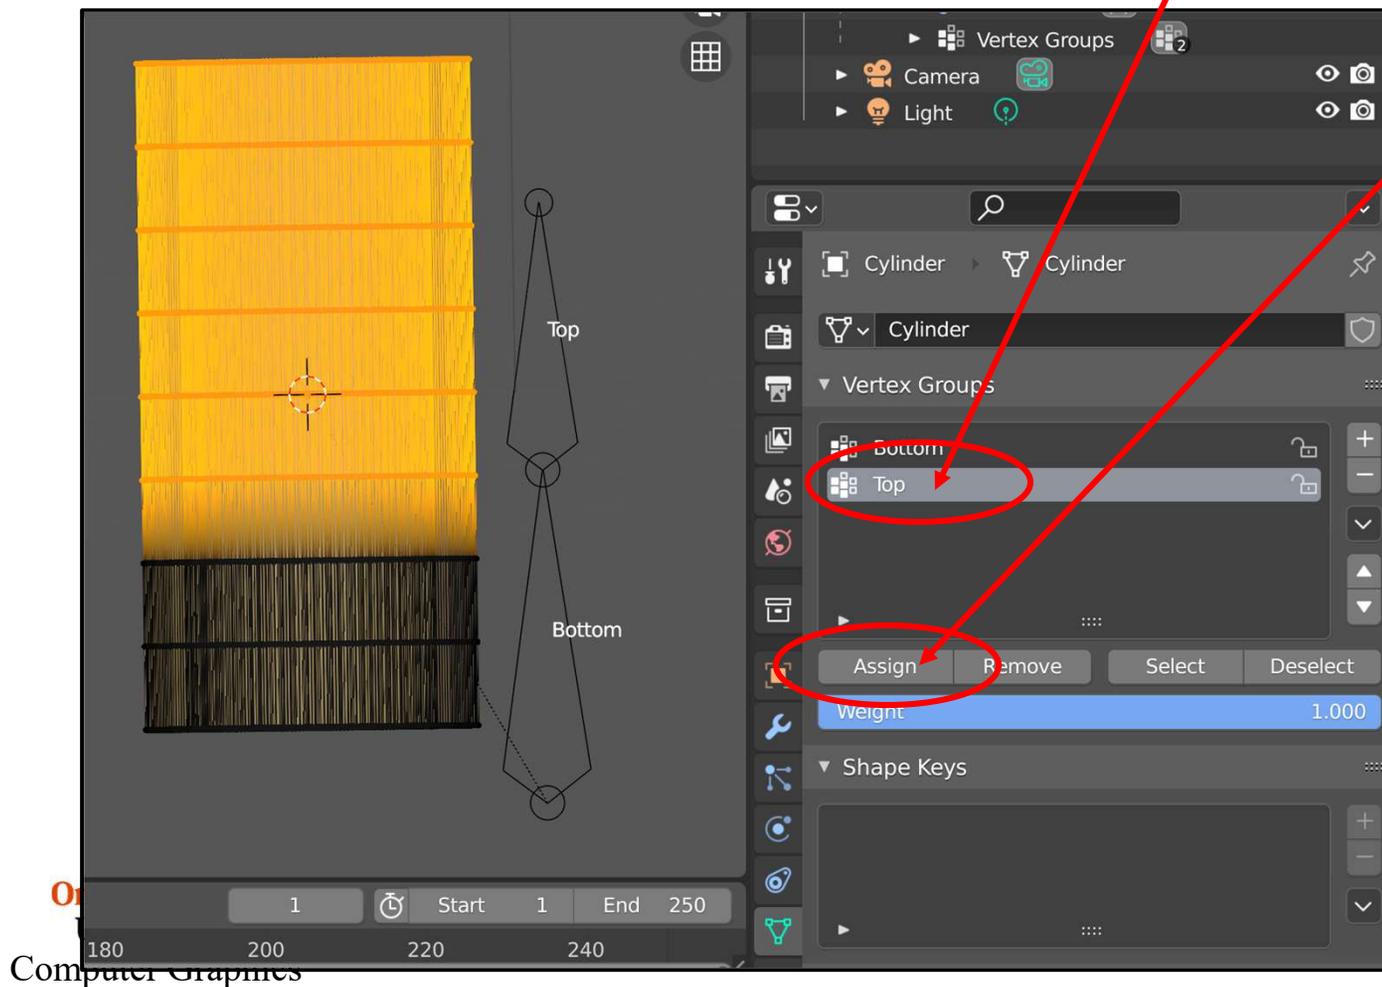

Rigging for Animation



10. Use the Border Select to select the *bottom 2/3* of Mac's vertices
11. Create a Vertex Group with them called Top by clicking on **Bottom** and then clicking on **Assign**
12. Hit 'a' to unselect everything
13. Turn off **X-ray** mode and go back to **Perspective**
14. Tab back to **Object Mode**

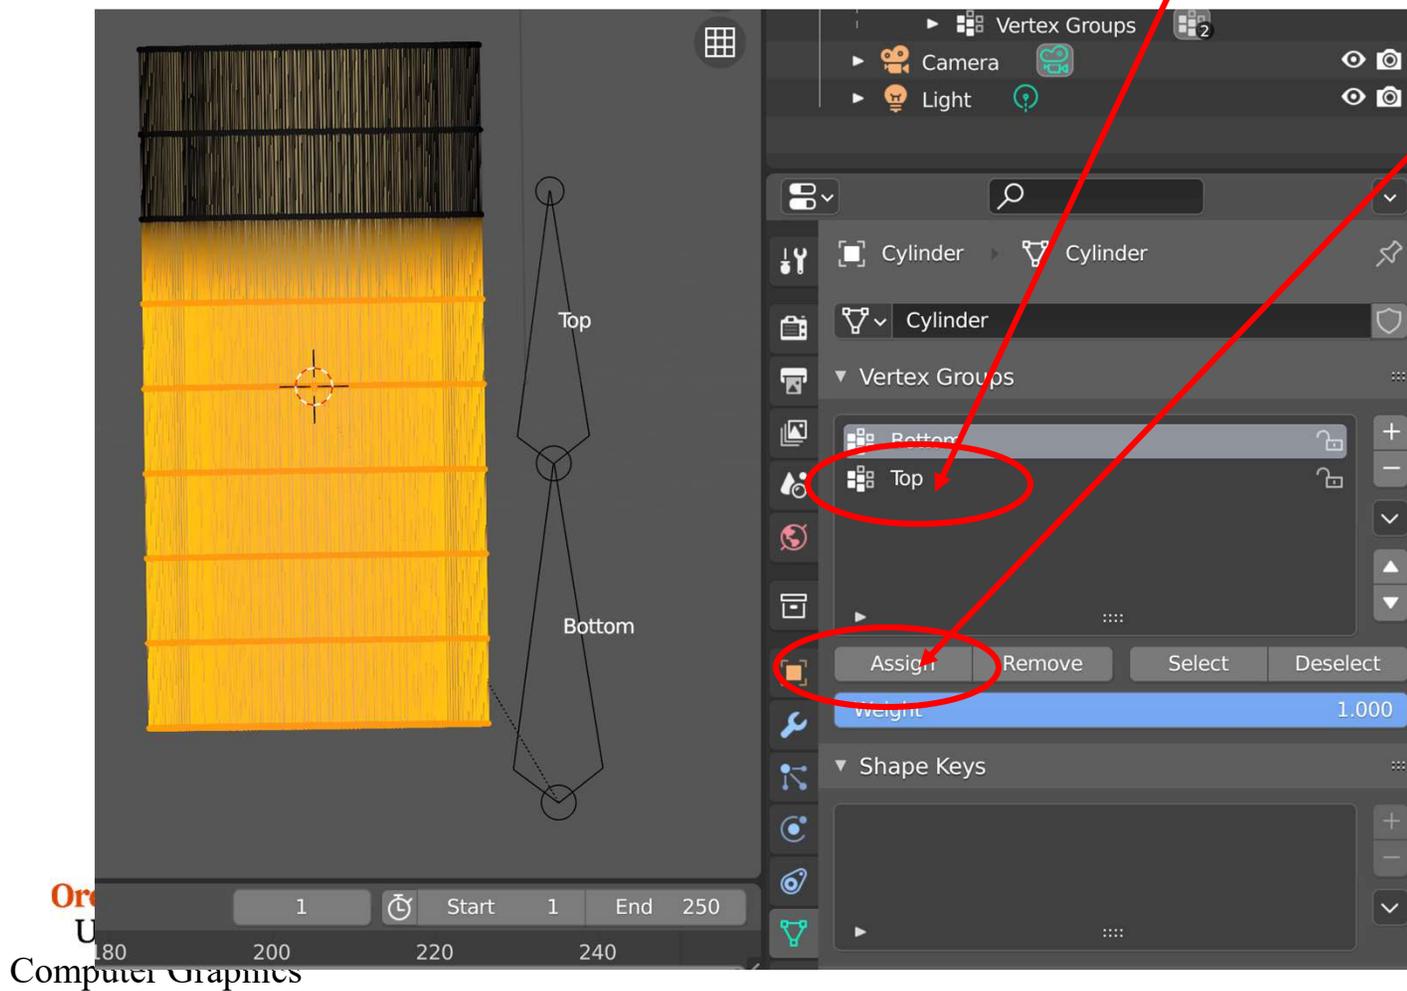


Rigging for Animation

Select the **Armature** and go to **Pose Mode**.


Select the different Bones and try grabbing, rotating, and scaling them. Obviously, a serious Mac animation will require more than two Bones! Bone transformation can be keyframed just like transformation parameters of any other object.

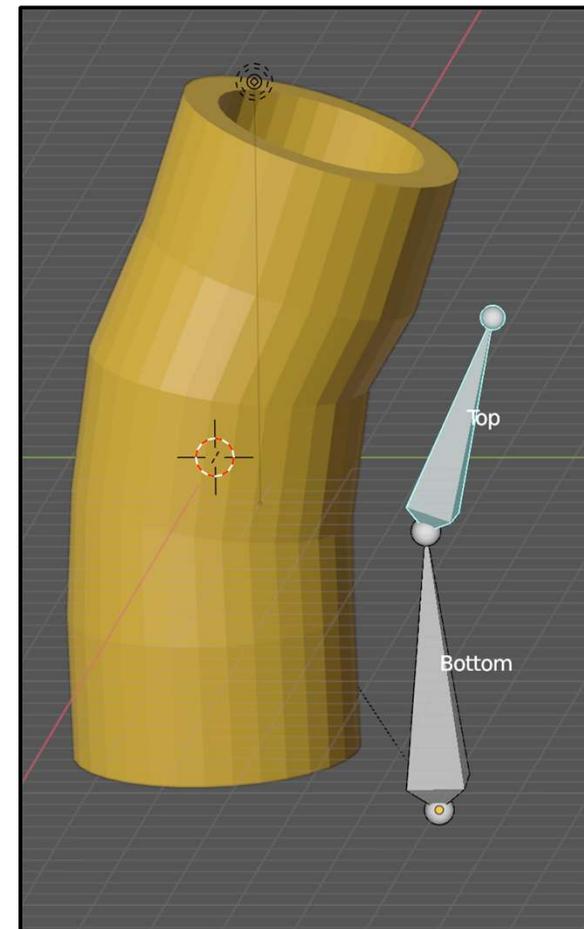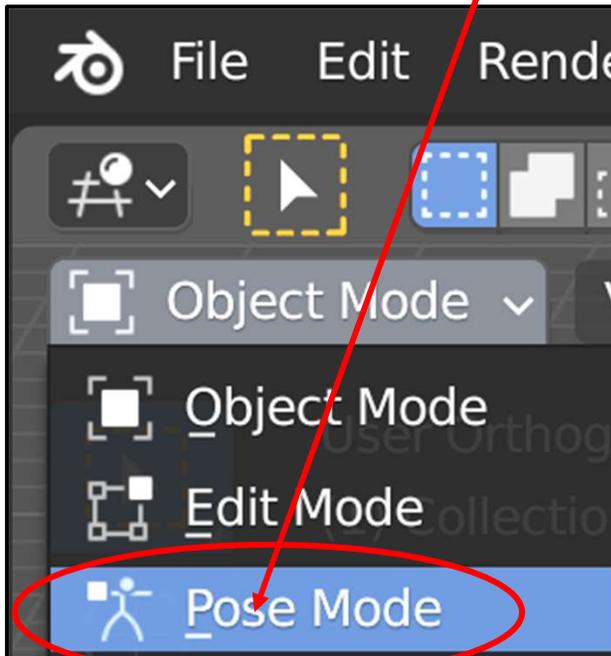

Rendering an Animation

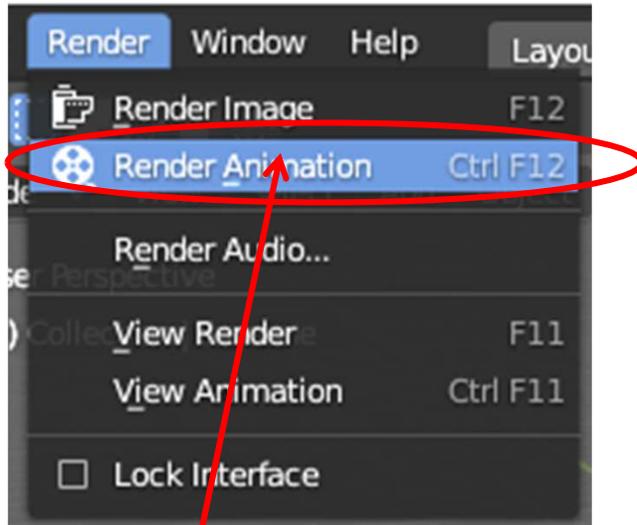


This kicks off the rendering of all your animation frames in order

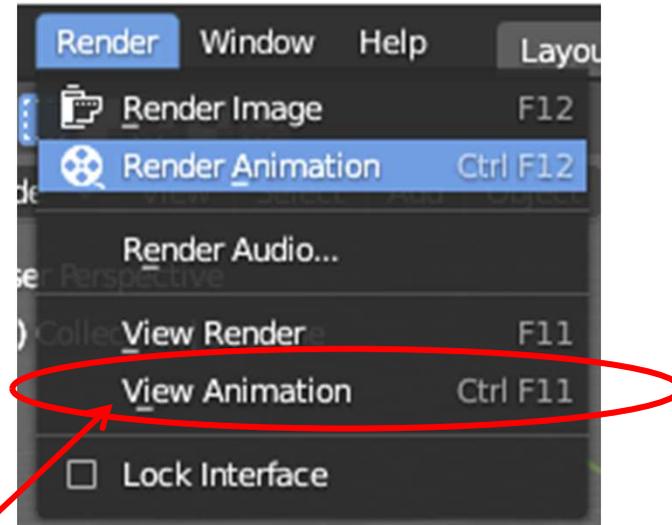


This brings up a separate window and plays back your animation.

Hint: if this is just a test render, and you have lots of time-consuming visual effects going on, you might cut down the resolution and/or the number of rendered frames to speed things up.

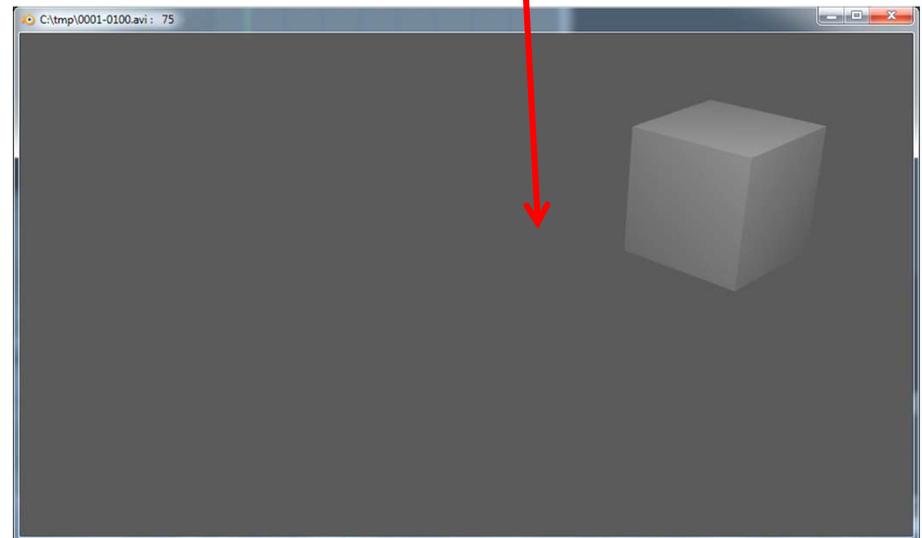

Rendering an Animation to a File

First, go to **Output Properties**

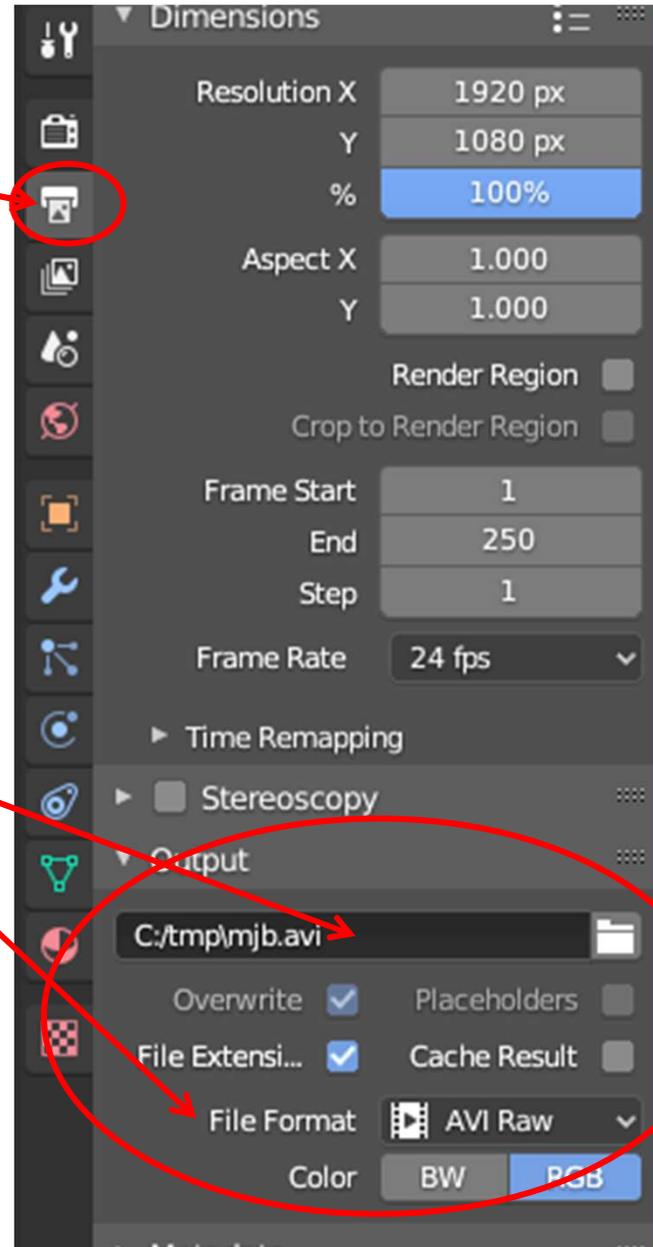


Before saving the animation rendering, you need to specify the file name to put the animation into. In my case, this was:

C:\tmp\mjb.avi

and the type of file format that it is to have

Rendering an Animation to a File

Here are the animation file types that Blender supports.

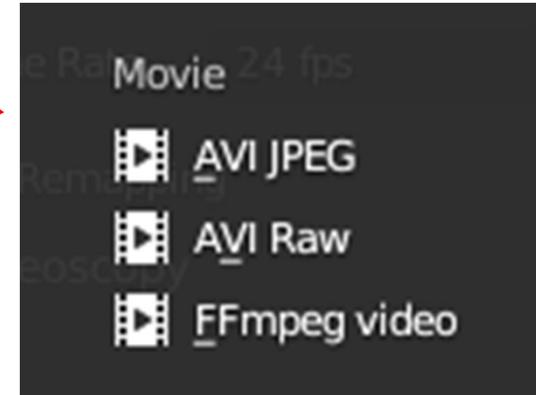


Here is how large a 100-frame animation of the monkey turned out to be.


Movie File Type	File Size	Displayed?	Import into PowerPoint?
AVI JPEG	~5 MB	Yes	Yes
AVI Raw	~607 MB	Yes	Yes
FFmpeg Video	~200 KB	Yes	Yes

Note: this scene is simple and compresses well. The mileage you get may vary.

YouTube accepts videos in **AVI** and **MPEG** formats


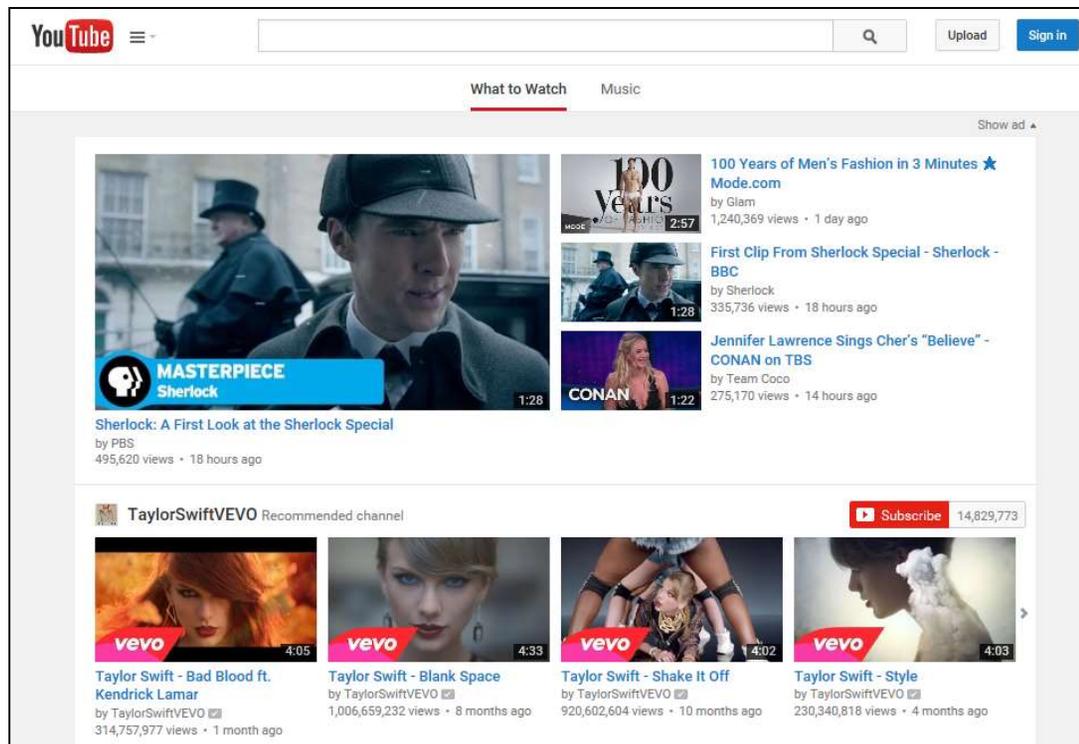


Importing an Animation into PowerPoint

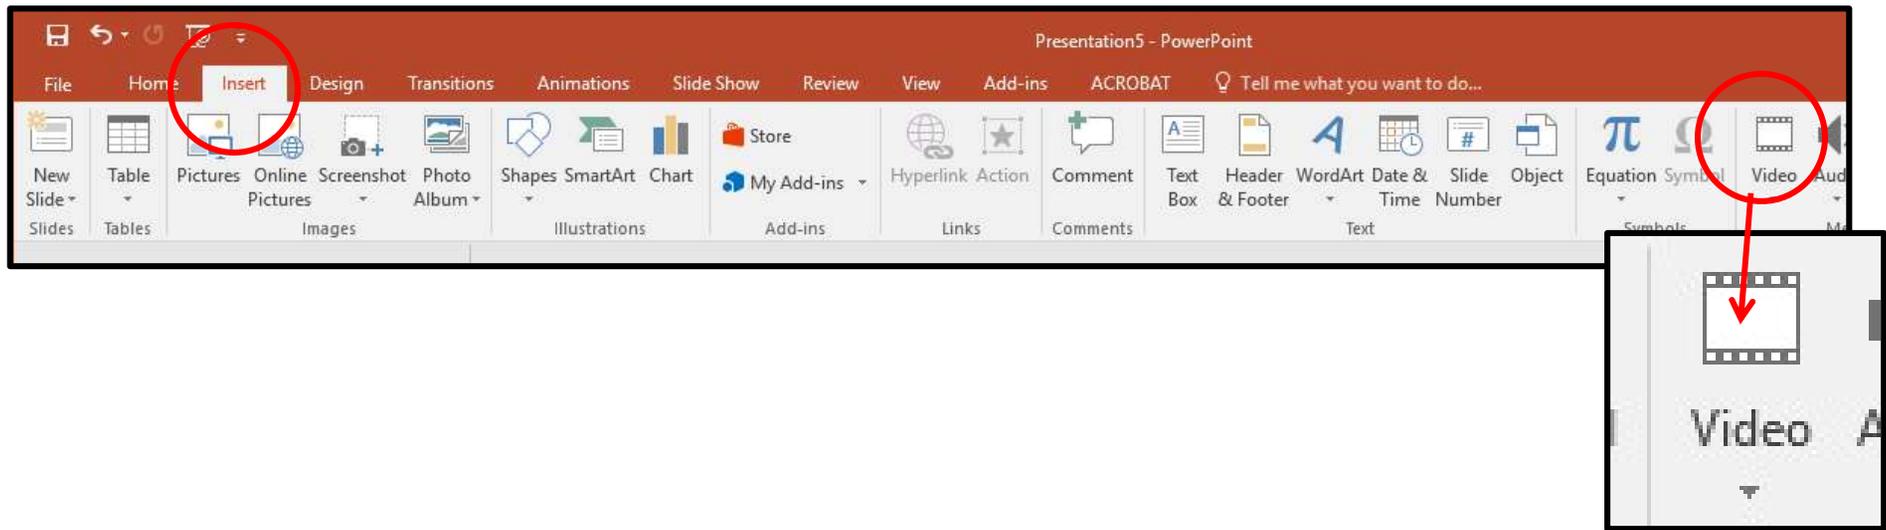

Movie File Type	File Size	Displayed?	Import into PowerPoint?
AVI JPEG	~5 MB	Yes	Yes
AVI Raw	~607 MB	Yes	Yes
FFmpeg Video	~200 KB	Yes	Yes

1. In this example, we added the first keyframe, then the last keyframe, then three keyframes in the middle. Sometimes it is easiest to work that way. Other times it is easier to add them in sequential order.
2. Sometimes it is easier if you initially add a bunch of duplications of the object in various positions to get a feel for the motion, edit those positions as you see fit, and then use them as keyframe positions.
3. Extending from each keyframe dot is a line. That line can be twisted to change the slope of the curve at that keyframe. Select the dots at the end of that line and move them.
4. The Camera position and the Lamps can be animated too. For each, define an Empty object, force the Camera or Lamp to follow it (it's one of the Constraints), then animate the Empty. Be sure to give the Empty a descriptive name – all Empties look alike.

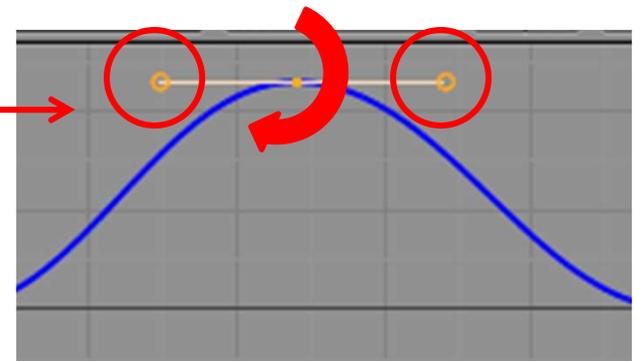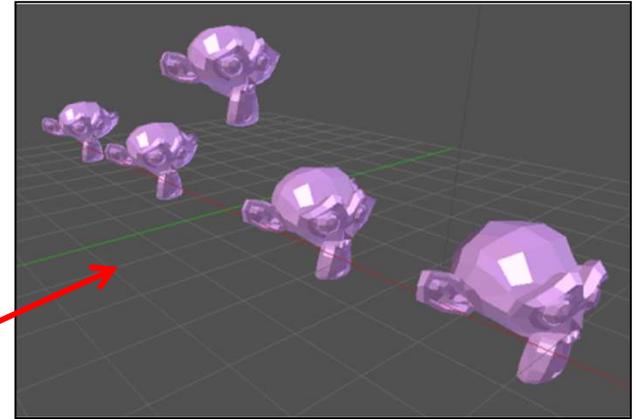


John Lasseter's Principles of Animation


1. **Squash and Stretch** -- Defining the rigidity and mass of an object by distorting its shape during an action.
2. **Timing** -- Spacing actions to define the weight and size of objects and the personality of characters.
3. **Anticipation** -- The preparation for an action.
4. **Staging** -- Presenting an idea so that it is unmistakably clear.
5. **Follow Through and Overlapping Action** -- The termination of an action and establishing its relationship to the next action.
6. **Straight Ahead Action and Pose-To-Pose Action** -- The two contrasting approaches to the creation of movement.
7. **Slow In and Out** -- The spacing of the inbetween frames to achieve subtlety of timing and movement.
8. **Arcs** -- The visual path of action for natural movement.
9. **Exaggeration** -- Accentuating the essence of an idea via the design and the action.
10. **Secondary Action** -- The action of an object resulting from another action,
11. **Appeal** -- Creating a design or an action that the audience enjoys watching.



14. 3D Printing

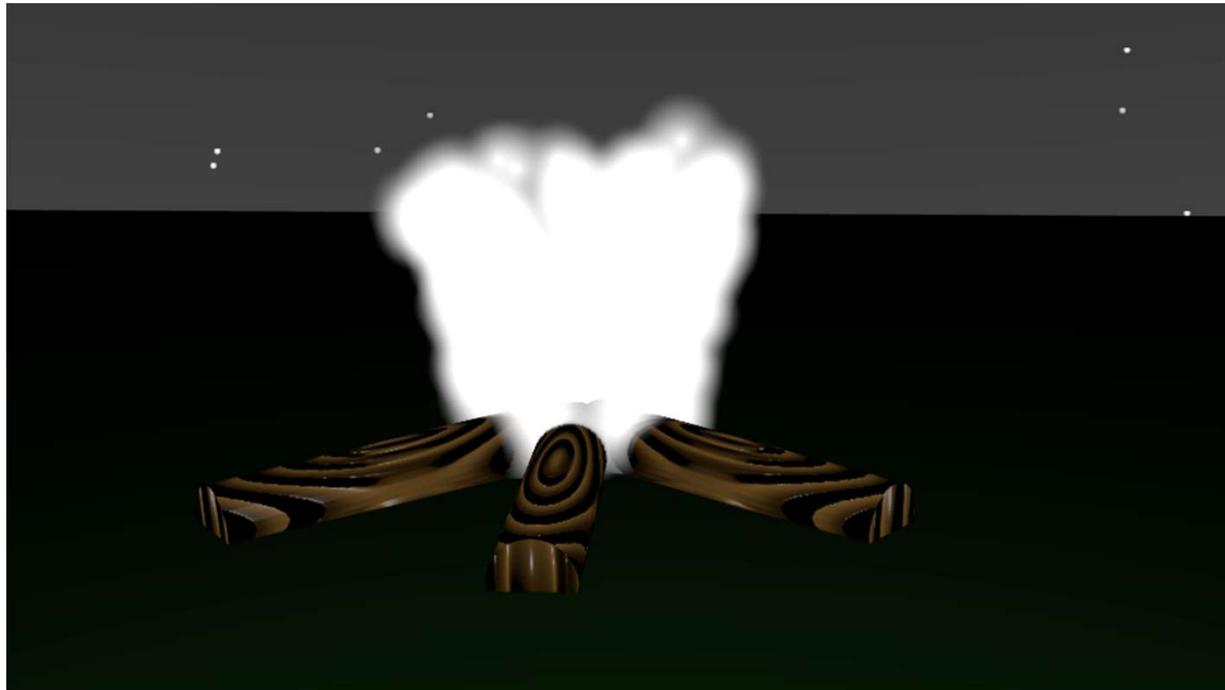

In the Beginning, Manufacturing was “Subtractive”

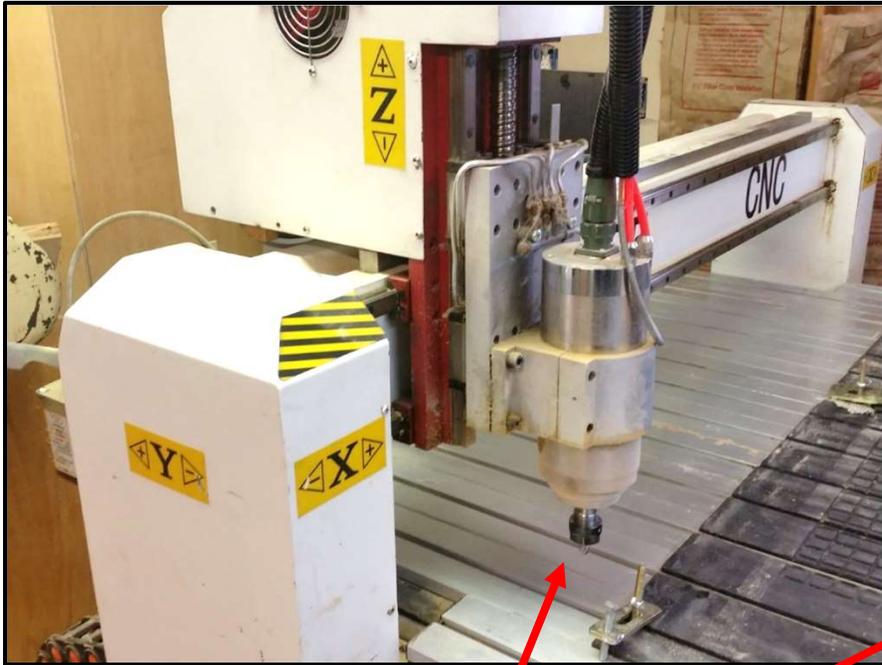


1. The whirling drill bit follows a 3D path
2. Chips of metal (or wood or wax) fly
3. A block of metal becomes a part




3D Printing is Additive

“3D Printing” is defined by some sort of “additive” process. The current trend in desktop 3D Printing consists mostly of systems that deposit layers of molten plastic:

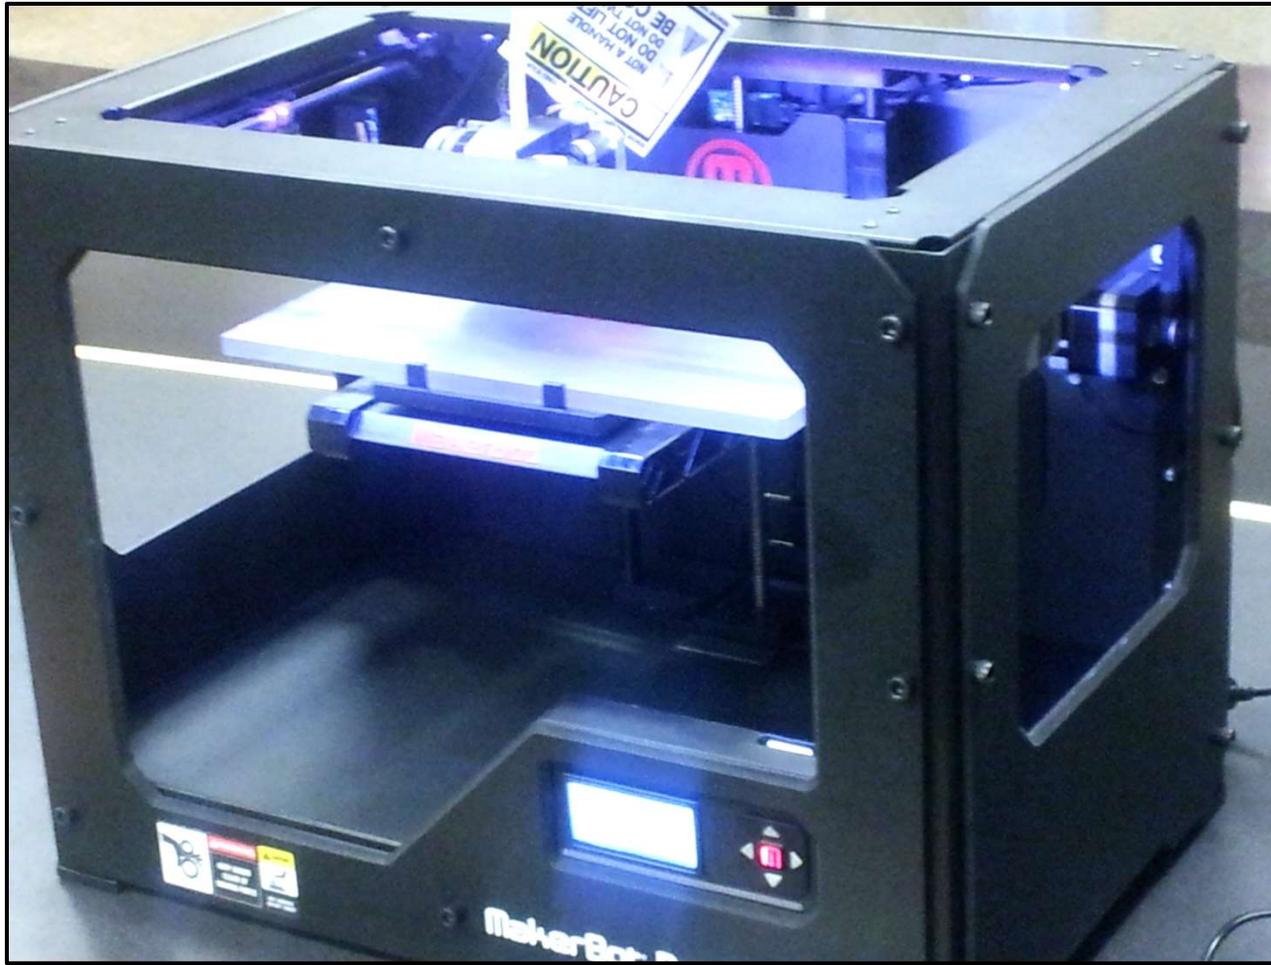

Examples of 3D Printing

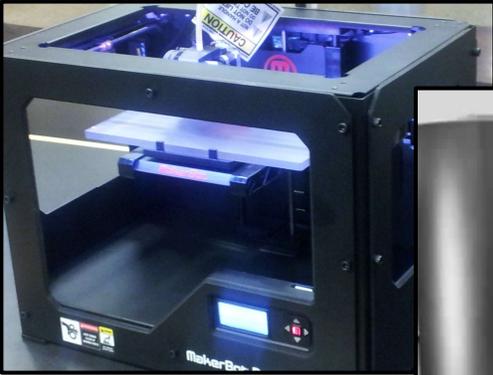

Portland's Laika uses Color 3D Printing for Stop-motion Movies



Kubo and the Two Strings



The 3D Printing Geometry File

3D Printers are fed a file called an “STL File”, which lists all the triangles in the object. Blender (as well as all CAD systems) can produce this type of file for you.

```

solid

facet normal  0.00  0.00 -1.00
  outer loop
    vertex -2.000000 -2.000000  0.250000
    vertex -1.980000 -1.980000  0.250000
    vertex -1.980000 -2.000000  0.250000
  endloop
endfacet

facet normal  0.00  0.00 -1.00
  outer loop
    vertex -2.000000 -2.000000  0.250000
    vertex -2.000000 -1.980000  0.250000
    vertex -1.980000 -1.980000  0.250000
  endloop
endfacet

...

endsolid
  
```

In this particular file, these coordinates were in units of inches.


Some 3D Printers still use **inches**, but most now use **millimeters**.

Check! It matters!


Note: there are 25.4 mm/inch

Advice on 3D Printing

Don't make the part too big – it will take a long time to 3D print. It's nice if you can fit several models in a single run.

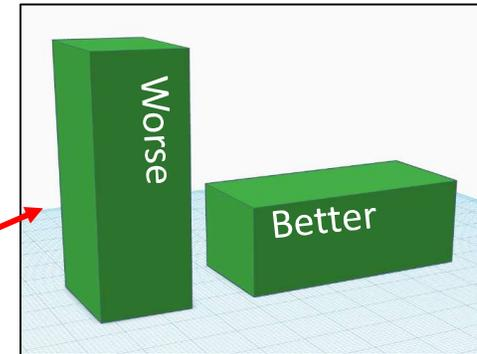


Try to rotate the part so the smallest dimension is vertical. It's stronger that way, and it builds faster.

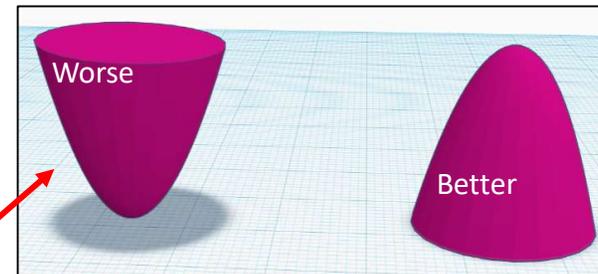


The 3D Printer will like it better if the part gets smaller as it goes up, not the other way around.

Don't design the part with long, thin edges. They will likely snap right off.

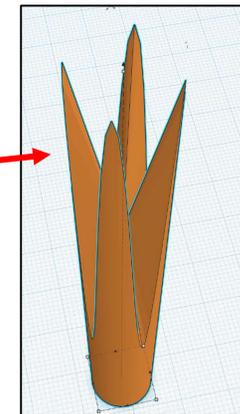


Don't make walls too thin – they might break.



Object Rules for 3D Printing

Rule #1: The object must be a mesh and *consist only of triangles*.

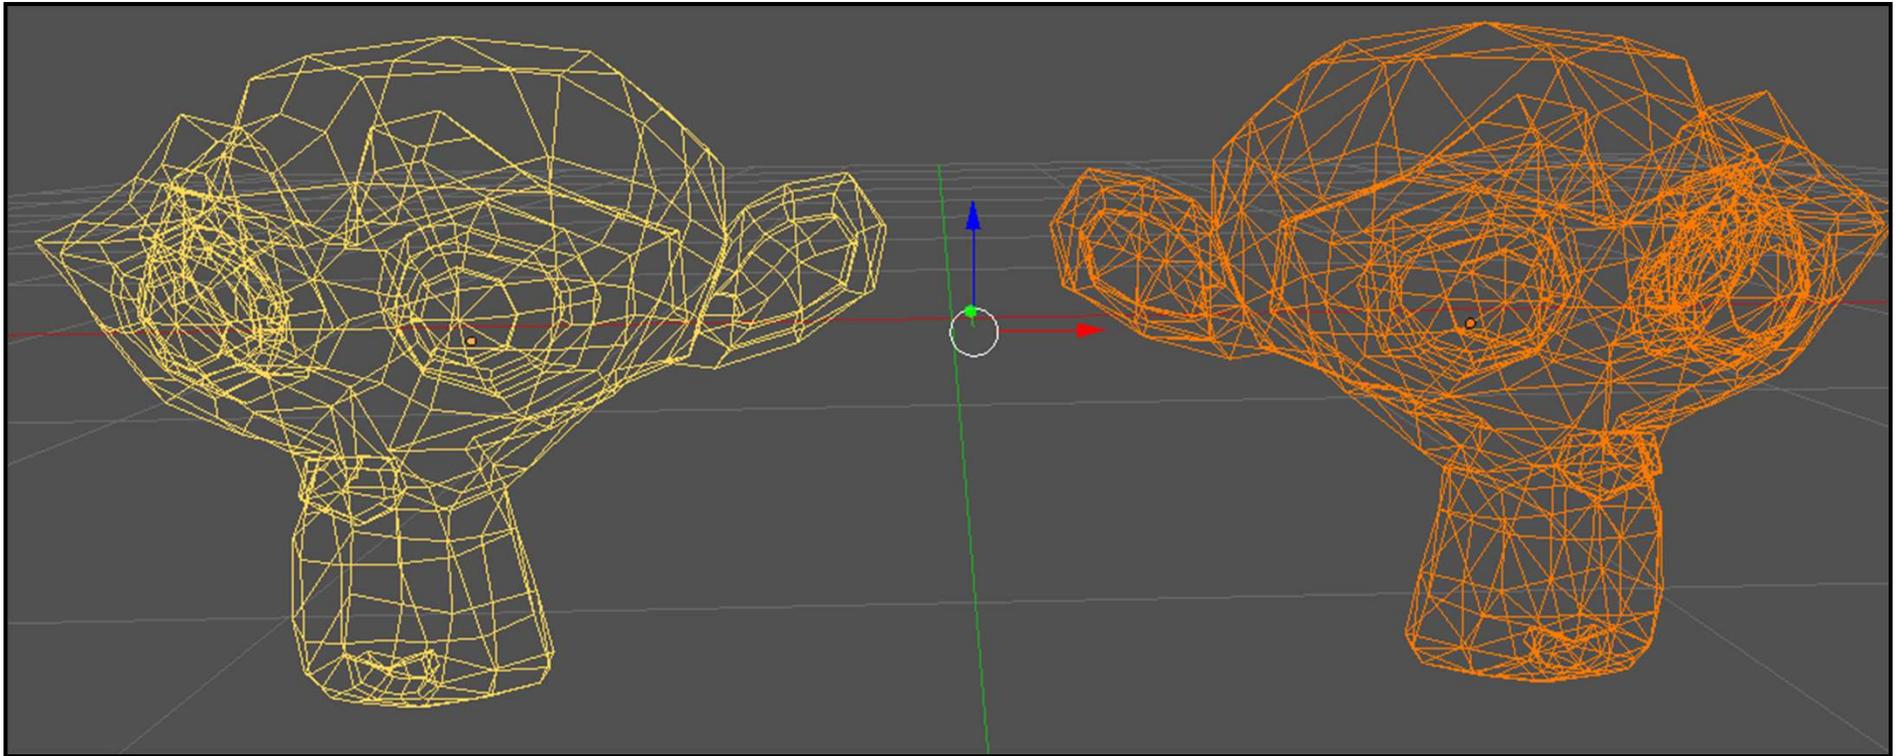


1. Select the mesh object
2. **Modifiers**→**Add Modifier**→**Generate**→**Triangulate** →**Apply**

RMB→**Convert To**→**Mesh** to turn a Meta object or 3D Text into a mesh first


Object Rules for 3D Printing

Rule #2: The object must be a legal solid. It must have a definite inside and a definite outside. It can't have any missing face pieces.

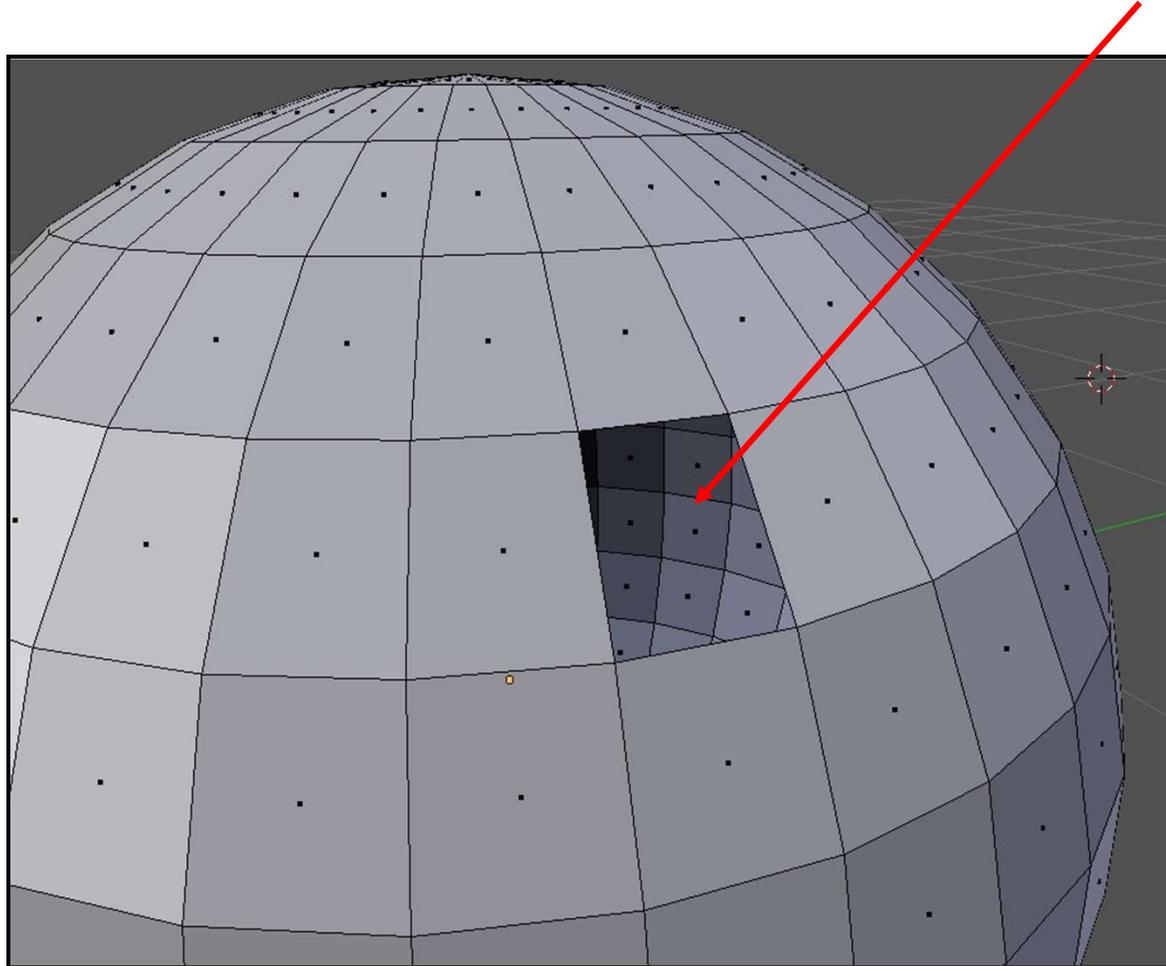

The Simplified Euler's Formula* for Legal Solids

*sometimes called the Euler-Poincaré formula


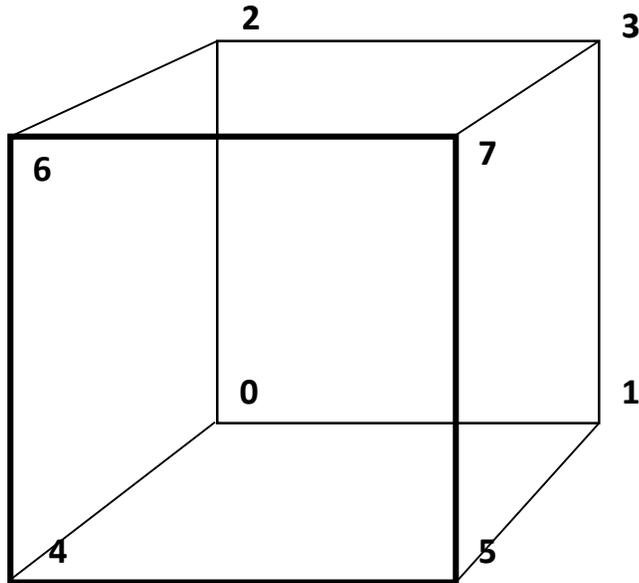


$$F - E + V = 2$$

F	Faces
E	Edges
V	Vertices

For a cube, $6 - 12 + 8 = 2$ ✓


Watch Out for Overhangs!

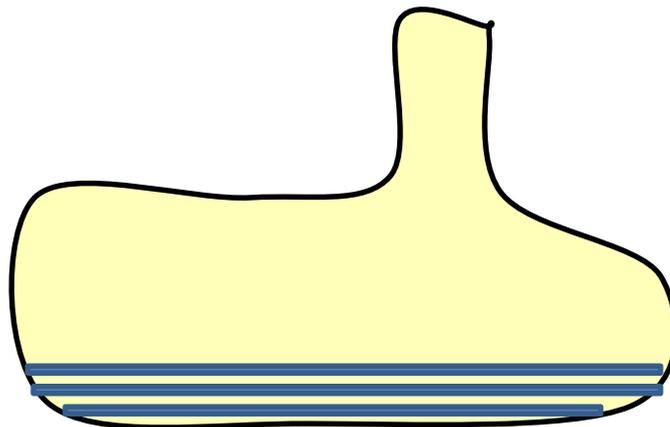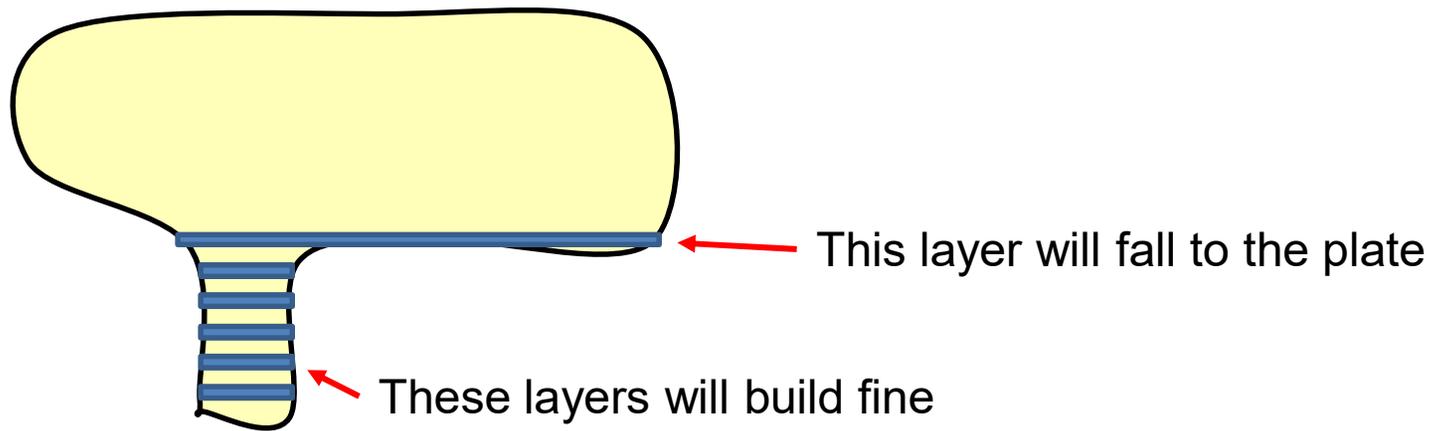


Note that if you build it upside-down, it will probably work fine



Watch Out for Overhangs!

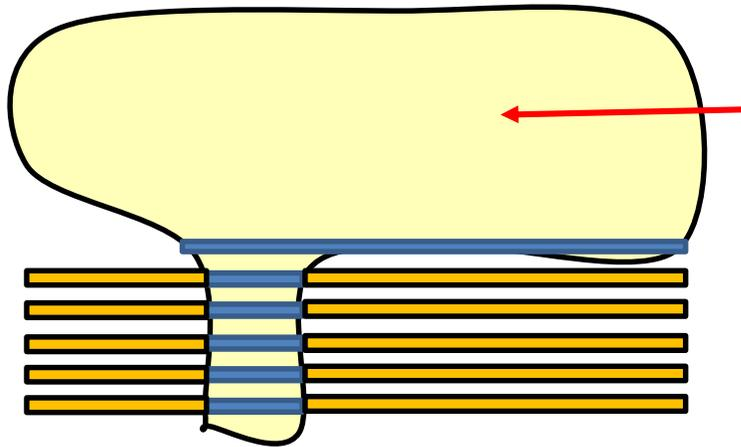


Some 3D printers handle this by leaving unused material in place to support the overhangs

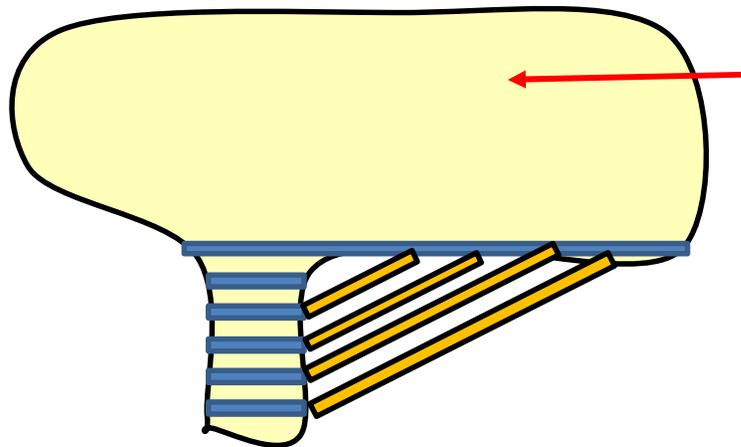


Some 3D printers handle this by using software to add “support structures” to the overhangs

Some 3D printers handle this better than others... 😊

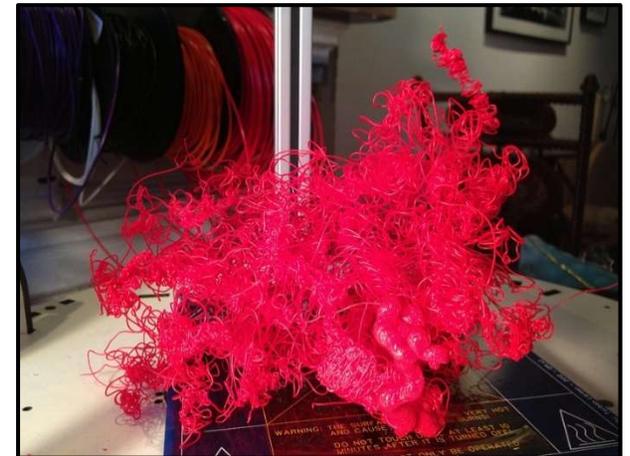


Object Rules for 3D Printing

Rule #3: You can't make a new object by simply overlapping two objects in 3D. If you want both shapes together, do a Boolean union on them so that they become one complete object.

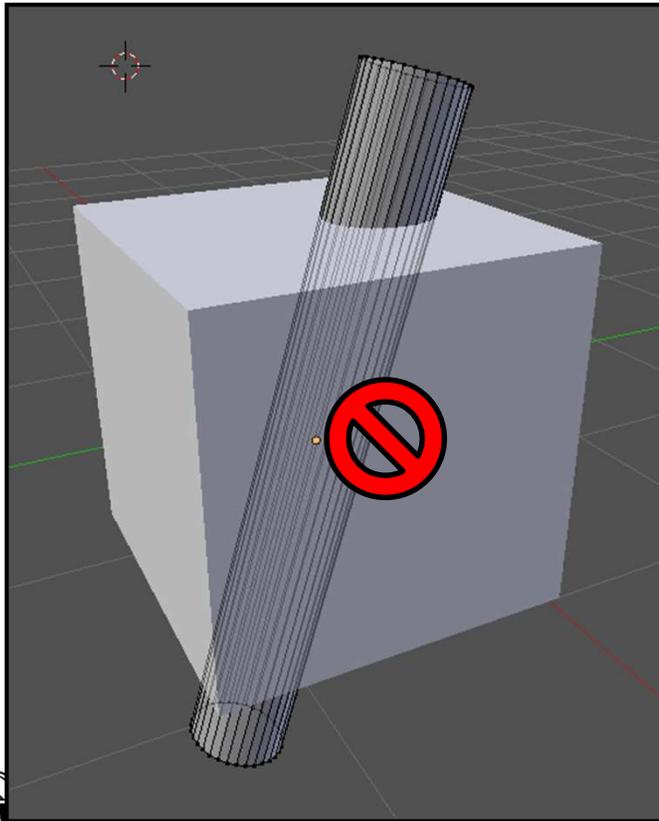

Overlapped in 3D

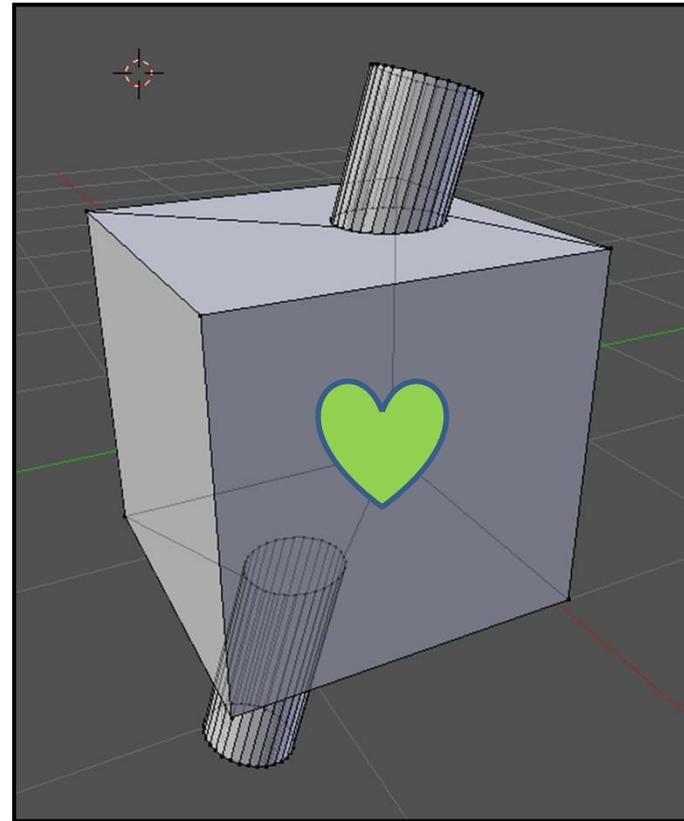


Boolean union





What Happens if You Do Overlap Objects?

Here's what one of the 3D Printers in the OSU Library did:

Overlapped in 3D

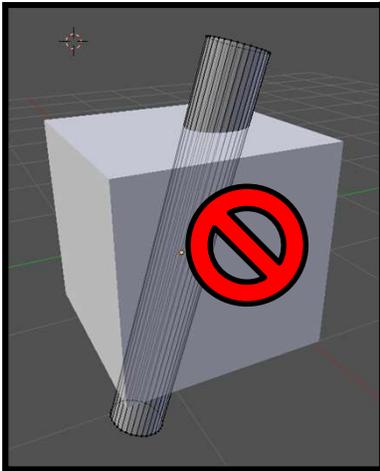


Boolean union

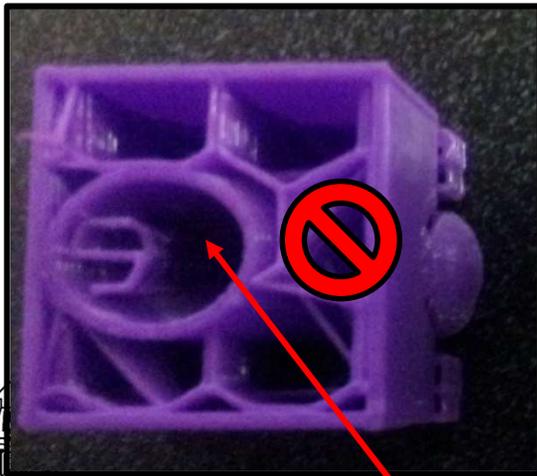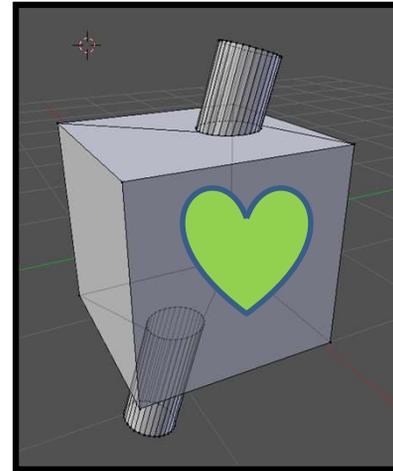


Not bad – it could have been lots worse ...

Object Rules for 3D Printing

Rule #4: Each edge in the mesh must bound **2 and only 2** triangles (this is known as the Vertex-to-Vertex Rule). If this is not true, then your model has cracks in it.

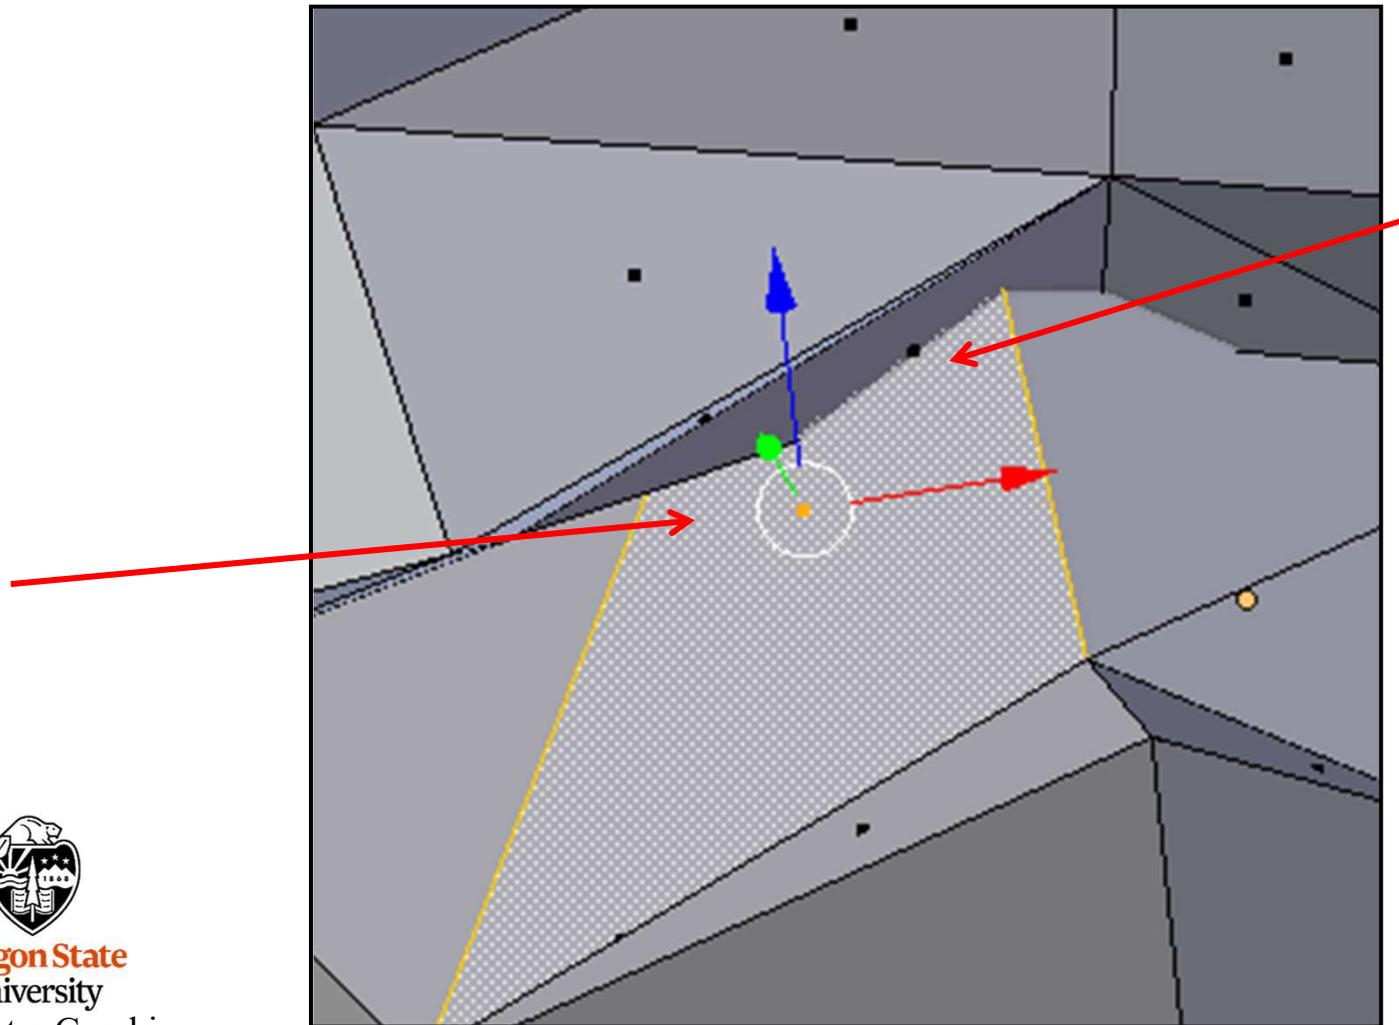



Installing the Blender 3D Printing Add-on

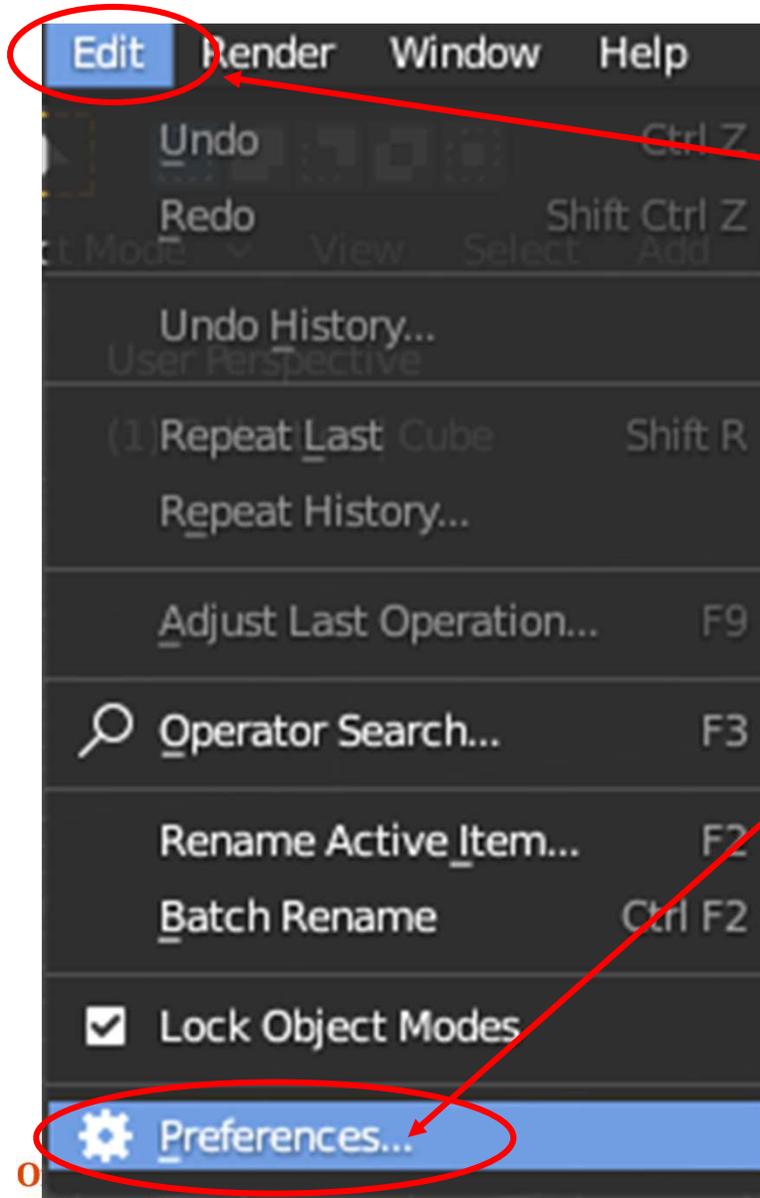


Select **Edit** → **Preferences**

Installing the Blender 3D Printing Add-on

Select **Add-ons** → **Mesh: 3D-Print Toolbox**

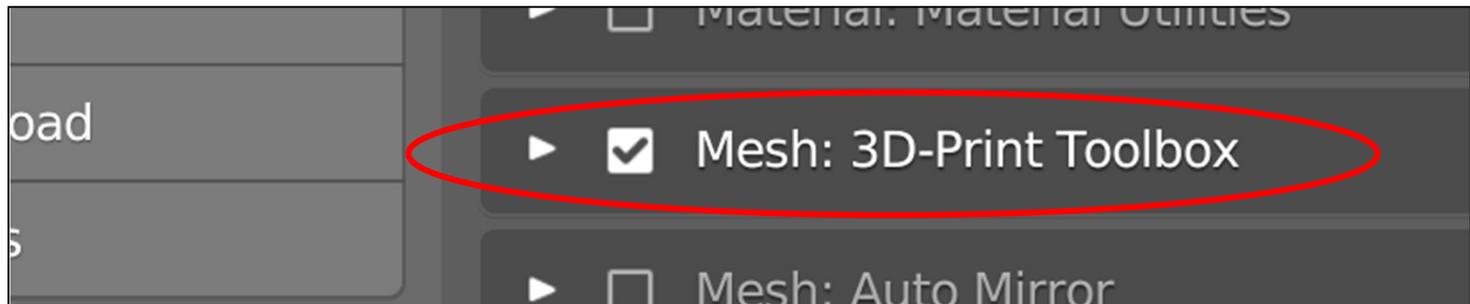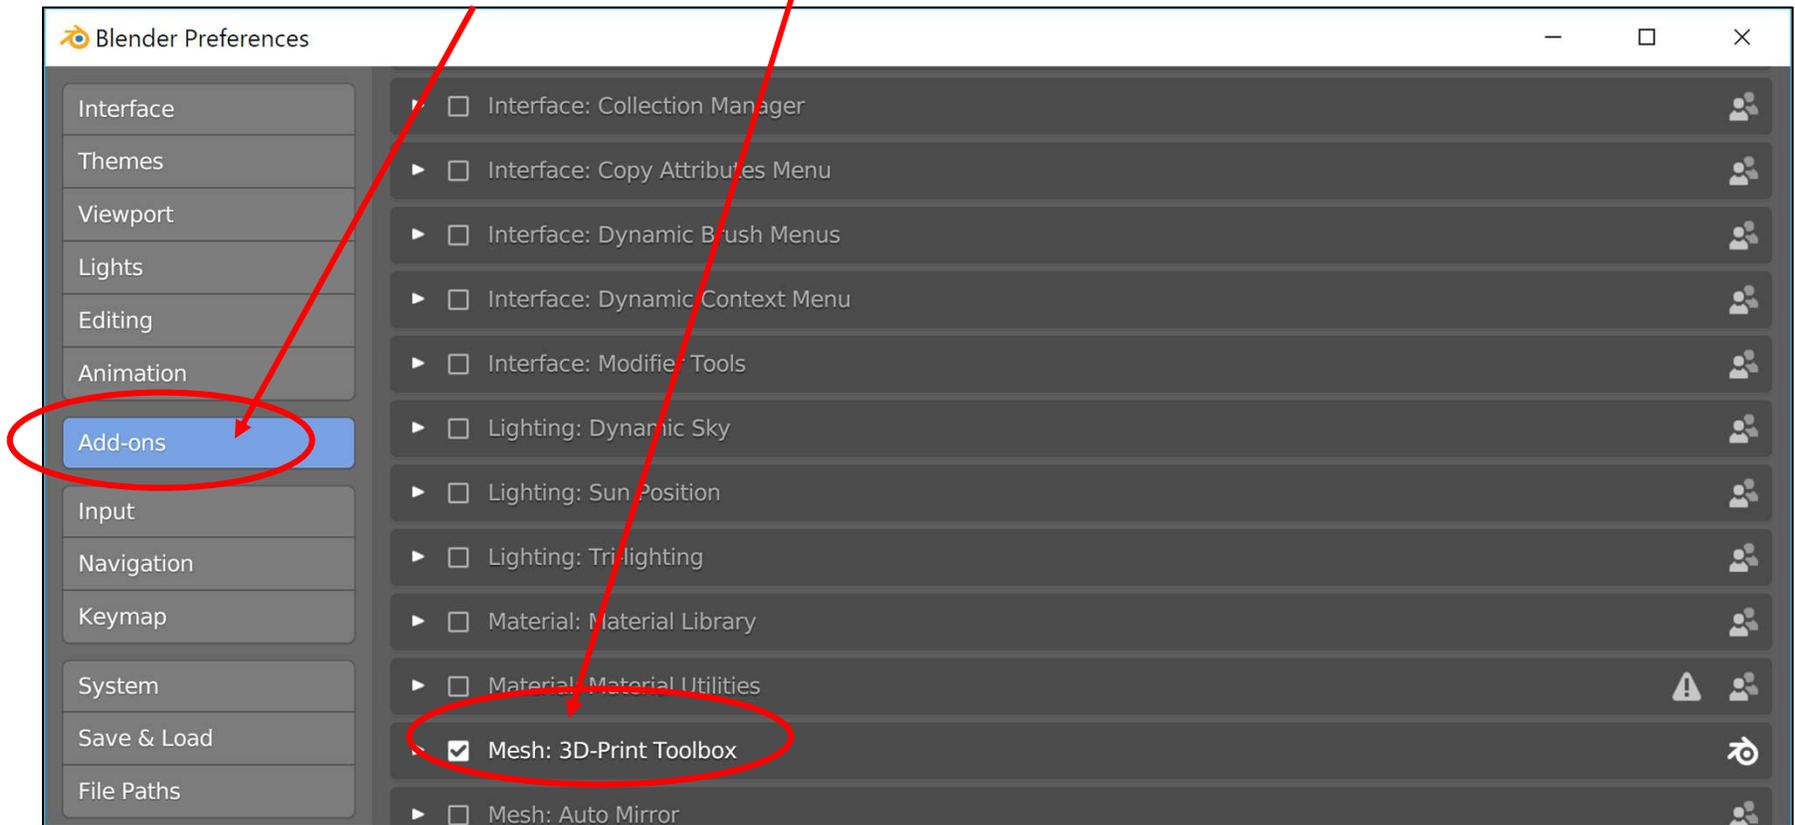


Installing the Blender 3D Printing Add-on

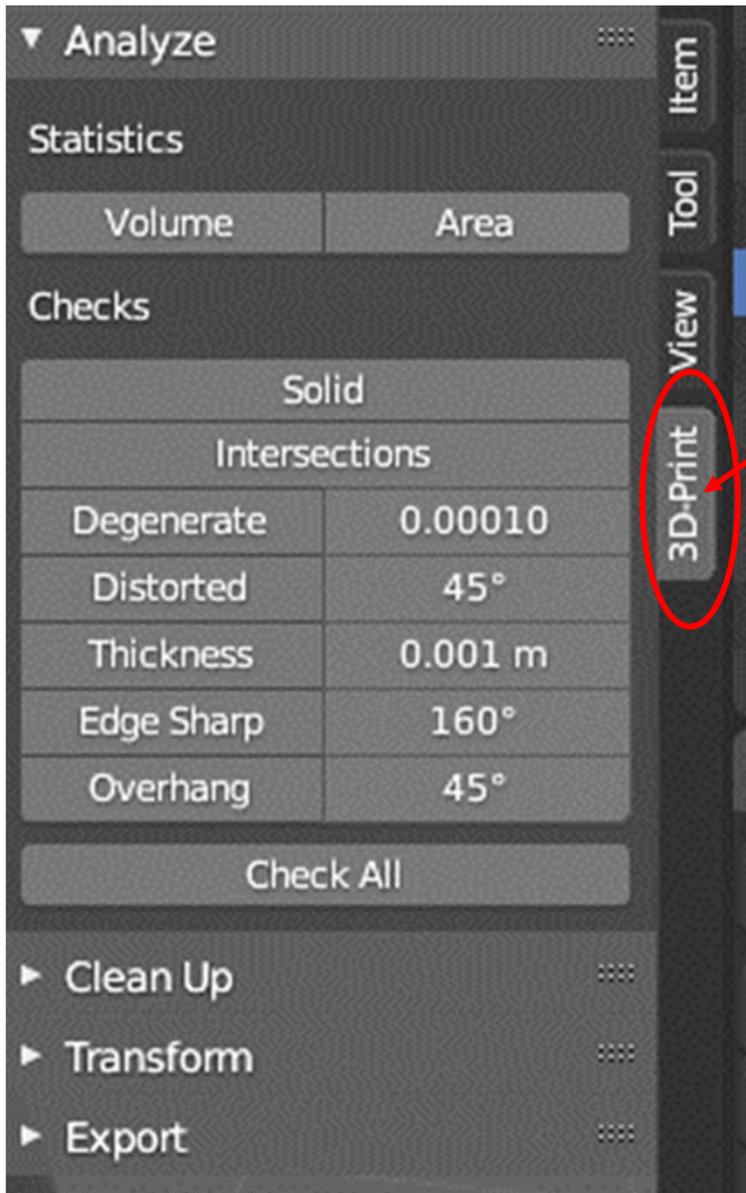


Hit the 'n' key to see the sidebar menu.
The **3D Print Toolbox** will be a tab like this.

The Blender 3D Printing Toolbox Add-on

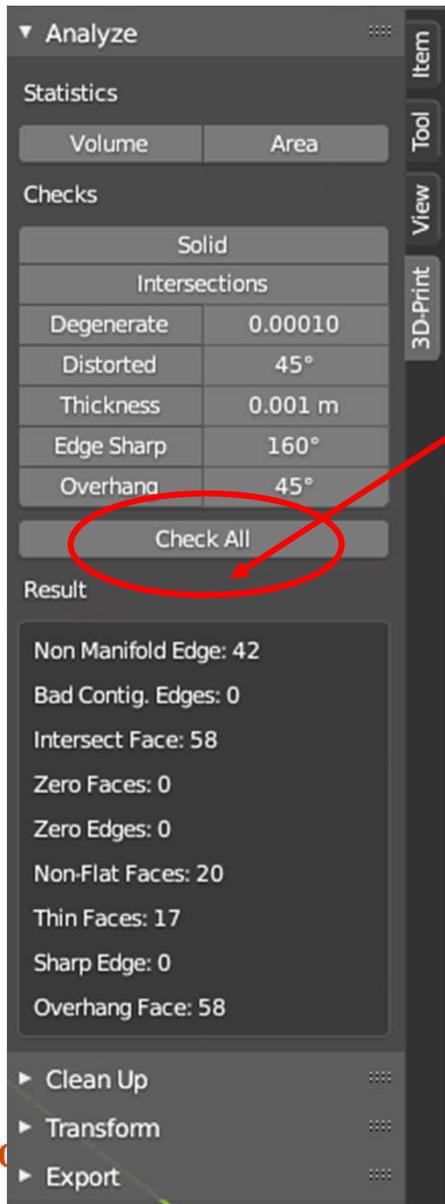

Selecting your object and then clicking on **Check All** will give you this nice list of problems Blender thinks you will have if you try to 3D Print this object

Selecting **Clean Up** will try to fix the problems

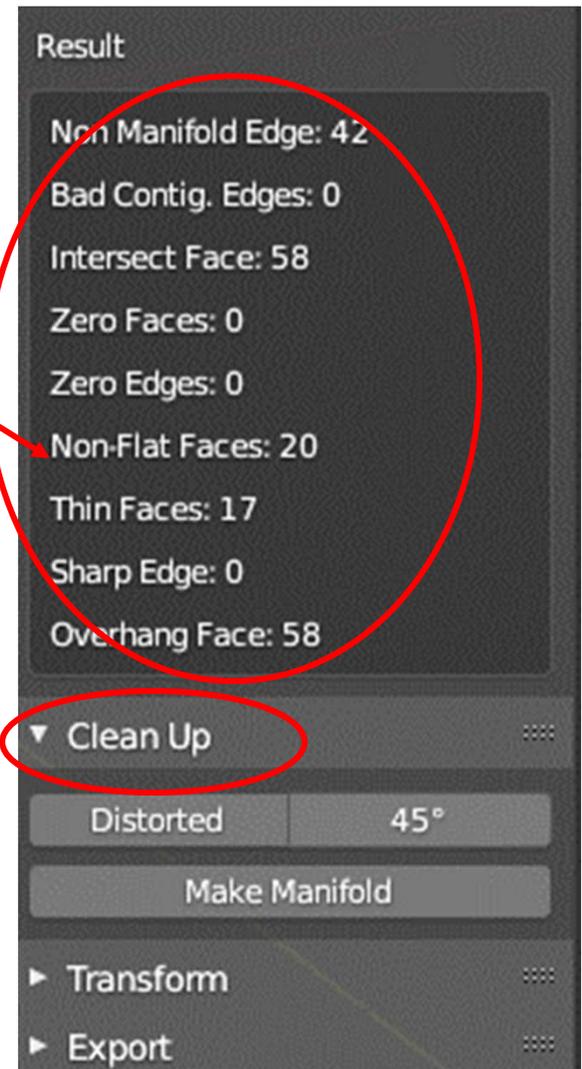


The Blender 3D Printing Toolbox Add-on

Tab over to **Edit Mode**.

Click in an empty area to unselect everything.

Then click in all the places that show problems.

Blender will light up the object in the places that provoked that problem, giving you a chance to fix them.

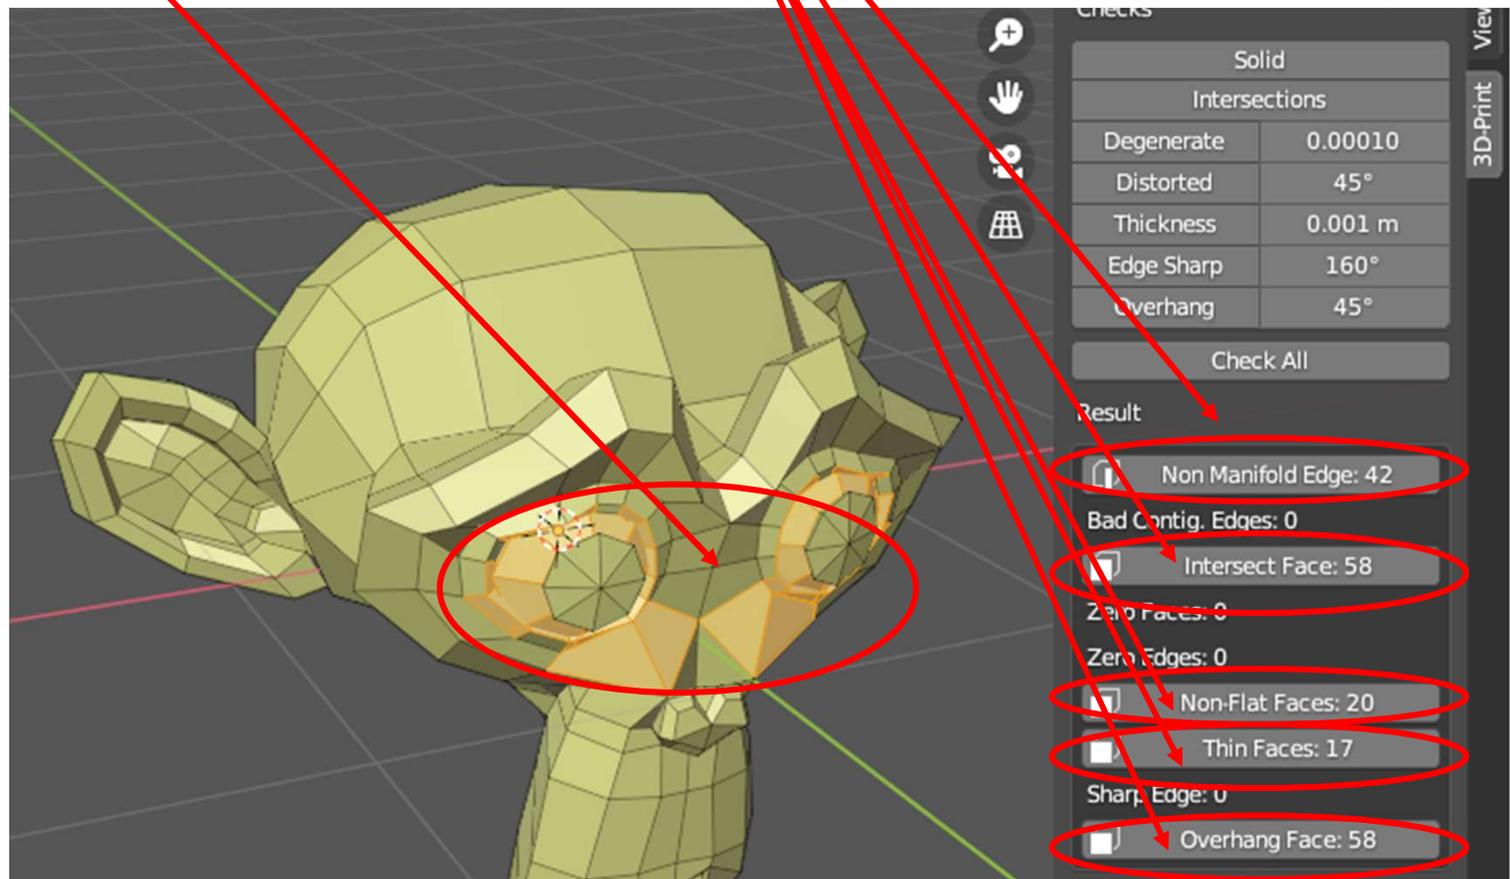

Output for 3D Printing


To **export** an STL file for 3D Printing:

1. Select the triangulated mesh object
2. **File**→**Export**→**Stl (.stl)**
3. Navigate to where you want to save the file
4. Give it a filename that ends in .stl
5. Click **Export STL**

.stl is the most common 3D printing file format

“STL” stands for **Stereolithography**


The word “stereolithography” comes from the Greek words for “3D” and “writing”.

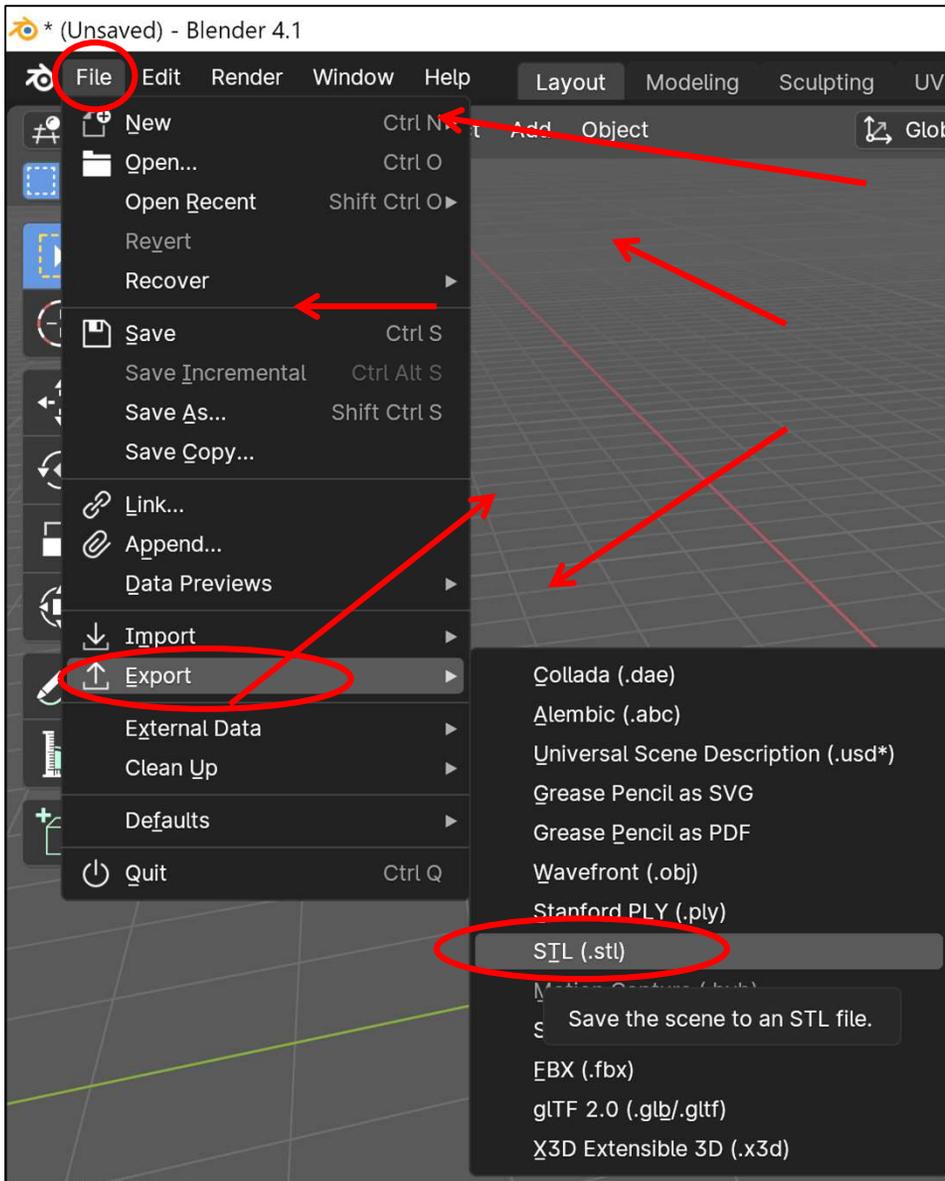

Want to see 3D Printing in Action?

Oregon State University's library has 3D Printers for use by OSU students. To see them via webcam, go to: <http://webcam.oregonstate.edu/3dprinter>


Click here to see the live, streaming view.

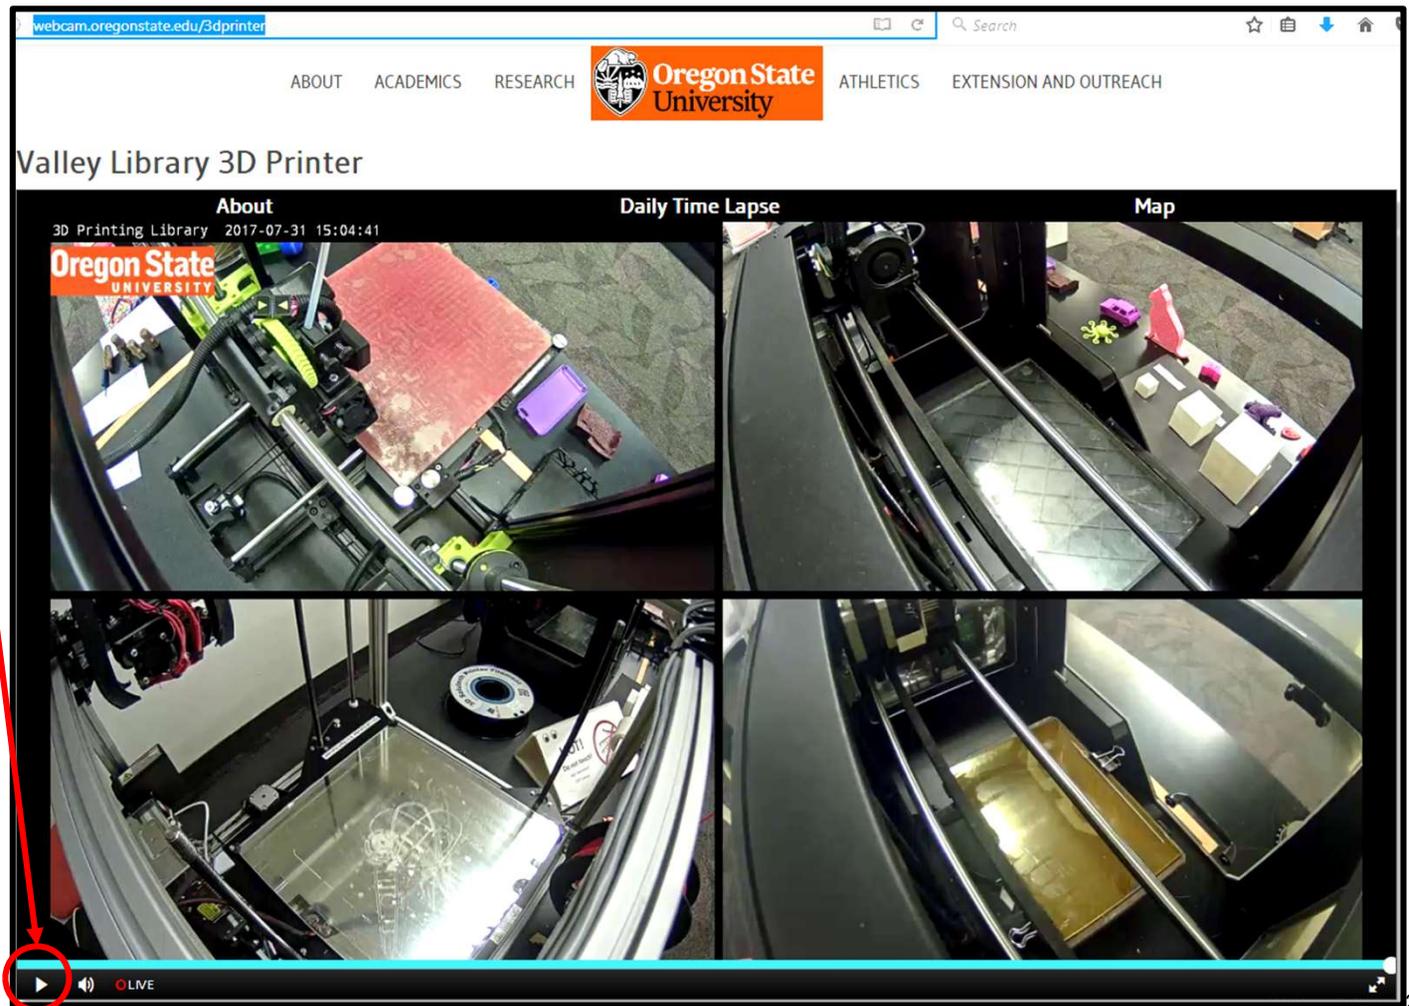

15. Stereographics



Stereoscopy is not new – it's been in common use since the 1950s

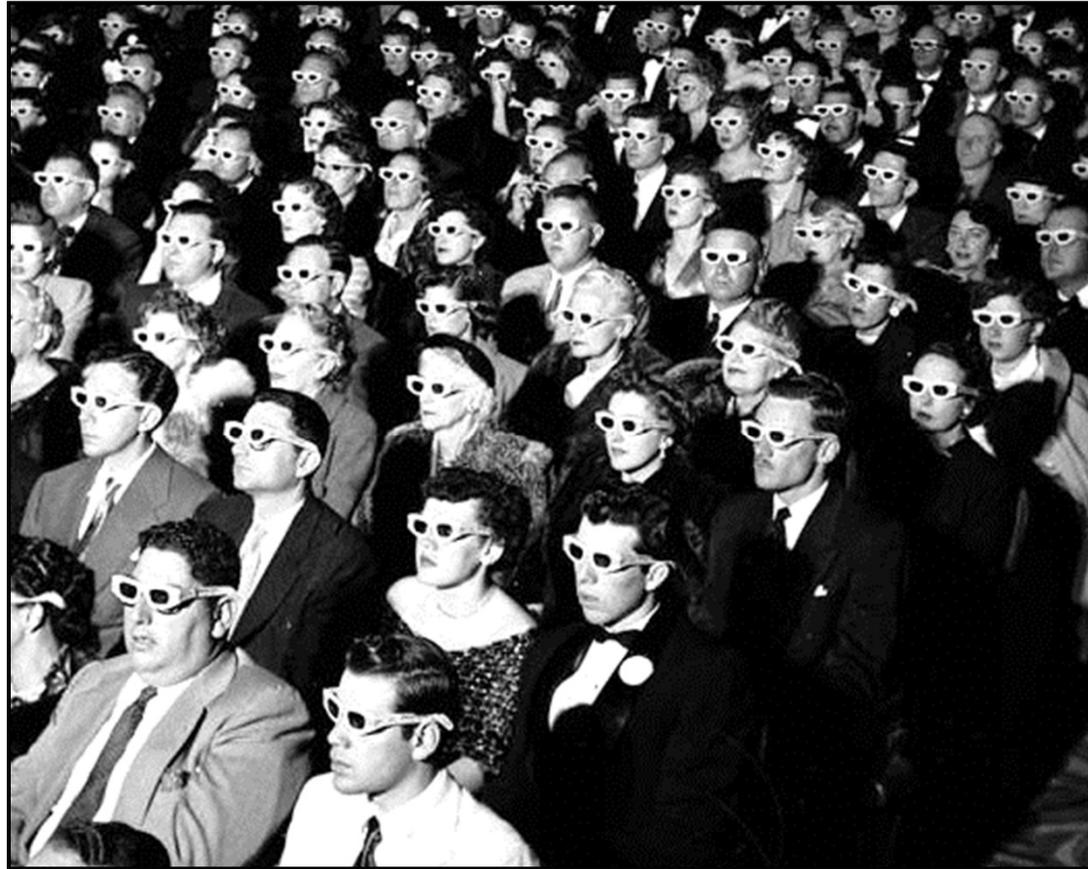

Life Magazine

But, with virtual reality and 3D movies being so popular, stereoscopy has made a big comeback. And, you can get at it through Blender!



Oreg
Uni

For more information on stereoscopy, see: <https://en.wikipedia.org/wiki/Stereoscopy>

And, even longer than that in stills




Newport Maritime Museum



Portland Art Museum's Ansel Adams Exhibit

We Humans have Binocular Vision

In everyday living, part of our perception of depth comes from the slight difference in how our two eyes see the world around us. This is known as *binocular vision*. We care about this because computer graphics can simulate that slight viewing difference and thus create the binocular viewing of a synthetic scene.

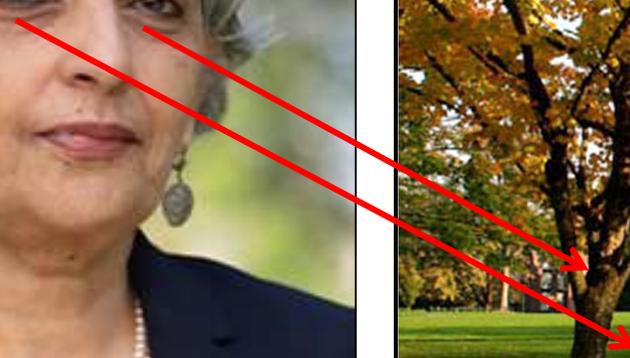


OSU's 16th President Dr. Jayathi Murthy

Step #1a – Be Sure You are Using the Eevee Renderer, not Cycles⁴³⁸



Open the **Render Properties** menu

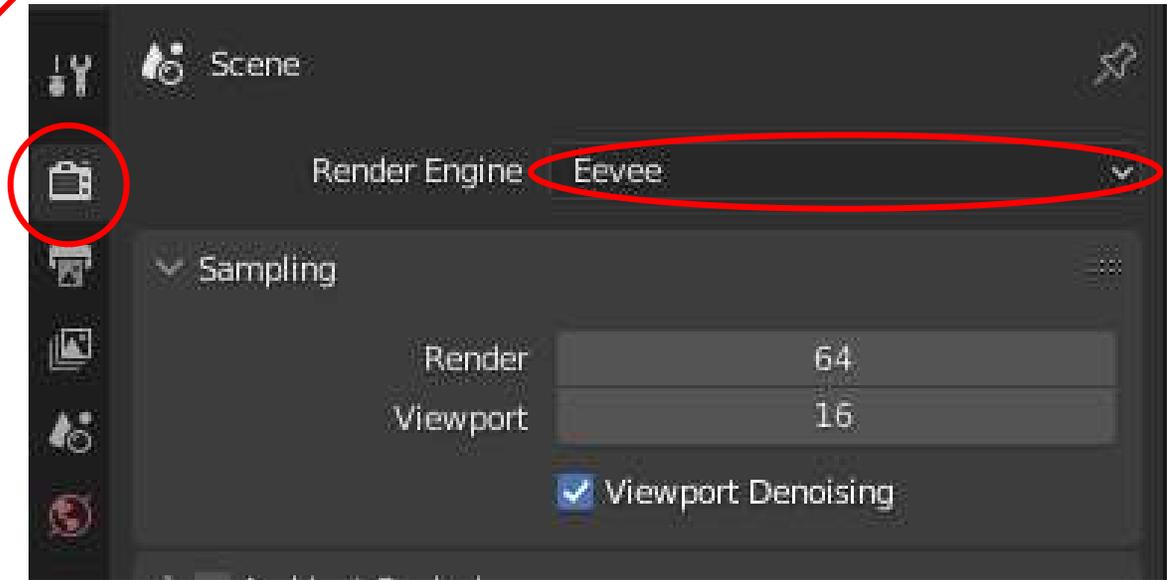

Step #1b – Turn the Stereographics On



Open the **Output Properties** menu

Resolution X 1920 px
Resolution Y 1080 px
% 100%
Aspect X 1.000
Aspect Y 1.000
Render Region
Crop to Render Region
Frame Start 1
End 250
Step 1
Frame Rate 24 fps

Time Remapping

Stereoscopy

Stereo 3D Multi-View

left
right

File Suffix _L

Enable the **Stereoscopy** checkbox and open the menu

Select **Stereo 3D**.

Be sure these are both checked

Step #1c – Turn the Stereographics On



While *still* in the **Output Properties** menu ...

Click on **Stereo 3D**.

Cache Result

File Format

Color

Color Depth

Compression


Image Sequence Overwrite Placeholders

Views

Views Format

Stereo Mode


Anaglyph Type

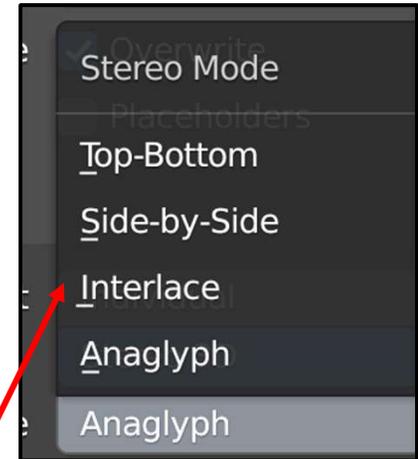

Pick one of these here

Red-Cyan is good here if you picked Anaglyph before. On the screen, the display will always be a Red-Cyan anaglyph. This menu controls how it will be drawn when you write a file after a **Render**.

Step #2 – Set the Stereo Cameras

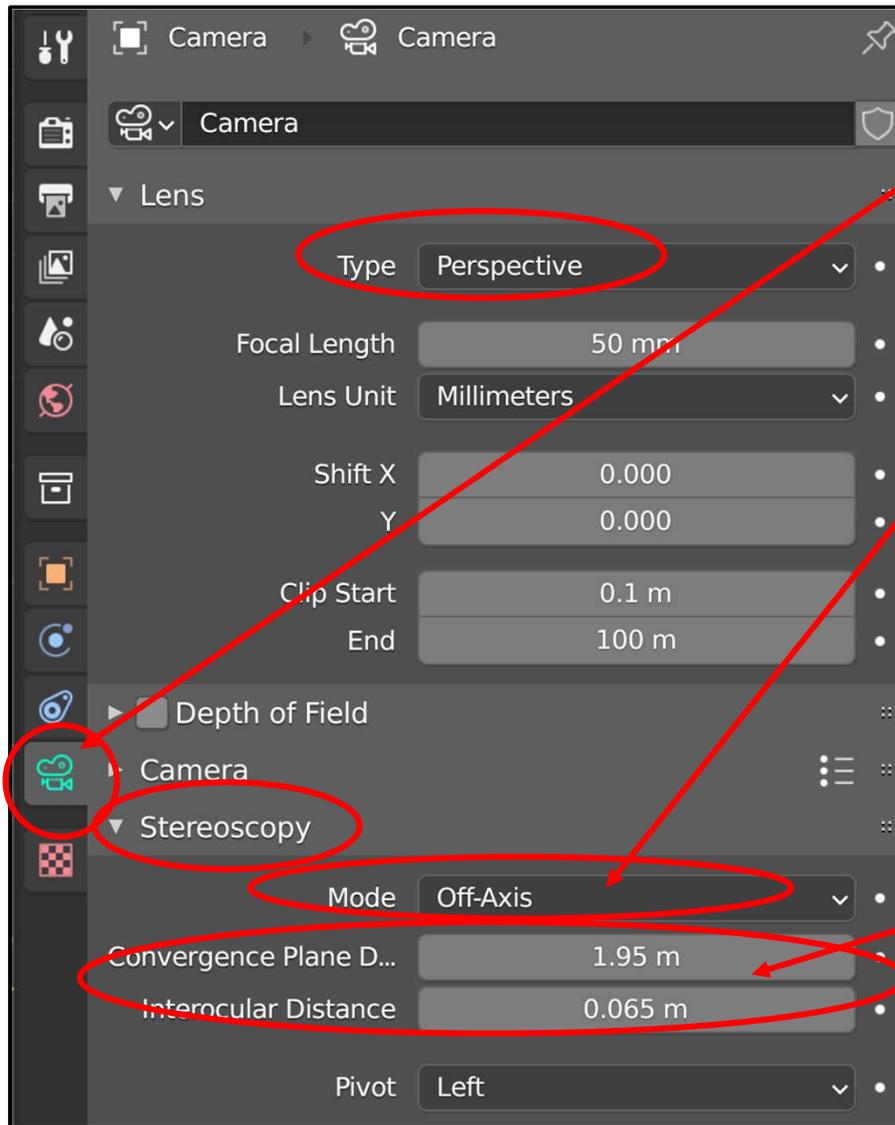


Select your **Camera** (in the scene or in the Outliner) and then open the **Camera Data** menu

Any of these will work well. I'm kind of partial to **Off-Axis** or **Tow-In**.


These are interesting to experiment with. They control how deep the stereo focuses and how easy the stereo images are to converge.




Step #3 – Tell the Renderer to Produce both a Left and Right View

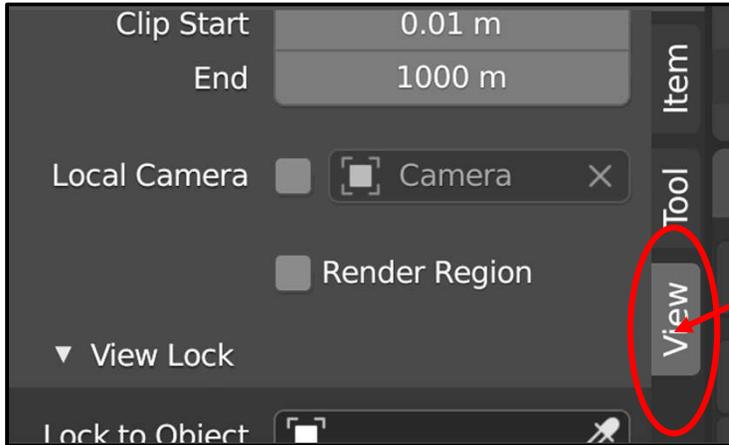

Open the **Object Properties** menu (hit 'n' on the keyboard) and click on the **View** tab

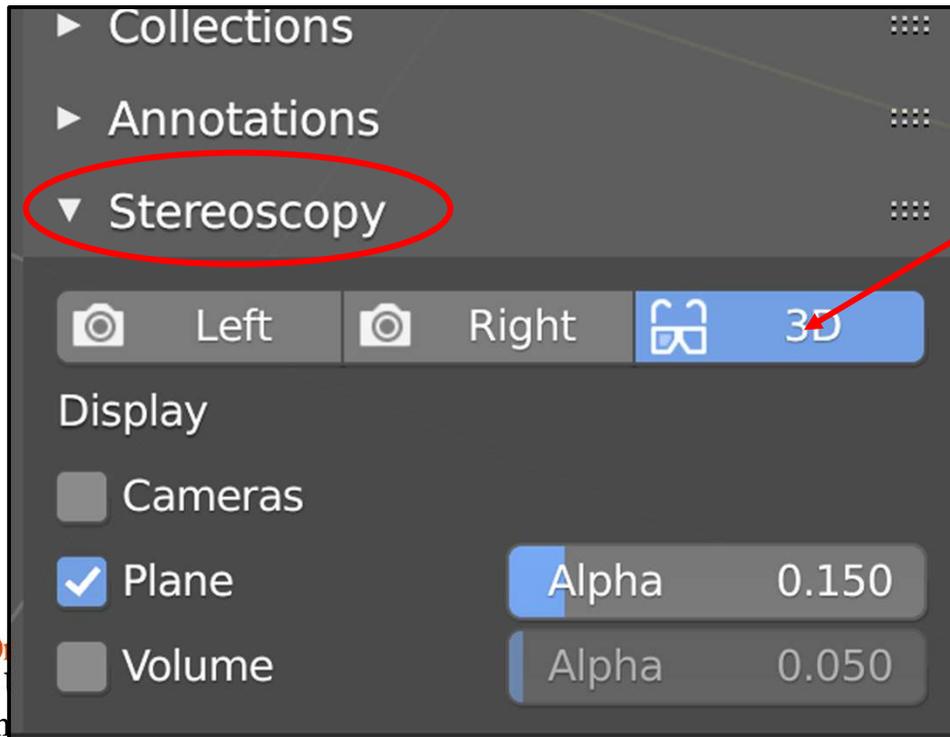


This tells the Renderer to produce both a left and right view, and to make a red-cyan stereopair from them

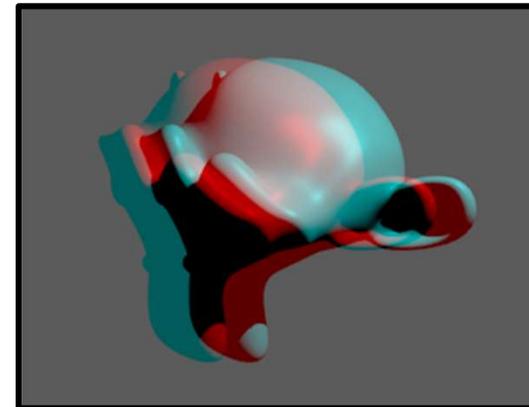

Com


Step #4 – Render → Render Image

443

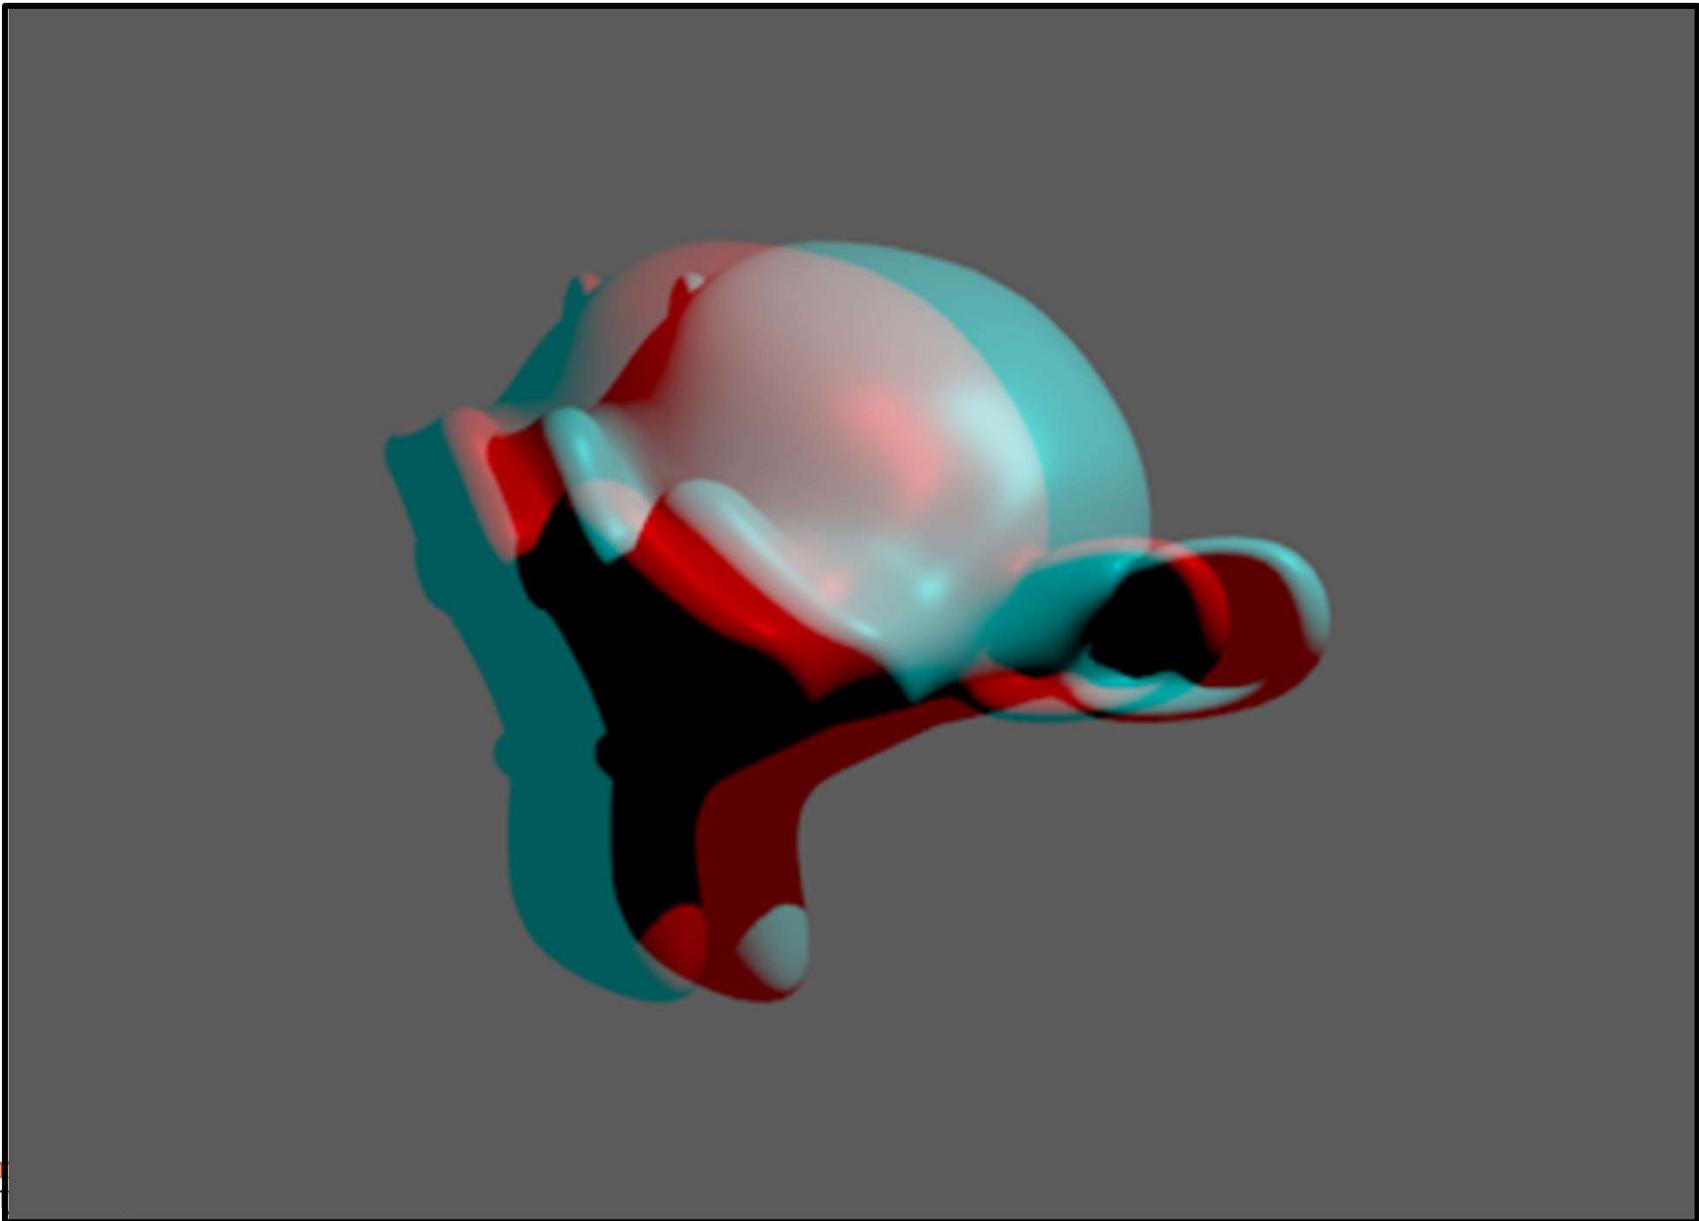

0

Red-Cyan Glasses

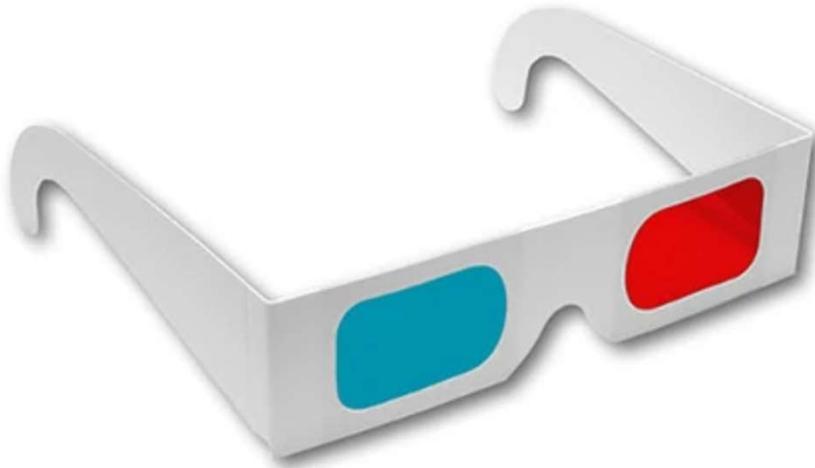

No, they are not *red-blue* glasses!
No, they are not *red-green* glasses!
They are ***red-cyan*** glasses!

The universal convention is:


- Red goes over the left eye
- Cyan goes over the right eye

If you want to buy your own red-cyan glasses, my go-to is:

<https://www.3dglasesonline.com/products/anaglyphic/>




Step #5 – (if you want): From the Render window, write out a Stereographics Image File

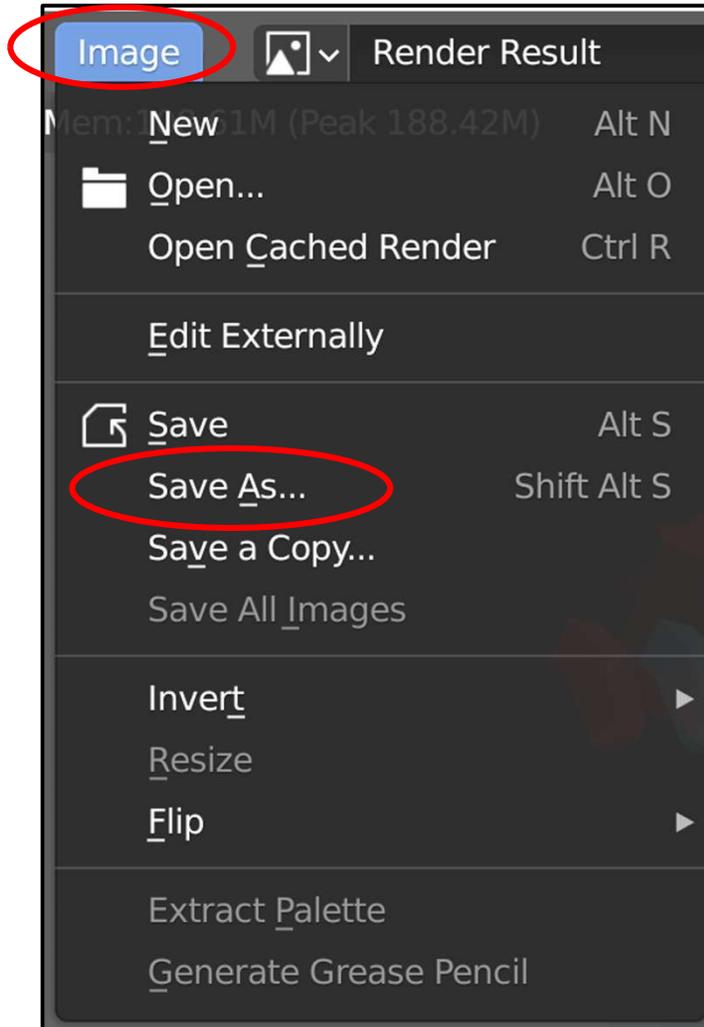

This assumes you have already done the other steps

How Deep your Scene Appears to be into and out of the Computer Screen -- Setting the Convergence Plane

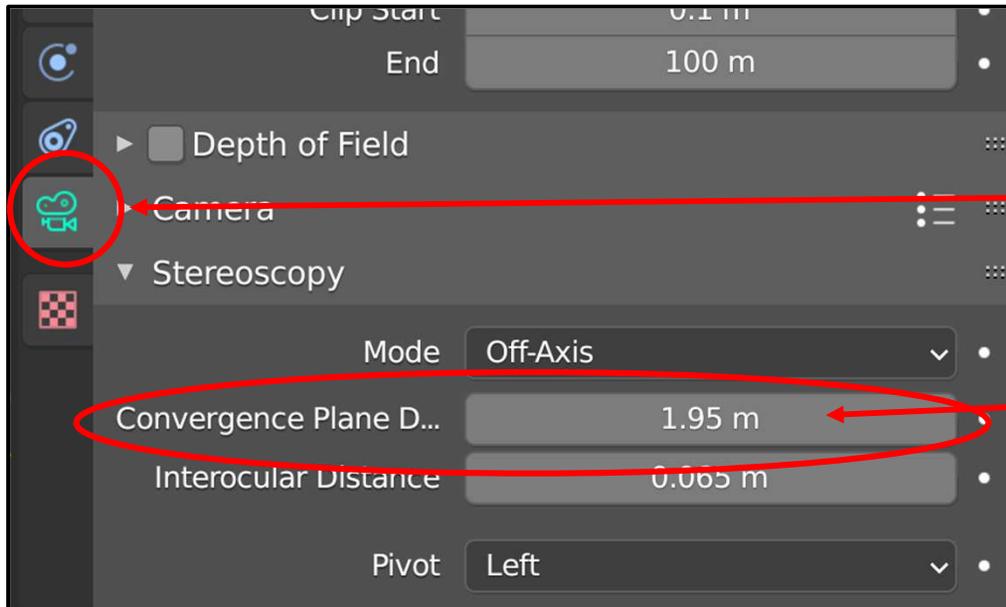


Select your **Camera** (in the scene or in the Outliner) and then open the **Camera Data** menu


The **Convergence Plane Distance** controls how much the scene appears to exist behind or in front of the display screen. Use a small distance to make the scene look like it is living in the monitor.

Use a larger distance to make the scene look like it is living in the air in front of the monitor. (Don't go too crazy with this – it will look less cool than you are expecting.)


How Deep does the Scene Appear to be into and out of the Computer Screen? Setting the Convergence Plane

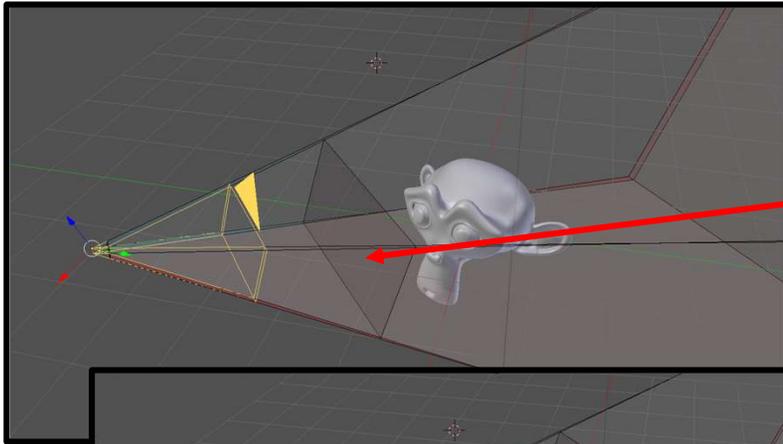

The Convergence Plane is in front of the object – the object will appear to be inside the monitor


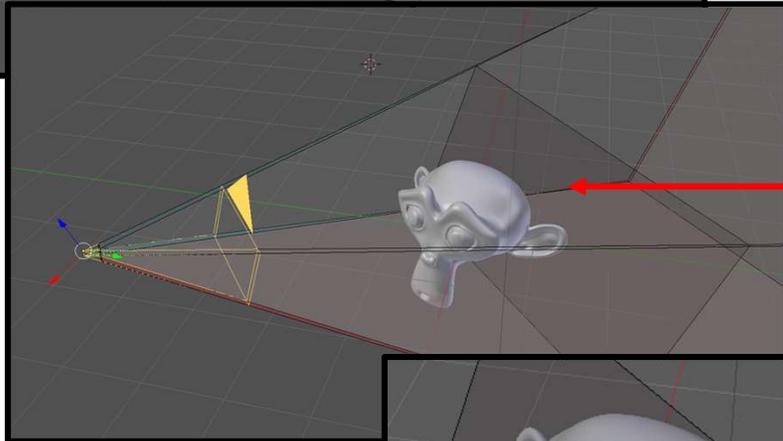


The Convergence Plane is behind the object – the object will appear to be in the air in front of the monitor

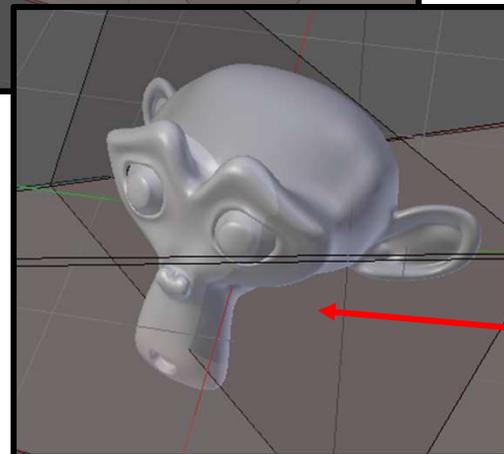

I like placing the Convergence Plane about 1/3 of the way through the object

There are many ways to display the correct view into the correct eye

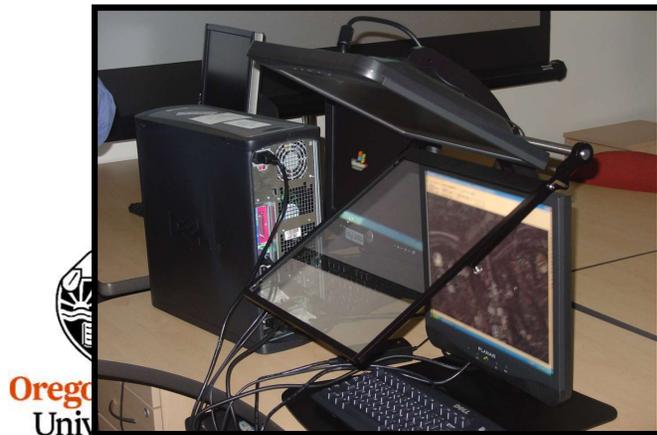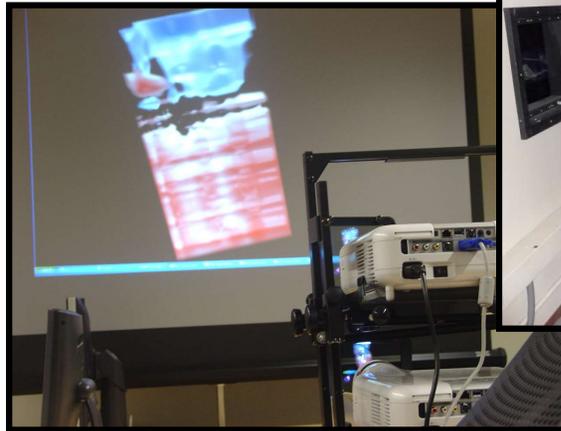

16. References



Blender References I Like

<http://cs.oregonstate.edu/~mjb/blender>



<http://blender.org>

<http://www.blender.org/education-help/>

<http://www.blenderguru.com/>


John Blain, *The Complete Guide to Blender Graphics: Computer Modeling and Animation*, Seventh Edition, CRC Press, 2022.

Ruan Lotter, *Taking Blender to the Next Level*, Packt, 2022.

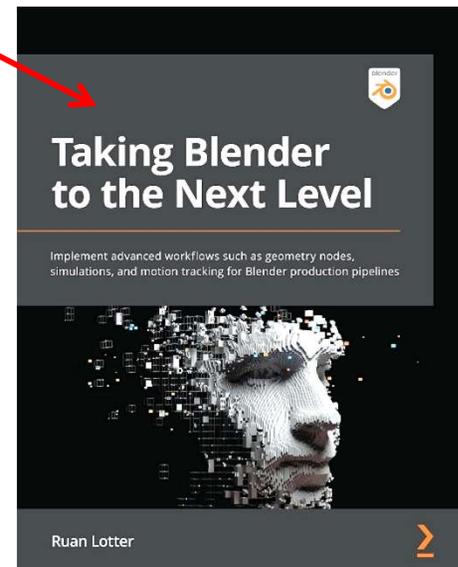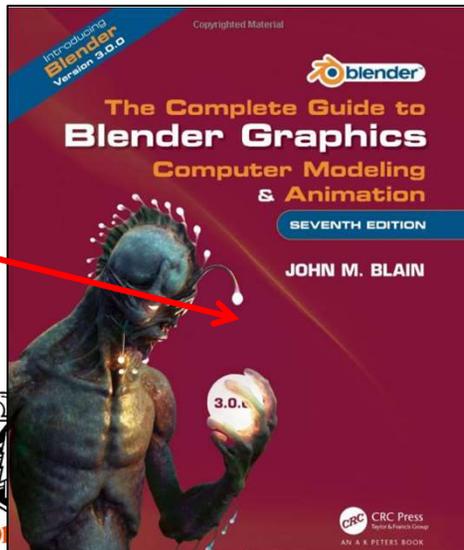

Camp Blender

<http://cs.oregonstate.edu/~mjb/blender>

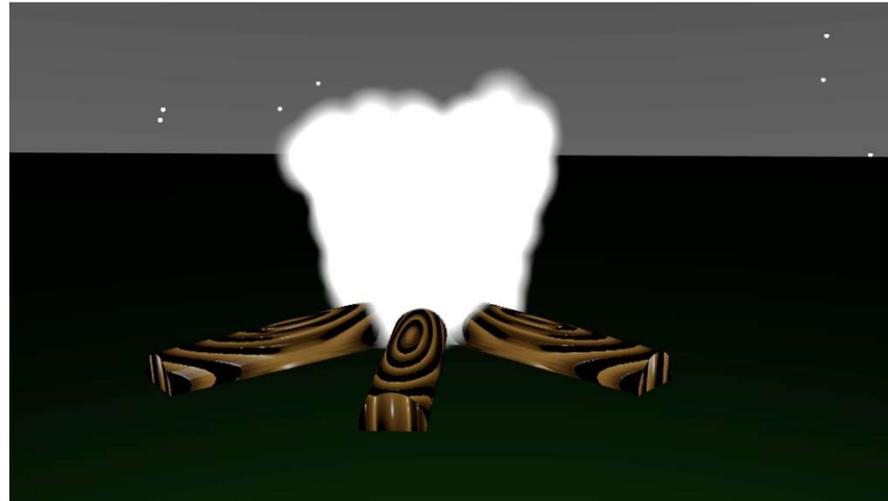

Oregon State
University
Mike Bailey

mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



Oregon State
University
Computer Graphics